


STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

OTSU TRANSITION / SHTLE TRANSITION / MIYAZU TRANSITION		RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.		SHTLE TRANSITION YOE : 66.0NM to SHTLE – 63.0NM to SHTLE CUE : 50.0NM to SHTLE – 45.0NM to SHTLE KCC : 35.0NM to SHTLE – 16.0NM to SHTLE
DME GAP	MIYAZU TRANSITION 9.3NM to YME – 3.3NM to YME	MIYAZU TRANSITION AJD : 4.2NM to ASAGI – 27.3NM to YME KNE : 10.3NM to YME – 9.3NM to YME CUE : 3.3NM to YME – YME
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

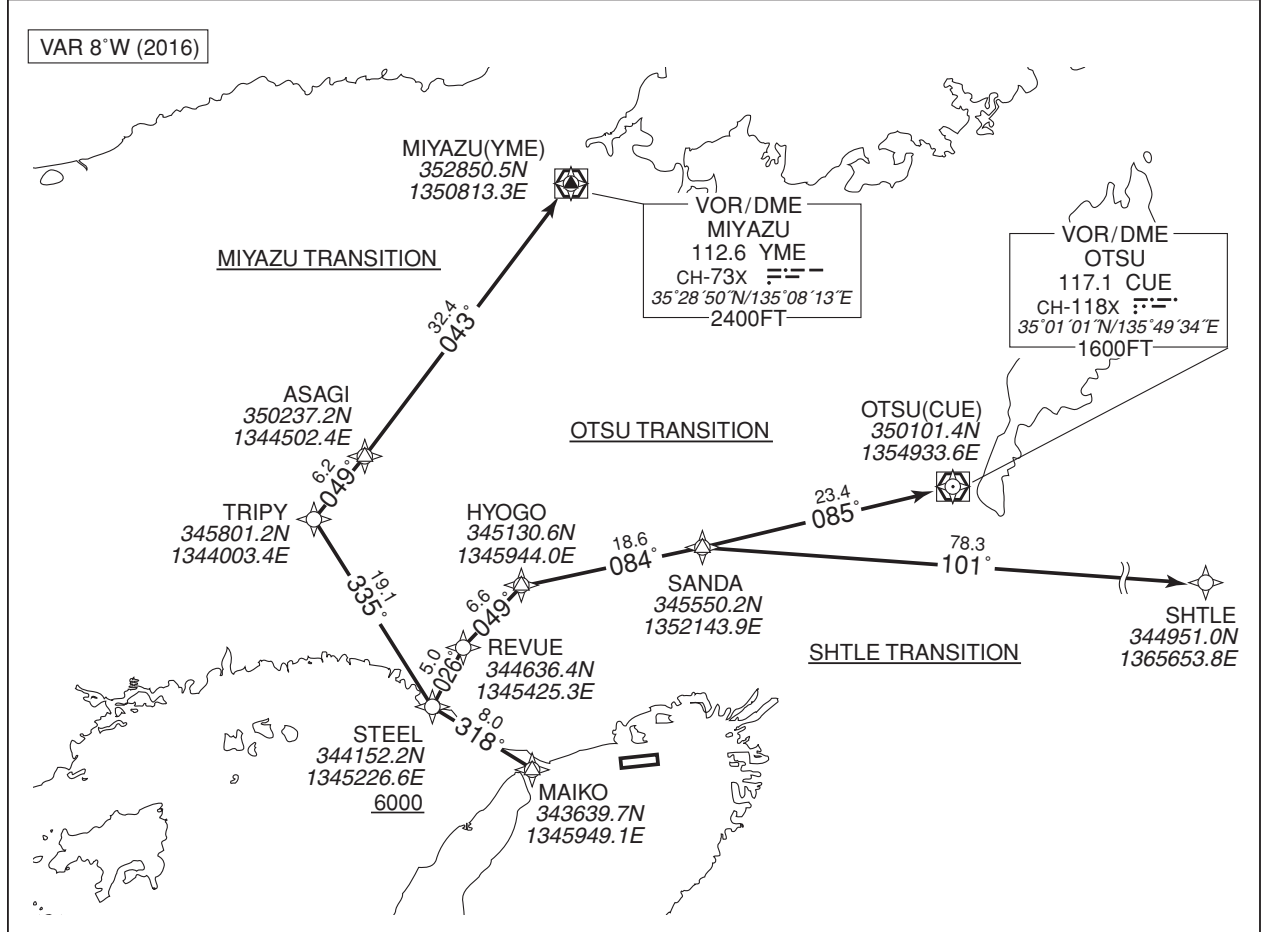

OTSU TRANSITION

From MAIKO, to STEEL at or above 6000FT, to REVUE, to HYOGO, to SANDA, to CUE.

SHTLE TRANSITION

From MAIKO, to STEEL at or above 6000FT, to REVUE, to HYOGO, to SANDA, to SHTLE.

MIYAZU TRANSITION

From MAIKO, to STEEL at or above 6000FT, to TRIPY, to ASAGI, to YME.

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

OTSU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	STEEL	—	318 (310.7)	-7.6	8.0	—	+6000	—	—	RNAV1
003	TF	REVUE	—	026 (018.9)	-7.6	5.0	—	—	—	—	RNAV1
004	TF	HYOGO	—	049 (041.6)	-7.6	6.6	—	—	—	—	RNAV1
005	TF	SANDA	—	084 (076.4)	-7.6	18.6	—	—	—	—	RNAV1
006	TF	CUE	—	085 (077.1)	-7.6	23.4	—	—	—	—	RNAV1

SHTLE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	STEEL	—	318 (310.7)	-7.6	8.0	—	+6000	—	—	RNAV1
003	TF	REVUE	—	026 (018.9)	-7.6	5.0	—	—	—	—	RNAV1
004	TF	HYOGO	—	049 (041.6)	-7.6	6.6	—	—	—	—	RNAV1
005	TF	SANDA	—	084 (076.4)	-7.6	18.6	—	—	—	—	RNAV1
006	TF	SHTLE	—	101 (093.9)	-7.6	78.3	—	—	—	—	RNAV1

MIYAZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	STEEL	—	318 (310.7)	-7.6	8.0	—	+6000	—	—	RNAV1
003	TF	TRIPY	—	335 (327.9)	-7.6	19.1	—	—	—	—	RNAV1
004	TF	ASAGI	—	049 (041.6)	-7.6	6.2	—	—	—	—	RNAV1
005	TF	YME	—	043 (035.7)	-7.6	32.4	—	—	—	—	RNAV1