AD 2 AERODROMES

RJER AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJER - RISHIRI

RJER AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	451431N/1411115E 057° / 900m from RWY07 THR
2	Direction and distance from (city)	23nm 242° QTE from Wakkanai city
3	Elevation/ Reference temperature	99FT / 23°C(2004-2008)
4	Geoid undulation at AD ELEV PSN	94FT
5	MAG VAR/ Annual change	10°W(2009) / 1.9'E
6	AD Administration, address, telephone, telefax, telex, AFS, e- mail and/or Web-site addresses	Hokkaido, Public AP Airport administration branch 1143 Oshidomari-aza-hondomari, Rishirifuji-cho, Rishiri-gun, Hokkaido TEL:0163-82-1269 FAX:0163-82-1414
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Nil

RJER AD 2.3 OPERATIONAL HOURS

1	AD Administration	0000 - 0800
2	Customs and immigration	On request Customs: 0162-33-1075 Immigration: 0162-23-3269
3	Health and sanitation	Quarantine(human): On request(0162-23-4403) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (NEW CHITOSE)
7	ATS	0000-0800 Remarks:Airport Remote Mobile Communication Service Provided By New Chitose FSC.
8	Fuelling	Nil
9	Handling	0000 - 0800
10	Security	0000 - 0800
11	De-icing	Nil
12	Remarks	Nil

RJER AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJER AD 2.5 PASSENGER FACILITIES

1	Hotels	Nil		
2	Restaurants	At Airport		
3	Transportation	Buses, Taxis and Rental Car		
4	Medical facilities	Nil		
5	Bank and Post Office	Nil		
6	Tourist Office	Nil		
7	Remarks	Nil		

RJER AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 7
2	Rescue equipment	Emergency medical equipments conveyance truck x 1, Chemical fire fighting truck x 2
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

RJER AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Fruck for snow clearance x 5 , Rotary x 4 , Snow clearance dozer x 3 , Snow sweeper x 3 , Snow melting agent spray truck x 1	
2	Clearance priorities	1:RWY , 2:TWY , 3:Apron	
3	Remarks	Nil	

RJER AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Strength:Cement-Concrete , PCN 48/R/B/X/T		
2	Taxiway width, surface and strength	Width:23m, Strength:Asphalt-Concrete, PCN 50/F/B/X/T		
3	ACL and elevation	Not AVBL		
4	VOR checkpoints	Not AVBL		
5	INS checkpoints	Spot NR 1: 451437.61N/1411105.43E 2: 451436.57N/1411103.17E 3: 451435.84N/1411101.03E		
6	Remarks	Nil		

RJER AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY: RWY07/25 (Marking): RWY designation, RWY CL, RWY THR, Aiming point, TDZ, RWY side stripes (LGT): RCLL, REDL, RTHL, RENL, RWY DIST marker LGT TWY: (Marking): TWY CL, TWY side stripe (LGT): TWY edge LGT, TWY CL LGT
3	Stop bars	Nil
4	Remarks	(Marking):Overrun area (LGT): Apron flood LGT

RJER AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas

RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil					

In circling area and at AD

Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Mountain	451312N/1411010E	301FT	- / LIM(Red)	
Mountain	451356N/1411048E	208FT	- / LIM(Red)	
Mountain	451425N/1411206E	207FT	- / LIM(Red)	
Mountain	451417N/1411323E	371FT	- / LIM(Red)	

RJER AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NEW CHITOSE			
2	Hours of service MET Office outside hours	H24 (NEW CHITOSE)			
3	Office responsible for TAF preparation Periods of validity	Nil			
4	Trend forecast Interval of issuance	Nil			
5	Briefing/ consultation provided	Briefing is available upon inquiry at NEW CHITOSE			
6	Flight documentation Language(s) used	C En			
7	Charts and other information available for briefing or consultation	$\begin{split} &S_6, U_{85}, U_7, U_5, U_3, U_{25}, U_2/T_r, P_S, P_5, P_3, P_{25}, P_{SWE}, P_{SWF}, P_{SWG}, P_{SWI},\\ &P_{SWM}, P_{SW}(\text{domestic}), E, C, W_E, W_F, W_G, W_I, W, N \end{split}$			
8	Supplementary equipment available for providing information	Nil			
9	ATS units provided with information	REMOTE			
10	Additional information (limitation of service, etc.)	Nil			

RJER AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and Surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
07 25	57.04° 237.04°	1800x45 1800x45	PCN 50/F/B/X/T (1)PCN 55/F/C/X/T (2)PCN 80/F/A/X/T Asphalt-Concrete	451415.35N 1411040.77E 94.2FT 451447.08N 1411150.01E 93.9FT	THR ELEV : 98FT THR ELEV : 112FT
Slope of RWY		Strip Dimensions (M)	RESA(Overrun) Dimensions(M)	Rem	arks
7		10	11	14	
SEE AD2.24 AD CHART		1920x150 1920x150	40x150 190x150	RWY grooving 1800m x 45m (1)BTN 630m and 750m FM RWY25 THR (2)BTN 410m and 570m FM RWY07 THR	

RJER AD 2.13 DECLARED DISTANCES

RWY	TORA	TODA	ASDA	LDA	
Designator	(m)	(m)	(m)	(m)	Remarks
1	2	3	4	5	6
07	1800	1800	1800	1800	Nil
25	1800	1800	1800	1800	Nil

RJER AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
07	Nil	Green	PAPI 3.0°/LEFT 356.1m 61FT	Nil	1,800m 30m Coded color (White/Red) LIH	1,800m 60m Coded color (White/Yellow) LIH	Red	Nil(*2)
25	SALS (*1) 420m LIH	Green	PAPI 3.0°/LEFT 428.0m 61FT	Nil	1,800m 30m Coded color (White/Red) LIH	1,800m 60m Coded color (White/Yellow) LIH	Red	Nil(*2)
				Remarks				
				10				
SALS with RAI Overrun area of RWY THR ID I	edge LGT(LÉ	N:60m Col	, , ,					

RJER AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 451443N/1411104E, ALTN FLG White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI:Nil Anemometer: RWY07:300m from RWY07 THR, LGTD RWY25:308m from RWY25 THR, LGTD
3	TWY edge and centerline lighting	TWY edge and center line lights installed, see AD 2.9
4	Secondary power supply/ switch-over time	Within 15 sec:ALL LGT(except for OBST LGT)
5	Remarks	WDI LGT

RJER AD 2.16 HELICOPTER LANDING AREA

|--|

RJER AD 2.17 ATS AIRSPACE


Designation and lateral limits			Airspace classification	ATS unit call sign Language	Remarks
1			3	4	6
Rishiri Area within a radius of 5nm(9km) of			Е	Rishiri remote	
Information Rishiri ARP		below		En	
Zone					

RJER AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
A/G	Rishiri Remote	122.7MHz	0000 - 0800	RAG controlled by New Chitose FSC

RJER AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (10°W/2019)	RSE	114.6MHz	H24	451444.38N/ 1411112.36E		Unusable: 130°-140° beyond 35nm BLW 8000ft 140°-200° BLW 8000ft
DME	RSE	1180MHz (CH-93X)	H24	451444.38N/ 1411112.36E	109.6ft	Unusable: 110°-120° beyond 35nm BLW 4000ft 130°-140° beyond 20nm BLW 8000ft 140°-200° BLW 8000ft
LOC 25	IRS	109.3MHz	0000 - 0800	451411.20N/ 1411031.69E		LOC:235m(771ft) away FM RWY 07 THR, BRG(MAG)247°.
LOC-DME 25	IRS	991MHz (CH-30X)	0000 - 0800	451410.03N/ 1411034.98E	106ft	DME:194m(636ft) away FM RWY 07 THR, 69.6m(228ft) SE of RCL.

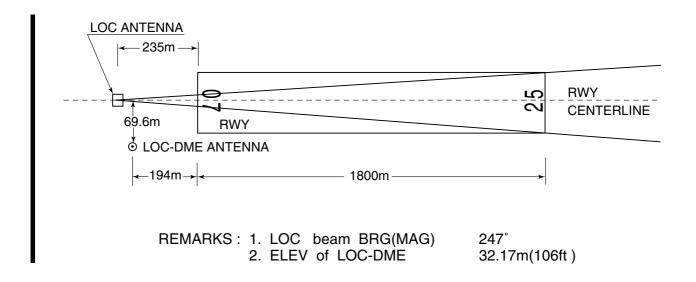

1. Aiı	RJER AD 2.20 LOCAL TRAFFIC REGULATIONS rport regulations
	Nil
2. Ta	xiing to and from stands
	Nil
3. Pa	arking area for small aircraft(General aviation)
	Nil
4. Pa	arking area for helicopters
	Nil
5. Ap	oron - taxiing during winter conditions
	Nil
6. Ta	xiing - limitations
	Nil
7. Sc	chool and training flights - technical test flights - use of runways
	Nil
8. He	elicopter traffic - limitation
	Nil
9. Re	emoval of disabled aircraft from runways
	Nil

RJER AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RJER AD 2.22 FLIGHT PROCEDURES

TAKE OFF MINIMA

	RWY	REDL & RCLL AVBL	REDL or RCLL AVBL	REDL & RCLL Not AVBL		
		CEIL-VIS	CEIL-VIS	CEIL-VIS		
TKOF ALTN AP	07	300′-800m	300′-1000m	300´-1200m		
Filed	25	000 000111	300 1000111			
Other	07	AVBL LDG MINIMA				
Outer	25					

NOTE: SIDs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

RJER AD 2.23 ADDITIONAL INFORMATION

Nil

RJER AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
Standard Departure Chart - Instrument
Instrument Approach Chart (VOR/DME/LOC RWY25)
Instrument Approach Chart (VOR/DME A)
Instrument Approach Chart (VOR/DME B)
Other Chart (Visual REP)
Other Chart (MVA CHART)

NOTE: SIDs and IAPs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.