

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

➔ RNAV(RNP) RWY18

SAPPORO CONTROL
128.325 – 246.1
134.25 – 260.4


GNSS and RF required.

MEMANBETSU TOWER
118.85 – 126.2

NO RADAR


For uncompensated Baro-VNAV systems, procedure not authorized below -25°C / above 45°C

VAR 9°W (2017)

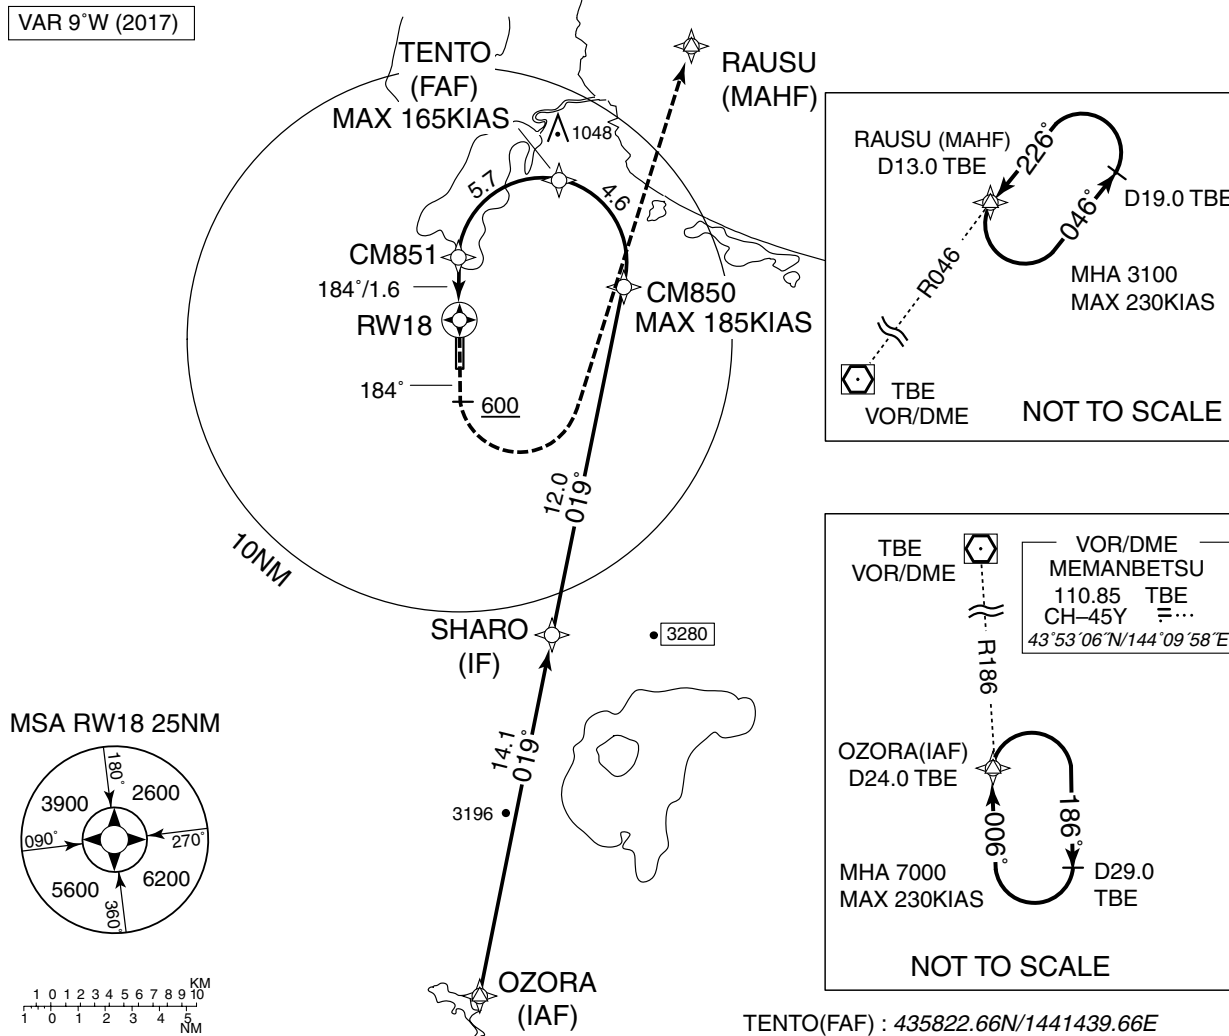

MISSED APPROACH

From RW18 on track 184°, at or above 600FT turn left, direct to RAUSU and hold at 3100FT. Contact MEMANBETSU TOWER.

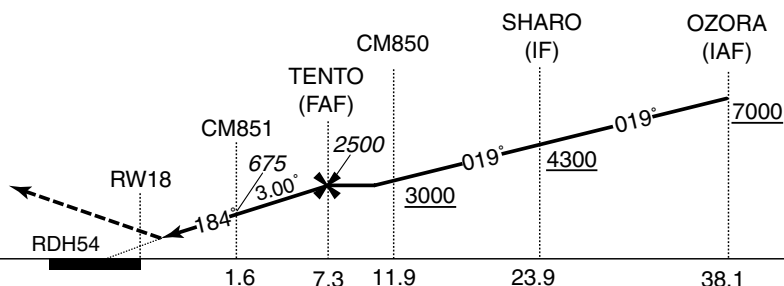

Missed APCH climb gradient MNM 3.0%

CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	—	—
B	—	—
C	402 (300)	1000
D	—	1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

➔ RNAV(RNP) RWY18

RNAV(RNP) RWY18Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	OZORA	—	—	-9.2	—	—	+7000	—	—	—
002	TF	SHARO	—	019 (009.5)	-9.2	14.1	—	+4300	—	—	1.0
003	TF	CM850	—	019 (009.6)	-9.2	12.0	—	+3000	-185	—	1.0
004	RF Center: CMRF1 r=3.04	TENTO	—	—	-9.2	4.6	L	2500	-165	—	1.0
005	RF Center: CMRF1 r=3.04	CM851	—	—	-9.2	5.7	L	675	—	-3.00	0.3
006	TF	RW18	Y	184 (174.7)	-9.2	1.6	—	156	—	-3.00/54	0.3
007	FA	—	—	184 (174.7)	-9.2	—	—	+600	—	—	1.0
008	DF	RAUSU	—	—	-9.2	—	L	3100	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OZORA	432908.24N / 1441153.19E	CMRF1	435524.66N / 1441344.15E
SHARO	434301.91N / 1441506.66E		
CM850	435454.27N / 1441753.05E		
TENTO	435822.66N / 1441439.66E		
CM851	435507.75N / 1440932.81E		
RW18	435330.51N / 1440945.38E		
RAUSU	440327.56N / 1442052.43E		