#### **AD 2 AERODROMES**

# **ROYN AD 2.1 AERODROME LOCATION INDICATOR AND NAME**

# **ROYN - YONAGUNI**

#### ROYN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	242803N/1225847E
		075°/1.00km from RWY 08 THR
2	Direction and distance from (city)	124km W from ISHIGAKI City
3	Elevation/ Reference temperature	49ft / 32.7°C(2001 - 2005)
4	Geoid undulation at AD ELEV PSN	76ft
5	MAG VAR/ Annual change	3°44'(2006) / Annual Change 0°03'W
6	AD Administration, address,	OKINAWA PREF. Public AP.
	telephone, telefax, telex, AFS,	4350, Aza-Yonaguni, Yonaguni-cho, Yaeyama-gun, Okinawa Pref
	e-mail and/or Web-site addresses	Tel 0980-87-8375, 0980-87-3266
		Fax 0980-87-2913,
		E-mail:aa063002@pref.okinawa.lg.jp
		Web: http://www.pref.okinawa.jp/
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Nil

#### **ROYN AD 2.3 OPERATIONAL HOURS**

1	AD Administration	2300 - 1030
2	Customs and immigration	On request Customs: 0980-87-2804 Immigration: 0980-82-2333
3	Health and sanitation	Quarantine(human): On request(0980-82-4940) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (NAHA)
7	ATS	2300 - 1030
		REMARKS: Airport Remote Mobile Communication Service provided
		by Naha FSC.
8	Fuelling	Nil
9	Handling	2300 - 1030
10	Security	2300 - 1030
11	De-icing	Nil
12	Remarks	Nil

#### **ROYN AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	Ask AD Administration
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

#### **ROYN AD 2.5 PASSENGER FACILITIES**

1	Hotels	Hotels in Yonaguni-cho
2	Restaurants	Restaurants in Yonaguni-cho
3	Transportation	Busses and Taxis
4	Medical facilities	Clinic in Yonaguni-cho 4.0km
5	Bank and Post Office	Post Office in Yonaguni-cho
6	Tourist Office	Nil
7	Remarks	Nil

### **ROYN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	CAT 7
2	Rescue equipment	Chemical fire fighting truck (6,000-Liter Class) x 2
		Chemical fire fighting truck (3,000-Liter Class) x 1
3	Capability for removal of disabled aircraft	Incapable
4	Remarks	Nil

#### **ROYN AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Not Applicable
2	Clearance priorities	Not Applicable
3	Remarks	Nil

# **ROYN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

1	Apron surface and strength	Surface: Asphalt-concrete Strength: PCN 33/F/A/X/T
2	Taxiway width, surface and strength	Width: 23m Surface: Asphalt-concrete Strength: PCN 33/F/A/X/T
3	ACL and elevation	Not Available
4	VOR checkpoints	Not Available
5	INS checkpoints	Spot NR S-1: 242756.96N/1225845.44E S-2: 242757.51N/1225847.70E
6	Remarks	Nil

#### ROYN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual dock- ing/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY: RWY08/26  (Marking): RWY designation, RWY CL, RWY THR, RWY middle point, TDZ, RWY side stripes, Aiming point  (LGT): RCLL, REDL, RENL, RTHL  TWY:  (Marking): TWY CL, RWY HLDG PSN, TWY side stripe  (LGT): TWY edge LGT, TWY CL LGT
3	Stop bars	Nil
4	Remarks	(Marking): Overrun area, Apron TWY CL (LGT): Apron flood LGT

# **ROYN AD 2.10 AERODROME OBSTACLES**

- In Area2 See Obstacle data
- In Area3 To be developed

# **ROYN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

1	Associated MET Office	NAHA
2	Hours of service	H24 (NAHA)
	MET Office outside hours	
3	Office responsible for TAF preparation	Nil
	Periods of validity	
4	Trend forecast	Nil
	Interval of issuance	
5	Briefing/ consultation provided	Briefing is available upon inquiry at NAHA
6	Flight documentation	C
	Language(s) used	En
7	Charts and other information available for	$S_6,\ U_{85},\ U_7,\ U_5,\ U_3,\ U_{25},\ U_2/T_r,\ P_S,\ P_5,\ P_3,\ P_{25},\ P_{SWE},\ P_{SWF},\ P_{SWG},$
	briefing or consultation	$P_{SWI}$ , $P_{SWM}$ , $P_{SW}$ (domestic), E, C, $W_E$ , $W_F$ , $W_G$ , $W_I$ , W, N
8	Supplementary equipment	Nil
	available for providing information	
9	ATS units provided with information	REMOTE
10	Additional information(limitation of ser-	Nil
	vice, etc.)	

# **ROYN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulati	highest elevation of 111/	
1	2	3	4	5	6	
08	075.27°	2000×45	PCN 33/F/A/X/T Asphalt-concrete	242754.37N 1225812.86E	THR ELEV: 71.9FT	
			1	76ft		
26	255.27°	2000×45	PCN 33/F/A/X/T Asphalt-concrete	242810.89N 1225921.54E	THR ELEV: 41.6FT	
			Aspirate concrete	76ft		
Slope of	RWY	Strip Dimensions(M)	RESA(0 Dimens	Overrun) ions(M)	Remarks	
7		10	11		14	
See below figure		2120×150	91×		RWY Grooving : 30m×2000m	
See belov	w ligure	2120×150	200×156		TWT Glooving . 30mx2000m	
RWY 08 71.9ft		<u>0. 700%</u>	LONGITUDINAL PR	OFILE OF RUNWAY		
			47. 8ft	LEVEL 4	7.8ft RWY 26 0.500% 41.6ft	
<u> </u>			 1050m		1 225m 2000m	

# **ROYN AD 2.13 DECLARED DISTANCES**

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
08	2000	2000	2000	2000	Nil
26	2000	2000	2000	2000	Nil

# **ROYN AD 2.14 APPROACH AND RUNWAY LIGHTING**

				10				
				Remarks				
	(*1) 420m LIH	-	3.0°/LEFT 276.6m 49ft		Coded color LIH	Coded color LIH		
26	SALS	Green	PAPI	-	2,000m 30m	2,000m 60m	Red	Nil(*2)
		-	3.0° /LEFT 356.1m 49ft		30m Coded color LIH	60m Coded color LIH		
08	-	Green	PAPI	-	2,000m	2,000m	Red	Nil(*2)
1	2	3	4	5	6	7	8	9
RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	(VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color

Overrun area edge LGT(LEN:60m Color:Red)(\*2) RWY THR ID LGT for RWY 08 THR (Color: White)

# **ROYN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**

1	ABN/IBN location, characteristics and hours of operation	ABN: 242756N/1225853E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI : Nil Anemometer : AVBL
3	TWY edge and centerline lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply/ switch-over time	Within 15sec: All Lights
5	Remarks	Nil

#### **ROYN AD 2.16 HELICOPTER LANDING AREA**

Nil	

# **ROYN AD 2.17 ATS AIRSPACE**

	Designation and lateral limits	Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
	1	2	3	4	6
Yonaguni Information Zone	Area within a radius of 5nm of Yonaguni ARP	3000	-	Yonaguni Remote En	Nil


# **ROYN AD 2.18 ATS COMMUNICATION FACILITIES**

Service designation	Call sign	Frequency	Hours of operation	Remarks	
1	2	3	4	5	
A/G	Yonaguni Remote	118.5MHz	2300 - 1030	Remote air-ground facilties controlled by Naha FSC	


# **ROYN AD 2.19 RADIO NAVIGATION AND LANDING AIDS**

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (5°W/2019) DME	YNE	115.05MHz 1058MHz (CH-97Y)	H24 H24	242753.72N/1225951.86E 242753.72N/1225951.86E	314.6ft	Unusable: 140° -170° beyond 20nm BLW 4000ft.
LOC 26	IYN	108.55MHz	2300- 1030	242752.42N/1225804.79E		LOC 26: 235m (771ft) away FM RWY 08 THR, BRG (MAG) 259°
LOC-DME 26	IYN	1109MHz (CH-22Y)	2300- 1030	242750.22N/1225805.42E		DME 26: 235m (771ft) inside FM RWY 08 THR, 70m (230ft) S of RCL. ELEV 25.8m (85ft). Unusable: beyond 25° south (90Hz) side of course due to terrain
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based.

#### LOC and LOC-DME for RWY26

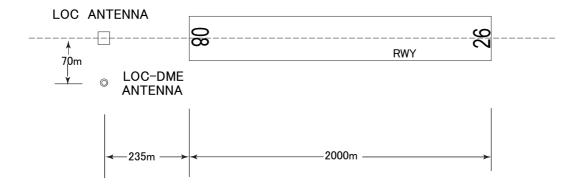

REMARKS : 1. LOC beam BRG(MAG)  $259^{\circ}$  2. ELEV of LOC-DME 25.8 m (85 ft)

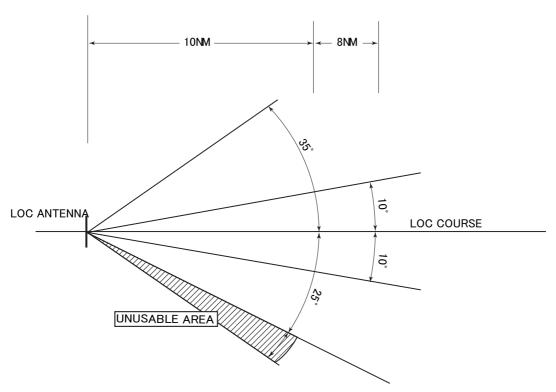

UNUSABLE: BEYOND 25DEG SOUTH (90Hz) SIDE OF COURSE DUE TO TERRAIN.

# **ROYN AD 2.20 LOCAL TRAFFIC REGULATIONS**

On us	of YONAGUNI airport, aircraft operator is required to notify Okinawa Pref. in advance.	
iing to	nd from stands	
	Nii.	
	Nil	
rking ar	a for small aircraft(General aviation)	
	Nil	
rking ar	a for helicopters	
	Nil	
ron - tax	ng during winter conditions	
	Nil	
xiing - lii	itations	
	Nil	
hool and	training flights - technical test flights - use of runways	
	Nil	
licopter	raffic - limitation	
	Nil	
moval c	disabled aircraft from runways	
	Nil	
	ROYN AD 2.21 NOISE ABATEMENT PROCEDURES	

#### **ROYN AD 2.22 FLIGHT PROCEDURES**

#### **TAKE OFF MINIMA**

	RWY	ACFT CAT	REDL & RCLL	REDL or RCLL or RCL Marking	NIL (DAYTIME ONLY)	
			CEIL-VIS	CEIL-VIS	CEIL-VIS	
Multi-Engine	08	A,B,C,D	0-400m	0-400m	0-500m	
ACFT-with TKOF ALTN AP Filed	26		900-2400m <sup>*</sup> 300-2400m <sup>**</sup> 0-400m <sup>***</sup>	900-2400m* 300-2400m** 0-400m***	900-2400m* 300-2400m** 0-400m***	
OTHER	08	A,B,C,D	AVBL LDG MINIMA			
OTHER	26	А,Б,С,Б				

<sup>\*</sup> Applicable to Conventional Departure in case of not climbing with 9.0%.

#### **ROYN AD 2.23 ADDITIONAL INFORMATION**

Ask AD administration

#### **ROYN AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart

Standard Departure Chart - Instrument (TAKZO, ABASA)

Standard Departure Chart - Instrument (AYAKA-RNAV)

Standard Arrival Chart - Instrument (ABASA-RNAV)

Instrument Approach Chart (LOC RWY26)

Instrument Approach Chart (VOR RWY26)

Instrument Approach Chart (RNAV(GNSS) RWY26)

Other Chart (Visual REP)
Other Chart (MVA CHART)

<sup>\*\*</sup>Applicable to RNAV Departure in case of not climbing with 7.2%.

<sup>\*\*\*</sup>Applicable to Conventional Departure in case of climbing with 9.0% gradient up to 900FT.

<sup>\*\*\*</sup>Applicable to RNAV Departure in case of climbing with 7.2% gradient up to 600FT.