INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS	Rwy Idg	12,101
235°	TDZE	143
	Arpt Elev	143

RNAV(GPS) RWY23L

* Circling not authorized NW of Rwy 05L-23R.

MISSED APPROACH: Climb to 6000 direct ADYEK and hold. Continue climb-in-hold to 6000.

ATIS★	NAHA APP CON/DEP CON	TOWER	GND CON CTL	CLNC DEL	ASR
124.2 280.5	119.1 335.8 NORTHWEST 126.5 258.3 SOUTHEAST	134.1 315.8	118.5 275.8	123.3 235.0	

DME/DME RNP - 0.3 NA

RNP APCH

RADAR required for holding at ADYEK above 10,000 when W174 is active.

RADAR requied for holding at BYYRD above 10,000 when W178/178A is active.

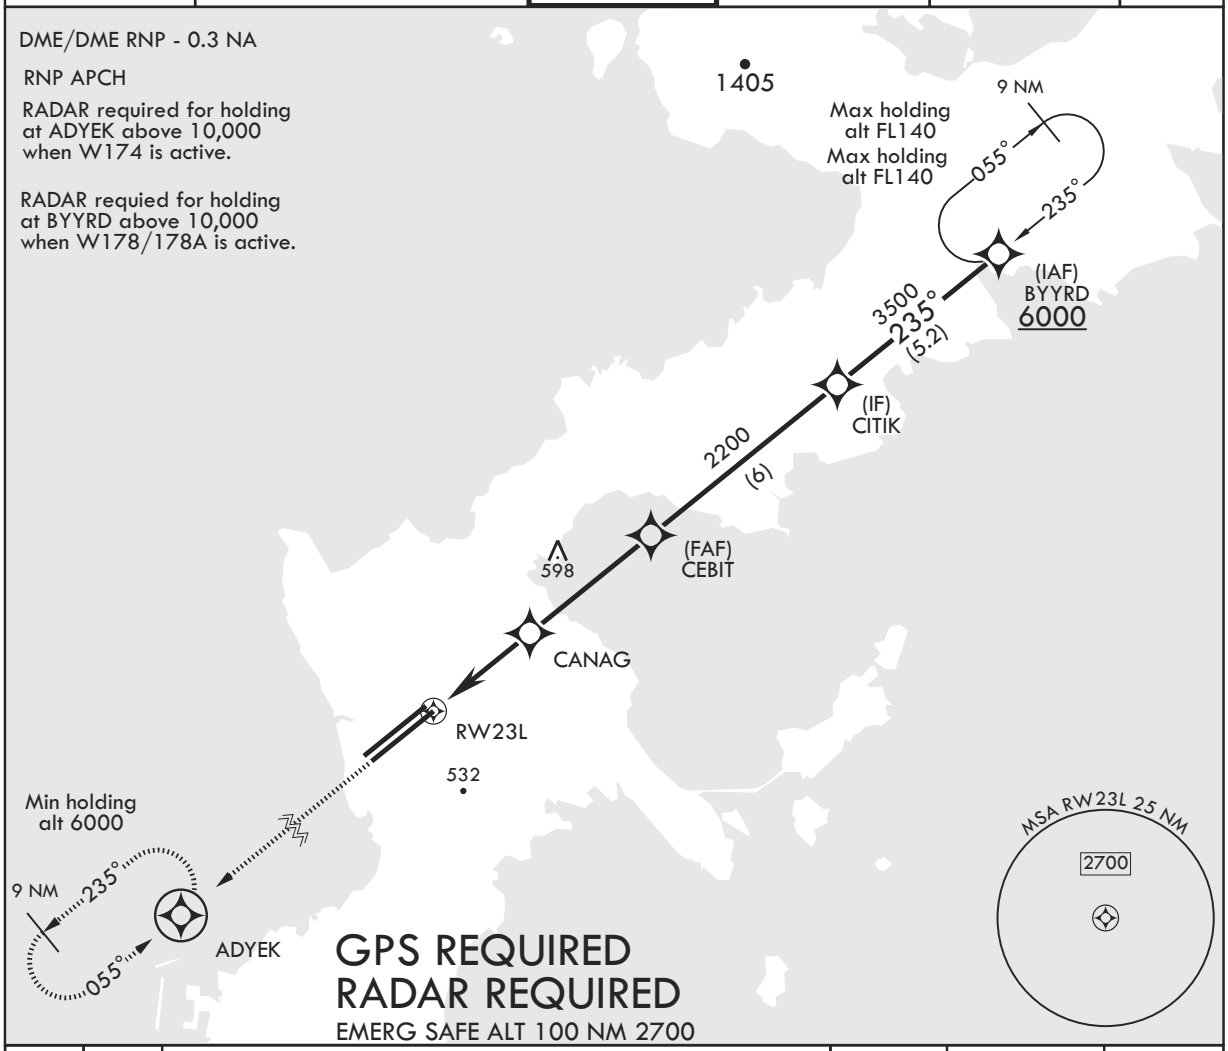

6000 | ADYEK

TLv FL140
TA 14,000

VGSI and Descent angles not coincident.

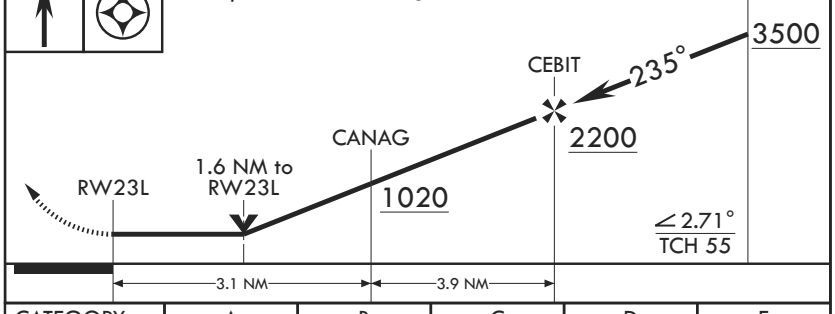

ELEV 143 | TDZE 143

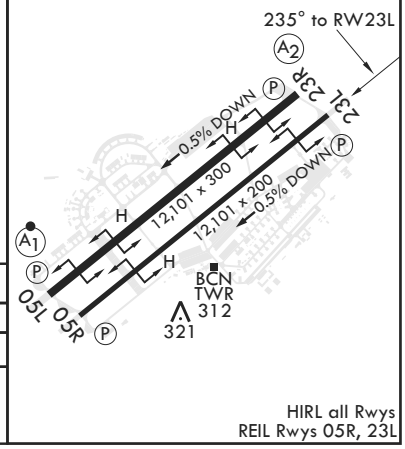

CATEGORY	A	B	C	D	E
LNAV MDA	700/55 557 (600-1)		700-1⅝ 557 (600-1⅝)		
C CIRCLING*	780-1 637 (700-1)	880-1 737 (800-1)	960-2½ 817 (900-2½)	960-2¾ 817 (900-2¾)	1160-3 1017 (1100-3)

HIRL all Rwys
REIL Rwys 05R, 23L

CHANGE : Update

NOTE: REPRINTING DOD FLIP