INSTRUMENT APPROACH CHART

RJSA / AOMORI — RNAV(RNP) Y RWY06

SAPPORO CONTROL 127.575 – 315.3 120.575 – 277.1	GNSS and RF required	AOMORI TOWER 118.3 –126.2	NO RADAR

For uncompensated Baro-VNAV systems, procedure not authorized below -20˚C / above 45˚C

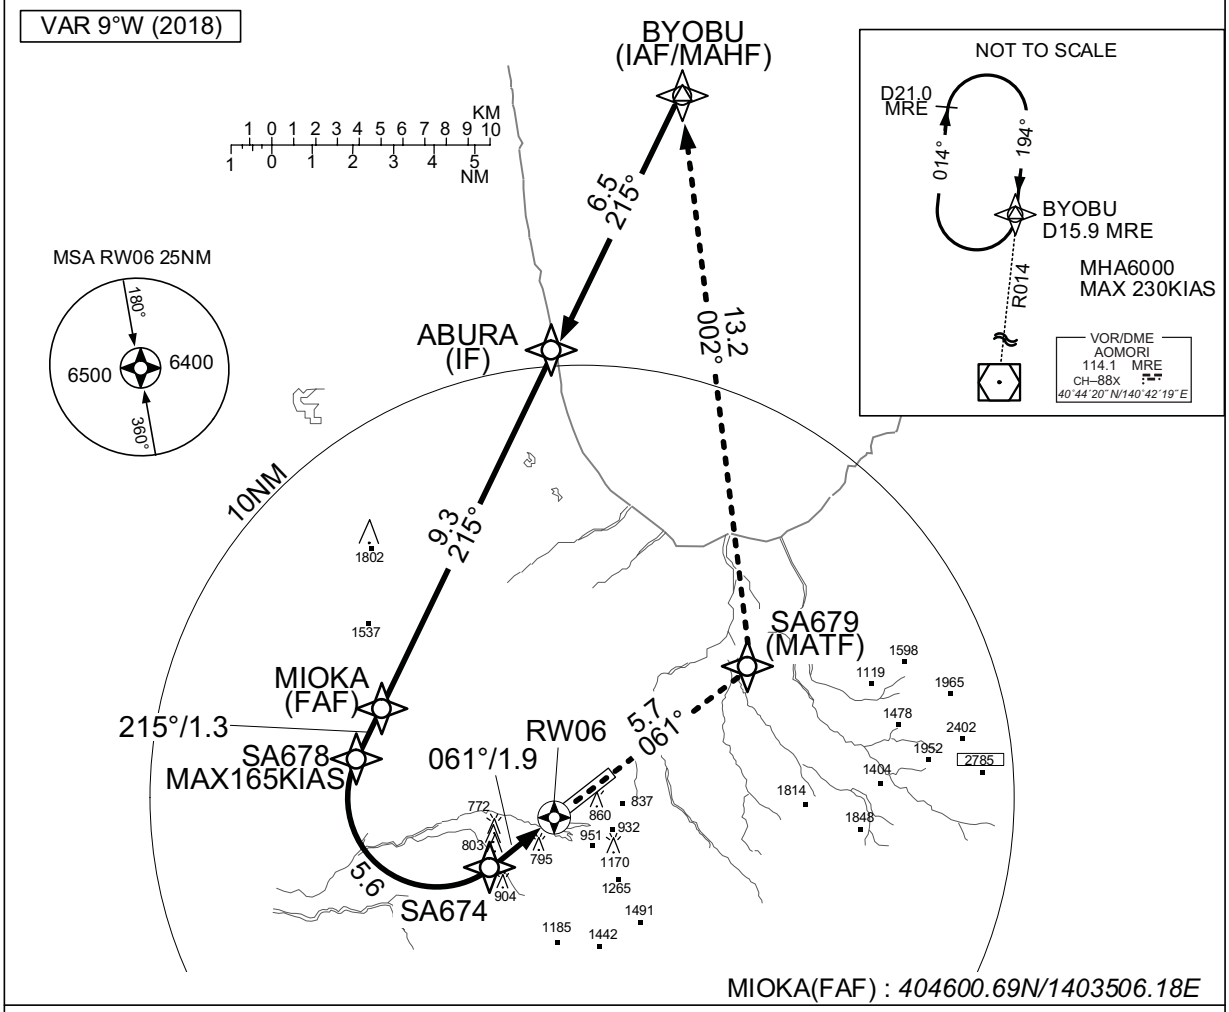

MIOKA(FAF) : *404600.69N/1403506.18E*

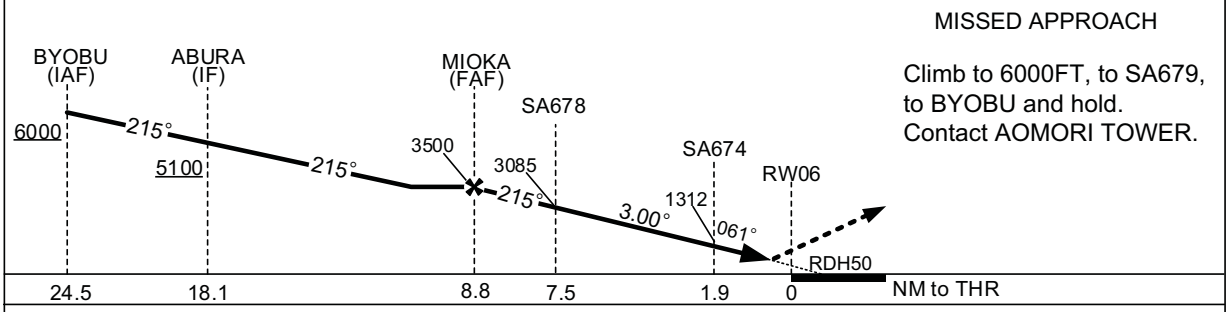

MISSED APPROACH

Climb to 6000FT, to SA679,
to BYOBU and hold.
Contact AOMORI TOWER.

Missed APCH climb gradient MNM 5.0%

MINIMA	THR elev. 647		AD elev. 650	
CAT	RNP 0.10		RNP 0.30	
	DA(H)	RVR/CMV	DA(H)	RVR/CMV
A	–	–	–	–
B				
C	1004(357)	1400	1039(392)	1400
D	1014(367)	1600	1049(402)	1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJSA / AOMORI RNAV(RNP) Y RWY06

RNAV (RNP) Y RWY06

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	BYOBU	—	—	-9.0	—	—	+6000	—	—	—
002	TF	ABURA	—	215 (206.1)	-9.0	6.5	—	+5100	—	—	1.0
003	TF	MIOKA	—	215 (206.0)	-9.0	9.3	—	3500	—	—	1.0
004	TF	SA678	—	215 (206.0)	-9.0	1.3	—	3085	-165	-3.00	0.10 0.30
005	RF Center: SARF4 r=2.07NM	SA674	—	—	-9.0	5.6	L	1312	—	-3.00	0.10 0.30
006	TF	RW06	Y	061 (051.8)	-9.0	1.9	—	697	—	-3.00/50	0.10 0.30
007	TF	SA679	—	061 (051.8)	-9.0	5.7	—	—	—	—	1.0
008	TF	BYOBU	—	002 (352.9)	-9.0	13.2	—	6000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
BYOBU	*410009.54N/1404414.25E*	SARF4	*404355.81N/1403647.71E*
ABURA	*405419.99N/1404028.03E*		
MIOKA	*404600.69N/1403506.18E*		
SA678	*404450.39N/1403420.99E*		
SA674	*404218.09N/1403828.52E*		
RW06	*404329.77N/1404028.61E*		
SA679	*404701.68N/1404624.34E*		

CHANGE : New PROC