

INSTRUMENT APPROACH CHART

RODN / KADENA

LOC I-KZZ 108.7	APCH CRS 235°	Rwy ldg 12,101 THRE 129 Arpt Elev 143
---------------------------	-------------------------	--

ILS or LOC RWY23R

† * When ALS inop, increase CAT AB RVR to 55 vis to 1 mile, CAT CDE vis to 1½ miles.
** Circling NW of Rwy 05L-23R not authorized.




† MISSED APPROACH: Climb to 6000 on KAD VORTAC R-235 to JACKS and hold.

ATIS ★ 124.2 280.5	NAHA APP CON 119.1 335.8 NORTHWEST 126.5 258.3 SOUTHEAST	KADENA TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
------------------------------	--	------------------------------------	-------------------------------	--------------------------------	-----

† CAUTION: Missed Approach
Minimum Climb Rate to 6000


Knots	60	120	180	240	300	360
V/V(fpm)	280	560	840	1120	1400	1680

ATC Minimum Climb Rate

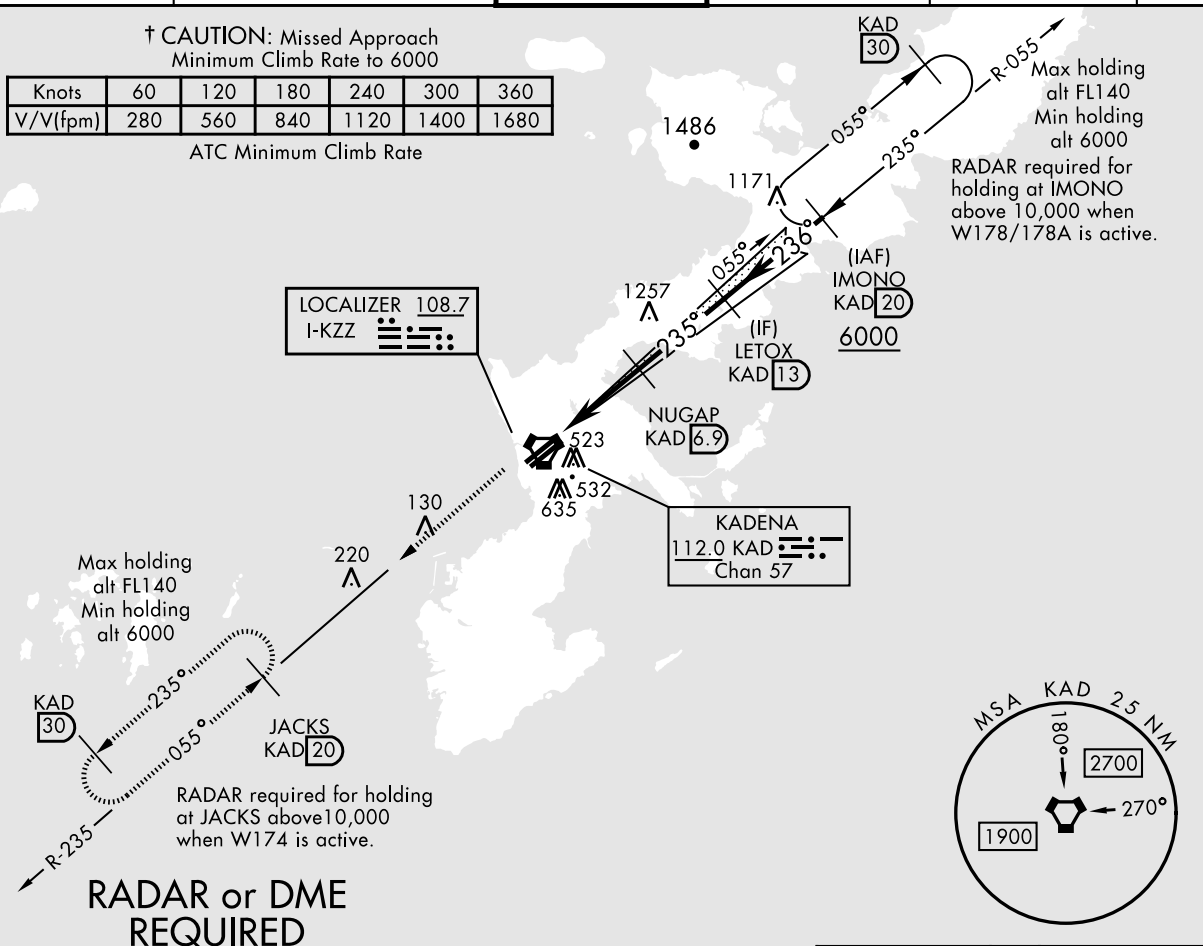


**RADAR or DME
REQUIRED**

EMERGENCY SAFE ALT 100 NM 2700

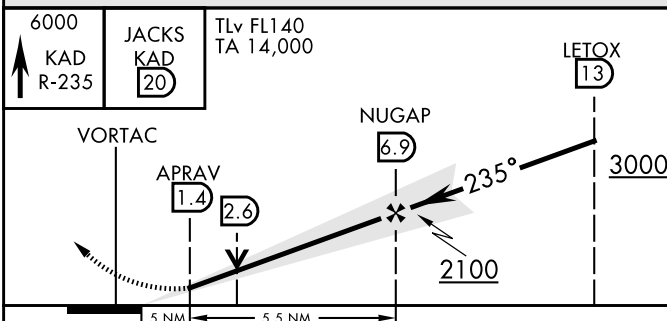

ELEV 143	THRE 129
----------	----------

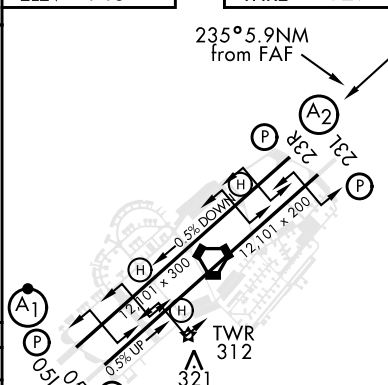

HIRL all Rwy
REIL Rwy 05R-23L

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

CHANGE : Update

NOTE: REPRINTING DOD FLIP