


RJTY / YOKOTA

AD CHART

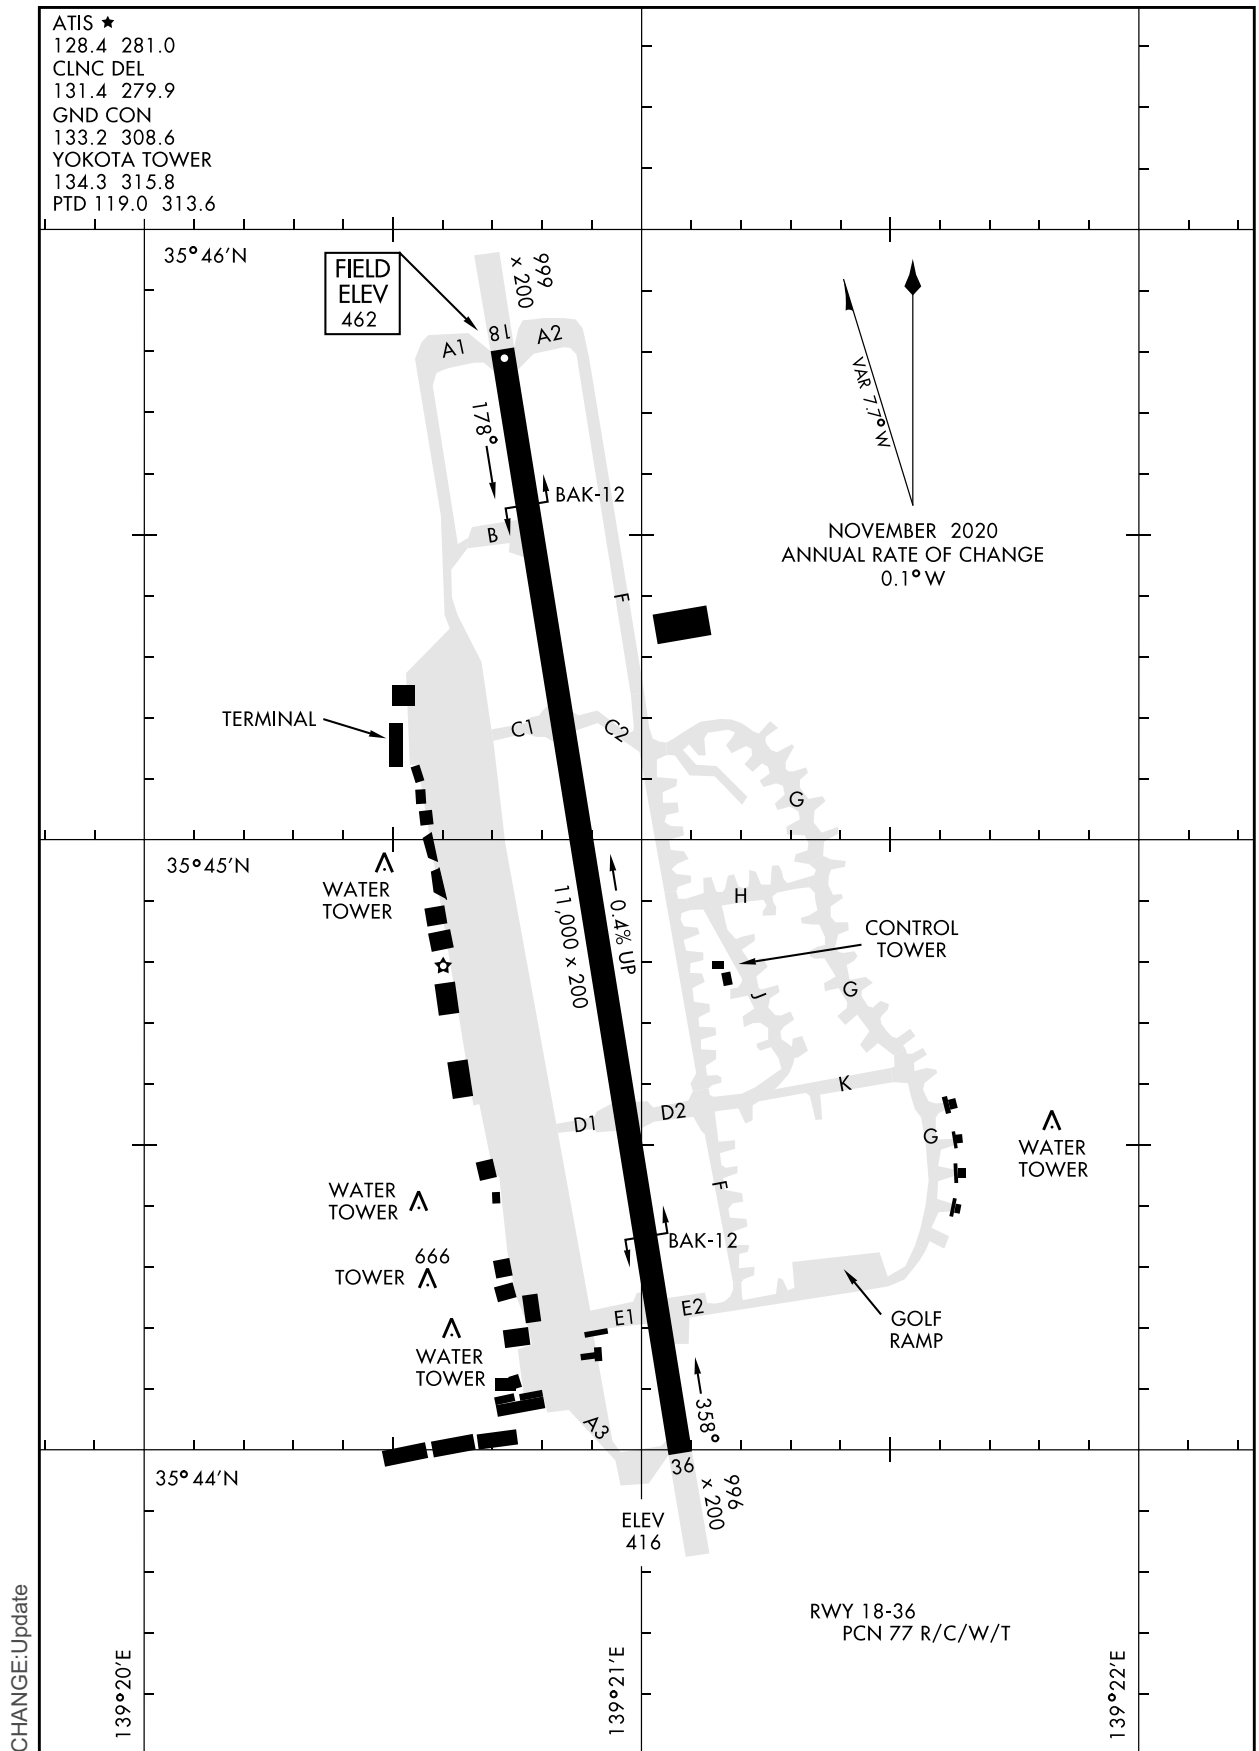

NOTE: REPRINTING DOD FLIP

## RJTY / YOKOTA

ATIS★	128.4	281.0
CLNC DEL	131.4	279.9
GND CON	133.2	308.6
YOKOTA TOWER	134.3	315.8
YOKOTA DEP CON	122.1	363.8

YOKOTA  
Chan 85 YOK

177°

178°

18

BREE 3

FL110

R-178

TA 14,000

T

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.  
Cross BREEE at or below FL110. Continue as assigned by ATC.

CHANGE : Update

**NOTE: REPRINTING DOD FLIP**


## STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FOUR DEPARTURE (OBSTACLE)

ATIS ★ 128.4 281.0  
 CLNC DEL  
 131.4 279.9  
 GND CON  
 133.2 308.6  
 YOKOTA TOWER  
 134.3 315.8  
 YOKOTA DEP CON  
 122.1 363.8

SL-1458 [USAF]

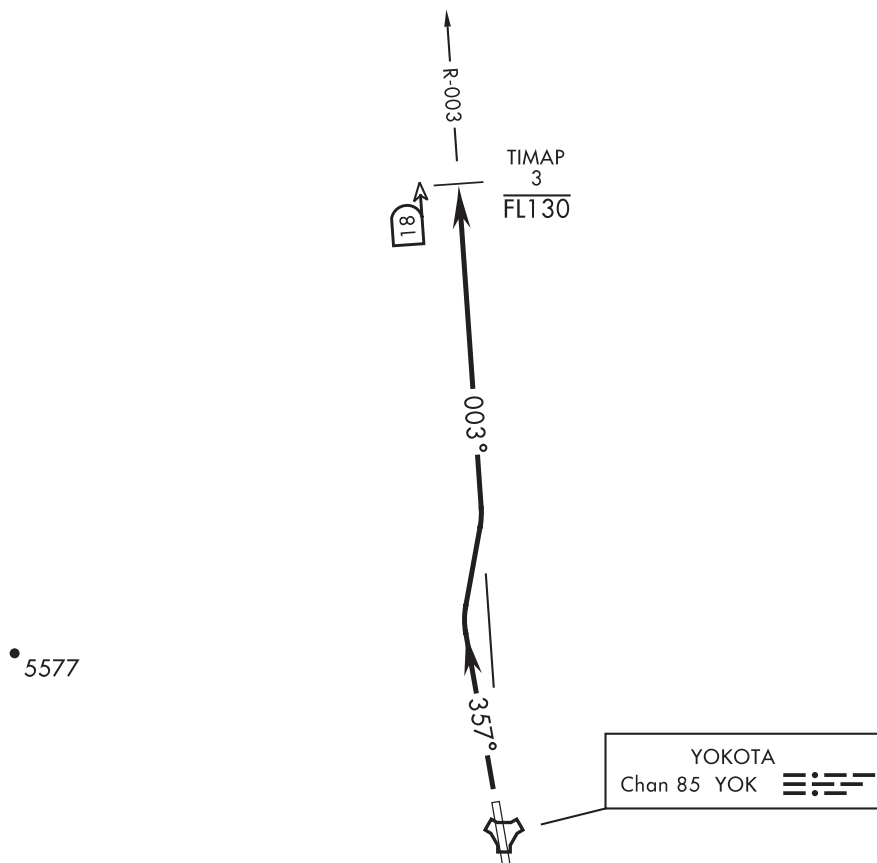

TA 14,000



## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP. Cross TIMAP at or below FL130. Continue as assigned by ATC.

CHANGE : Update


NOTE: REPRINTING DOD FLIP

## RJTY / YOKOTA

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a)	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 (b)	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 (c)	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 (b)	V/V(fpm)	476	952	1428	1904	2380	2856

© to 7900

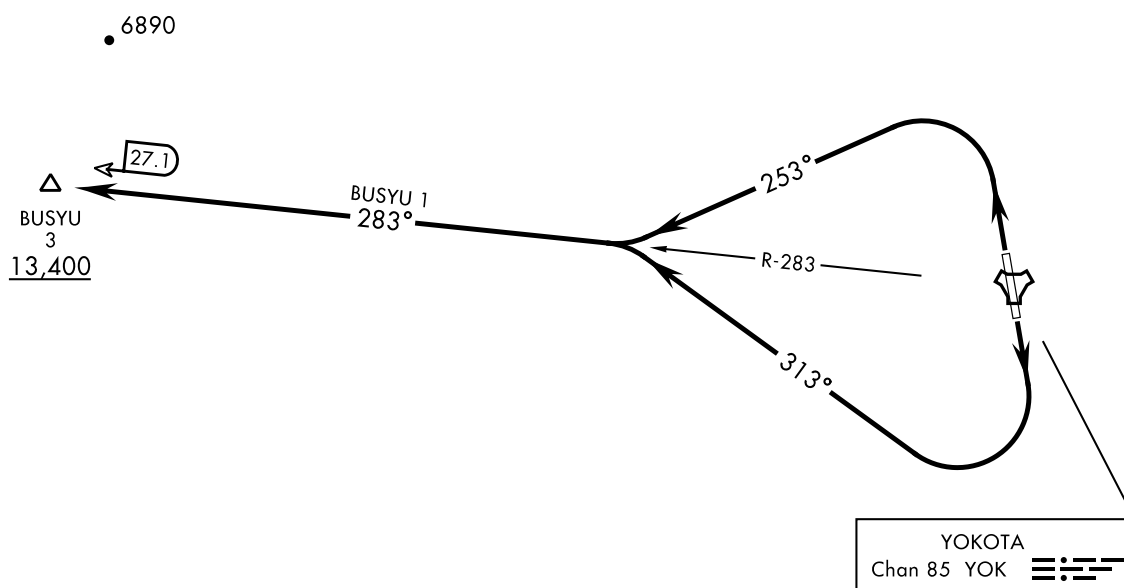

TLv FL140  
TA 14,000

**T**

## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU. Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : New PROC

**NOTE: REPRINTING DOD FLIP**

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

FISAB TWO DEPARTURE (RNAV)

ATIS★ 128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

TAKE-OFF OBSTACLES:  
(1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.  
(2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.  
(3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

5577

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000

▼

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT


RJTY /YOKOTA

GERGE TWO DEPARTURE (RNAV)

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

TAKE-OFF OSBTACLES:

- (1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
- (2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
- (3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
- (4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
- (5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
- (6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.

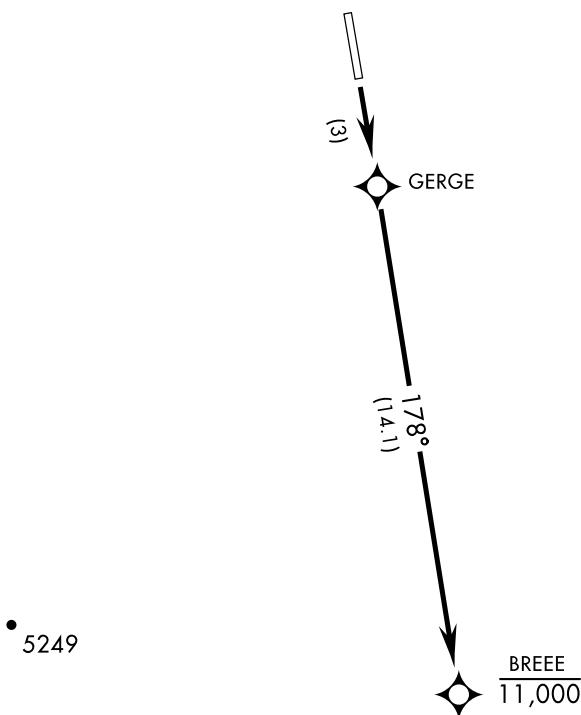

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**

(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000



DEPARTURE ROUTE DESCRIPTION


TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

NOTE: REPRINTING DOD FLIP

**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

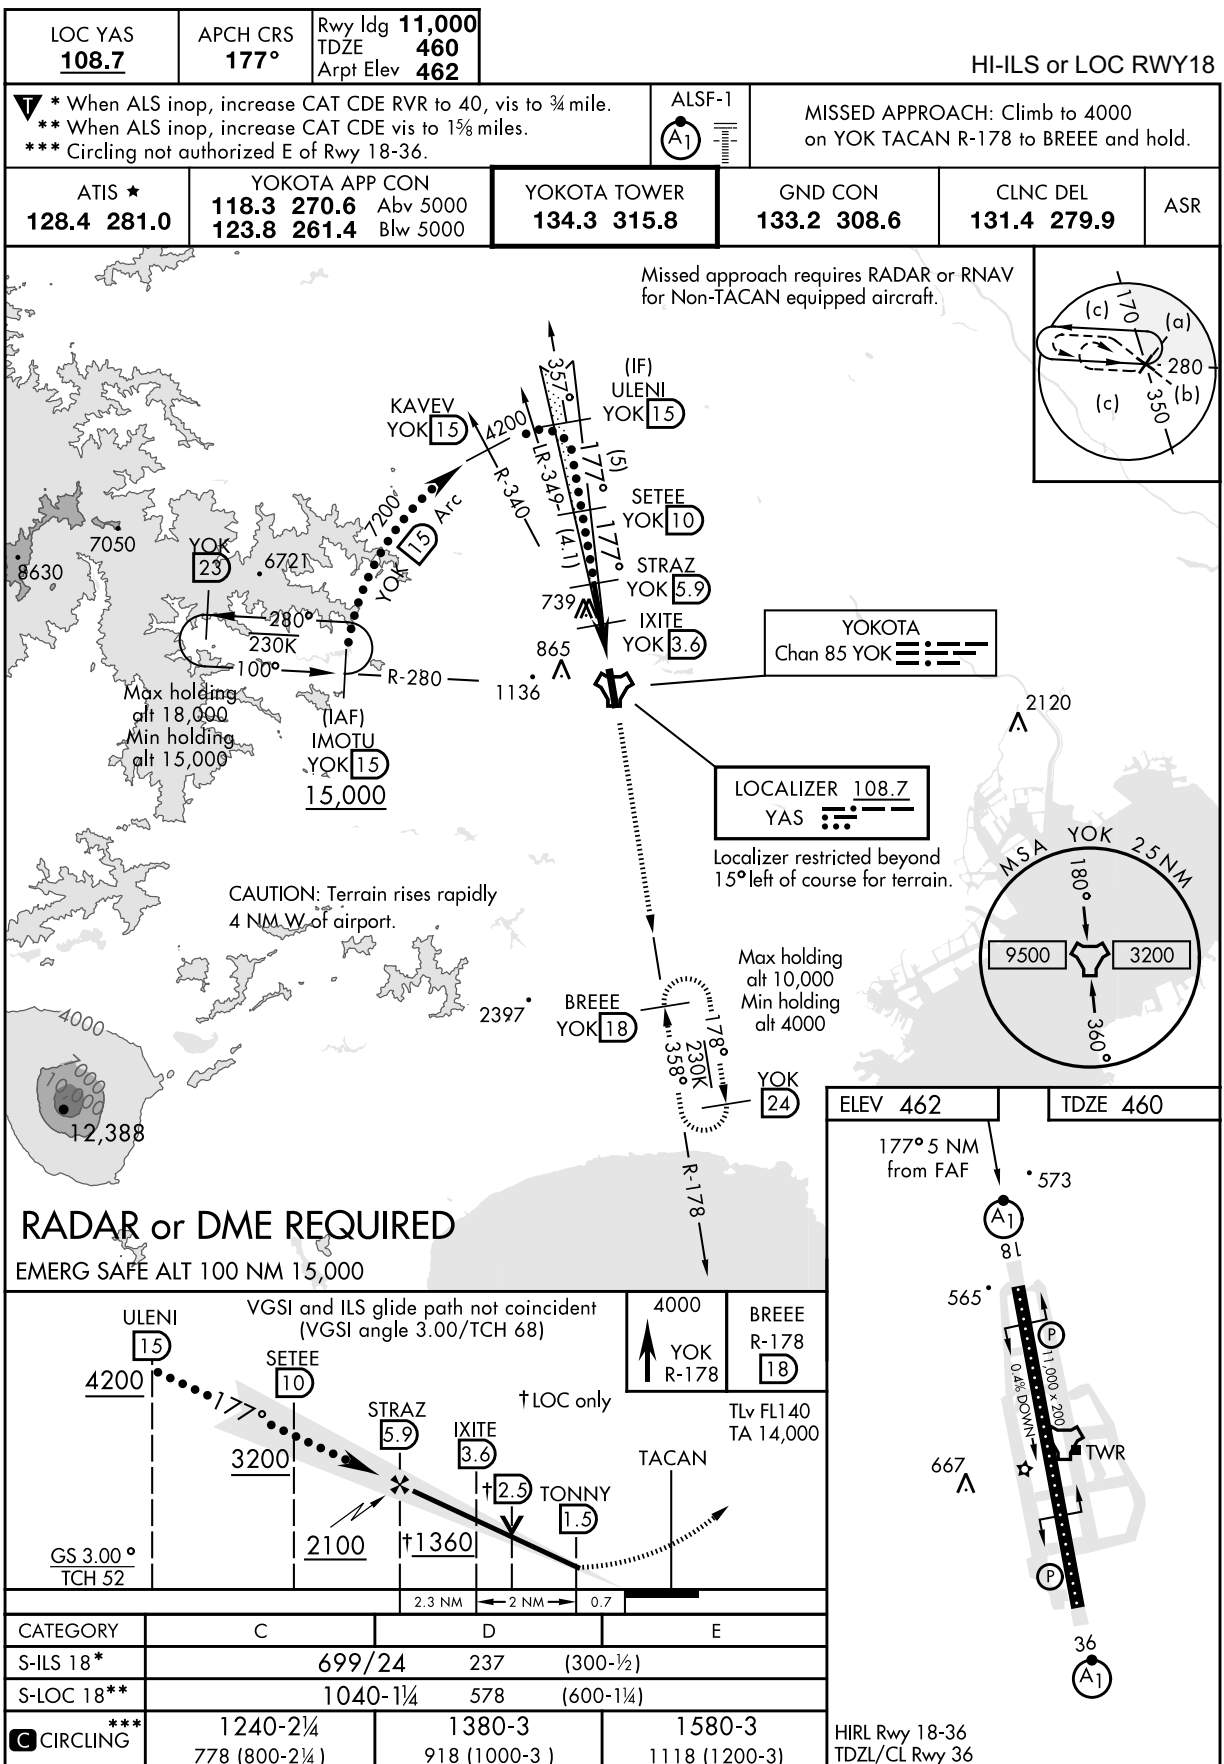


NOTE: REPRINTING DOD FLIP



## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

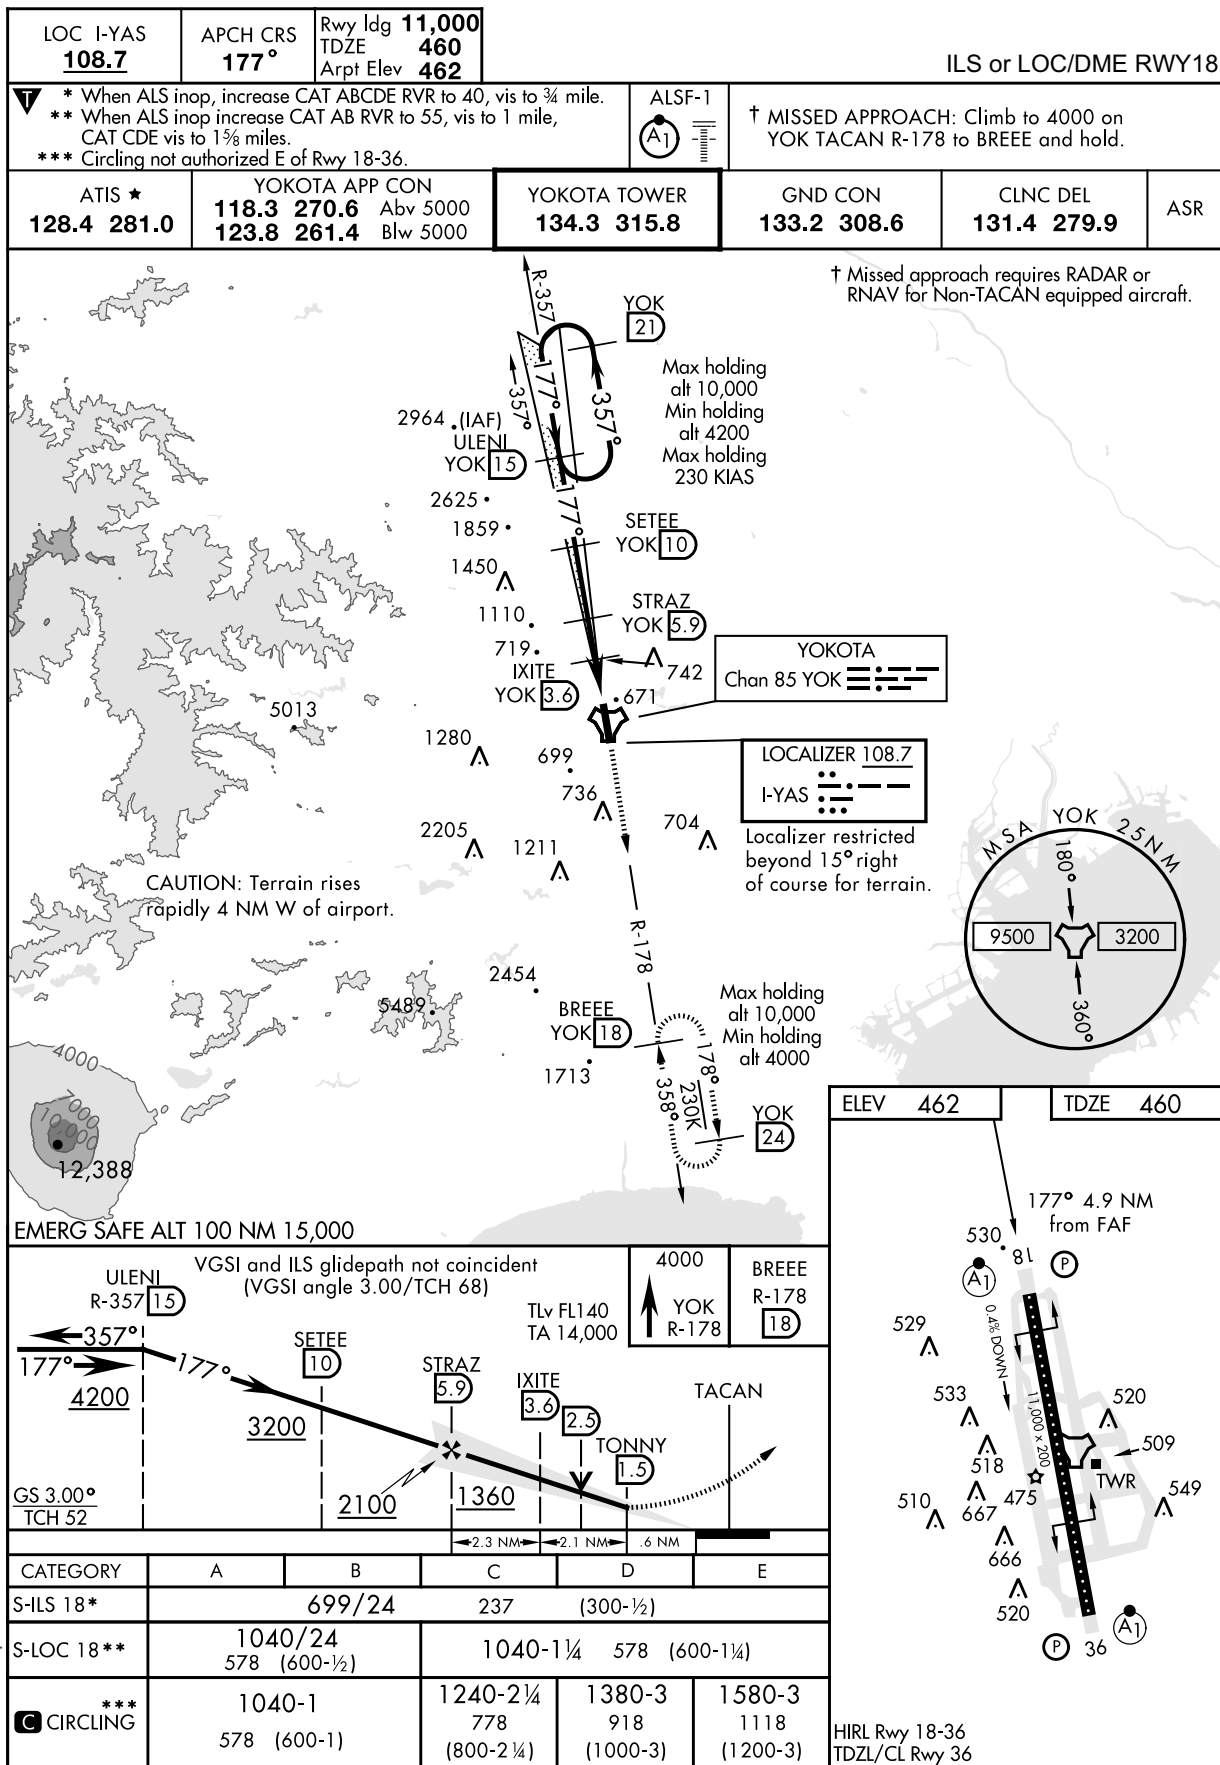

NOTE: REPRINTING DOD FLIP

## RJTY / YOKOTA

LOC I-YOK <b>109.7</b>	APCH CRS <b>357°</b>	Rwy Idg <b>11,000</b> TDZE <b>428</b> Arpt Elev <b>462</b>
---------------------------	-------------------------	--

HI-ILS or LOC RWY36

\* When ALS inop, increase CAT CDE RVR to 40, vis to ¾ mile.  
 \*\* When ALS inop, increase CAT CDE vis to 1¼ miles.  
 \*\*\* Circling not authorized E of Rwy 18-36.

ATIS ★  
**128.4 281.0**

YOKOTA APP CON  
**118.3 270.6** Abv 5000  
**123.8 261.4** Blw 5000

YOKOTA TOWER  
**134.3 315.8**

GND CON  
**133.2 308.6**

CLNC DEL  
**131.4 279.9**

ASR

Missed approach requires RADAR or RNAV for Non-TACAN equipped aircraft.  
 CAUTION: Terrain rises rapidly 4 NM W of airport.  
 Max holding alt 10,000  
 Min holding alt 4200  
 LOCALIZER 109.7 I-YOK  
 Localizer restricted beyond 20° left of course for terrain.  
 YOKOTA Chan 85 YOK  
 MSA YOK 2.5 NM  
 180° 360°  
 9500 3200

### RADAR or DME REQUIRED

EMERG SAFE ALT 100 NM 15,000

4200 YOK R-003	TIMAP R-003 <b>18</b>	VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96) OKURA <b>15</b> TLv FL140 TA 14,000
-------------------	--------------------------	--

† LOC only BURTE **4**  
 TACAN TEEJA **1.5** † **2.4**  
 † 1280 2300  
 GS 2.50° TCH 53  
 3.1 NM 3.8 NM

CATEGORY	C	D	E
S-ILS 36*	630/18	200 (200-½)	
S-LOC 36**	860/40	430 (400-¾)	
***	1240-2¼ 778 (800-2¼)	1380-3 918 (1000-3)	1580-3 1118 (1200-3)

**CIRCLING**  
 HIRL Rwy 18-36  
 TDZL/CL Rwy 36

357° 6.9 NM from FAF

**NOTE: REPRINTING DOD FLIP**

## RJTY / YOKOTA

**LOC I-YOK**  
**109.7**

**APCH CRS**  
**357°**

**Rwy Idg**  
**11,000**

**TDZE**  
**428**

**Arpt Elev**  
**462**

ILS or LOC/DME RWY36

**\* When ALS inop, increase RVR to 40, vis to ¾ mile.**

**\*\* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1½ miles.**

**\*\*\* Circling not authorized E of Rwy 18-36.**

ALSF-1

† MISSED APPROACH: Climb to 4200, intercept YOK TACAN R-003 to TIMAP and hold.

**ATIS ★**

**128.4 281.0**

**YOKOTA APP CON**

**118.3 270.6** Abv 5000

**123.8 261.4** Blw 5000

**YOKOTA TOWER**

**134.3 315.8**

**GND CON**

**133.2 308.6**

**CLNC DEL**

**131.4 279.9**

ASR

† Missed approach requires RADAR or RNAV for non-TACAN equipped aircraft.

**ELEV 462**

**TDZE 428**

CATEGORY	A	B	C	D	E
S-ILS 36*	630/18		200	(200-½)	
S-LOC 36**	860/24	430 (400-½)	860/40	430	(400-¾)
*** CIRCLING	1040-1 578 (600-1)	1240-2¼ 778 (800-2¼)	1380-3 918 (1000-3)	1580-3 1118 (1200-3)	


HIRL Rwy 18-36

TDZL/CL Rwy 36

3/12/20

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

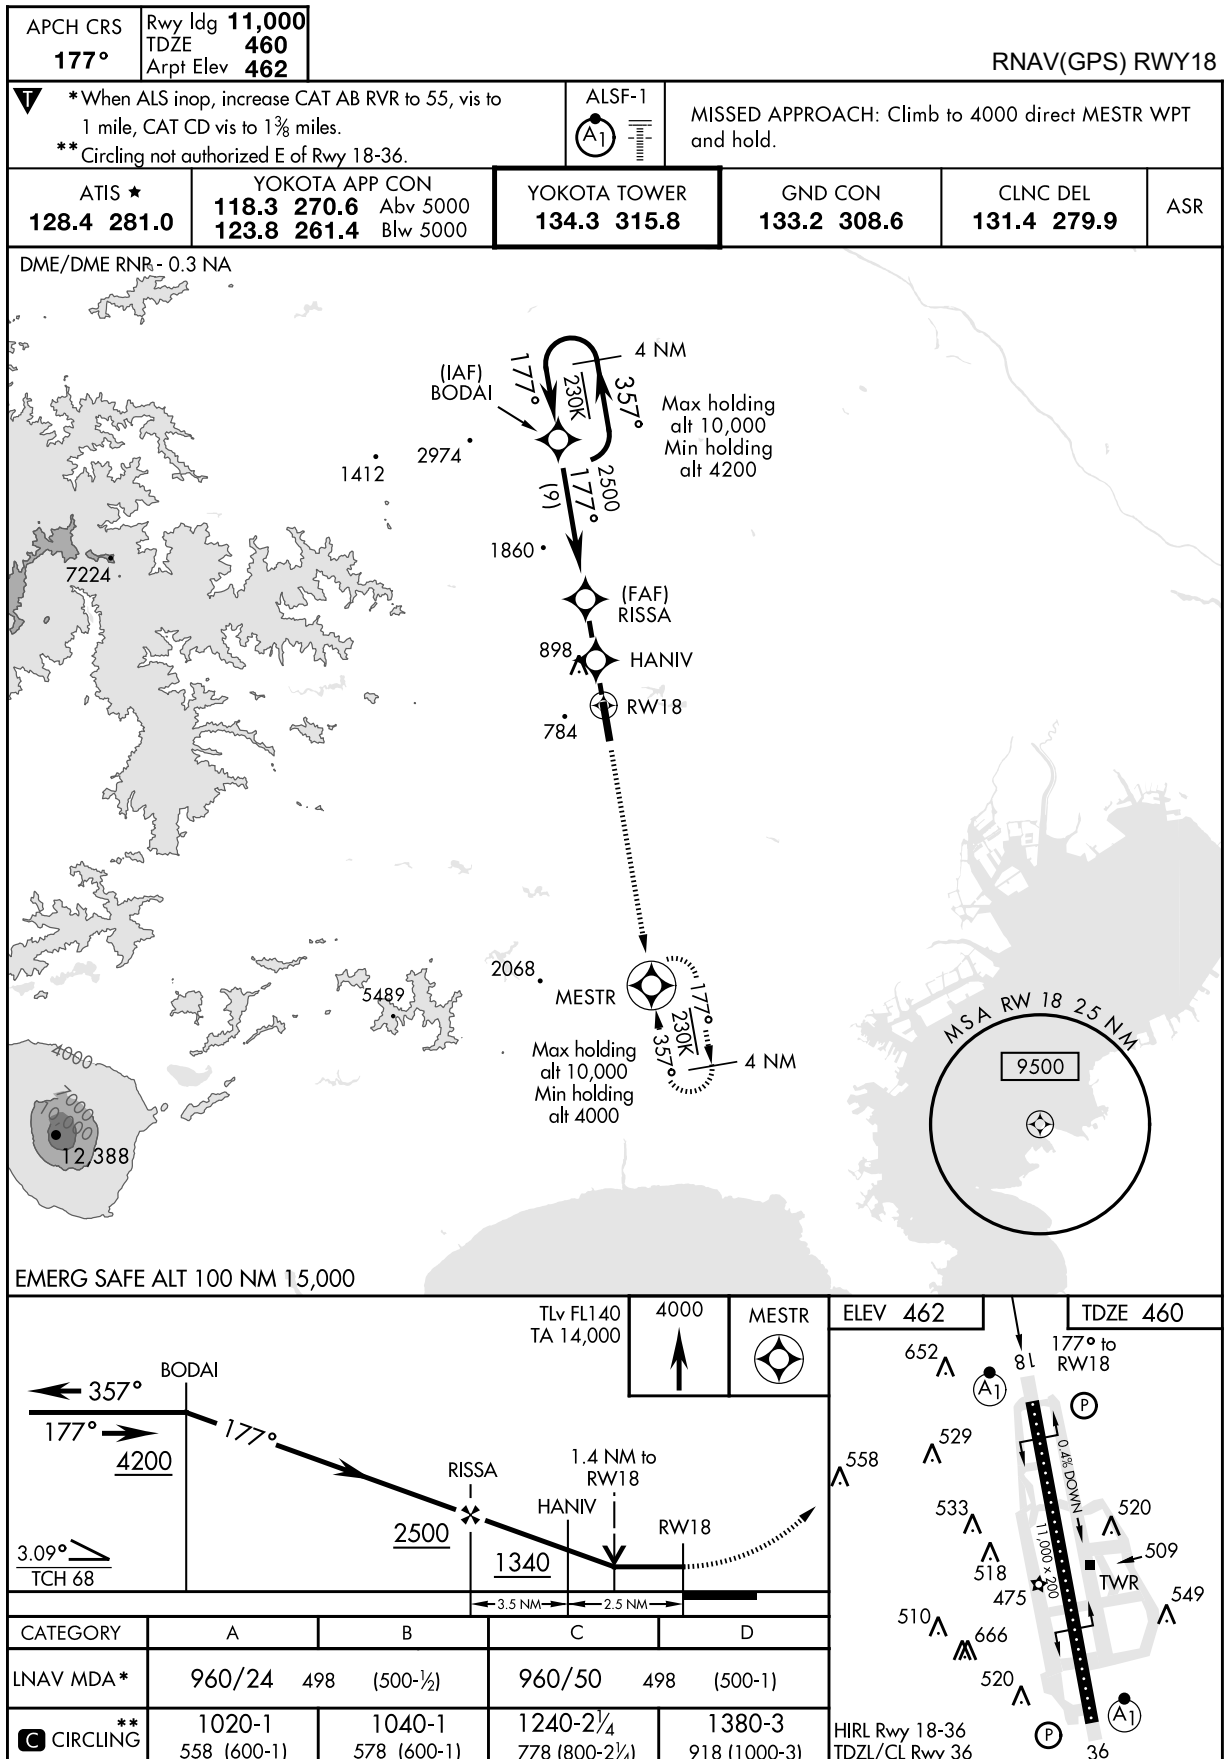

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
357°	TDZE	428
	Arpt Elev	462


RNAV(GPS) RWY36

⚠ \* When ALS inop, increase CAT A/B RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.  
 \*\* Circling not authorized East of Rwy 18-36.



MISSED APPROACH: Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.


ATIS★	APP CON	TOWER★	GND CON	CLNC DEL	ASR
128.4 281.0	118.3 261.4	134.3 315.8	133.2 308.6	131.4 279.9	

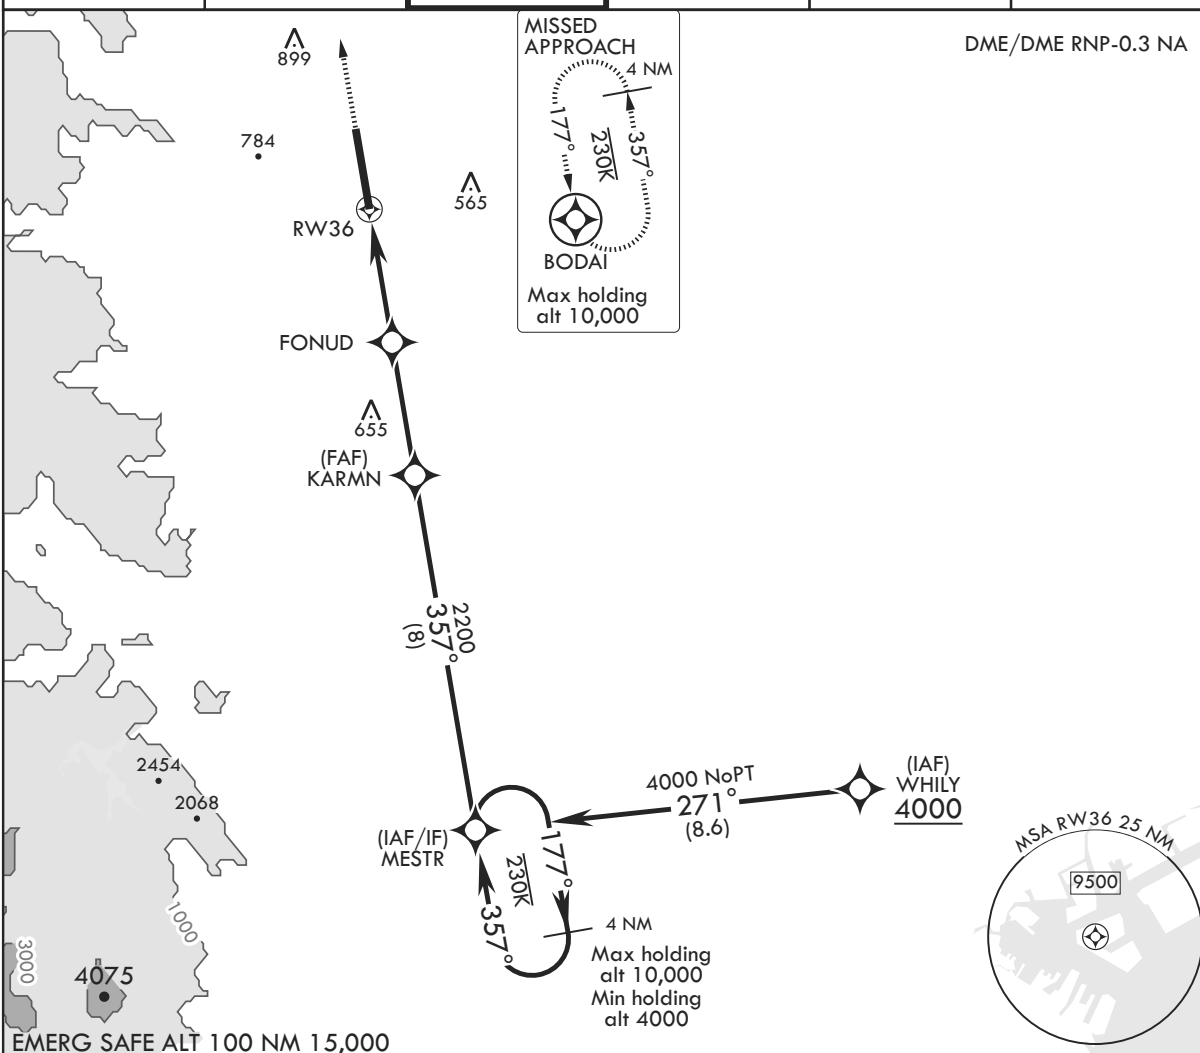

EMERG SAFE ALT 100 NM 15,000


5300	BODAI	VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96).
------	-------	--

TLv FL140  
TA 14,000

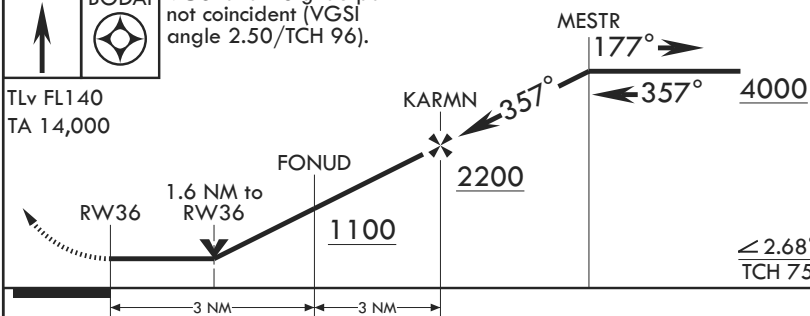

ELEV 462

TDZE 428

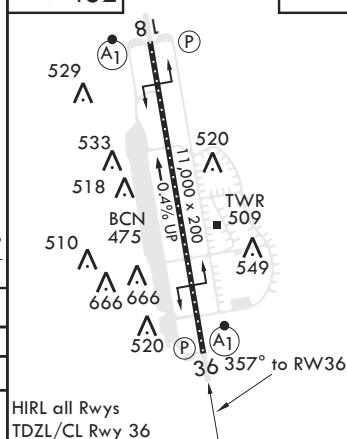

CATEGORY	A	B	C	D
LNAV MDA*	940/24 510 (500-1/2)	940/55 510 (500-1)		
CIRCLING**	1040-1 578 (600-1)	1240-2 1/4 778 (800-2 1/4)	1380-3 918 (1000-3)	

HIRL all Rwy  
TDZL/CL Rwy 36

NOTE: REPRINTING DOD FLIP