

Designation	Call Sign	FREQ. (MHz)
TWR	Kobe Tower	118.5, 126.2
ATIS	Kobe Airport	128.075

KOBE AP

VAR 7° W

THR 343754N/1351237E

THR 343758N/1351326E

THR 343802N/1351415E

APCH LGT BCN

APCH AREA EDGE LGT

OVERRUN AREA EDGE LGT

WIND SPEED METER

CEILO METER

RWY GUARD LGT (T1-T6)

ARP

3.0° MEHT 22.5m(74ft)

3.0° MEHT 20.0m(66ft)

WIND SPEED METER

430.9m

490.5m

300m

420m

180m

300m

120m

605m x 190m

2500m x 40m

PCN 80/F/B/X/T

34m PCN 65/F/B/X/T

32m PCN 80/F/B/X/T

30m PCN 80/F/B/X/T

30m PCN 74/R/B/X/T

9m PCN 19/F/B/X/T

18m PCN 39/F/B/X/T

23m PCN 46/F/B/X/T

W1

W2

W3

P1 thru P3, P5

P4

T1, T6

T2, T3, T4, T5

T6

P5

P4

P3

P2

P1

T1

T2

T3

T4

T5

T6

W1

W2

W3

W4

W5

W6

W7

W8

W9

W10

W11

W12

W13

W14

W15

W16

W17

W18

W19

W20

W21

W22

W23

W24

W25

W26

W27

W28

W29

W30

W31

W32

W33

W34

W35

W36

W37

W38

W39

W40

W41

W42

W43

W44

W45

W46

W47

W48

W49

W50

W51

W52

W53

W54

W55

W56

W57

W58

W59

W60

W61

W62

W63

W64

W65

W66

W67

W68

W69

W70

W71

W72

W73

W74

W75

W76

W77

W78

W79

W80

W81

W82

W83

W84

W85

W86

W87

W88

W89

W90

W91

W92

W93

W94

W95

W96

W97

W98

W99

W100

W101

W102

W103

W104

W105

W106

W107

W108

W109

W110

W111

W112

W113

W114

W115

W116

W117

W118

W119

W120

W121

W122

W123

W124

W125

W126

W127

W128

W129

W130

W131

W132

W133

W134

W135

W136

W137

W138

W139

W140

W141

W142

W143

W144

W145

W146

W147

W148

W149

W150

W151

W152

W153

W154

W155

W156

W157

W158

W159

W160

W161

W162

W163

W164

W165

W166

W167

W168

W169

W170

W171

W172

W173

W174

W175

W176

W177

W178

W179

W180

W181

W182

W183

W184

W185

W186

W187

W188

W189

W190

W191

W192

W193

W194

W195

W196

W197

W198

W199

W200

W201

W202

W203

W204

W205

W206

W207

W208

W209

W210

W211

W212

W213

W214

W215

W216

W217

W218

W219

W220

W221

W222

W223

W224

W225

W226

W227

W228

W229

W230

W231

W232

W233

W234

W235

W236

W237

W238

W239

W240

W241

W242

W243

W244

W245

W246

W247

W248

W249

W250

W251

W252

W253

W254

W255

W256

W257

W258

W259

W260

W261

W262

W263

W264

W265

W266

W267

W268

W269

W270

W271

W272

W273

W274

W275

W276

W277

W278

W279

W280

W281

W282

W283

W284

W285

W286

W287

W288

W289

W290

W291

W292

W293

W294

W295

W296

W297

W298

W299

W300

W301

W302

W303

W304

W305

W306

W307

W308

W309

W310

W311

W312

W313

W314

W315

W316

W317

W318

W319

W320

W321

W322

W323

W324

W325

W326

W327

W328

W329

W330

W331

W332

W333

W334

W335

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE


SID

KOBE FOUR DEPARTURE

RWY09: Turn right, climb via YOE R274 to intercept and proceed via
KNE R323, via KCE R272 to MAIKO.

RWY27: Climb via KCE R272 to MAIKO.

CHANGE : PROC renamed. Radial FM KCE.

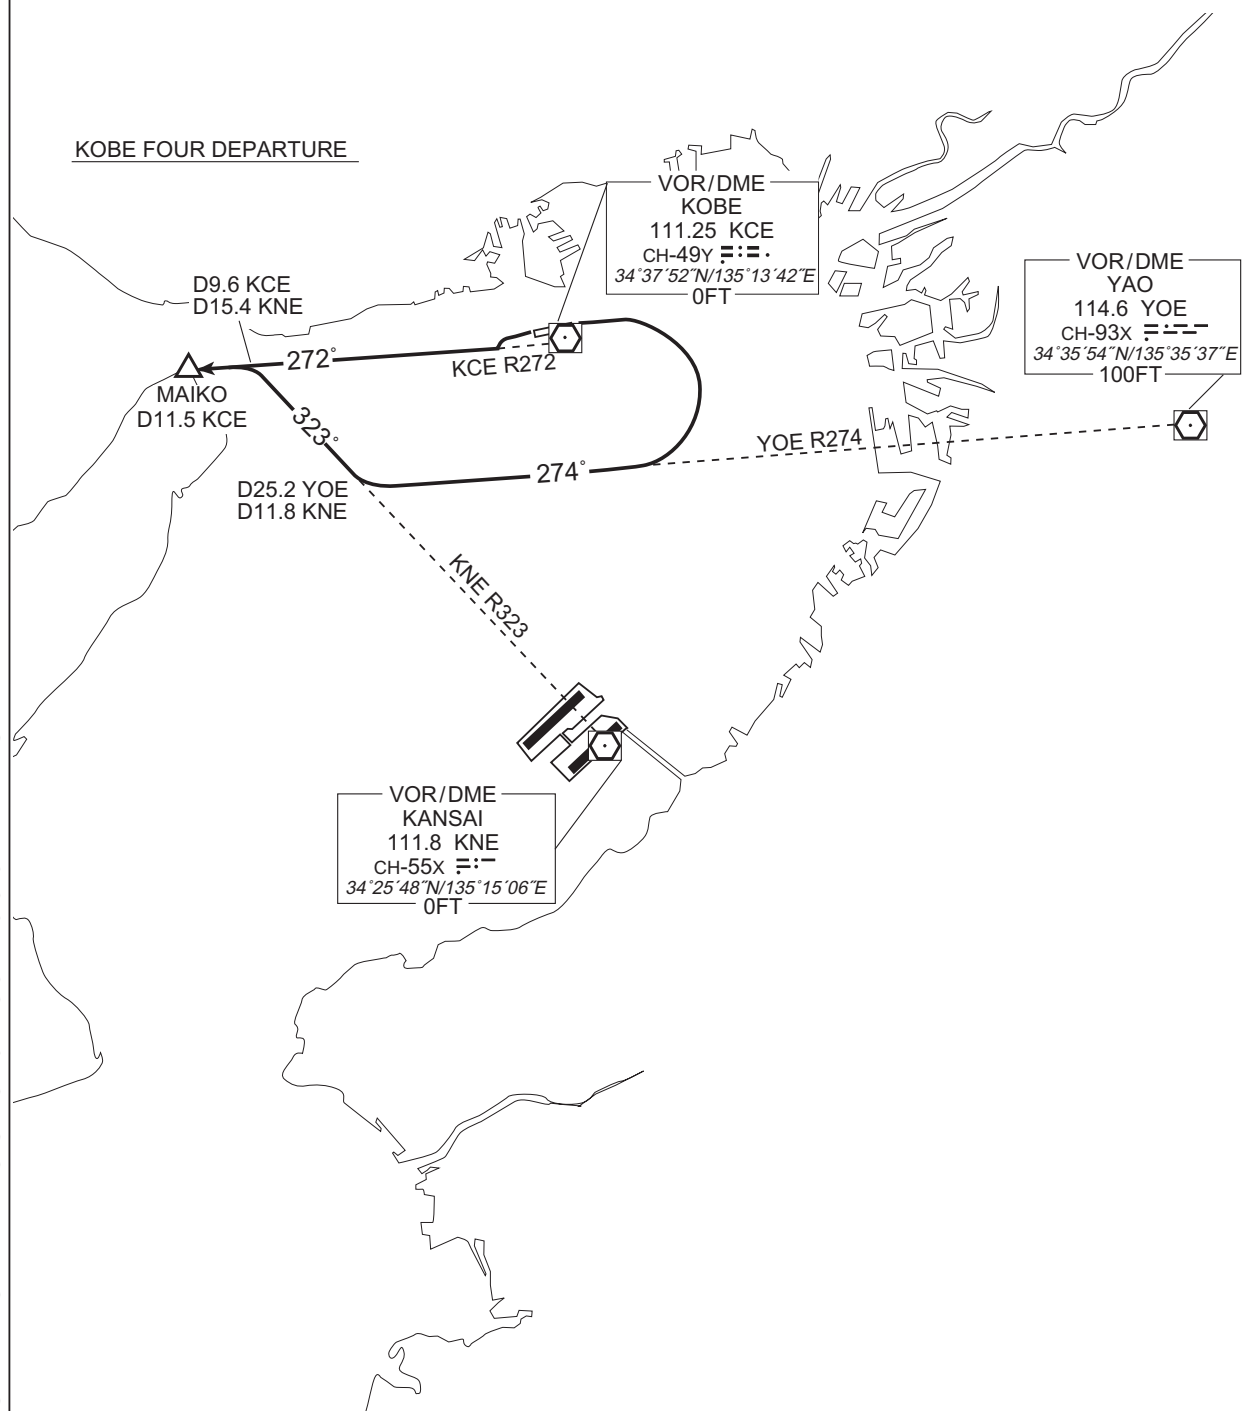

STANDARD DEPARTURE CHART - INSTRUMENT

RJBE / KOBE

TRANSITION

KIBI TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via OYE R114 to OYE VOR/DME.

Cross KAWAT at or above 8000FT.

TAMBA TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via TSC R001 to CHIZU via AYAYA, via YME R236 to YME VOR/DME via TAMBA.

Cross KAWAT at or above 8000FT.

KAGAWA TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via KTE R058 to KTE VOR/DME.

Cross KAWAT at or above 8000FT.

AYAYA TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via TSC R001 to AYAYA.

Cross KAWAT at or above 8000FT.


CHANGE : Radial FM KCE.



STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

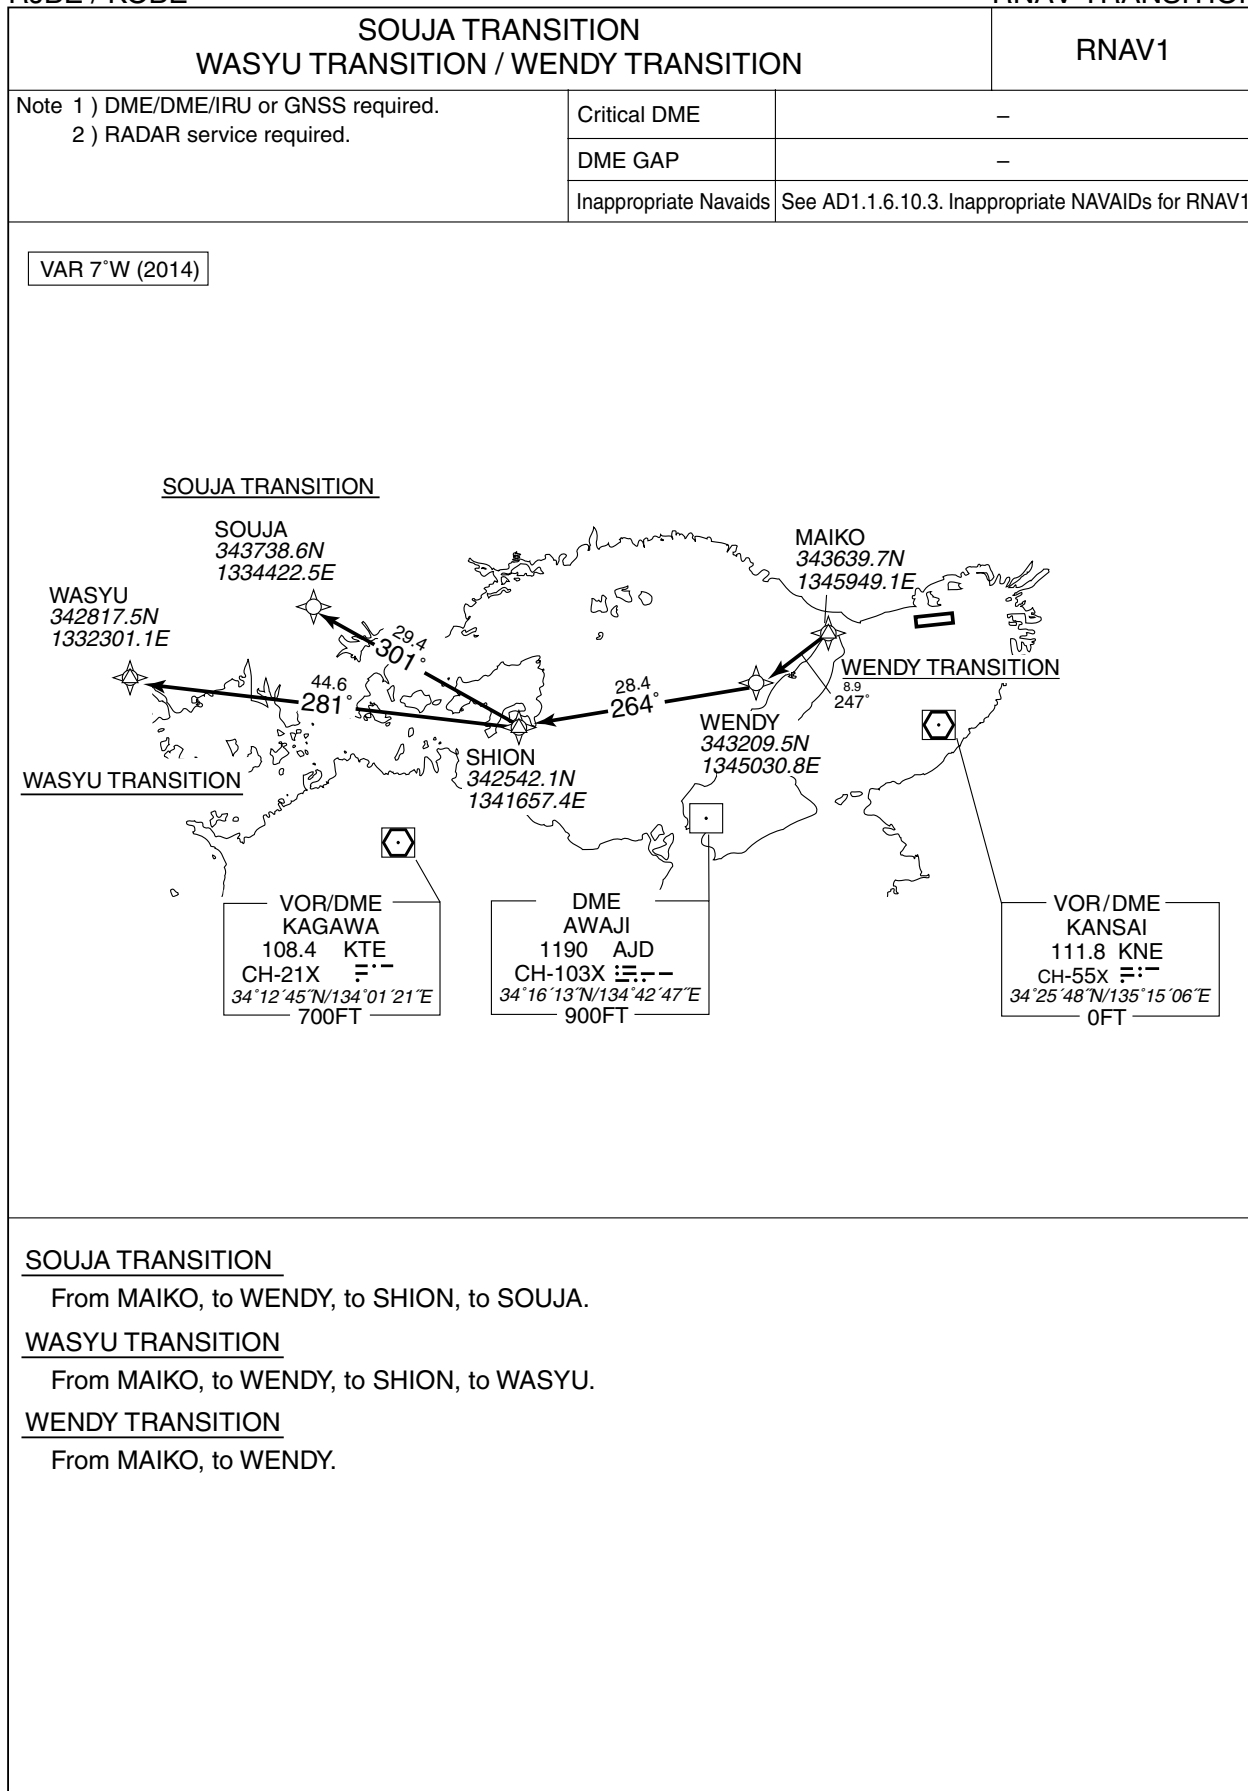

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

SOUJA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	WENDY	—	247 (239.6)	-7.3	8.9	—	—	—	—	RNAV1
003	TF	SHION	—	264 (257.0)	-7.3	28.4	—	—	—	—	RNAV1
004	TF	SOUJA	—	301 (294.1)	-7.3	29.4	—	—	—	—	RNAV1

WASYU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	WENDY	—	247 (239.6)	-7.3	8.9	—	—	—	—	RNAV1
003	TF	SHION	—	264 (257.0)	-7.3	28.4	—	—	—	—	RNAV1
004	TF	WASYU	—	281 (273.6)	-7.3	44.6	—	—	—	—	RNAV1

WENDY TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	WENDY	—	247 (239.6)	-7.3	8.9	—	—	—	—	RNAV1


STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

MIDER TRANSITION / SHTLE TRANSITION / MIYAZU TRANSITION			RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.		Critical DME	SHTLE TRANSITION YOE : 66.0NM to SHTLE – 63.0NM to SHTLE KCC : 35.0NM to SHTLE – 16.0NM to SHTLE
DME GAP	SHTLE TRANSITION 50.0NM to SHTLE – 45.0NM to SHTLE MIYAZU TRANSITION 9.3NM to YME – YME		MIYAZU TRANSITION AJD : 4.2NM to ASAGI – 27.3NM to YME KNE : 10.3NM to YME – 9.3NM to YME
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1		

VAR 8°W (2020)

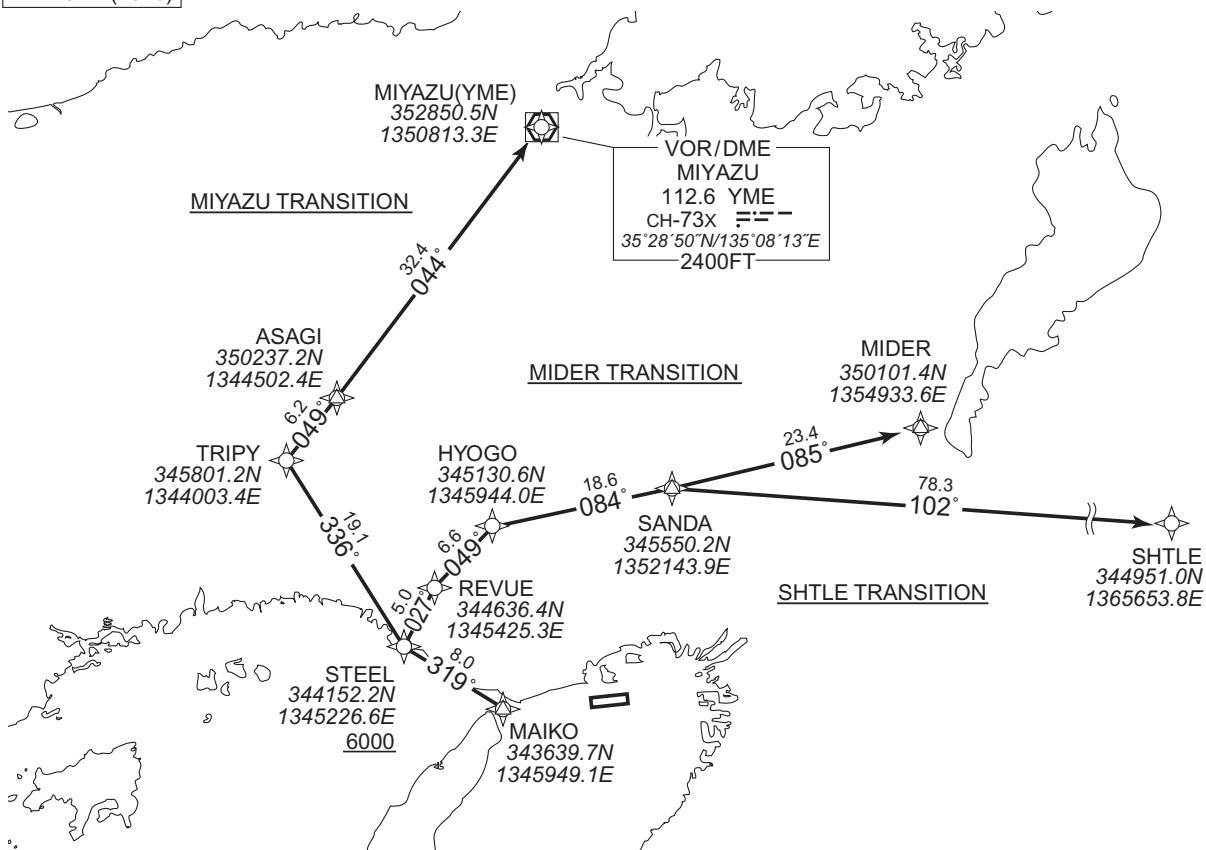MIDER TRANSITION

From MAIKO, to STEEL at or above 6000FT, to REVUE, to HYOGO, to SANDA, to MIDER.

SHTLE TRANSITION

From MAIKO, to STEEL at or above 6000FT, to REVUE, to HYOGO, to SANDA, to SHTLE.

MIYAZU TRANSITION

From MAIKO, to STEEL at or above 6000FT, to TRIPY, to ASAGI, to YME.

CHANGE : VAR. MIDER TRANSITION established. OTSU TRANSITION abolished. PROC course. OTSU VOR/DME(CUE) abolished.
Critical DME. DME GAP. MIYAZU, HYOGO(FIX symbol).

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

MIDER TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	STEEL	—	319 (310.7)	-7.9	8.0	—	+6000	—	—	RNAV1
003	TF	REVUE	—	027 (018.9)	-7.9	5.0	—	—	—	—	RNAV1
004	TF	HYOGO	—	049 (041.6)	-7.9	6.6	—	—	—	—	RNAV1
005	TF	SANDA	—	084 (076.4)	-7.9	18.6	—	—	—	—	RNAV1
006	TF	MIDER	—	085 (077.1)	-7.9	23.4	—	—	—	—	RNAV1

SHTLE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	STEEL	—	319 (310.7)	-7.9	8.0	—	+6000	—	—	RNAV1
003	TF	REVUE	—	027 (018.9)	-7.9	5.0	—	—	—	—	RNAV1
004	TF	HYOGO	—	049 (041.6)	-7.9	6.6	—	—	—	—	RNAV1
005	TF	SANDA	—	084 (076.4)	-7.9	18.6	—	—	—	—	RNAV1
006	TF	SHTLE	—	102 (093.9)	-7.9	78.3	—	—	—	—	RNAV1

MIYAZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MAIKO	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	STEEL	—	319 (310.7)	-7.9	8.0	—	+6000	—	—	RNAV1
003	TF	TRIPY	—	336 (327.9)	-7.9	19.1	—	—	—	—	RNAV1
004	TF	ASAGI	—	049 (041.6)	-7.9	6.2	—	—	—	—	RNAV1
005	TF	YME	—	044 (035.7)	-7.9	32.4	—	—	—	—	RNAV1

CHANGE : VAR. MIDER TRANSITION established. OTSU TRANSITION abolished. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

STAR

AYAYA ARRIVAL

From over AYAYA, proceed via TSC R001 to intercept and proceed via KCE R283 to TRACY, via KNE R307 to intercept and proceed via KCE R273 to SIOJI.


Cross SIOJI at or above 3000FT.

TOKUSHIMA ARRIVAL

From over TSC VORTAC, proceed via TSC R001 to intercept and proceed via KCE R283 to TRACY, via KNE R307 to intercept and proceed via KCE R273 to SIOJI.

Cross SIOJI at or above 3000FT.

CHANGE : Radial FM KCE. Bearing on HOLD Pattern (for VOR RWY 09).

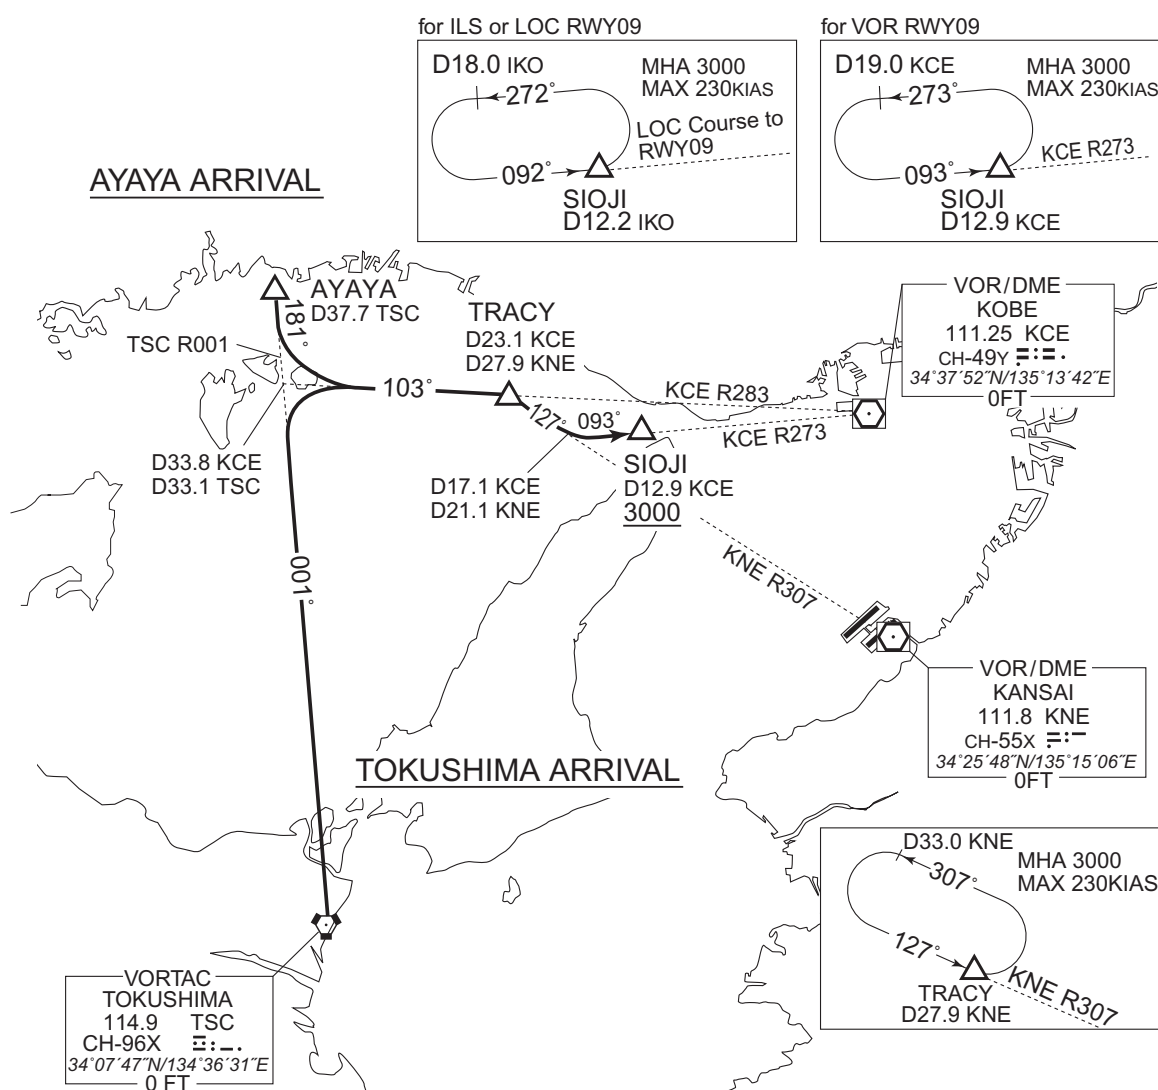

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

RNAV STAR RWY09

HANSHIN NORTH ARRIVAL
HANSHIN SOUTH ARRIVAL
HANSHIN WEST ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 7°W (2014)

CHANGE : Bearing on HOLD Pattern (for VOR RWY 09).



STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

RNAV STAR RWY09

HANSHIN NORTH ARRIVAL

From TRACY, to SIOJI at or above 3000FT.

Critical DME	STD : TRACY - SIOJI
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TRACY	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	SIOJI	—	114 (106.7)	-7.3	10.6	—	+3000	—	—	RNAV1

HANSHIN SOUTH ARRIVAL

From BECKY, to KAKEF at or above 6000FT, to OKADA, to TRACY, to SIOJI at or above 3000FT.

Critical DME	GBD : 5.6NM to OKADA – OKADA AJD : OKADA – TRACY STD : 5.0NM to TRACY – SIOJI
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	BECKY	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	KAKEF	—	017 (009.9)	-7.3	18.9	—	+6000	—	—	RNAV1
003	TF	OKADA	—	017 (009.9)	-7.3	23.7	—	—	—	—	RNAV1
004	TF	TRACY	—	069 (062.2)	-7.3	6.0	—	—	—	—	RNAV1
005	TF	SIOJI	—	114 (106.7)	-7.3	10.6	—	+3000	—	—	RNAV1


HANSHIN WEST ARRIVAL

From BERTH, to KAKEF at or above 6000FT, to OKADA, to TRACY, to SIOJI at or above 3000FT.

Critical DME	GBD : 5.6NM to OKADA – OKADA AJD : OKADA – TRACY STD : 5.0NM to TRACY – SIOJI
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	BERTH	—	—	-7.3	—	—	—	—	—	RNAV1
002	TF	KAKEF	—	077 (070.2)	-7.3	13.6	—	+6000	—	—	RNAV1
003	TF	OKADA	—	017 (009.9)	-7.3	23.7	—	—	—	—	RNAV1
004	TF	TRACY	—	069 (062.2)	-7.3	6.0	—	—	—	—	RNAV1
005	TF	SIOJI	—	114 (106.7)	-7.3	10.6	—	+3000	—	—	RNAV1

INSTRUMENT APPROACH CHART

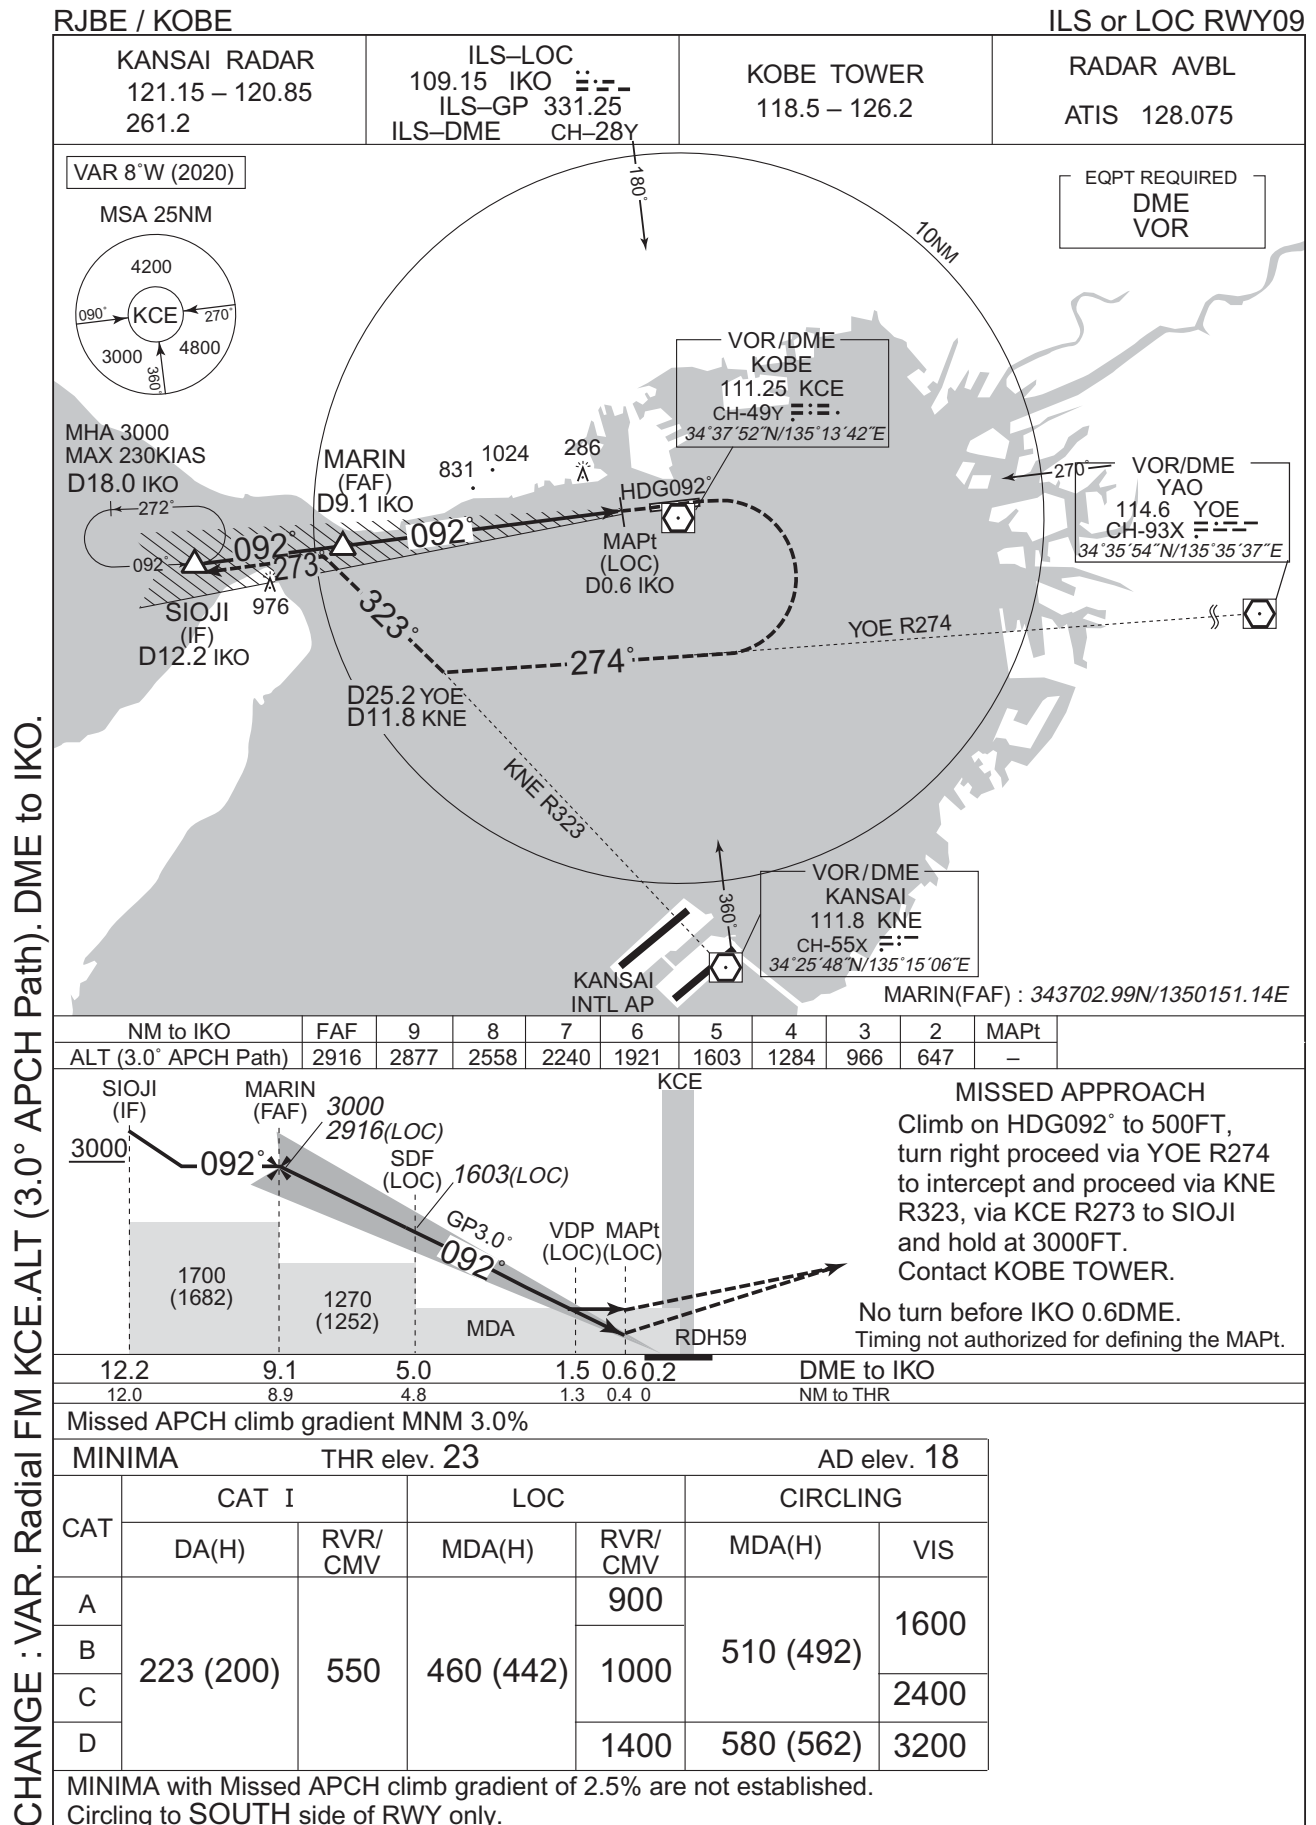

INSTRUMENT APPROACH CHART

RJBE / KOBE VOR RWY09

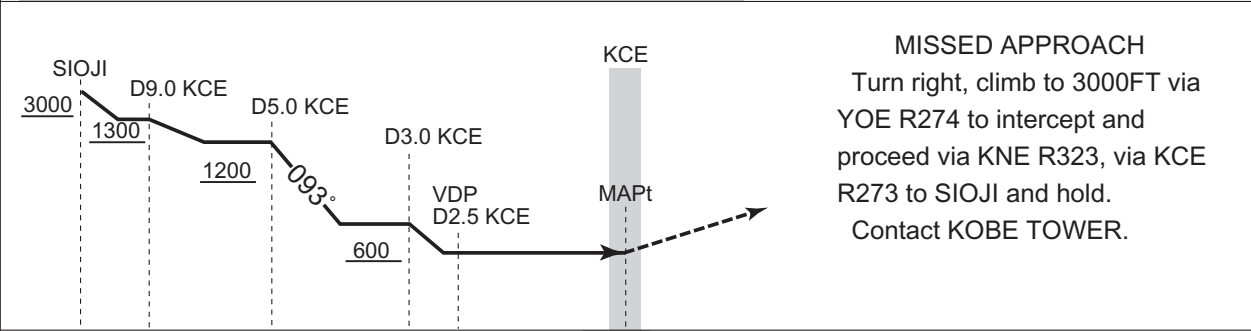


MINIMA		THR elev. 23		AD elev. 18	
CAT			CIRCLING		
	MDA(H)	RVR/ CMV	MDA(H)	VIS	
A	560 (542)	1000	560 (542)	1600	
B		1200		2400	
C					
D		1600	580 (562)	3200	

Circling to SOUTH side of RWY only.

CHANGE : VAR. Radial FM KCE. Bearing on HOLD Pattern (SIOJI).

RJBE / KOBE

Visual REP

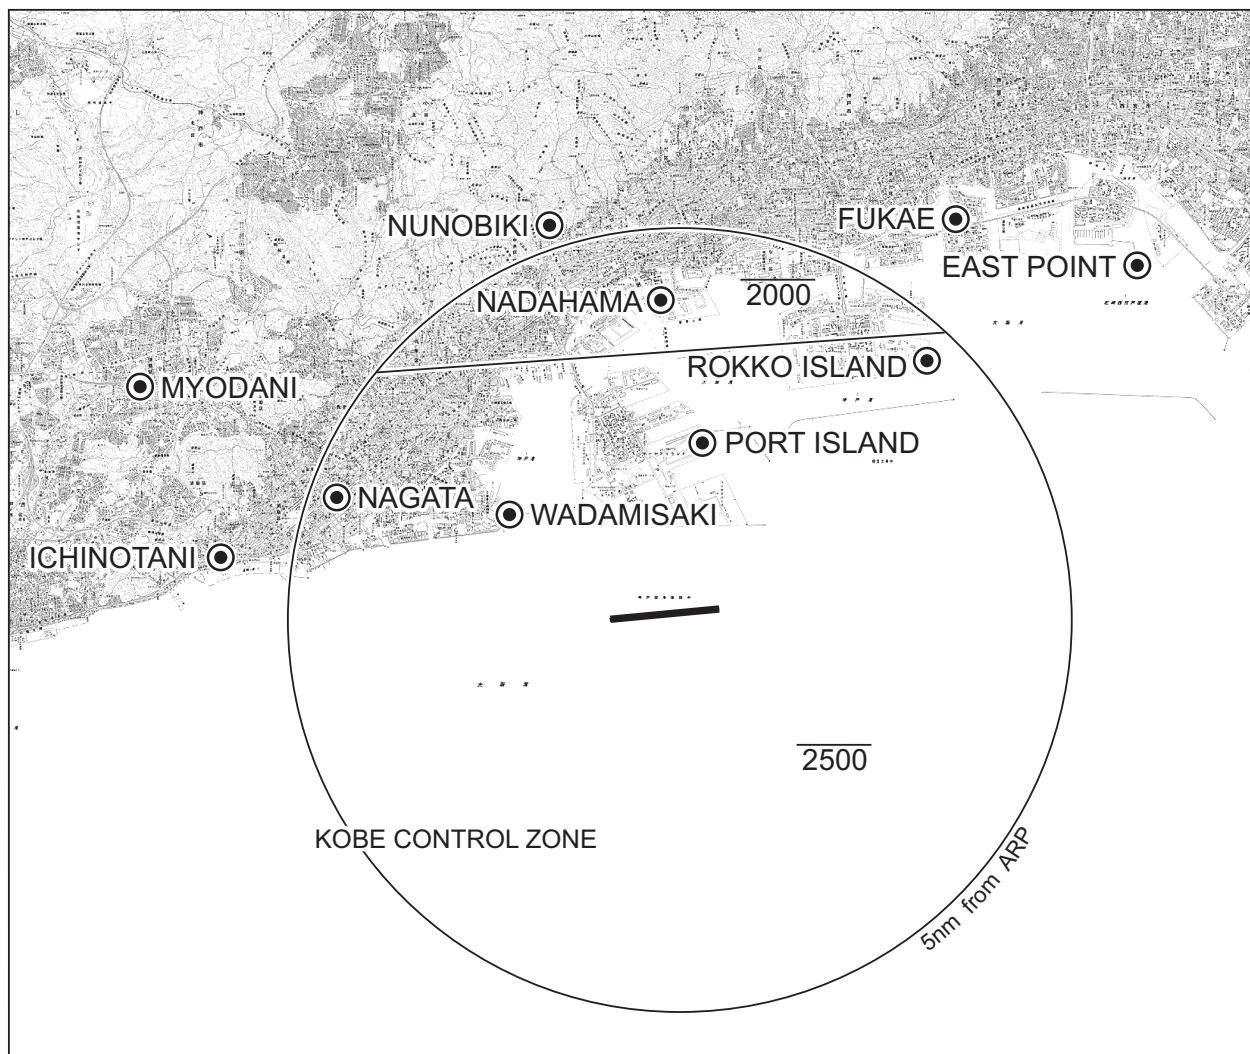

Call sign	BRG / DIST from ARP	Remarks
一ノ谷 Ichinotani	283° / 5.5NM	JR須磨駅 JR Station
名谷 Myodani	301° / 7.0NM	神戸市営西神・山手線名谷駅 Station
長田 Nagata	297° / 4.2NM	JR新長田駅 JR Station
和田岬 Wadamisaki	310° / 2.2NM	岬 Cape
布引 Nunobiki	348° / 5.0NM	布引公園 Park
灘浜 Nadahama	007° / 3.8NM	ハーバーハイウェイ摩耶ランプ Ramp
ポートアイランド Port Island	020° / 2.2NM	ポートアイランド南埠頭 Southern Warf of Port Island
六甲アイランド Rokko Island	051° / 4.4NM	六甲アイランド南東端 Southern Edge of Rokko Island
深江 Fukae	045° / 6.0NM	阪神高速5号湾岸線 深江浜インターチェンジ Interchange
イーストポイント East Point	061° / 7.2NM	西宮ヨットハーバー防波堤 Breakwater of Nishinomiya Yacht Harbor



RJBE / KOBE

Minimum Vectoring Altitude CHART

