

RJNK / KOMATSU

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID and TRANSITION

MANAH TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY06 KMC, YME: 10NM to KAETU - 30NM to MANAH, 23NM to MANAH - 3NM to MANAH RWY24 KMC, YME: 23NM to MANAH - 3NM to MANAH
	DME GAP	RWY06 06DER - 10NM to KAETU 30NM to MANAH - 23NM to MANAH RWY24 24DER - 23NM to MANAH
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

VAR 8° W(2014)

**MANAH TWO DEPARTURE**

RWY06 : Climb on HDG063° at or above 500FT, turn left direct to KAETU, to MANAH.

RWY24 : Climb on HDG243° at or above 500FT, direct to AWAZU, to MANAH.

NOTE RWY06 : 4.1% climb gradient required up to 3900FT.

OBST ALT 3215FT located at 13.0NM 200° FM end of RWY06.

RWY24 : 4.8% climb gradient required up to 3900FT.

OBST ALT 3215FT located at 12.0NM 195° FM end of RWY24.

KOMAKI TRANSITION

From MANAH to KCC.

CHANGE : Minor change

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID and TRANSITION

MANAH TWO DEPARTURE

RWY06

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	063 (055.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	KAETU	—	—	-7.7	—	L	—	—	—	RNAV1
003	TF	MANAH	—	162 (154.3)	-7.7	32.9	—	—	—	—	RNAV1

RWY24

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	243 (235.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	AWAZU	Y	—	-7.7	—	—	—	—	—	RNAV1
003	TF	MANAH	—	162 (154.7)	-7.7	28.0	—	—	—	—	RNAV1

KOMAKI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MANAH	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	KCC	—	162 (154.5)	-7.7	42.7	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID and TRANSITION



STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID and TRANSITION

GINJO TWO DEPARTURE

RWY06

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	063 (055.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	HAKUI	—	—	-7.7	—	L	—	—	—	RNAV1
003	TF	GINJO	—	014 (006.5)	-7.7	23.3	—	—	—	—	RNAV1
004	TF	NTE	—	064 (056.0)	-7.7	15.0	—	—	—	—	RNAV1

RWY24

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	243 (235.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	HAKUI	—	—	-7.7	—	R	—	—	—	RNAV1
003	TF	GINJO	—	014 (006.5)	-7.7	23.3	—	—	—	—	RNAV1
004	TF	NTE	—	064 (056.0)	-7.7	15.0	—	—	—	—	RNAV1

KINZAN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NTE	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	GOLDO	—	063 (055.4)	-7.7	83.0	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID

SONBU TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	RWY06 YME: 30NM to SONBU - 6NM to SONBU RWY24 YME: 23NM to SONBU - 6NM to SONBU
	DME GAP	RWY06 06DER - 44.5NM to SONBU RWY24 24DER - 23NM to SONBU
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 8°W(2014)

SONBU TWO DEPARTURE

RWY06 : Climb on HDG063° at or above 500FT, turn left direct to SONBU.
RWY24 : Climb on HDG243° at or above 500FT, turn right direct to SONBU.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

RNAV SID

SONBU TWO DEPARTURE

RWY06

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	063 (055.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	SONBU	—	—	-7.7	—	L	—	—	—	RNAV1

RWY24

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	243 (235.0)	-7.7	—	—	+500	—	—	RNAV1
002	DF	SONBU	—	—	-7.7	—	R	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

SID

NOTO TWO DEPARTURE

RWY06: Turn left,...

RWY24: Turn right,...

... climb via KMC R016 to intercept and proceed via NTE R244 to NTE VOR/DME.

Cross KMC R016/10.0DME at or below 7000FT, cross NTE R244/15.0DME at assigned altitude.



CHANGE : SID renamed

STANDARD DEPARTURE CHART -INSTRUMENT

RJNK / KOMATSU

SID

MIYAZU FOUR DEPARTURE

RWY 06 : Turn left,...

RWY 24 : Turn right,...

...climb via KMC R286 to intercept and proceed via YME R040 to YME VOR/DME.

Cross KMC R286/10.0DME (YME R050) at or below 7000FT (*at 7000FT), cross YME R040/48.0DME (KMC R256) at assigned altitude.

*YME R050 MRA 7000FT

KOMATSU REVERSAL THREE DEPARTURE

RWY 06 : Turn left,...

RWY 24 : Turn right,...

...climb via KMC R351, turn left to intercept and proceed via KMC R331 to KMC VORTAC within KMC 30.0DME.

Cross KMC R351/8.0DME at or below 7000FT, cross KMC R331/10.0DME at assigned altitude.

KAGA FOUR DEPARTURE

RWY 06 : Turn left,...

RWY 24 : Turn right,...

...climb via KMC R331 to intercept and proceed via KMC 30.0DME counterclockwise ARC, turn right to intercept and proceed via KMC R261 to SAKYU.

Cross KMC R331/8.0DME at or below 7000FT, cross KMC R275 at assigned altitude.

CHANGE : SID renamed

STANDARD DEPARTURE CHART -INSTRUMENT



STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY06

KOMATSU WEST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

KOMATSU WEST ARRIVAL

From KMC, to SAWRA, to MEGIS at or above 4000FT, to KANOH, to DAIJO at or above 2000FT.

Critical DME	KMC : 6.9nm to SAWRA - 5.0nm to SAWRA KMC : 2.0nm to SAWRA - 5.0nm to MEGIS KMC : MEGIS - 3.0nm to KANOH YME : 6.9nm to SAWRA - 5.0nm to SAWRA YME : 2.0nm to SAWRA - 5.0nm to MEGIS YME : MEGIS - 3.0nm to KANOH
DME GAP	KMC - 6.9nm to SAWRA 5.0nm to SAWRA - 2.0nm to SAWRA 5.0nm to MEGIS - MEGIS 3.0nm to KANOH - DAIJO
Inappropriate Navaids	See AD1.1.6.10.3 Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KMC	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	SAWRA	—	300 (292.6)	-7.7	9.9	—	—	—	—	RNAV1
003	TF	MEGIS	—	224 (216.5)	-7.7	8.3	—	+4000	—	—	RNAV1
004	TF	KANOH	—	183 (175.0)	-7.7	4.4	—	—	—	—	RNAV1
005	TF	DAIJO	—	093 (084.9)	-7.7	4.3	—	+2000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY06

HIMMY WEST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



HIMMY WEST ARRIVAL

From HIMMY, to BURRI at or above 8000FT, to MEGIS at or above 4000FT, to KANOH, to DAIJO at or above 2000FT.

Critical DME	TOE : HIMMY - 11.0nm to BURRI TOE : 8.0nm to MEGIS - 7.0nm to MEGIS KMC : HIMMY - 30.0nm to BURRI KMC : 24.0nm to BURRI - 22.0nm to BURRI KMC : 17.0nm to BURRI - 15.0nm to BURRI KMC : 8.0nm to MEGIS - 7.0nm to MEGIS KMC : MEGIS - 3.0nm to KANOH YME : MEGIS - 3.0nm to KANOH
DME GAP	7.0nm to MEGIS - MEGIS 3.0nm to KANOH - DAIJO
Inappropriate Nav aids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HIMMY	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	BURRI	—	248 (239.9)	-7.7	34.8	—	+8000	—	—	RNAV1
003	TF	MEGIS	—	224 (216.5)	-7.7	13.5	—	+4000	—	—	RNAV1
004	TF	KANOH	—	183 (175.0)	-7.7	4.4	—	—	—	—	RNAV1
005	TF	DAIJO	—	093 (084.9)	-7.7	4.3	—	+2000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY06

IMIZU WEST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)

**IMIZU WEST ARRIVAL**

From IMIZU, to JYOZO, to BURRI at or above 8000FT, to MEGIS at or above 4000FT, to KANOH, to DAIJO at or above 2000FT.

Critical DME	TOE : IMIZU - 10.0nm to BURRI KMC : 4.0nm to JYOZO - JYOZO KMC : 24.0nm to BURRI - 22.0nm to BURRI KMC : 17.0nm to BURRI - 15.0nm to BURRI KMC : 7.0nm to MEGIS - 5.0nm to MEGIS KMC : MEGIS - 3.0nm to KANOH YME : 7.0nm to MEGIS - 5.0nm to MEGIS YME : MEGIS - 3.0nm to KANOH
DME GAP	5.0nm to MEGIS - MEGIS 3.0nm to KANOH - DAIJO
Inappropriate Navaids	See AD1.1.6.10.3 Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IMIZU	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	JYOZO	—	293 (285.1)	-7.7	9.0	—	—	—	—	RNAV1
003	TF	BURRI	—	248 (239.8)	-7.7	29.7	—	+8000	—	—	RNAV1
004	TF	MEGIS	—	224 (216.5)	-7.7	13.5	—	+4000	—	—	RNAV1
005	TF	KANOH	—	183 (175.0)	-7.7	4.4	—	—	—	—	RNAV1
006	TF	DAIJO	—	093 (084.9)	-7.7	4.3	—	+2000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY06

YARII WEST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



YARII WEST ARRIVAL

From YARII, to HESEN at or above 11000FT, to EIHEI at or above 6000FT, to DAIAN at or above 5000FT, to SAIKO at or above 3500FT, to DAIJO at or above 2000FT.

Critical DME	KMC : 14.0nm to HESEN -EIHEI YME : HESEN-EIHEI
DME GAP	EIHEI - DAIJO
Inappropriate Navaids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YARII	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	HESEN	—	269 (261.6)	-7.7	31.7	—	+11000	—	—	RNAV1
003	TF	EIHEI	—	269 (261.3)	-7.7	9.4	—	+6000	—	—	RNAV1
004	TF	DAIAN	—	269 (261.1)	-7.7	5.7	—	+5000	—	—	RNAV1
005	TF	SAIKO	—	319 (311.3)	-7.7	5.7	—	+3500	—	—	RNAV1
006	TF	DAIJO	—	033 (024.9)	-7.7	4.3	—	+2000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY06

SONBU WEST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)

SONBU WEST ARRIVAL

From SONBU, to KRAGE at or above 5000FT, to KOAJI at or above 3500FT, to DAIJO at or above 2000FT.

Critical DME	KMC : SONBU - 8.0nm to KRAGE YME : SONBU - 8.0nm to KRAGE
DME GAP	8.0nm to KRAGE - DAIJO
Inappropriate Navaids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SONBU	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	KRAGE	—	116 (108.5)	-7.7	16.2	—	+5000	—	—	RNAV1
003	TF	KOAJI	—	062 (054.7)	-7.7	10.0	—	+3500	—	—	RNAV1
004	TF	DAIJO	—	063 (054.8)	-7.7	8.3	—	+2000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY24

KOMATSU EAST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



KOMATSU EAST ARRIVAL

From KMC, to YAMJI, to ZEBRA at or above 4000FT, to HIMRO at or above 2600FT.

Critical DME	KMC : 6.6nm to YAMJI - YAMJI YME : 6.6nm to YAMJI - YAMJI
DME GAP	KMC - 6.6nm to YAMJI YAMJI - HIMRO
Inappropriate Navaids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KMC	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	YAMJI	—	360 (352.5)	-7.7	9.6	—	—	—	—	RNAV1
003	TF	ZEBRA	—	080 (072.2)	-7.7	4.5	—	+4000	—	—	RNAV1
004	TF	HIMRO	—	083 (075.6)	-7.7	5.0	—	+2600	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY24

HIMMY EAST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



HIMMY EAST ARRIVAL

From HIMMY, to GINRE at or above 7000FT, to KINKA at or above 5000FT.

Critical DME	TOE : HIMMY - GINRE TOE : 12.0nm to KINKA - 9.0nm to KINKA KMC : HIMMY - 7.0nm to GINRE KMC : 6.0nm to GINRE - 2.0nm to GINRE YME : 12.0nm to KINKA - 9.0nm to KINKA
DME GAP	GINRE - 12.0nm to KINKA 9.0nm to KINKA - KINKA
Inappropriate NavAids	See AD1.1.6.10.3 Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HIMMY	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	GINRE	—	178 (170.4)	-7.7	10.7	—	+7000	—	—	RNAV1
003	TF	KINKA	—	247 (239.1)	-7.7	12.7	—	+5000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY24

IMIZU EAST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



IMIZU EAST ARRIVAL

From IMIZU, to GINRE at or above 7000FT, to KINKA at or above 5000FT.

Critical DME	TOE : IMIZU - GINRE TOE : 12.0nm to KINKA - 9.0nm to KINKA KMC : IMIZU - 2.0nm to GINRE YME : 12.0nm to KINKA - 9.0nm to KINKA
DME GAP	GINRE - 12.0nm to KINKA 9.0nm to KINKA - KINKA
Inappropriate Nav aids	See AD1.1.6.10.3 Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IMIZU	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	GINRE	—	211 (203.4)	-7.7	6.2	—	+7000	—	—	RNAV1
003	TF	KINKA	—	247 (239.1)	-7.7	12.7	—	+5000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY24

YARII EAST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



YARII EAST ARRIVAL

From YARII, to HIDAH at or above 11000FT, to GINRE at or above 7000FT, to KINKA at or above 5000FT.

Critical DME	TOE : 8.0nm to HIDAH - 8.0nm to GINRE TOE : 1.0nm to GINRE - GINRE TOE : 12.0nm to KINKA - 9.0nm to KINKA KMC : 2.0nm to HIDAH - 8.0nm to GINRE YME : 1.0nm to GINRE - GINRE YME : 12.0nm to KINKA - 9.0nm to KINKA
DME GAP	8.0nm to GINRE - 1.0nm to GINRE GINRE - 12.0nm to KINKA 9.0nm to KINKA - KINKA
Inappropriate Nav aids	See AD1.1.6.10.3 Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YARII	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	HIDAH	—	337 (329.5)	-7.7	16.7	—	+11000	—	—	RNAV1
003	TF	GINRE	—	337 (329.4)	-7.7	9.4	—	+7000	—	—	RNAV1
004	TF	KINKA	—	247 (239.1)	-7.7	12.7	—	+5000	—	—	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

RJNK / KOMATSU

RNAV STAR RWY24

SONBU EAST ARRIVAL

RNAV 1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2014)



SONBU EAST ARRIVAL

From SONBU, to BURRI at or above 8000FT, to ZEBRA at or above 4000FT, to HIMRO at or above 2600FT.

Critical DME	YME : SONBU - 8.0nm to BURRI KMC : 34.0nm to BURRI - 8.0nm to BURRI KMC : 7.0nm to BURRI - 5.0nm to BURRI KMC : BURRI - 7.0nm to ZEBRA KMC : 6.0nm to ZEBRA - 5.0nm to ZEBRA TOE : 7.0nm to BURRI - 5.0nm to BURRI TOE : BURRI - 7.0nm to ZEBRA TOE : 6.0nm to ZEBRA - 5.0nm to ZEBRA
DME GAP	8.0nm to BURRI - 7.0nm to BURRI 5.0nm to ZEBRA - HIMRO
Inappropriate Nav aids	See AD1.1.6.10.3 Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SONBU	—	—	-7.7	—	—	—	—	—	RNAV1
002	TF	BURRI	—	066 (058.8)	-7.7	39.2	—	+8000	—	—	RNAV1
003	TF	ZEBRA	—	080 (072.1)	-7.7	9.6	—	+4000	—	—	RNAV1
004	TF	HIMRO	—	083 (075.6)	-7.7	5.0	—	+2600	—	—	RNAV1

INSTRUMENT APPROACH CHART

RJNK / KOMATSU

ILS Z or LOC Z RWY06



INSTRUMENT APPROACH CHART

RJNK / KOMATSU

ILS Y or LOC Y RWY06



INSTRUMENT APPROACH CHART

RJNK / KOMATSU

VOR RWY06



RJNK / KOMATSU

RNAV(GNSS) RWY24

KOMATSU APP
121.25 – 261.2 – 120.1

1. DME/DME not authorized.
2. RADAR service required.
3. GNSS required.

KOMATSU TOWER
118.25–304.8
126.2–236.8
121.7G–275.8G

RADAR AVBL CALL
KOMATSU APP

Baro - VNAV not authorized below -10°C

GOZEN D10.0 KMC
106°
286°
D16.0 KMC
MHA 3000
MAX 230KIAS

GOZEN (MAHF)
090°

KOMATSU VORTAC
112.0 KMC
CH-57X
36°23'47"N/136°24'15"E

HIMRO (IAF) 2600
180°

GOSIK (IF) 2600
243°(235.0°T)/2.2
243°(235.1°T)/2.1
243°(235.0°T)/3.0
270°

KINKA (IAF) 5000
1798
257°
6.0
(249.3°T)

NK451 (SDF) 2600
243°(235.0°T)/3.2

NEJYO (FAF) 2600
243°(235.0°T)/3.0

NK452 (SDF) 2600
270°

RW24 (MAPt) 2136
286°
KMC R286

TONM
2136

ARP: 362338N/1362427E

HIMRO (IAF)	363552.98N	1363402.29E
KINKA (IAF)	363210.74N	1364250.57E
GOSIK (IF)	363003.66N	1363552.24E
NK451 (SDF)	362849.05N	1363339.55E
NEJYO (FAF)	362659.08N	1363024.25E
NK452 (SDF)	362546.12N	1362814.50E
RW24 (MAPt)	362403.07N	1362511.48E
GOZEN (MAHF)	362504.92N	1361156.57E


5328

MISSED APPROACH

Turn right, direct to GOZEN
and hold at 3000FT.
Contact KOMATSU APP.

(For using VORTAC)

Climb to 3000FT via KMC R286
to GOZEN and hold.
Contact KOMATSU APP.

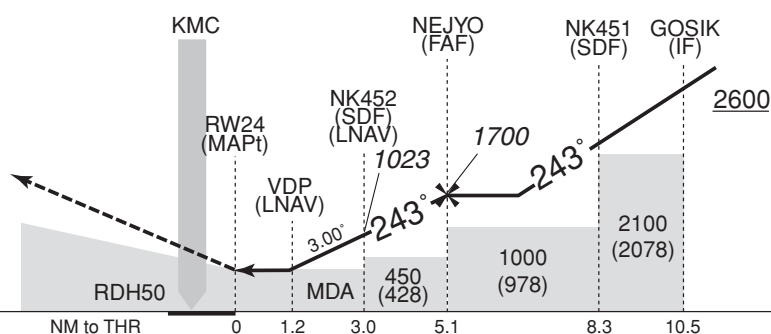

MINIMA						
THR elev. 18			AD elev. 22			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	420 (402)	1200	420 (398)	1200	510 (488)	1600
B		1300		1300		
C		1400		1400		
D		1600		1600	580 (558)	3200

CHANGE : Radial

INSTRUMENT APPROACH CHART

RJNK / KOMATSU

TACAN NR.1



CHANGE : VAR, MSA, MINIMA

RJNK / KOMATSU

KOMATSU APP

121.25 – 261.2 – 120.1

KOMATSU VORTAC

112.0 KMC ⅢⅢ.

CH-57X

36°23'47"N/136°24'15"E

KOMATSU TOWER

118.25-304.8

126.2-236.8

121.7G-275.8G

RADAR AVBL

CALL

KOMATSU APP

VAR 8°W (2018)

MSA 25NM

EMERG SAFE ALT 100NM 12,500

3117

IAF R220/D15 KMC

5000

R234/D15 KMC

3500

D15 KMC ARC

054°

D6 KMC

1500

KMC

015°

MISSED APPROACH

At KMC TACAN, turn left, climb via KMC R015 to 10DME fix to 2000FT and hold. Contact KOMATSU APP.

MINIMA		THR elev. 38	AD elev. 22	
CAT			CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	720 (698)	1200	720 (698)	1600
B		1400		2400
C				
D				

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJNK / KOMATSU

TACAN NR.4



MINIMA		AD elev. 22	
CAT	CIRCLING		
	MDA(H)	VIS	
A	540 (518)	1600	
B			
C		2400	
D	580 (558)	3200	

CHANGE : VAR, MSA



注： 小松飛行場の本滑走路の供用開始に伴い、着陸する航空機は、運用を廃止した仮設滑走路に誤認着陸しないように注意すること。

Note: With an in-service start of this runway of Komatsu aerodrome, warn a landing aircraft not to land at the out-service temporary runway.

備考：1. 仮設滑走路には禁止標識が設置される（300m以内に1個標準）。

2. 航空機の到着機がある場合は、気象状態にかかわらず着陸滑走路の進入灯が常時点灯される。

3. 管制官からの着陸許可発出後に注意喚起のため、次の用語が通報される場合がある。

用語例：「VERIFY LANDING RUNWAY.」

Rem: 1. A closed marking is installed in a temporary runway (one less than 300m, standard).

2. When there is arrival aircraft, approach lights of a landing runway is always turned on regardless of a weather state.

3. There is the case that the next term is reported to for attention awakening after a landing permission from a ATC.

A term example : 「VERIFY LANDING RUNWAY.」 .

Minimum Vectoring Altitude CHART