


RJOC / IZUMO

AD CHART

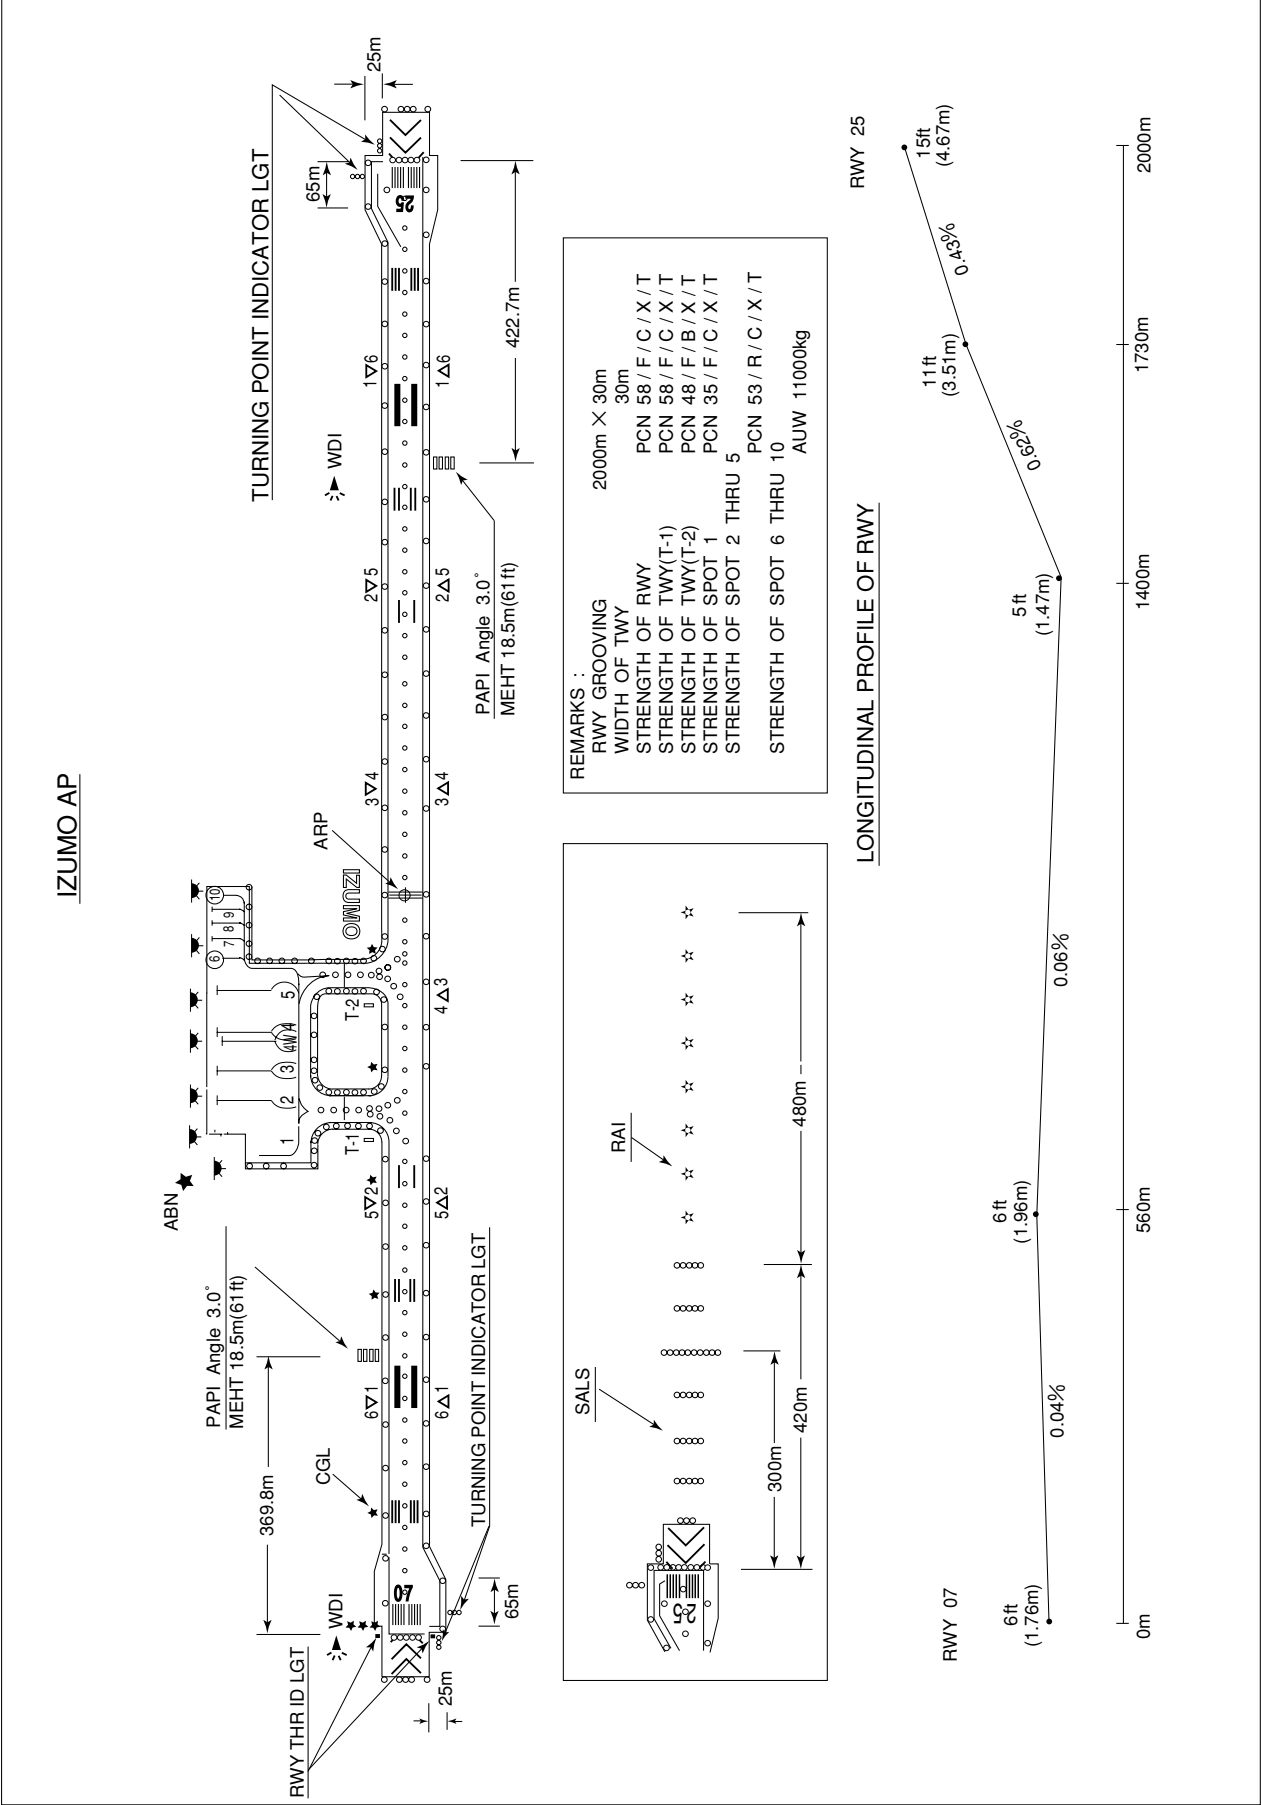

STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

DOZEN FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left ...

RWY25 : Climb RWY HDG to 1700FT, turn right HDG077°...

... to intercept and proceed via XZE R032(OIE R213) to DOZEN.

Cross DOZEN at or above 5000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.



## STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

IZUMO REVERSAL FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left to intercept and proceed via XZE R032 to 3000FT, turn left direct to XZE VOR/DME.

Cross XZE VOR/DME at or above 7000FT.

RWY25 : Climb RWY HDG to 1700FT, turn right to intercept and proceed via XZE R260 to XZE 10.5DME, turn right direct to XZE VOR/DME.


Cross XZE VOR/DME at or above 7000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

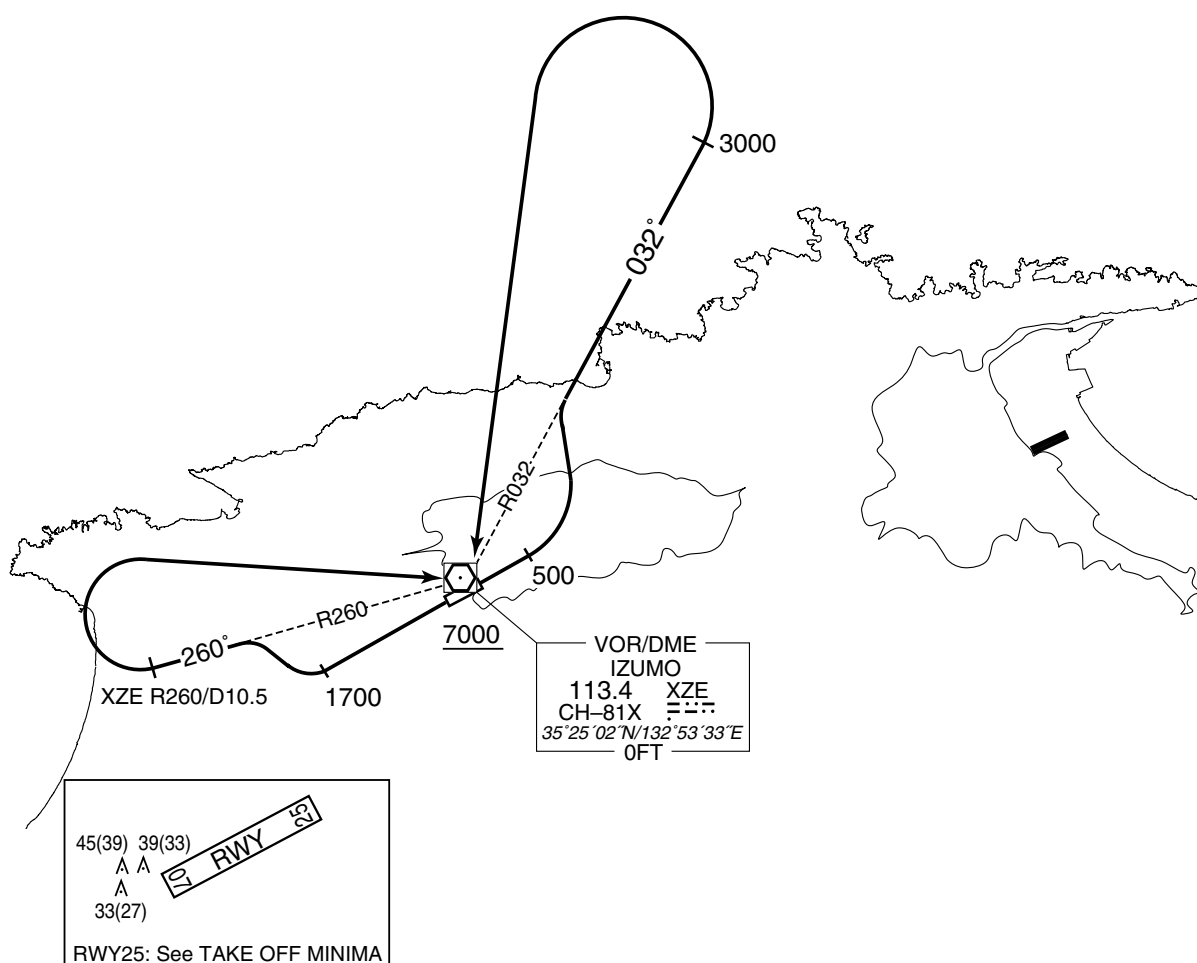IZUMO REVERSAL FOUR DEPARTURE

STANDARD DEPARTURE CHART - INSTRUMENT


RJOC / IZUMO

RNAV SID and TRANSITION

MATSUE TWO DEPARTURE  
TSUNO TRANSITION

Basic RNP1

Note GNSS required.

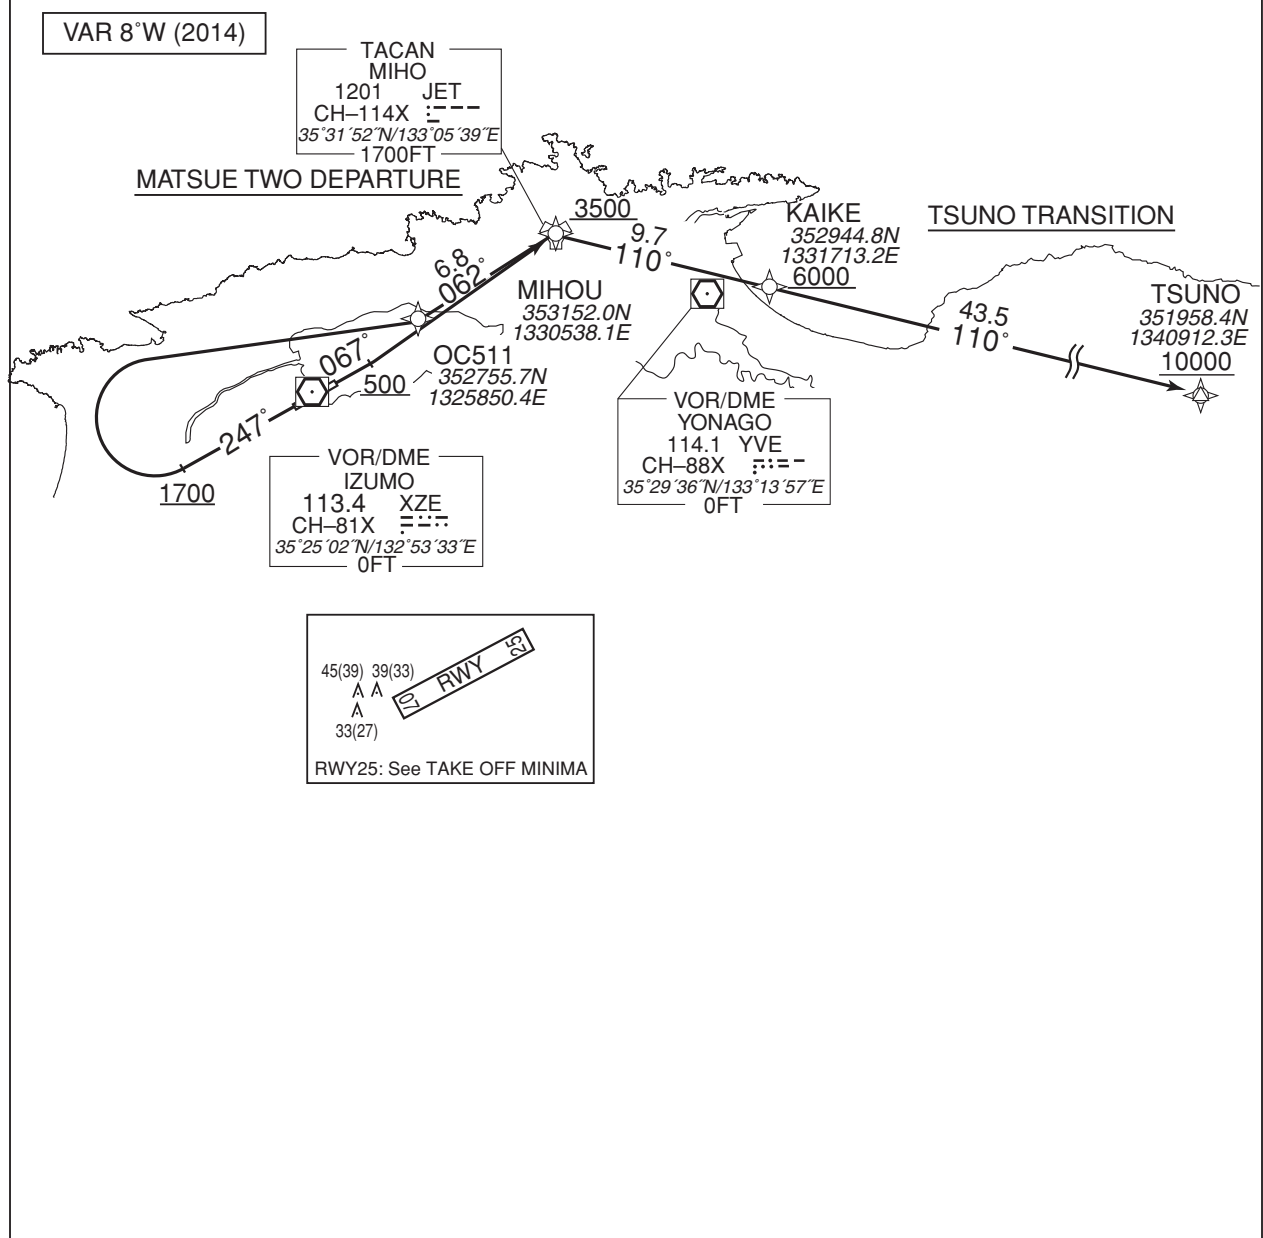

MATSUE TWO DEPARTURE

RWY07 : Climb on HDG067° at or above 500FT, direct to MIHO at or above 3500FT.

RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC511,  
to MIHO at or above 3500FT.

NOTE RWY07 : 3.5% climb gradient required up to 1300FT.

OBST ALT 1739FT located at 10.9NM 058° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

TSUNO TRANSITION

From MIHO, to KAIKE at or above 6000FT, to TSUNO at or above 10000FT.

CHANGE : MIHO TACAN(JET)

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJOC / IZUMO

## RNAV SID and TRANSITION

MATSUE TWO DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1


## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC511	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	MIHOU	—	062 (054.5)	-7.6	6.8	—	+3500	—	—	Basic RNP1

TSUNO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1
002	TF	KAIKE	—	110 (102.6)	-7.6	9.7	—	+6000	—	—	Basic RNP1
003	TF	TSUNO	—	110 (102.7)	-7.6	43.5	—	+10000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

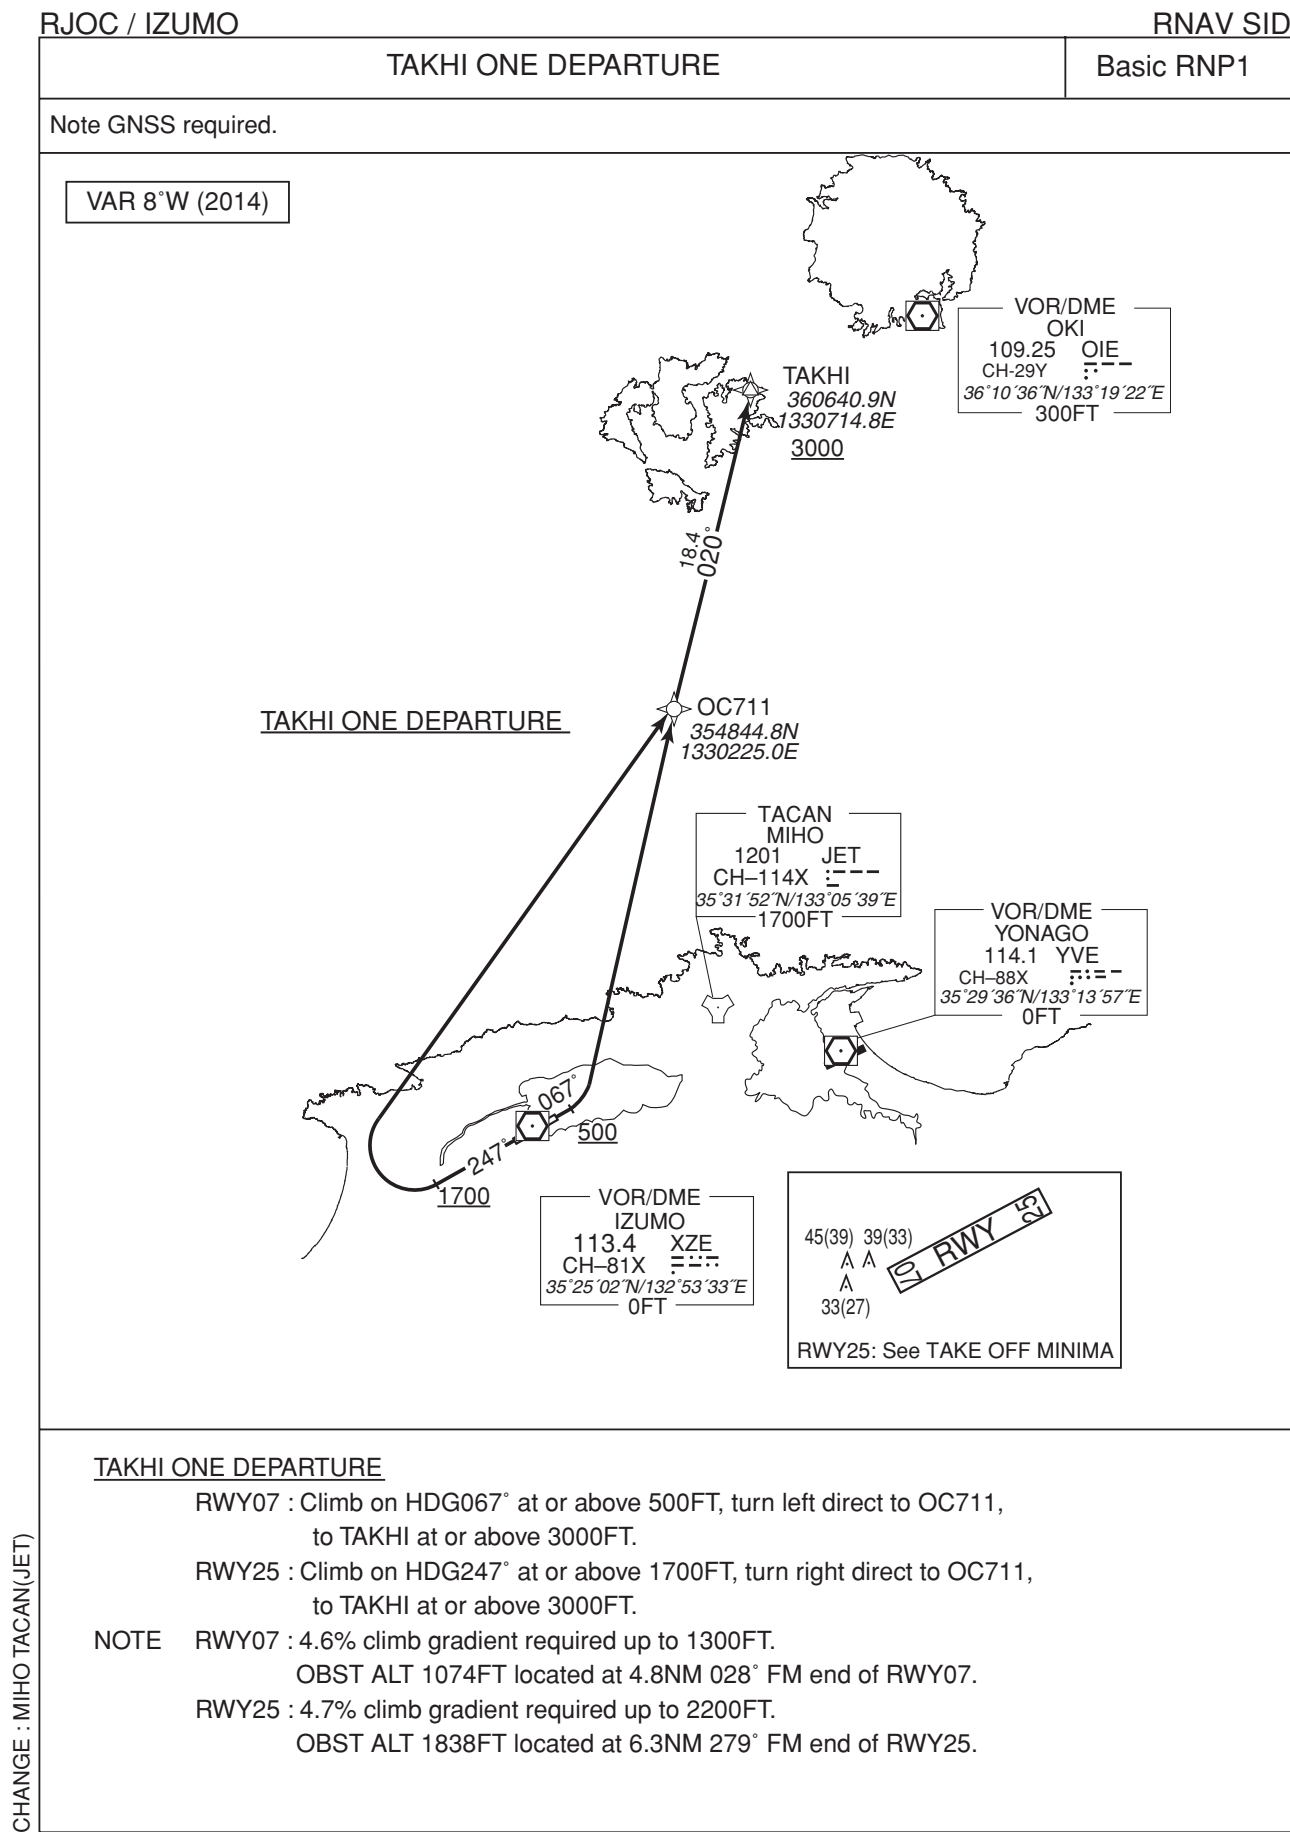

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

TAKHI ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID


SAIGO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

SAIGO ONE DEPARTURE

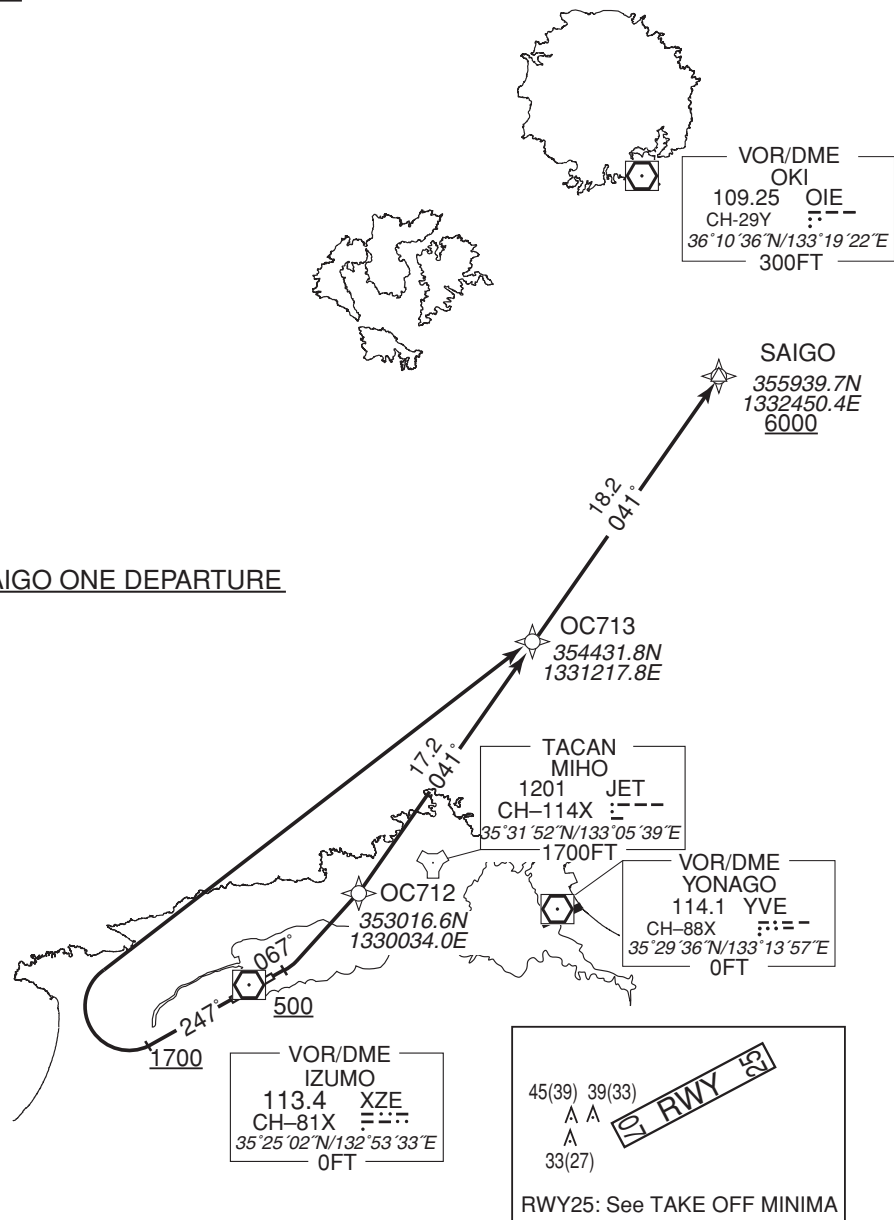

SAIGO ONE DEPARTURE

- RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC712, to OC713, to SAIGO at or above 6000FT.
- RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC713, to SAIGO at or above 6000FT.

NOTE RWY07 : 4.6% climb gradient required up to 800FT.  
OBST ALT 1214FT located at 6.8NM 044° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.  
OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

CHANGE : MIHO TACAN(JET)



## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

SAIGO ONE DEPARTURE


## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC712	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC713	—	041 (033.7)	-7.6	17.2	—	—	—	—	Basic RNP1
004	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC713	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

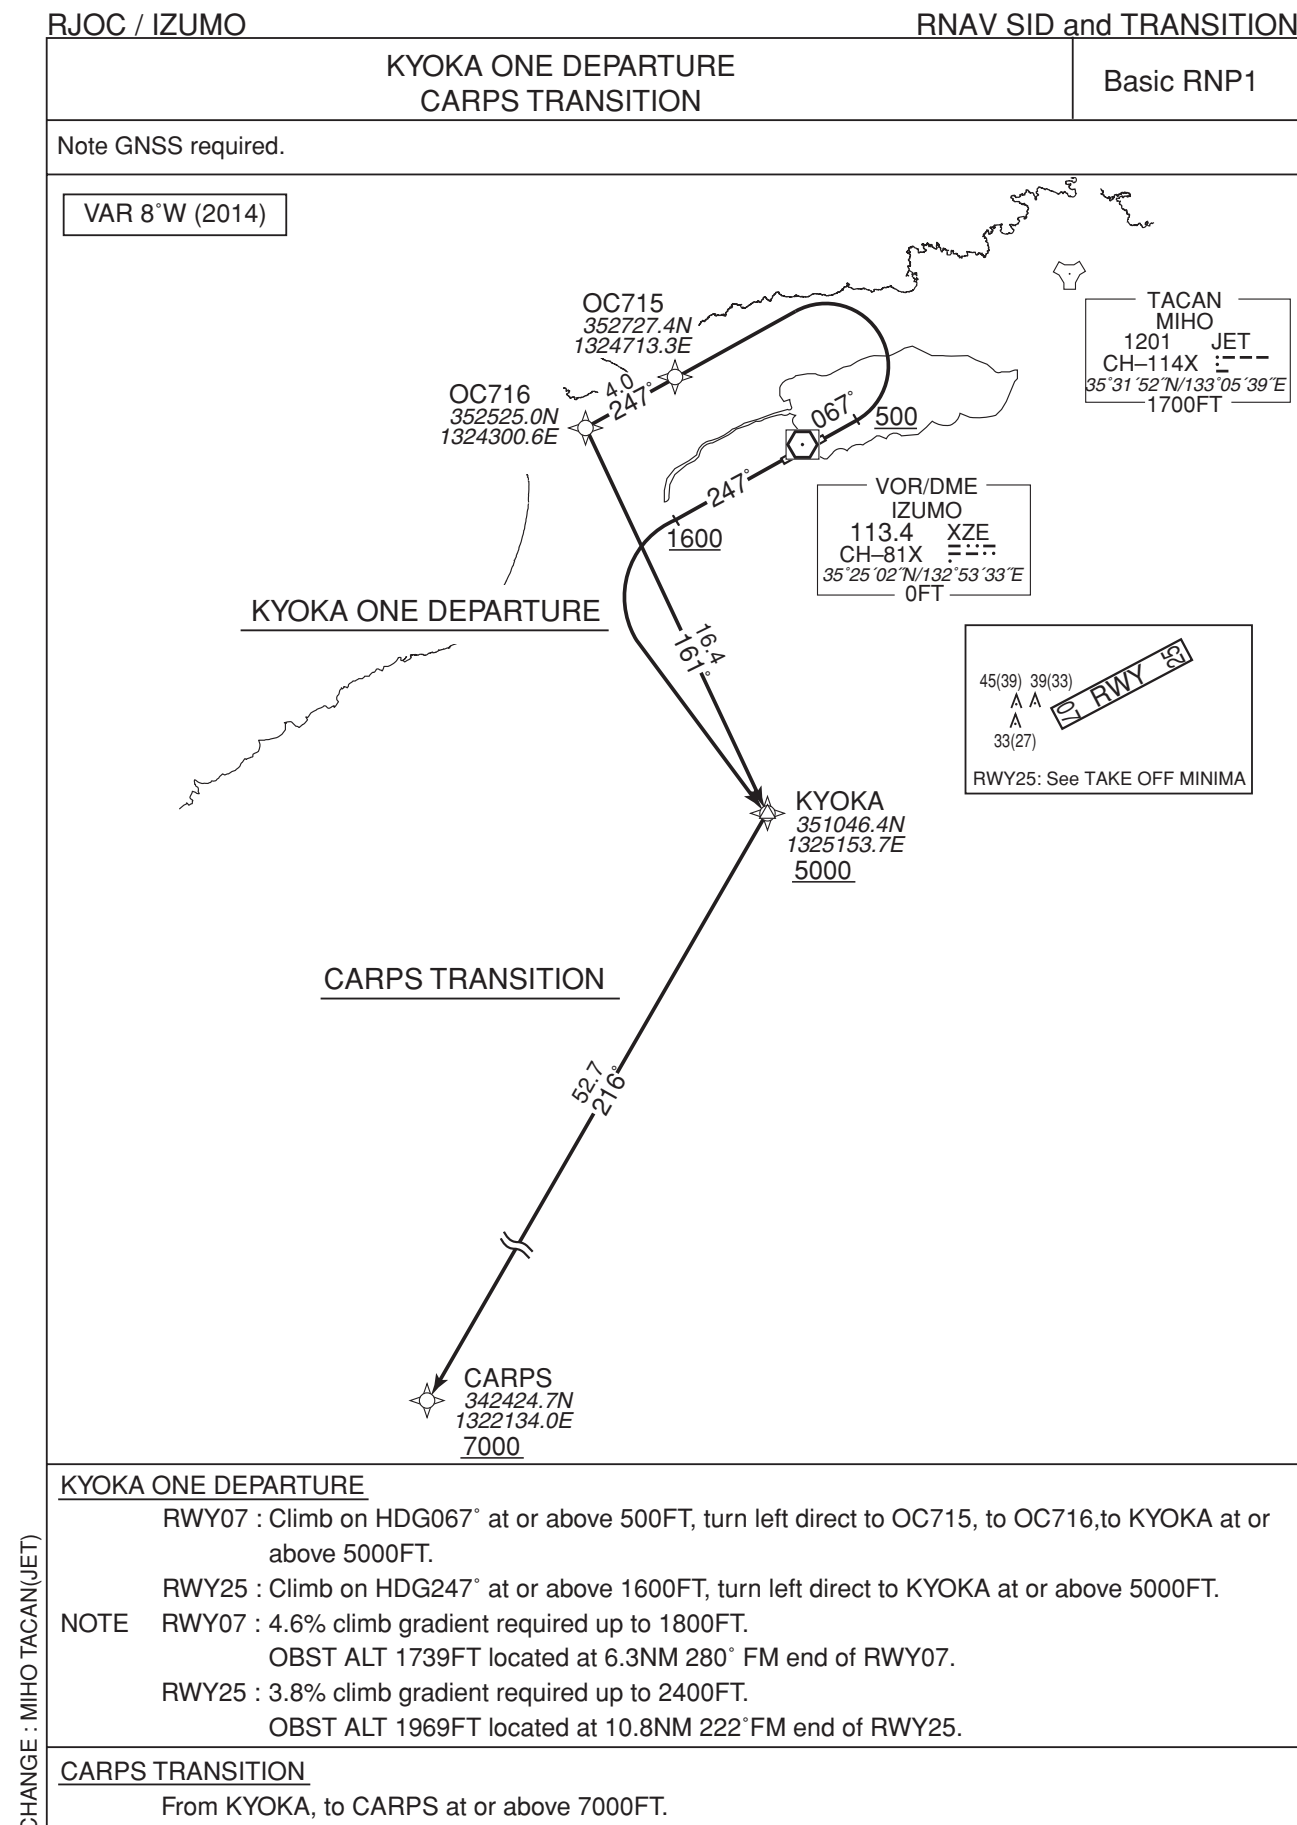

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJOC / IZUMO

## RNAV SID and TRANSITION

KYOKA ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC715	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC716	—	247 (239.3)	-7.6	4.0	—	—	—	—	Basic RNP1
004	TF	KYOKA	—	161 (153.6)	-7.6	16.4	—	+5000	—	—	Basic RNP1


## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1600	—	—	Basic RNP1
002	DF	KYOKA	—	—	-7.6	—	L	+5000	—	—	Basic RNP1

CARPS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KYOKA	—	—	-7.6	—	—	+5000	—	—	Basic RNP1
002	TF	CARPS	—	216 (208.4)	-7.6	52.7	—	+7000	—	—	Basic RNP1

STANDARD ARRIVAL CHART - INSTRUMENT

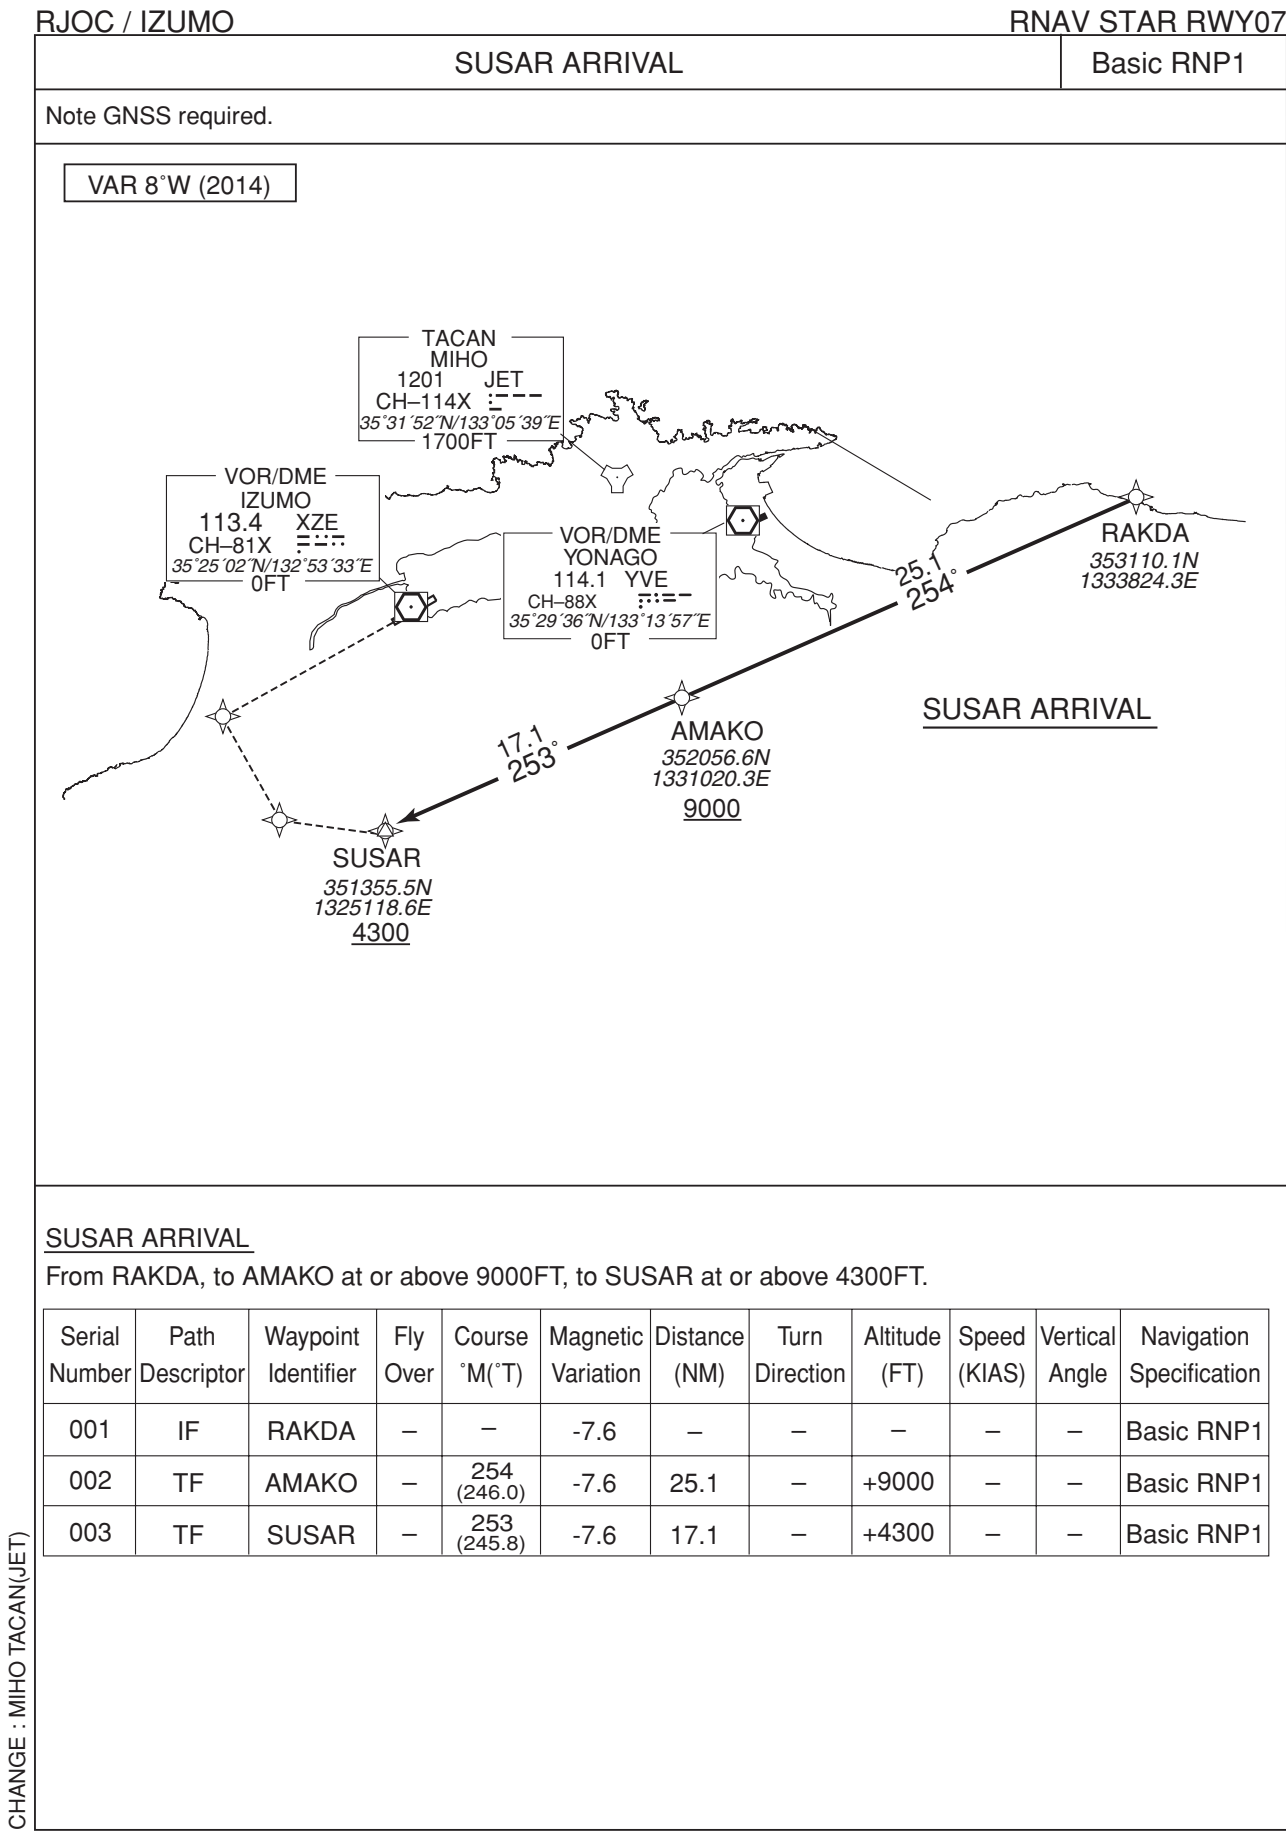

CHANGE : MIHO TACAN(JET)


STANDARD ARRIVAL CHART - INSTRUMENT

RJOC / IZUMO RNAV STAR RWY07

OKUNI ARRIVAL Basic RNP1

Note GNSS required.

VAR 8°W (2016)

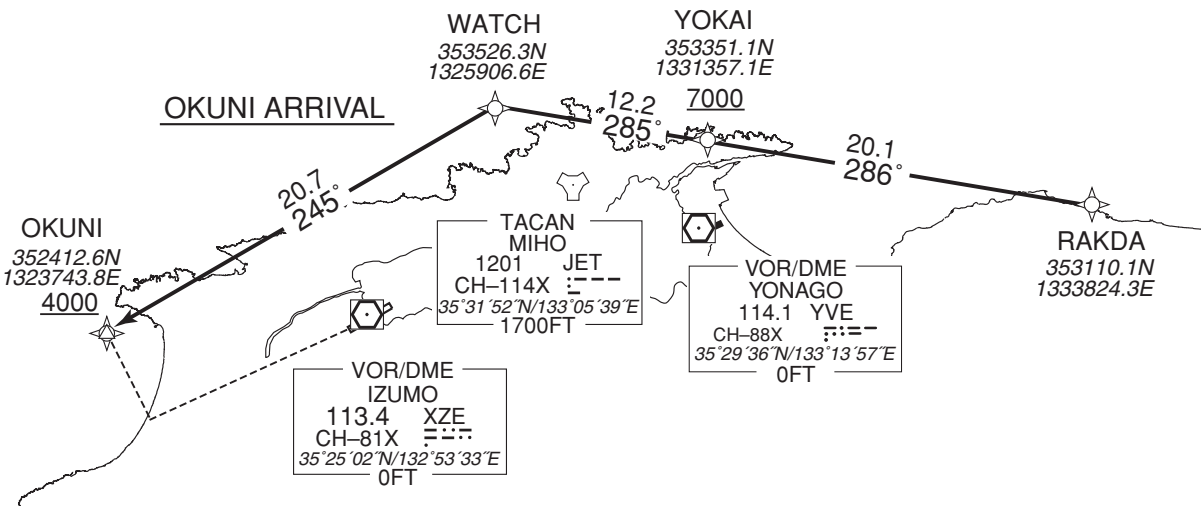


OKUNI ARRIVAL

From RAKDA, to YOKAI at or above 7000FT, to WATCH, to OKUNI at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RAKDA	—	—	-7.9	—	—	—	—	—	Basic RNP1
002	TF	YOKAI	—	286 (277.8)	-7.9	20.1	—	+7000	—	—	Basic RNP1
003	TF	WATCH	—	285 (277.6)	-7.9	12.2	—	—	—	—	Basic RNP1
004	TF	OKUNI	—	245 (237.3)	-7.9	20.7	—	+4000	—	—	Basic RNP1

CHANGE : MIHO TACAN(JET)

STANDARD ARRIVAL CHART - INSTRUMENT

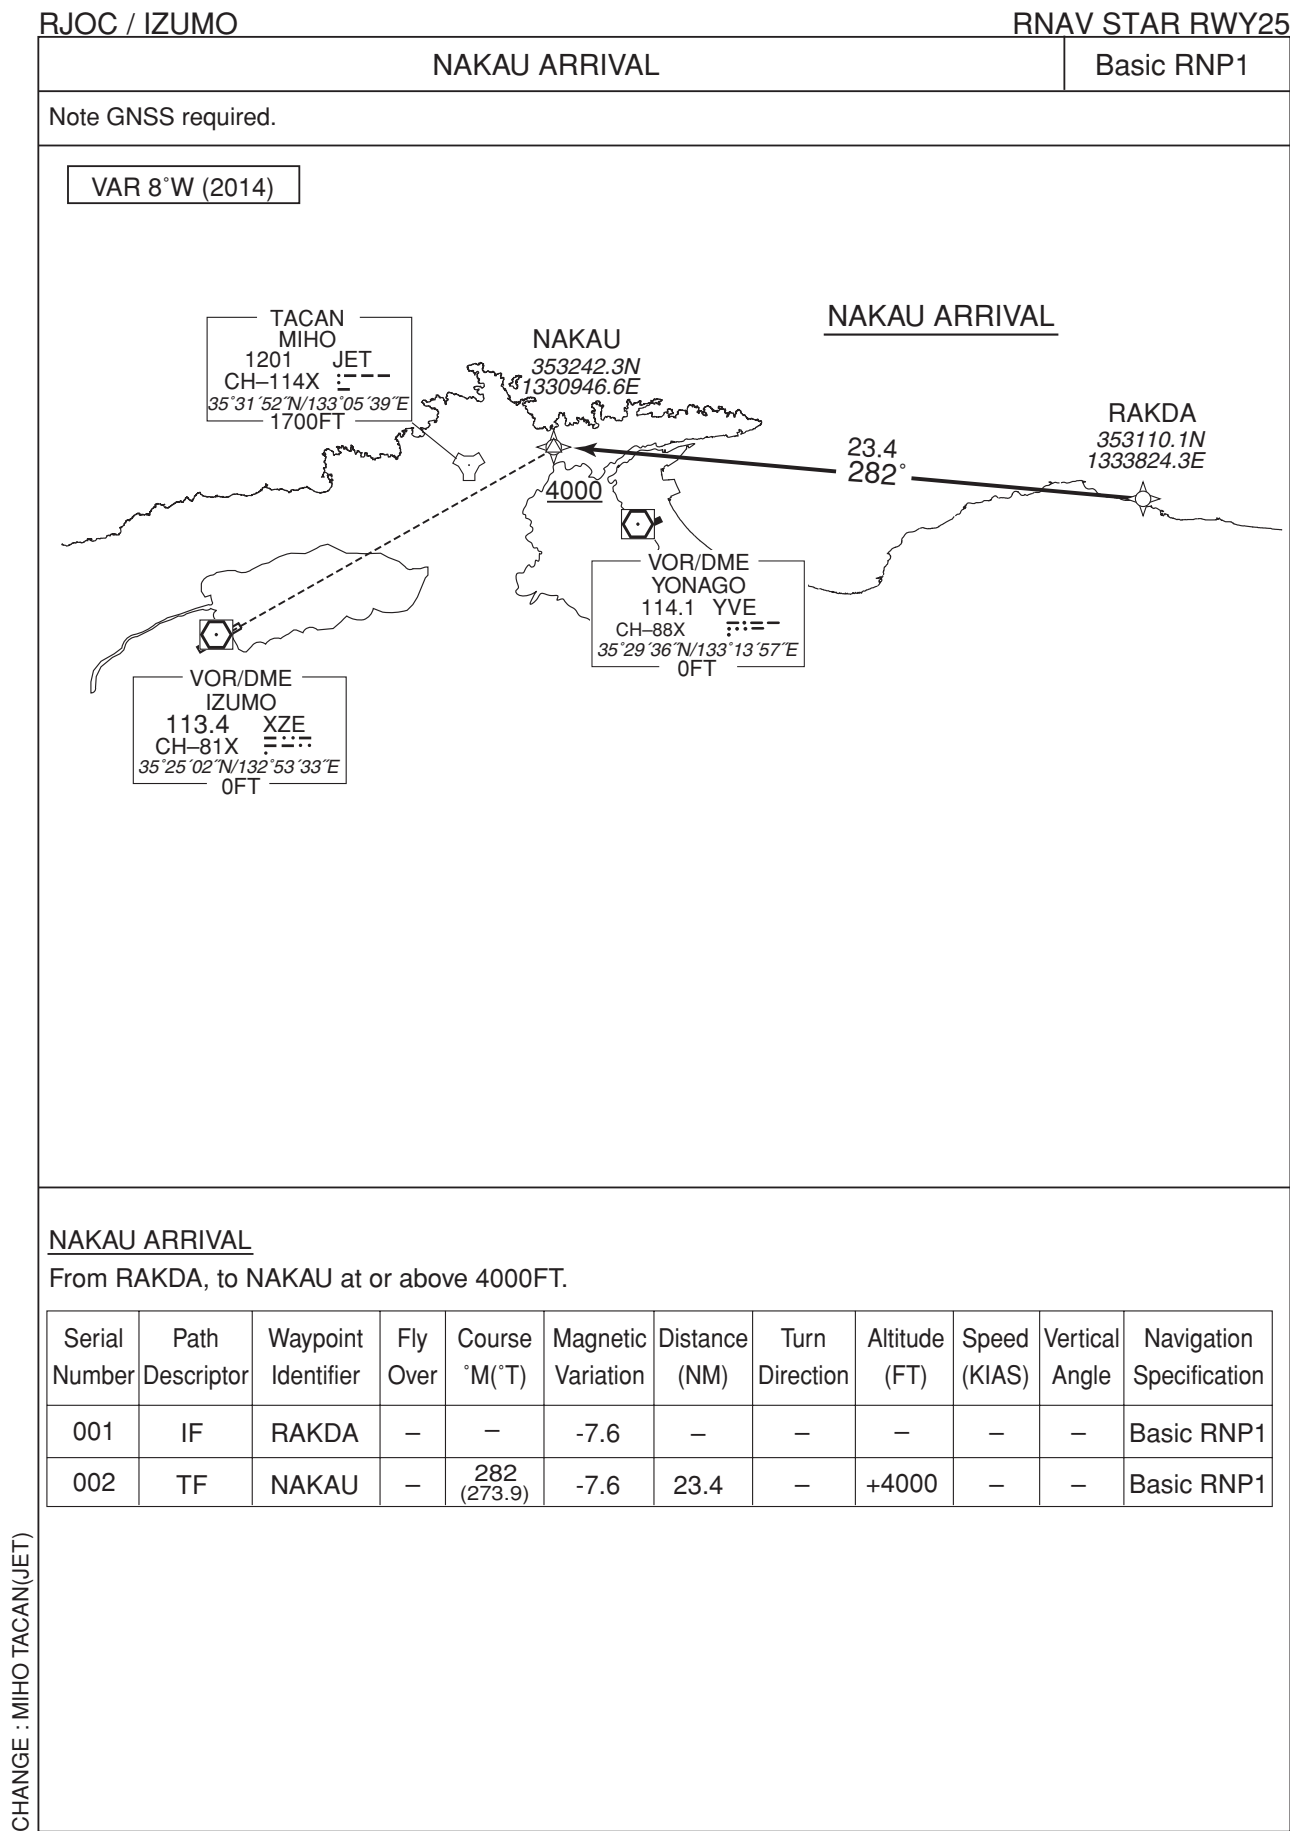

## INSTRUMENT APPROACH CHART

RJOC / IZUMO

LOC Z RWY25



## INSTRUMENT APPROACH CHART

RJOC / IZUMO


LOC Y RWY25



## MISSED APPROACH

Climb on HDG247° to 1600FT,  
turn right direct to XZE  
VOR/DME and hold at 3000FT.  
Contact IZUMO RADIO.

Timing not authorized for defining the  
MAPt.

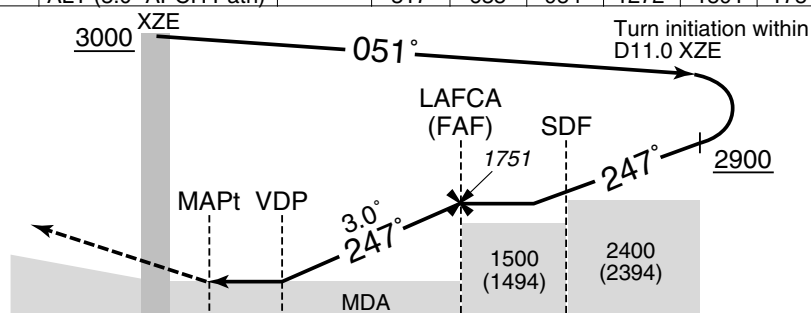

DME to IXZ	1.2	1.5	1.9	6.5	10.1
NM to THR	0	0.3	0.6	5.3	9.0

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 15	AD elev. 6	
CAT	CIRCLING			
	MDA(H)	CMV	MDA(H)	VIS
A	270 (264)	800	390 (384)	1600
B			460 (454)	
C			560 (554)	
D		1200	630 (624)	3200

Circling to NORTH side of RWY only.


MINIMA with Missed APCH climb gradient of 2.5% are not established.



## INSTRUMENT APPROACH CHART

RJOC / IZUMO


VOR RWY25

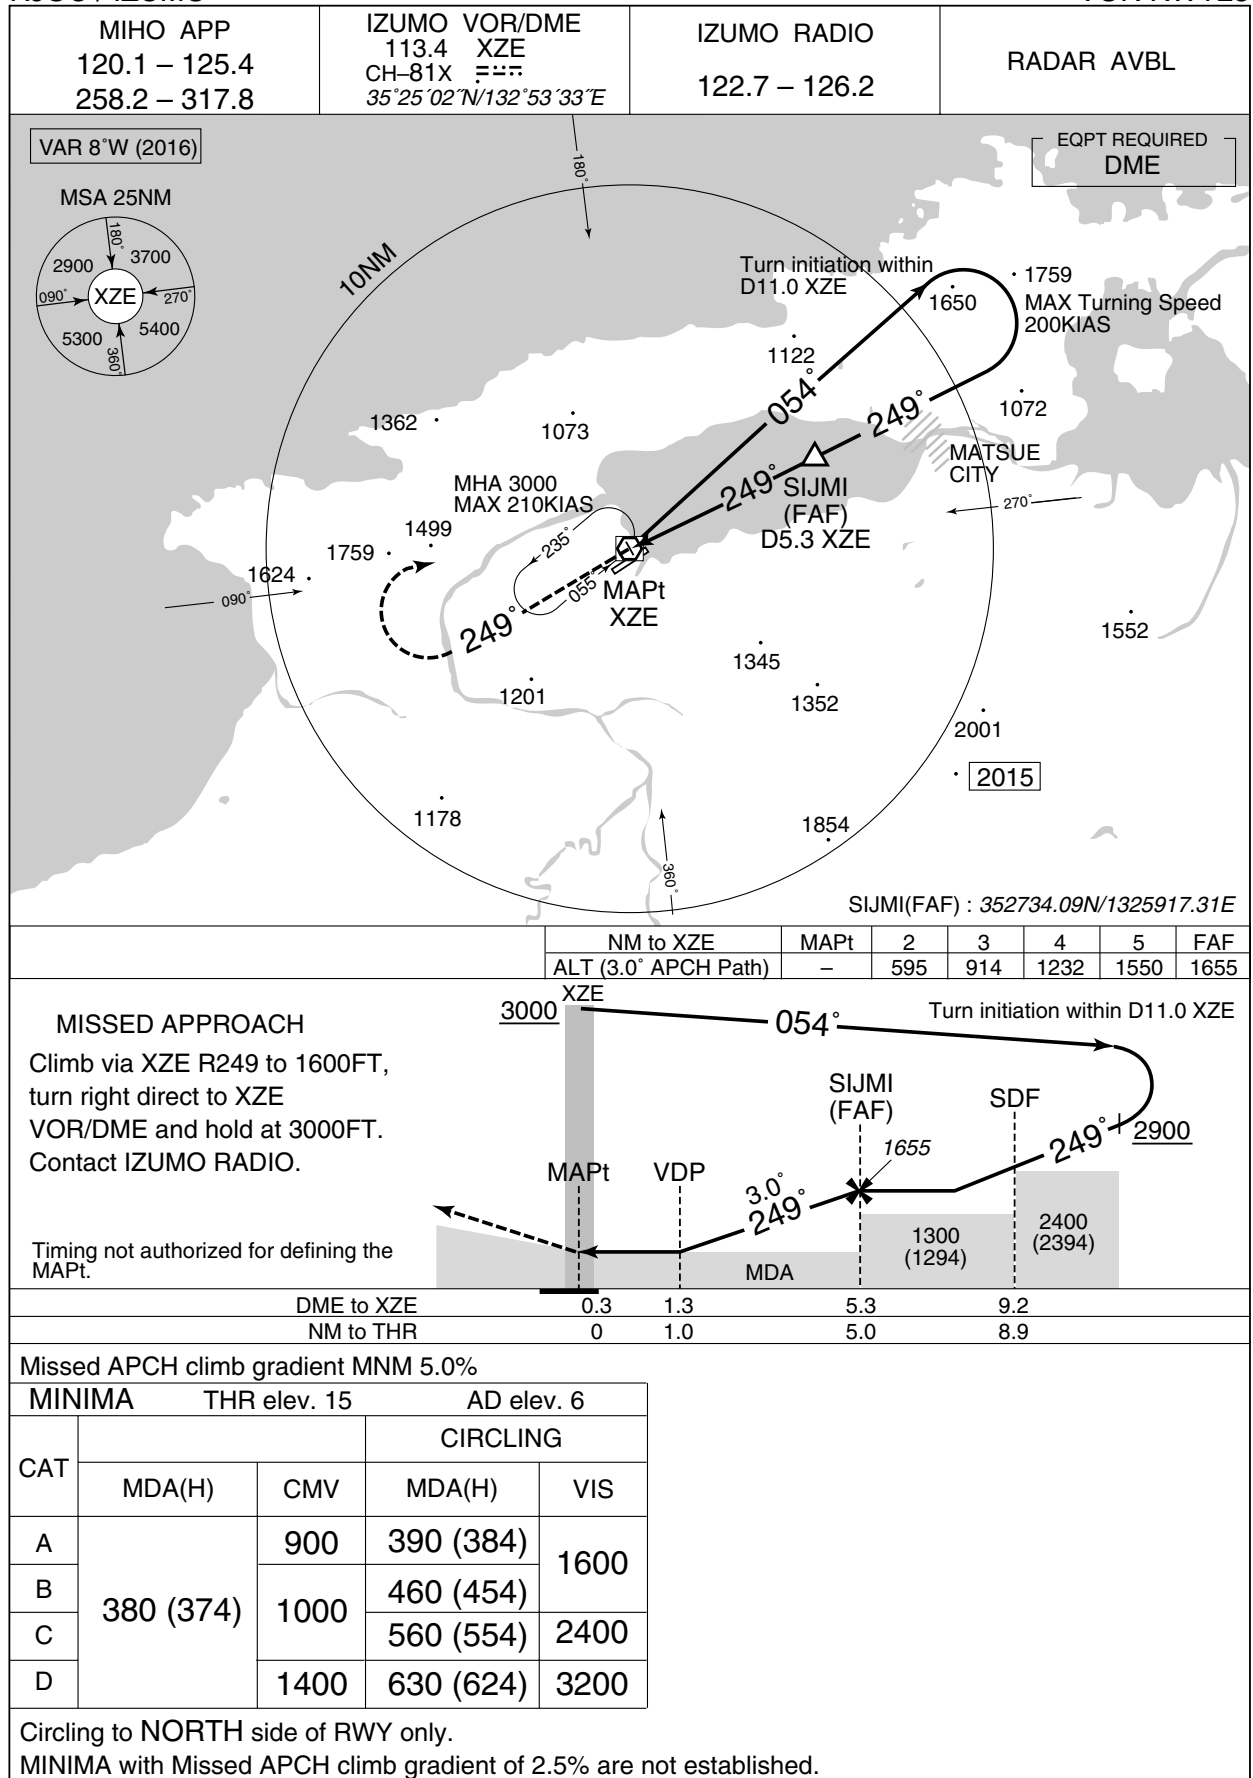

## INSTRUMENT APPROACH CHART

RJOC / IZUMO

RNAV(GNSS) RWY07

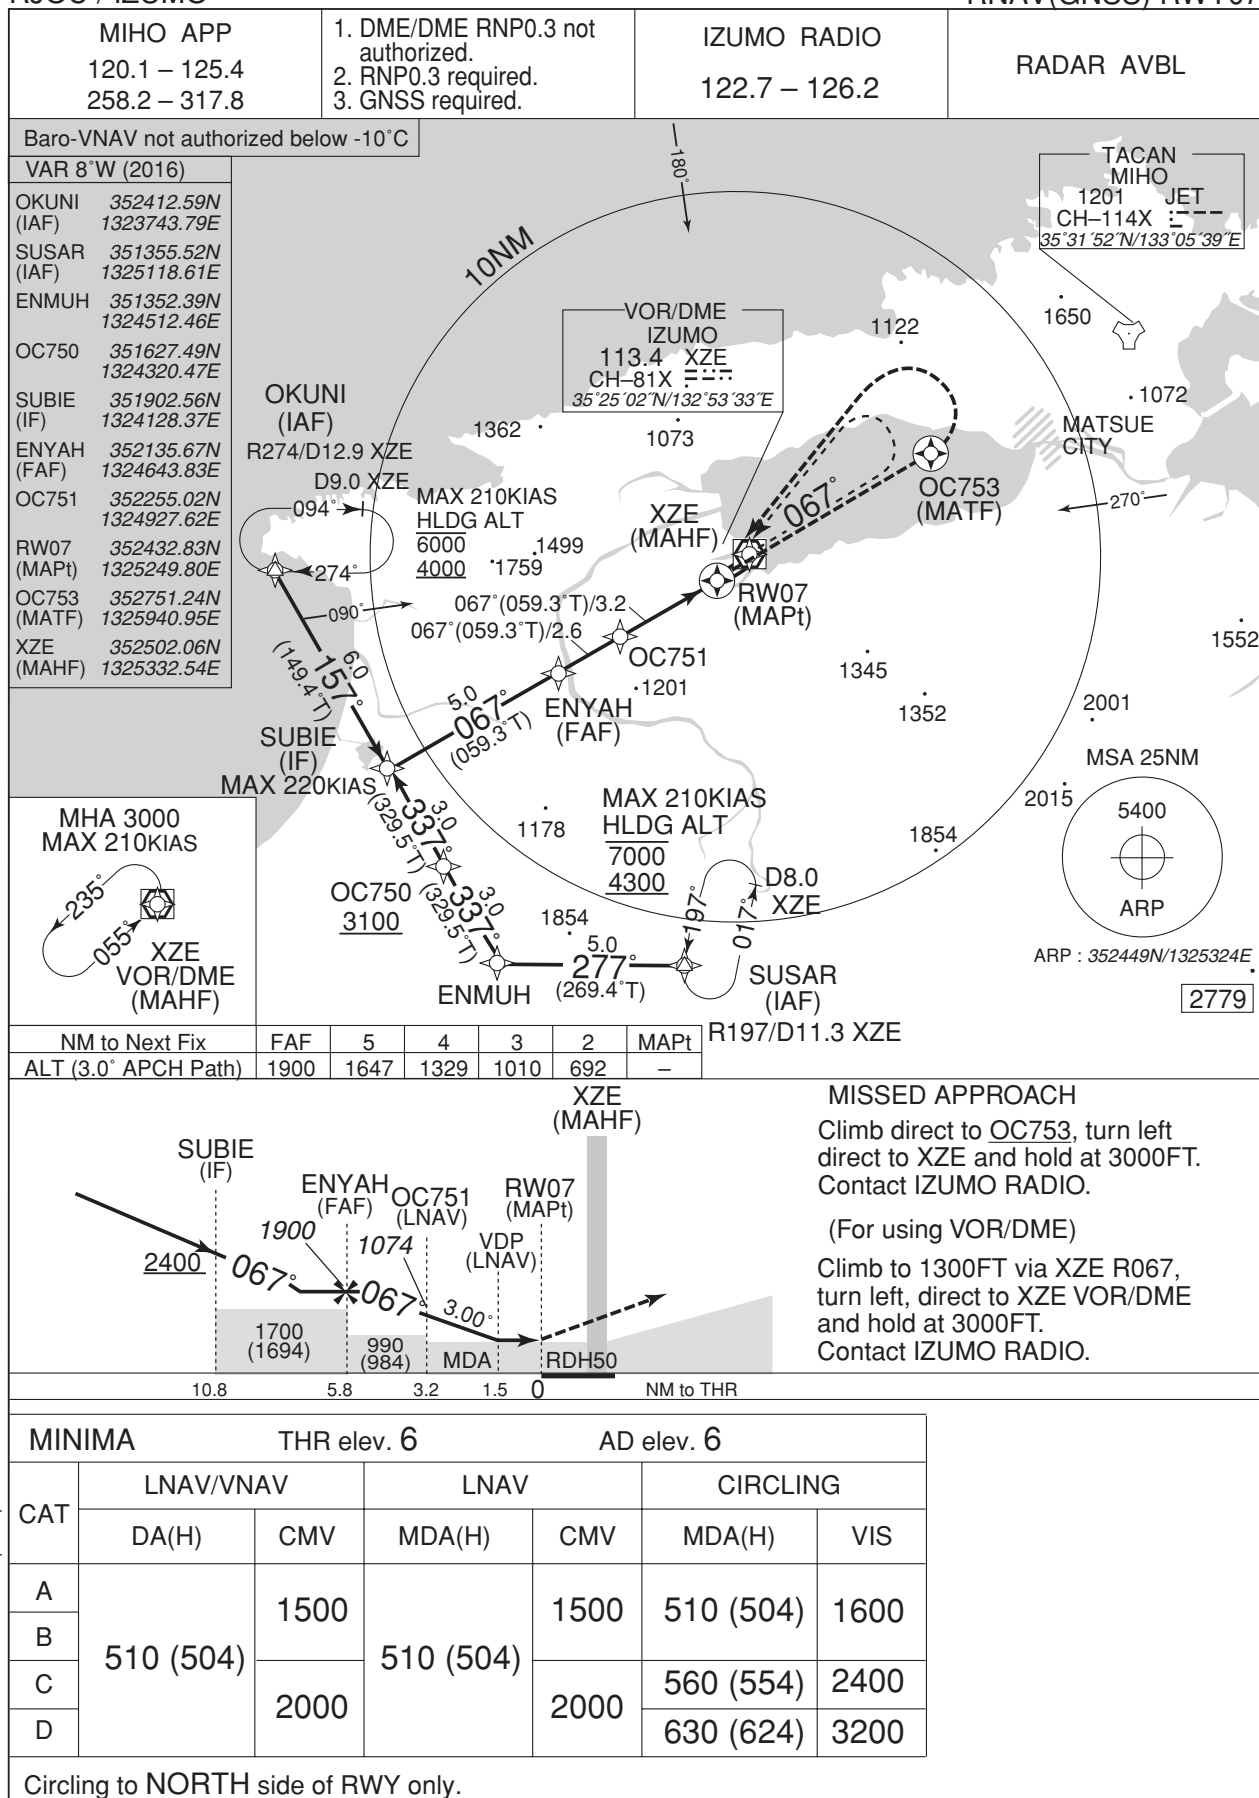

CHANGE : MIHO TACAN(JET)

## RJOC / IZUMO

RNAV(GNSS) RWY25


**MISSED APPROACH**

Climb direct to **OC553**, turn right direct to **XZE** and hold at **3000FT**.  
Contact **IZUMO RADIO**.

(For using VOR/DME)

Climb via **XZE R247** to **XZE 3.7DME**, turn right direct to **XZE VOR/DME** and hold at **3000FT**.  
Contact **IZUMO RADIO**.

Climb via XZE R247 to XZE 3.7DME,  
turn right direct to XZE VOR/DME  
and hold at 3000FT.  
Contact IZUMO RADIO.

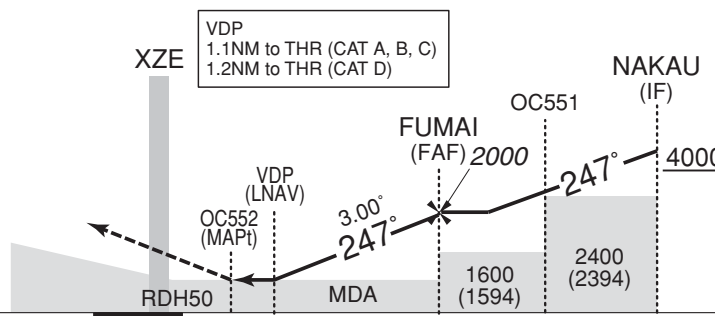

Missed APCH climb gradient MNM 5.0%


MINIMA		THR elev. 15		AD elev. 6		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	400 (385)	900	400 (394)	900	400 (394)	1600
B		1000		1000	460 (454)	
C					560 (554)	
D	430 (415)	1400	430 (424)	1400	630 (624)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : MIHO TACAN(JET)

RJOC / IZUMO

Visual REP

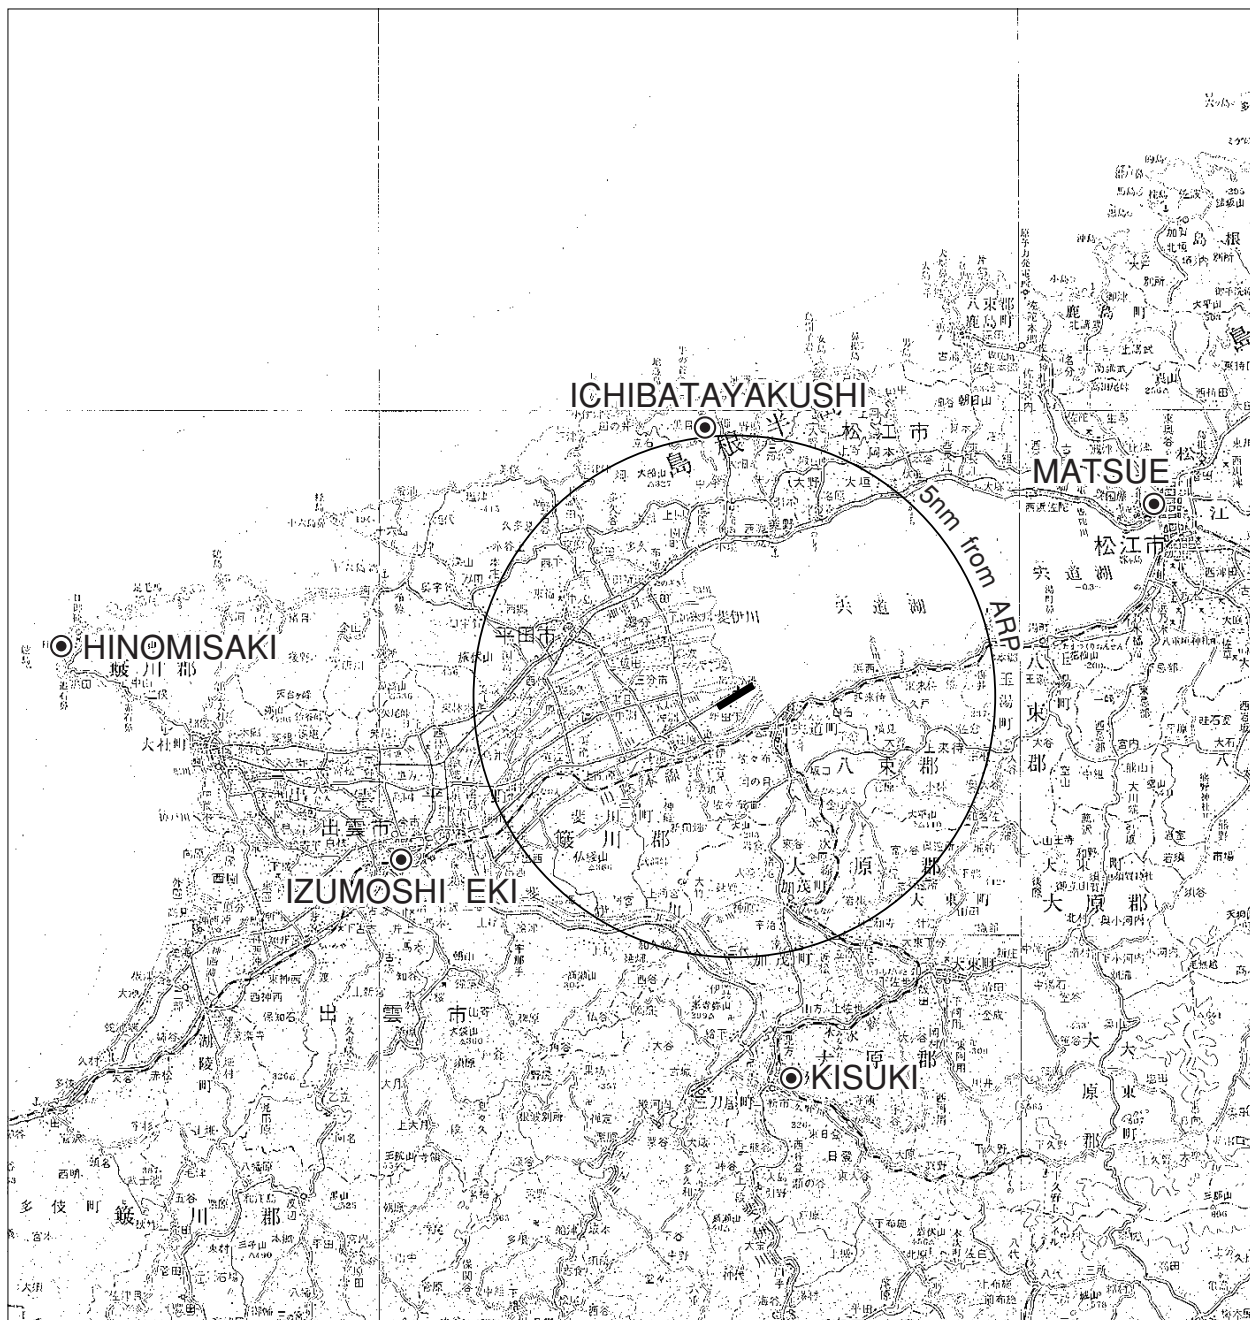


Call sign	BRG / DIST from ARP	Remarks
松江 Matsue	072°/9.1NM	松江城 Castle
出雲市駅 Izumoshi eki	251°/7.4NM	JR Station
一畑薬師 Ichibatayakushi	360°/5.3NM	寺 Temple
木次 Kisuki	181°/7.8NM	電々公社アンテナ Antenna
日御碕 Hinomisaki	280°/12.5NM	灯台 Lighthouse



RJOC / IZUMO

Minimum Vectoring Altitude CHART

VAR 8°W (2013)

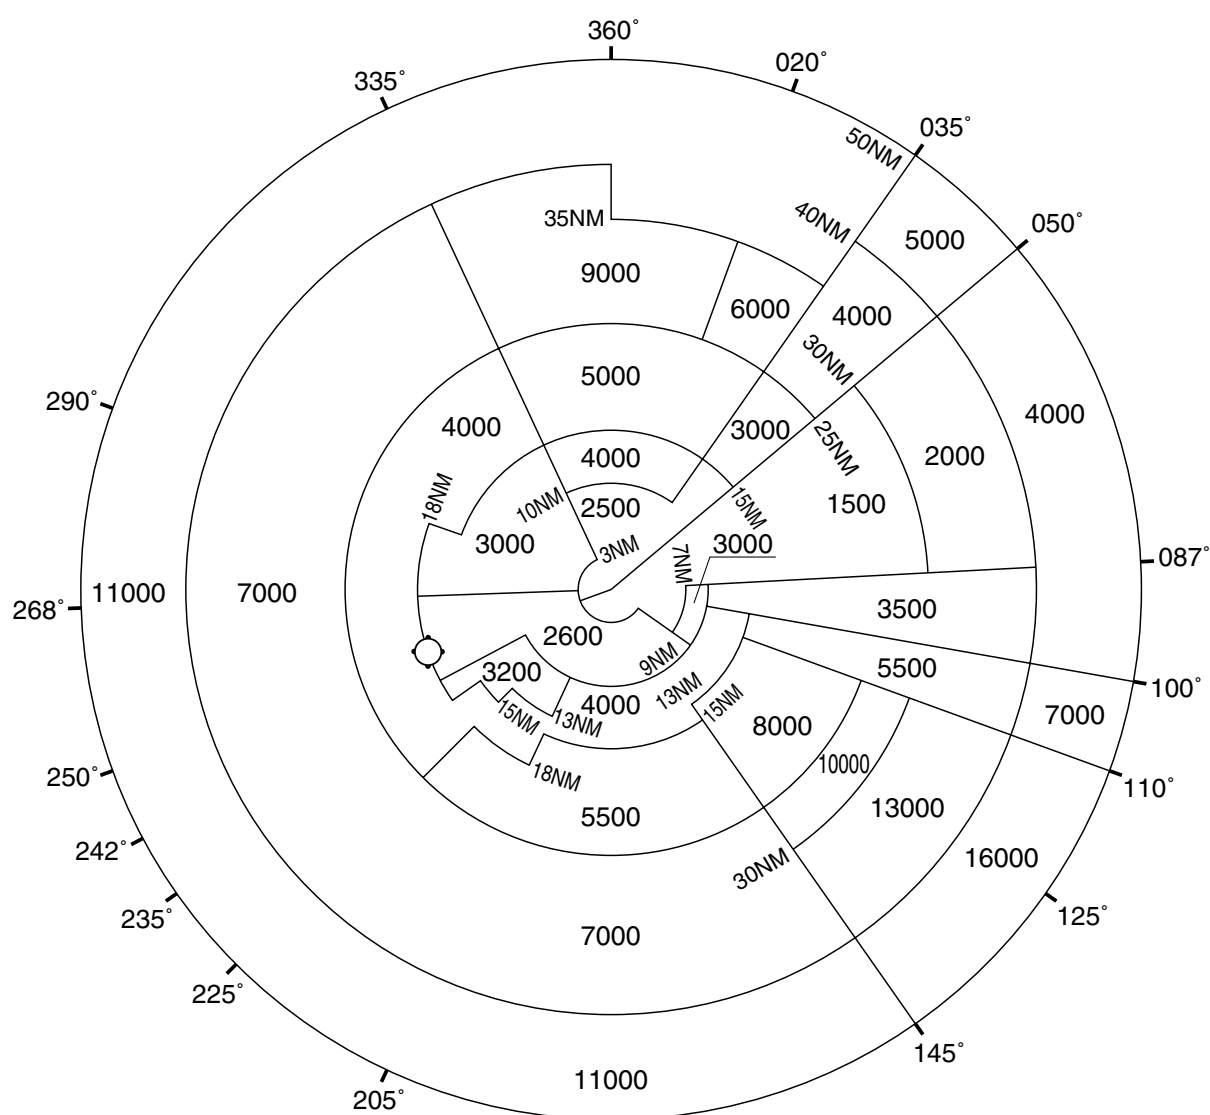

CENTER : 353003N/1331413E (RJOC RADAR SITE)