

RJSR / ODATE-NOSHIRO

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RJSR / ODATE-NOSHIRO

SID

ODATE REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 1800FT, turn right HDG332° to intercept and proceed...

RWY29 : Climb RWY HDG to ODE 3.0DME,...

...via ODE R287 to 6.0DME, turn left, direct to ODE VOR/DME.

Cross ODE VOR/DME at or above 6000FT.

Note RWY11 : 5.0% climb gradient required up to 1800FT.


OBST ALT 1313FT located at 4.3NM 093° FM end of RWY11.

OBST ALT 2100FT located at 9.5NM 137° FM end of RWY11.

RWY29 : 4.0% climb gradient required up to 700FT.

OBST ALT 656FT located at 2.1NM 276° FM end of RWY29.

ODATE REVERSAL TWO DEPARTURE

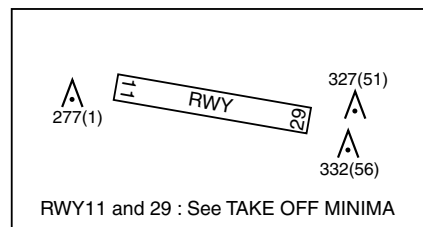

STANDARD DEPARTURE CHART -INSTRUMENT

RJSR / ODATE-NOSHIRO

SID

LAGOON THREE DEPARTURE

RWY11 : Climb RWY HDG to 1800FT, turn right HDG332° to intercept and proceed...

RWY29 : Climb RWY HDG to ODE 3.0DME,...

...via ODE R287 to NOSSY, turn left, via UWE R360 to UWE VOR/DME.

Cross NOSSY at or above 3000FT.

Note RWY11 : 5.0% climb gradient required up to 1800FT.

OBST ALT 1313FT located at 4.3NM 093° FM end of RWY11.

OBST ALT 2100FT located at 9.5NM 137° FM end of RWY11.

RWY29 : 4.0% climb gradient required up to 700FT.

OBST ALT 656FT located at 2.1NM 276° FM end of RWY29.

LAGOON THREE DEPARTURE

STANDARD ARRIVAL CHART - INSTRUMENT


RJSR / ODATE-NOSHIRO

RNAV STAR RWY29

NOSSY ARRIVAL

Basic RNP1

Note GNSS required.

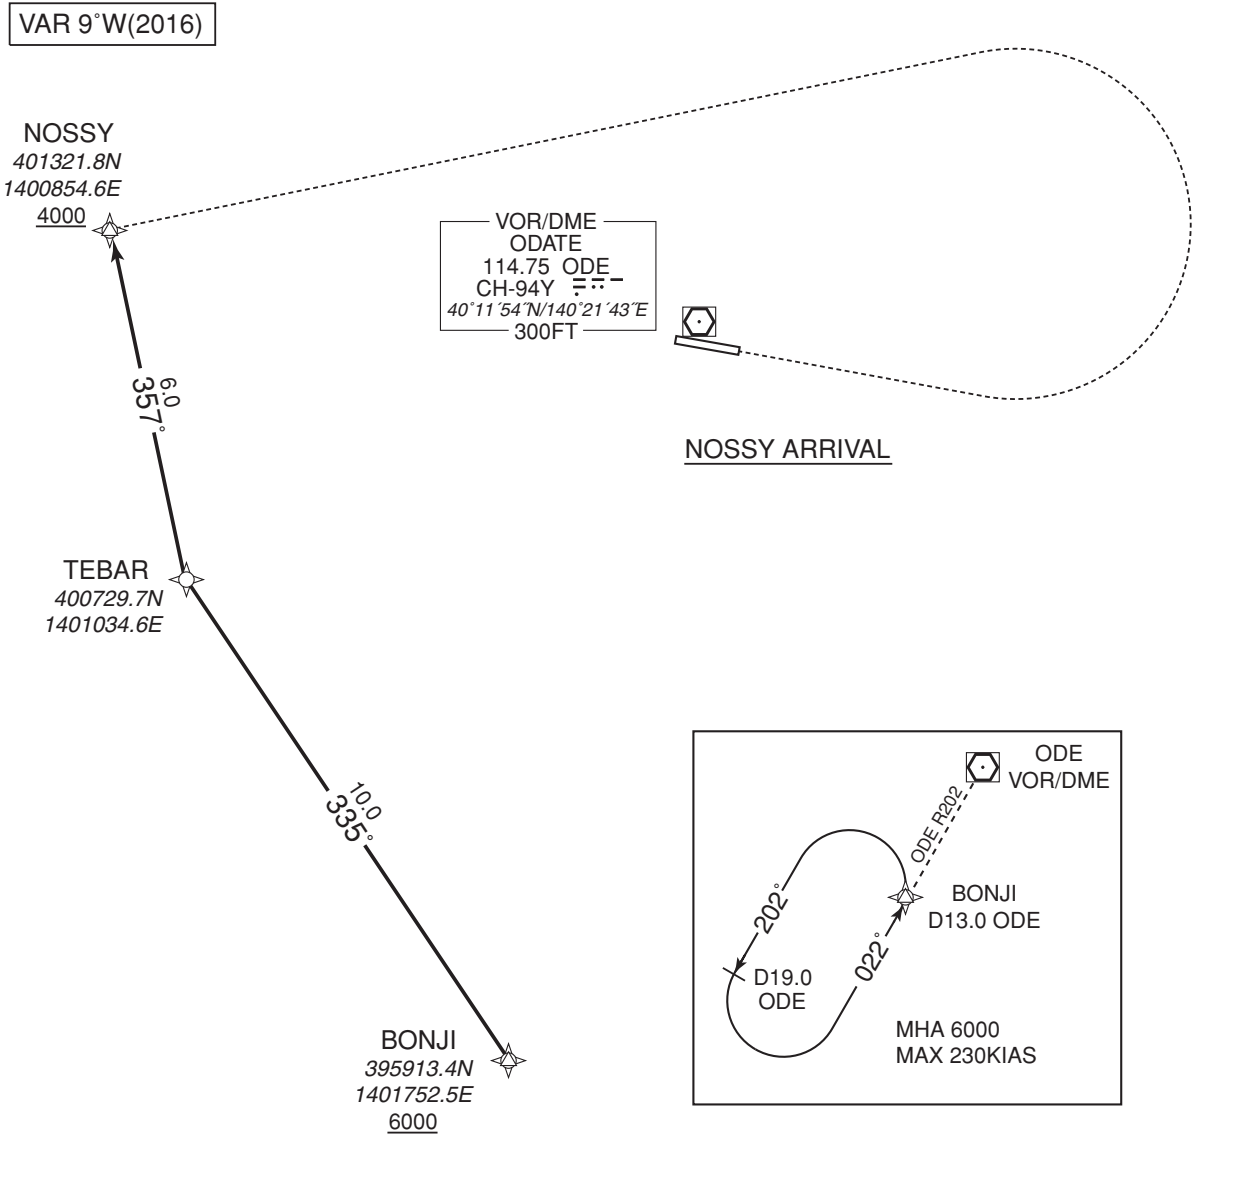

NOSSY ARRIVAL


From BONJI at or above 6000FT, to TEBAR, to NOSSY at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	BONJI	—	—	-8.8	—	—	+6000	—	—	Basic RNP1
002	TF	TEBAR	—	335 (326.0)	-8.8	10.0	—	—	—	—	Basic RNP1
003	TF	NOSSY	—	357 (347.8)	-8.8	6.0	—	+4000	—	—	Basic RNP1

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO


ILS Z or LOC Z RWY11

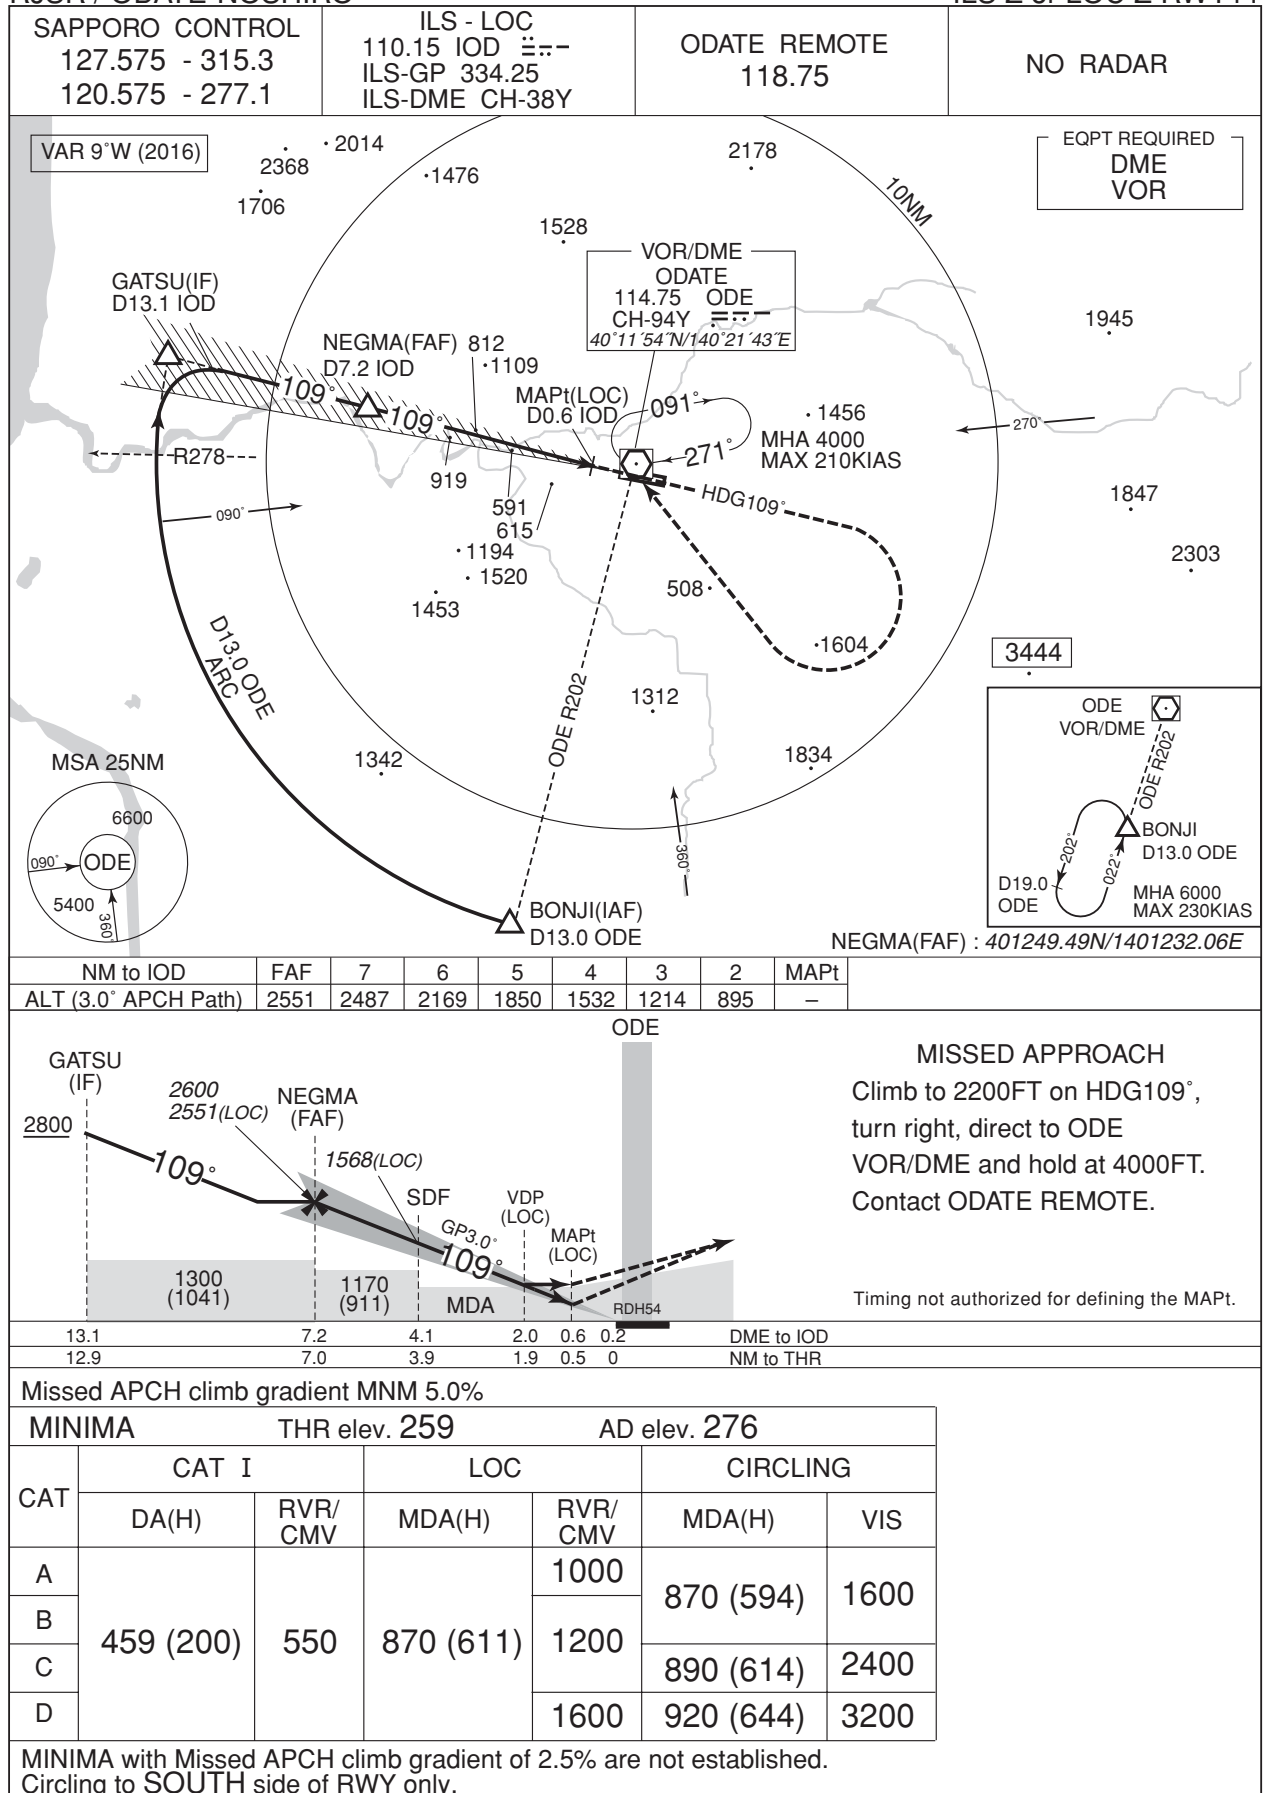

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO

ILS Y or LOC Y RWY11

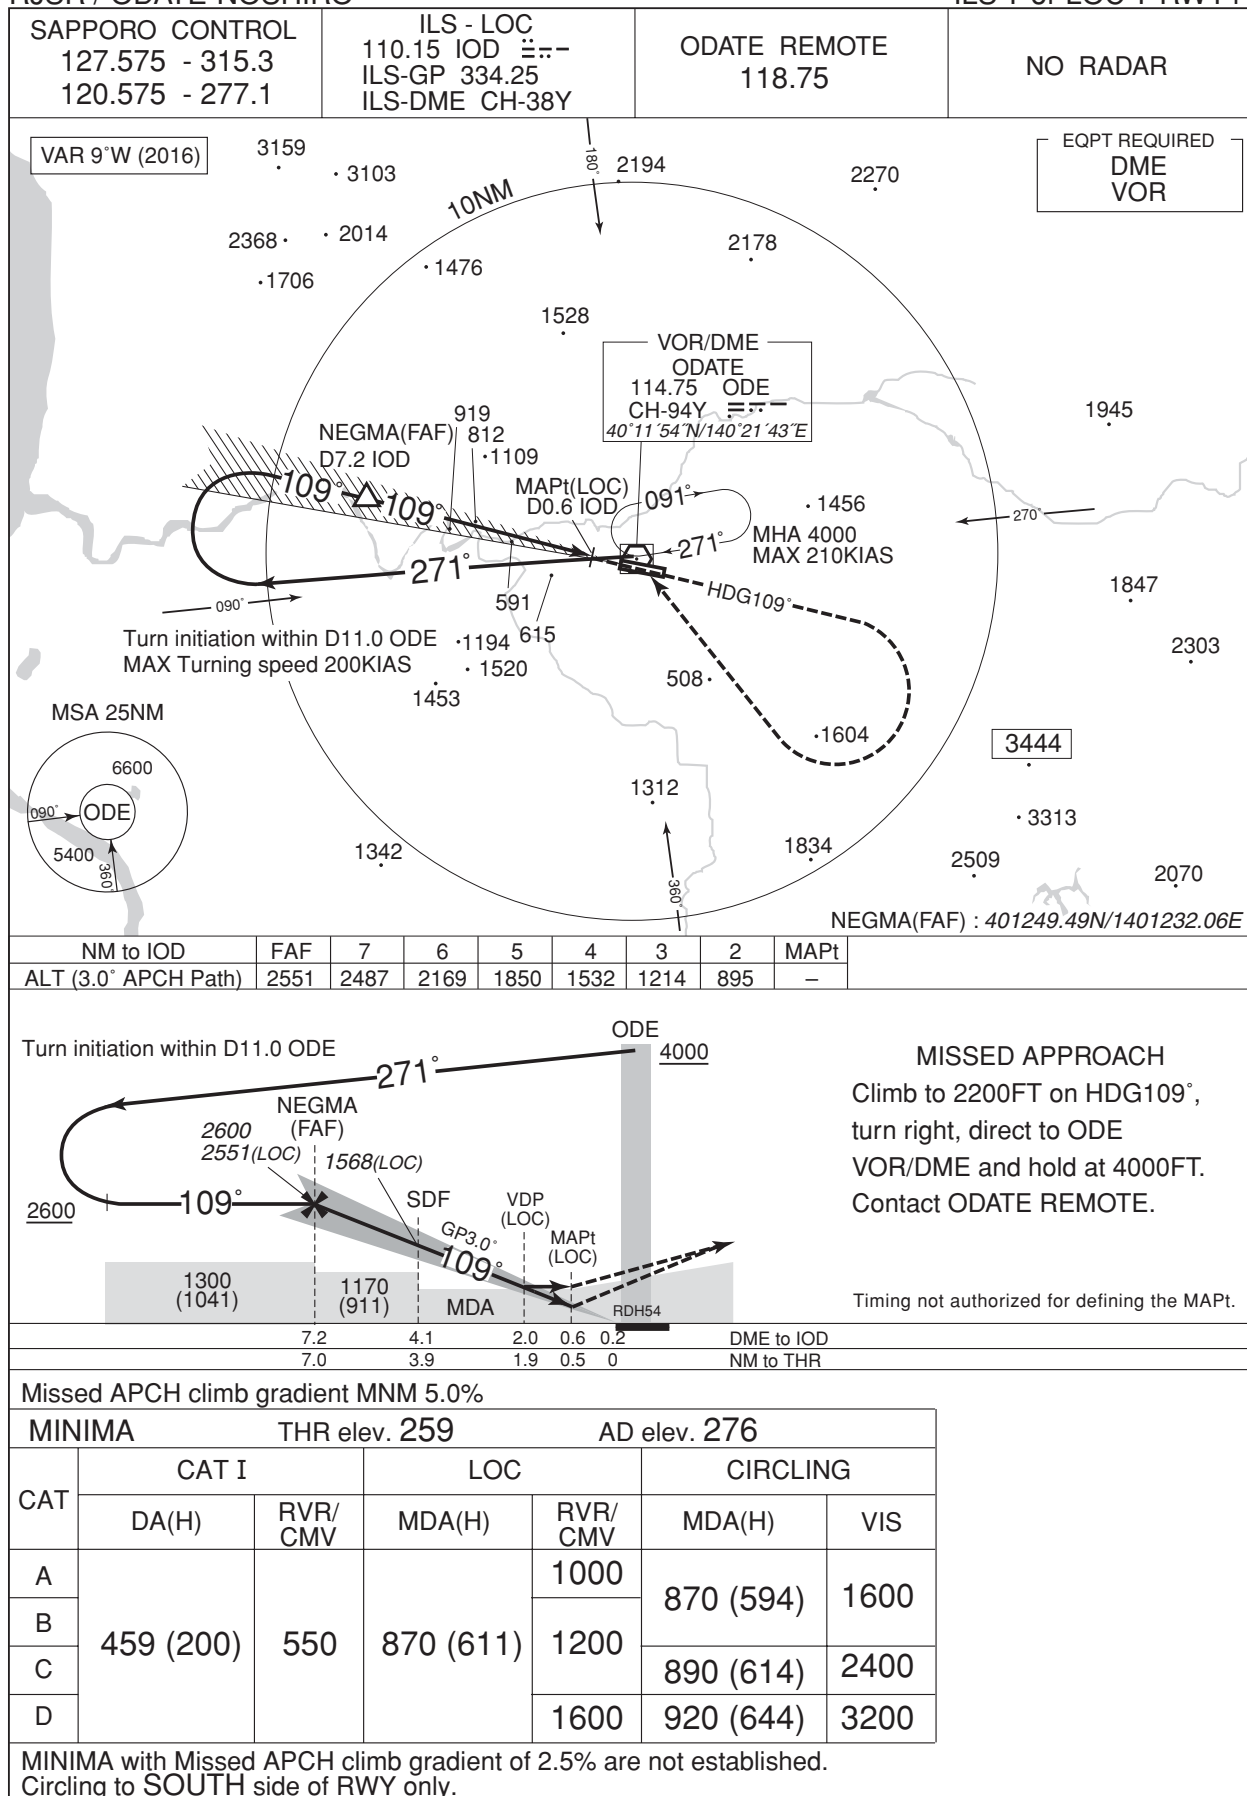

RJSR / ODATE-NOSHIRO

SAPPORO CONTROL 127.575 - 315.3 120.575 - 277.1	ODATE VOR/DME 114.75 ODE CH-94Y --- <i>40°11'54"N/140°21'43"E</i>	ODATE REMOTE 118.75	NO RADAR
--	---	-------------------------------	-----------------

VAR 9°W (2016)

MSA 25NM

EQPT REQUIRED DME

MHA 4000 MAX 210KIAS

NAKRA(FAF) : 401127.68N/1401512.56E

MISSED APPROACH

Climb to 2200FT via ODE R094,
turn right, direct to ODE
VOR/DME and hold at 4000FT.
Contact ODATE REMOTE.

Timing not authorized for defining the MAPt.

DME to ODE

5.0 3.5

MINIMA			AD elev. 276
CAT	CIRCLING		
	MDA(H)	VIS	
A	870 (594)	1600	
B			
C	890 (614)	2400	
D	920 (644)	3200	

Missed APCH climb gradient MNM 4.0%

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to SOUTH side of RWY only.

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO

RNAV(RNP) Z RWY29

SAPPORO CONTROL
127.575 - 315.3
120.575 - 277.1

GNSS and RF required.

ODATE REMOTE
118.75

NO RADAR

For uncompensated Baro-VNAV systems, procedure not authorized below -15°C / above 45°C

VAR 8°W (2011)

NOT TO SCALE

NOSSY
(MAHF)

D9.9 ODE

VOR/DME

ODATE


114.75 ODE

CH-94Y

40°11'54"N/140°21'43"E

MHA4000
MAX 230KIAS

MSA RW29 25NM




SR961(FAF) : 400434.91N/1402536.32E

MISSED APPROACH

Climb to 4000FT, to NOSSY
and hold.

Contact ODATE REMOTE.

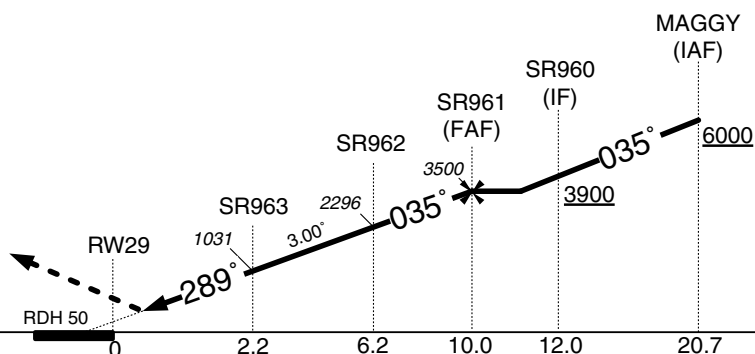

MINIMA THR elev. 292

AD elev. 276

CAT	RNP 0.27		RNP 0.30	
	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B	-	-	-	-
C	592(300)	1400	643(351)	1400
D	-	-	-	-

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO

RNAV(RNP) Z RWY29

RNAV(RNP) Z RWY29
Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [°M(°T)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MAGGY	—	—	-8.5	—	—	+6000	—	—	—
002	TF	SR960	—	035 (026.1)	-8.5	8.7	—	+3900	—	—	1.0
003	TF	SR961	—	035 (026.1)	-8.5	2.0	—	3500	—	—	1.0
004	TF	SR962	—	035 (026.1)	-8.5	3.8	—	2296	—	-3.00	0.27 0.30
005	RF Center: SRRF1 r=2.15NM	SR963	—	—	-8.5	4.0	L	1031	—	-3.00	0.27 0.30
006	TF	RW29	Y	289 (280.1)	-8.5	2.2	—	342	—	-3.00/50	0.27 0.30
007	TF	NOSSY	—	289 (280.3)	-8.5	10.9	—	4000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MAGGY	395456.61N / 1401926.80E	SRRF1	400855.54N / 1402516.24E
SR960	400247.11N / 1402427.29E		
SR961	400434.91N / 1402536.32E		
SR962	400758.60N / 1402746.93E		
SR963	401102.48N / 1402545.54E		
RW29	401125.10N / 1402258.78E		
NOSSY	401321.82N / 1400854.64E		

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO


RNAV(RNP) Y RWY29

SAPPORO CONTROL 127.575 - 315.3 120.575 - 277.1	GNSS and RF required.	ODATE REMOTE 118.75	NO RADAR
---	-----------------------	------------------------	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -15°C / above 45°C

VAR 8°W (2011)


MSA RW29 25NM

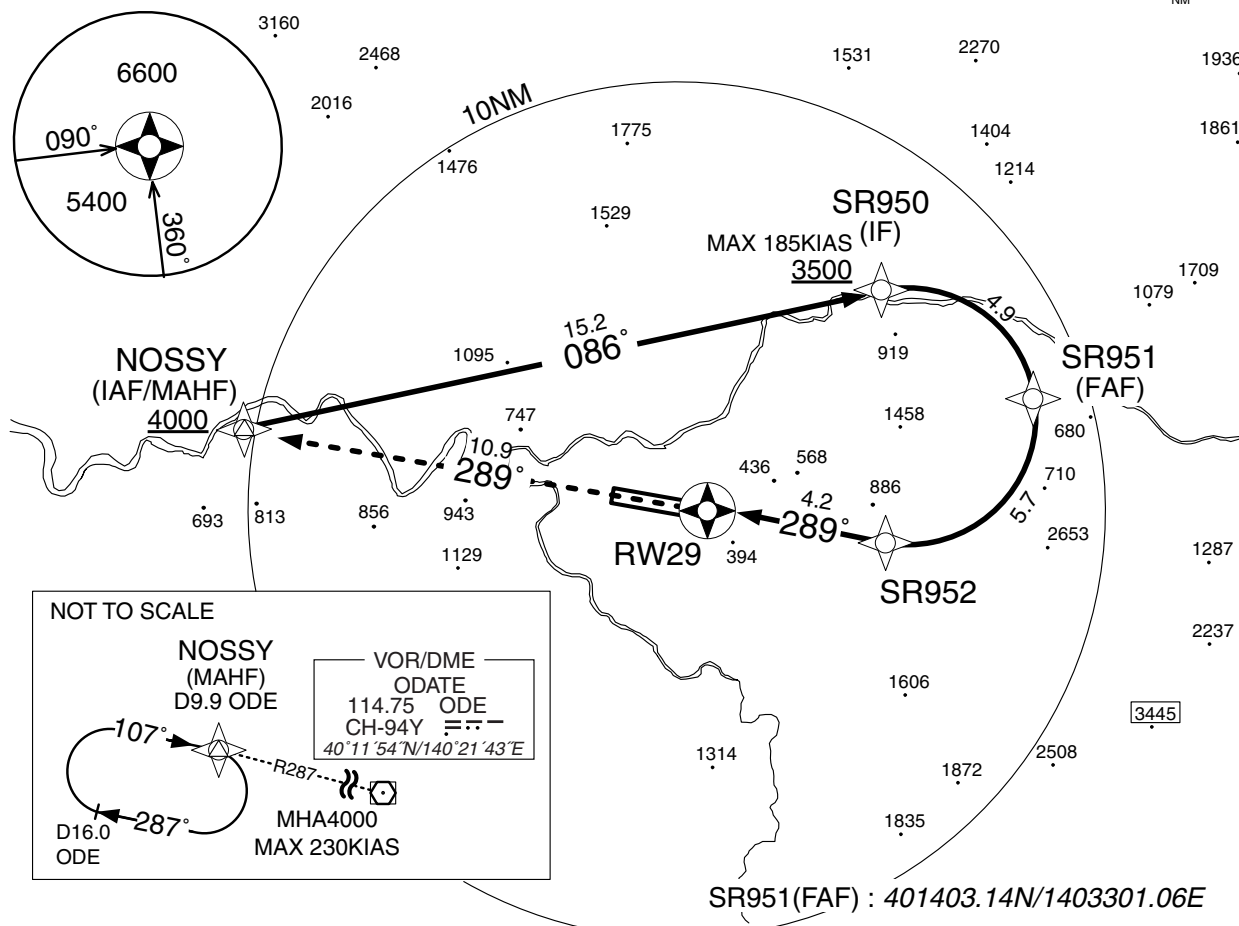

MISSED APPROACH

Climb to 4000FT, to NOSSY
and hold.

Contact ODATE REMOTE.

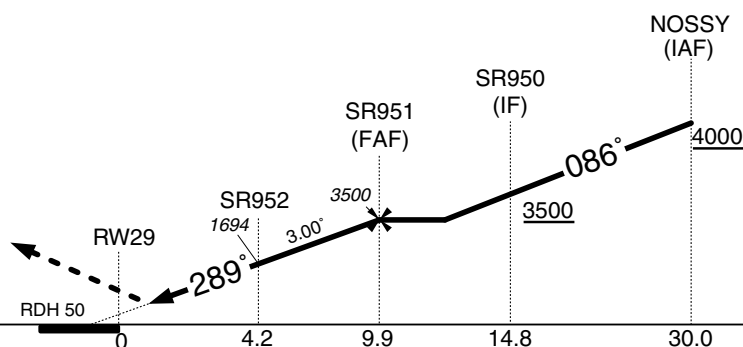

MINIMA THR elev. 292 AD elev. 276

CAT	RNP 0.27		RNP 0.30	
	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B	-	-	-	-
C	592(300)	1400	643(351)	1400
D	-	-	-	-

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJSR / ODATE-NOSHIRO

RNAV(RNP) Y RWY29

RNAV(RNP) Y RWY29

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [°M(°T)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	NOSSY	—	—	-8.5	—	—	+4000	—	—	—
002	TF	SR950	—	086 (077.7)	-8.5	15.2	—	+3500	-185	—	1.0
003	RF Center: SRRF2 r=3.00NM	SR951	—	—	-8.5	4.9	R	3500	—	—	1.0
004	RF Center: SRRF2 r=3.00NM	SR952	—	—	-8.5	5.7	R	1694	—	-3.00	0.27 0.30
005	TF	RW29	Y	289 (280.1)	-8.5	4.2	—	342	—	-3.00/50	0.27 0.30
006	TF	NOSSY	—	289 (280.3)	-8.5	10.9	—	4000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SR950	401634.48N / 1402818.75E	SRRF2	401338.11N / 1402908.01E
SR951	401403.14N / 1403301.06E		
SR952	401040.53N / 1402826.85E		
RW29	401125.10N / 1402258.78E		
NOSSY	401321.82N / 1400854.64E		

RJSR / ODATE-NOSHIRO

Visual REP

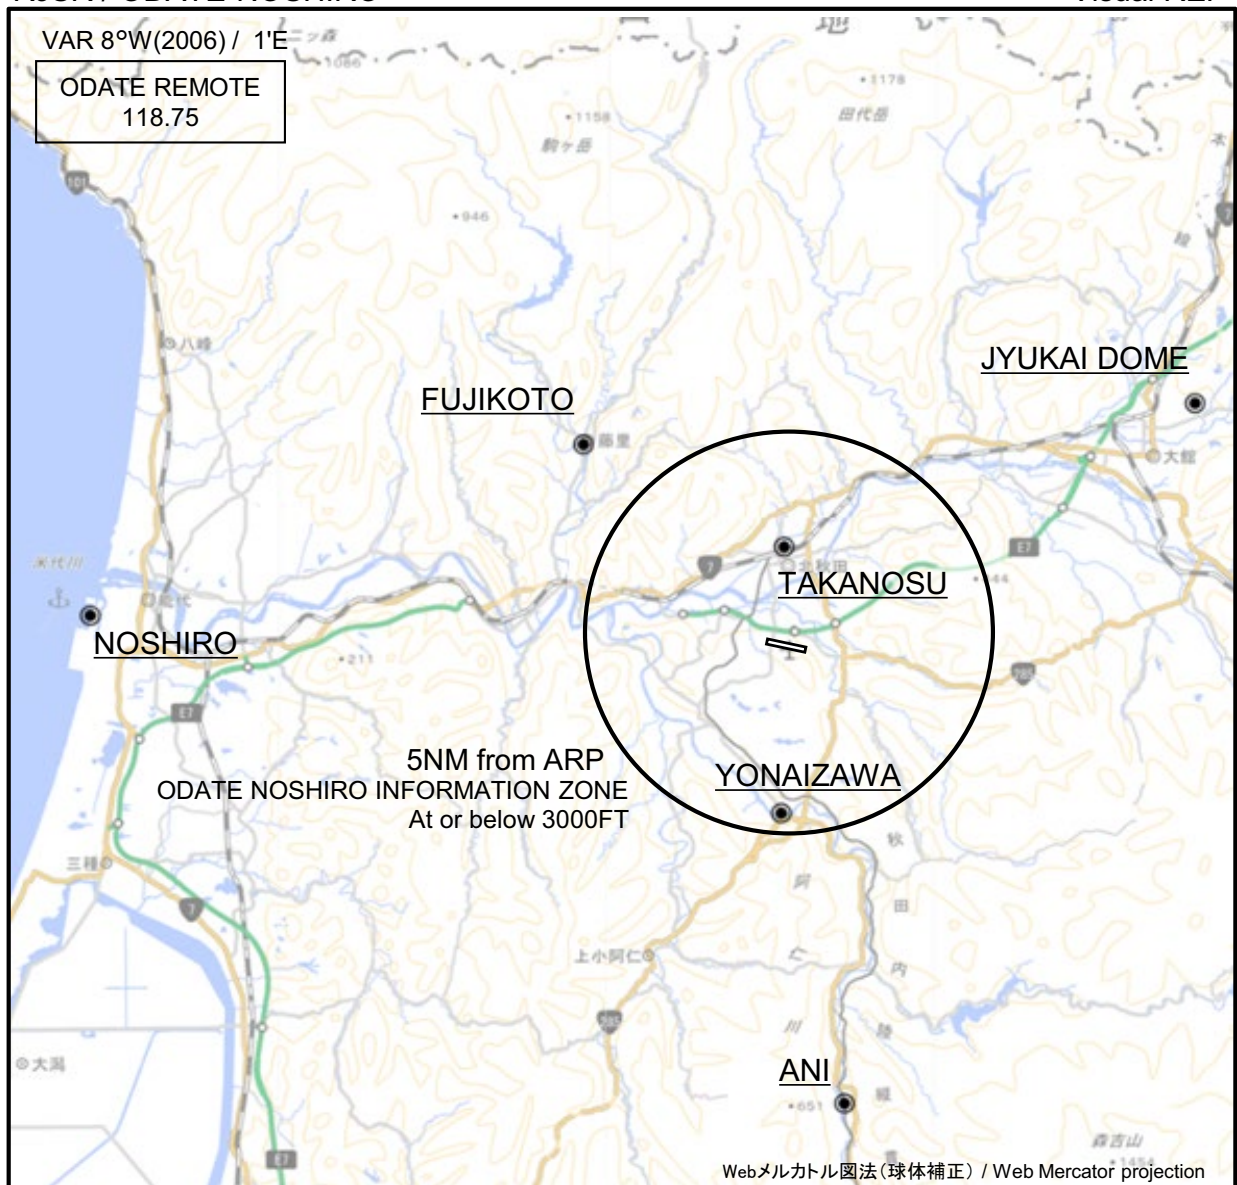

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
樹海ドーム Jyukai Dome	058°T / 11.6NM	大館市白色ドーム White Dome Odate City
藤琴 Fujikoto	314°T / 7.2NM	粕毛川・藤琴川交点 Intersection Kasuge and Fujikoto River
鷹巣 Takanosu	357°T / 2.5NM	JR駅北側 North of JR Station
能代 Noshiro	272°T / 17.3NM	能代港 Noshiro Harbor
米内沢 Yonaizawa	183°T / 4.2NM	内陸線米内沢駅南側米内沢橋 Bridge
阿仁 Ani	173°T / 11.6NM	内陸線阿仁合駅 Station

RJSR / ODATE-NOSHIRO

LDG CHART



RJSR / ODATE-NOSHIRO

Minimum Vectoring Altitude CHART

