

RJOC / IZUMO

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

DOZEN FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left ...

RWY25 : Climb RWY HDG to 1700FT, turn right HDG077°...

... to intercept and proceed via XZE R032(OIE R213) to DOZEN.

Cross DOZEN at or above 5000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.



STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

IZUMO REVERSAL FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left to intercept and proceed via XZE R032 to 3000FT, turn left direct to XZE VOR/DME.

Cross XZE VOR/DME at or above 7000FT.

RWY25 : Climb RWY HDG to 1700FT, turn right to intercept and proceed via XZE R260 to XZE 10.5DME, turn right direct to XZE VOR/DME.

Cross XZE VOR/DME at or above 7000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

IZUMO REVERSAL FOUR DEPARTURE

STANDARD DEPARTURE CHART - INSTRUMENT


RJOC / IZUMO

RNAV SID and TRANSITION

MATSUE TWO DEPARTURE
TSUNO TRANSITION

Basic RNP1

Note GNSS required.

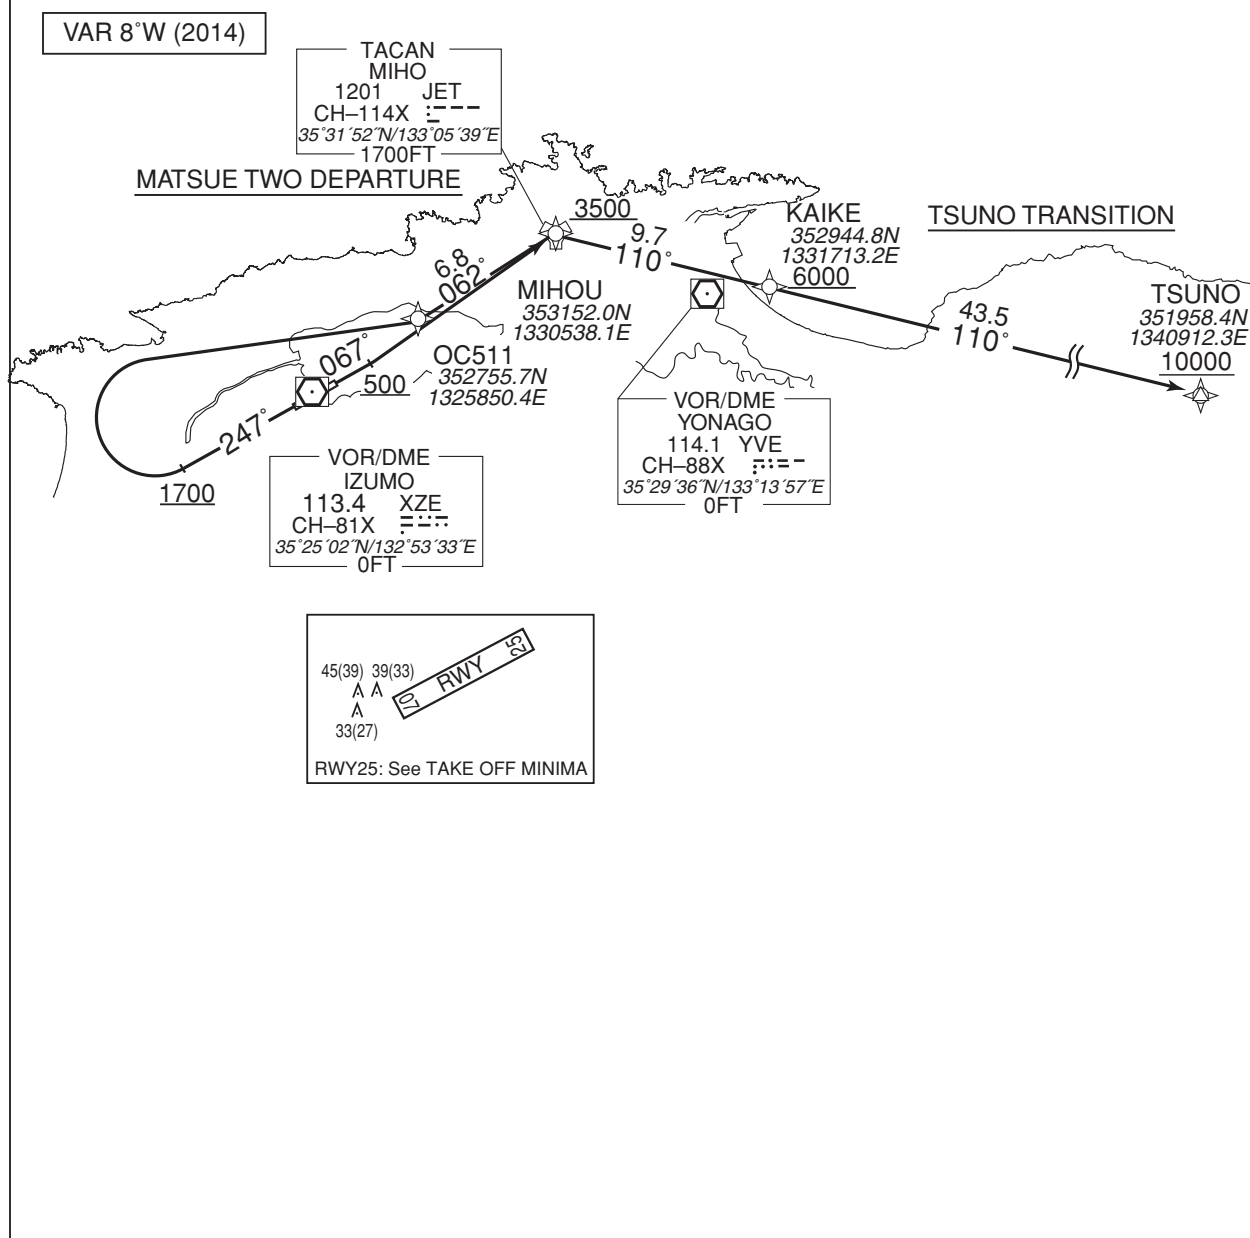MATSUE TWO DEPARTURE

RWY07 : Climb on HDG067° at or above 500FT, direct to MIHOU at or above 3500FT.

RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC511,
to MIHOU at or above 3500FT.

NOTE RWY07 : 3.5% climb gradient required up to 1300FT.

OBST ALT 1739FT located at 10.9NM 058° FM end of RWY07.

RWY25 : 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

TSUNO TRANSITION

From MIHOU, to KAIKE at or above 6000FT, to TSUNO at or above 10000FT.

CHANGE : MIHO TACAN(JET)

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID and TRANSITION

MATSUE TWO DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1


RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC511	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	MIHOU	—	062 (054.5)	-7.6	6.8	—	+3500	—	—	Basic RNP1

TSUNO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1
002	TF	KAIKE	—	110 (102.6)	-7.6	9.7	—	+6000	—	—	Basic RNP1
003	TF	TSUNO	—	110 (102.7)	-7.6	43.5	—	+10000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

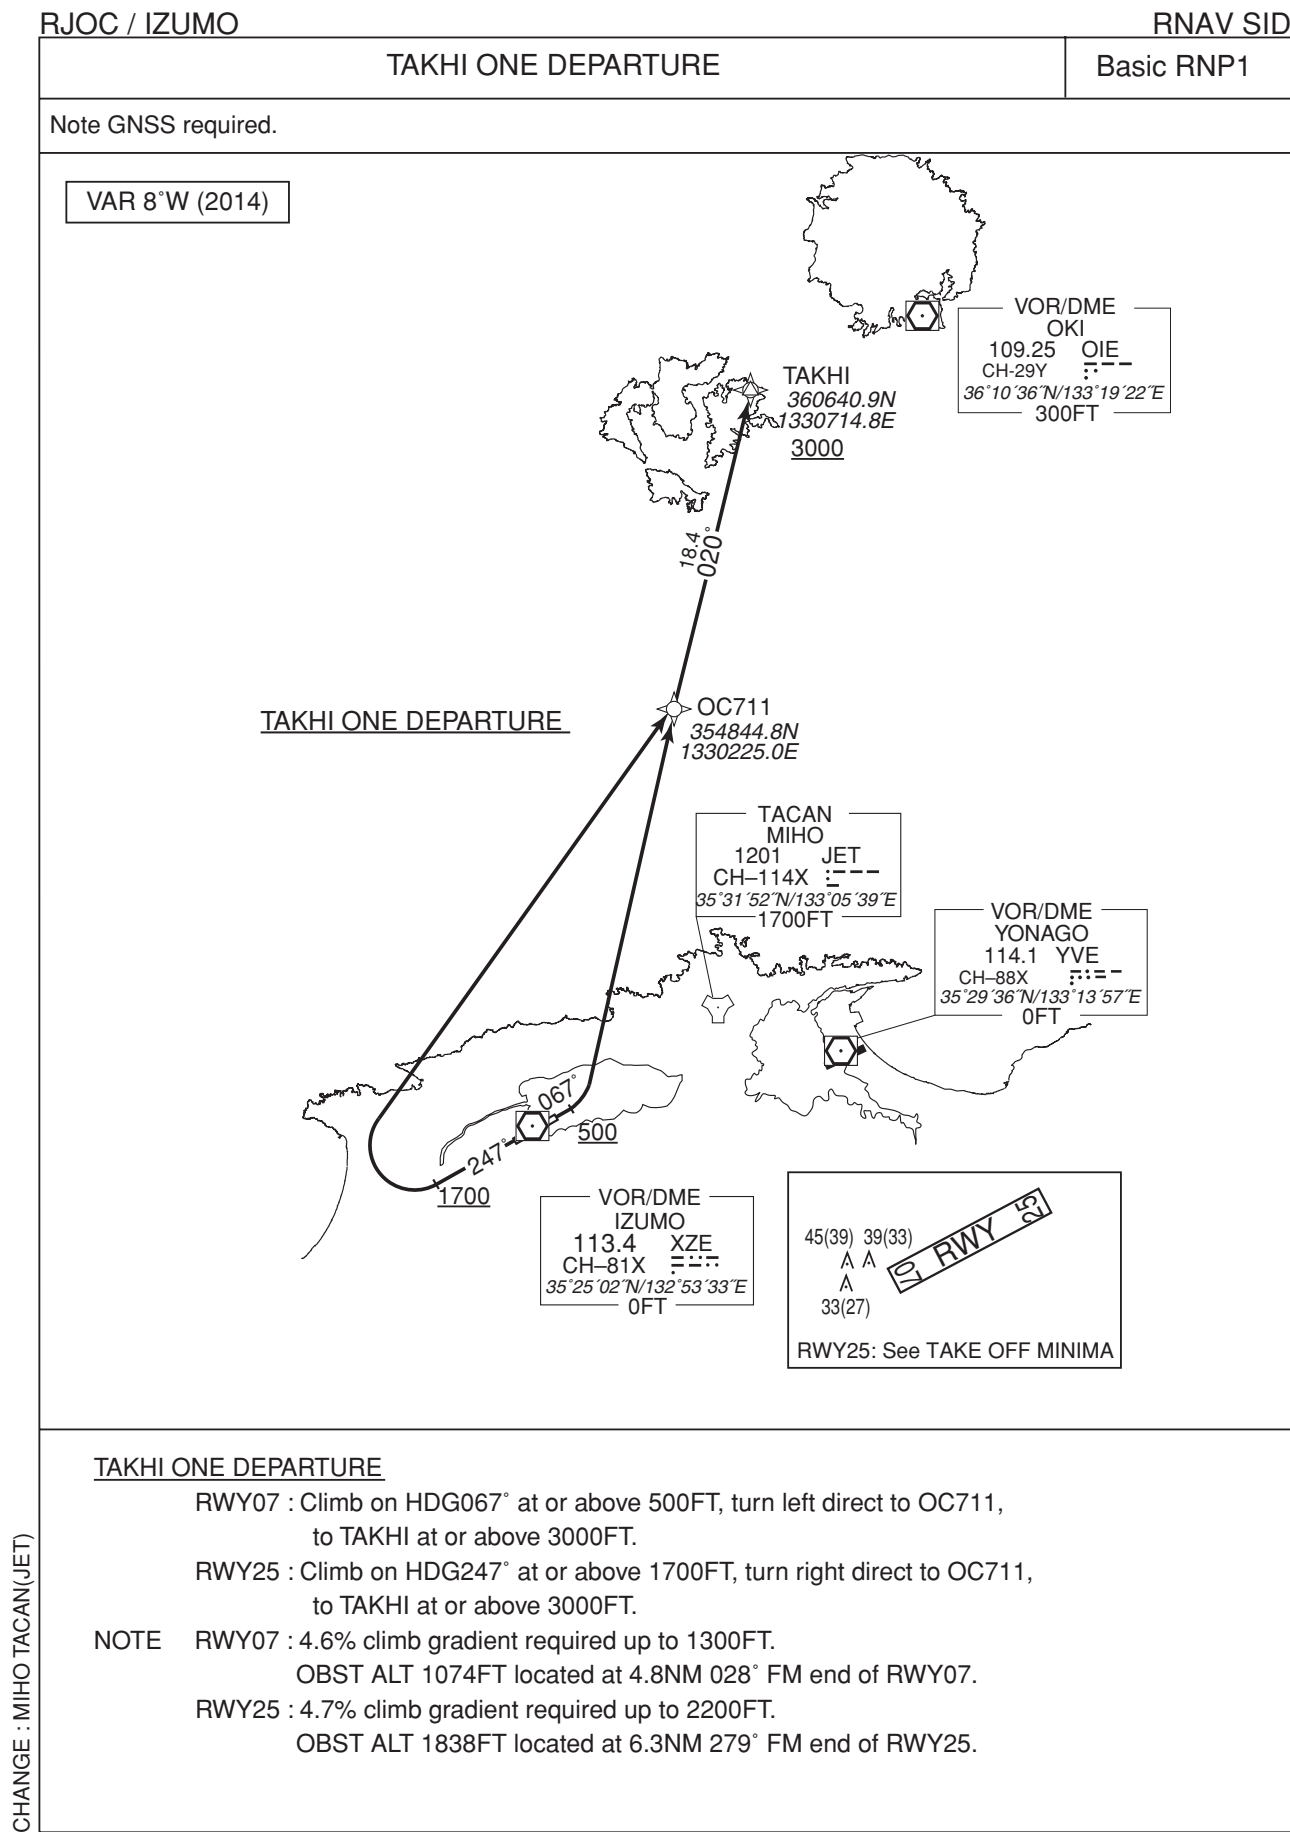

CHANGE : MIHO TACAN(JET)

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

TAKHI ONE DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO


RNAV SID

SAIGO ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

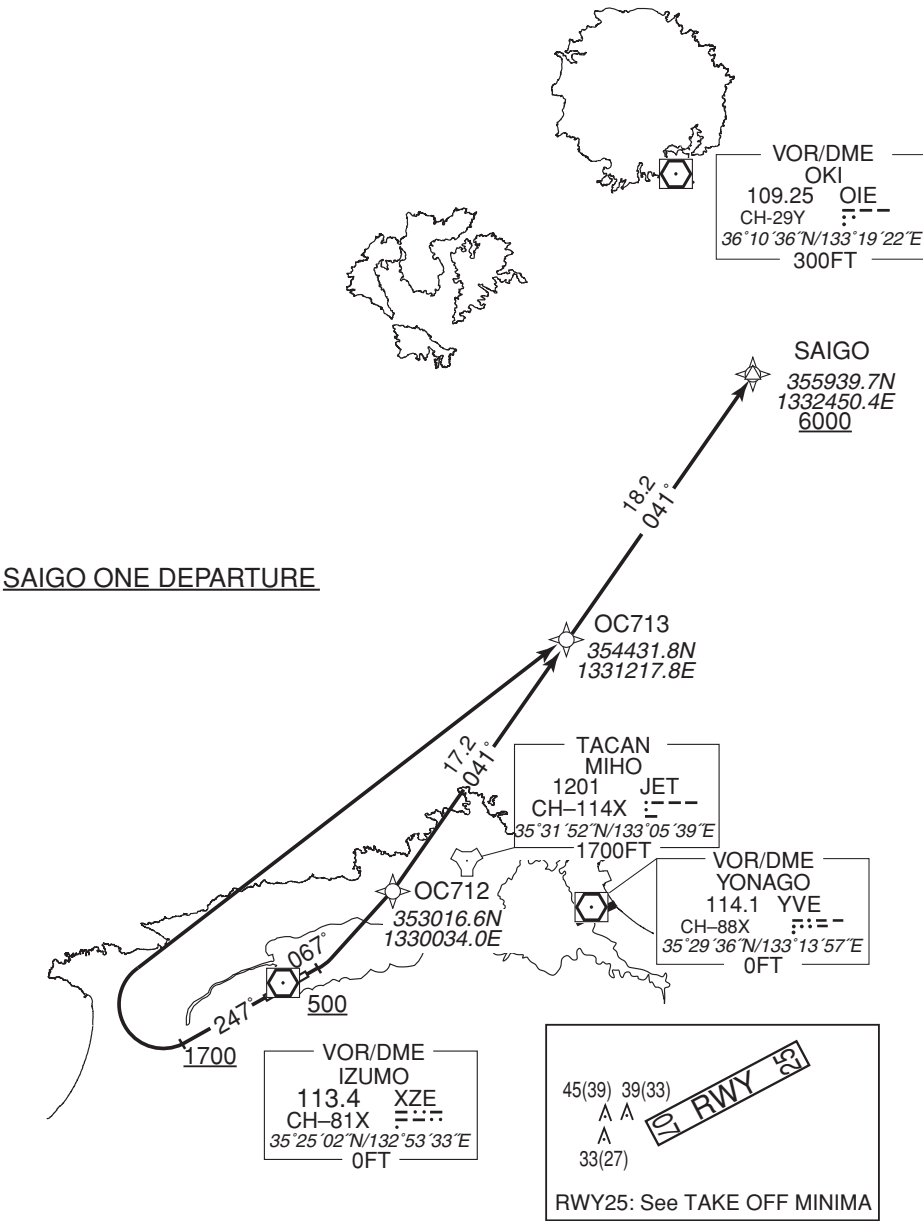

SAIGO ONE DEPARTURE

- RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC712, to OC713, to SAIGO at or above 6000FT.
- RWY25 : Climb on HDG247° at or above 1700FT, turn right direct to OC713, to SAIGO at or above 6000FT.
- NOTE RWY07 : 4.6% climb gradient required up to 800FT.
OBST ALT 1214FT located at 6.8NM 044° FM end of RWY07.
- RWY25 : 4.7% climb gradient required up to 2200FT.
OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

CHANGE : MIHO TACAN(JET)

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

SAIGO ONE DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC712	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC713	—	041 (033.7)	-7.6	17.2	—	—	—	—	Basic RNP1
004	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC713	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1


CHANGE : MIHO TACAN(JET)

RNAV SID and TRANSITION

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

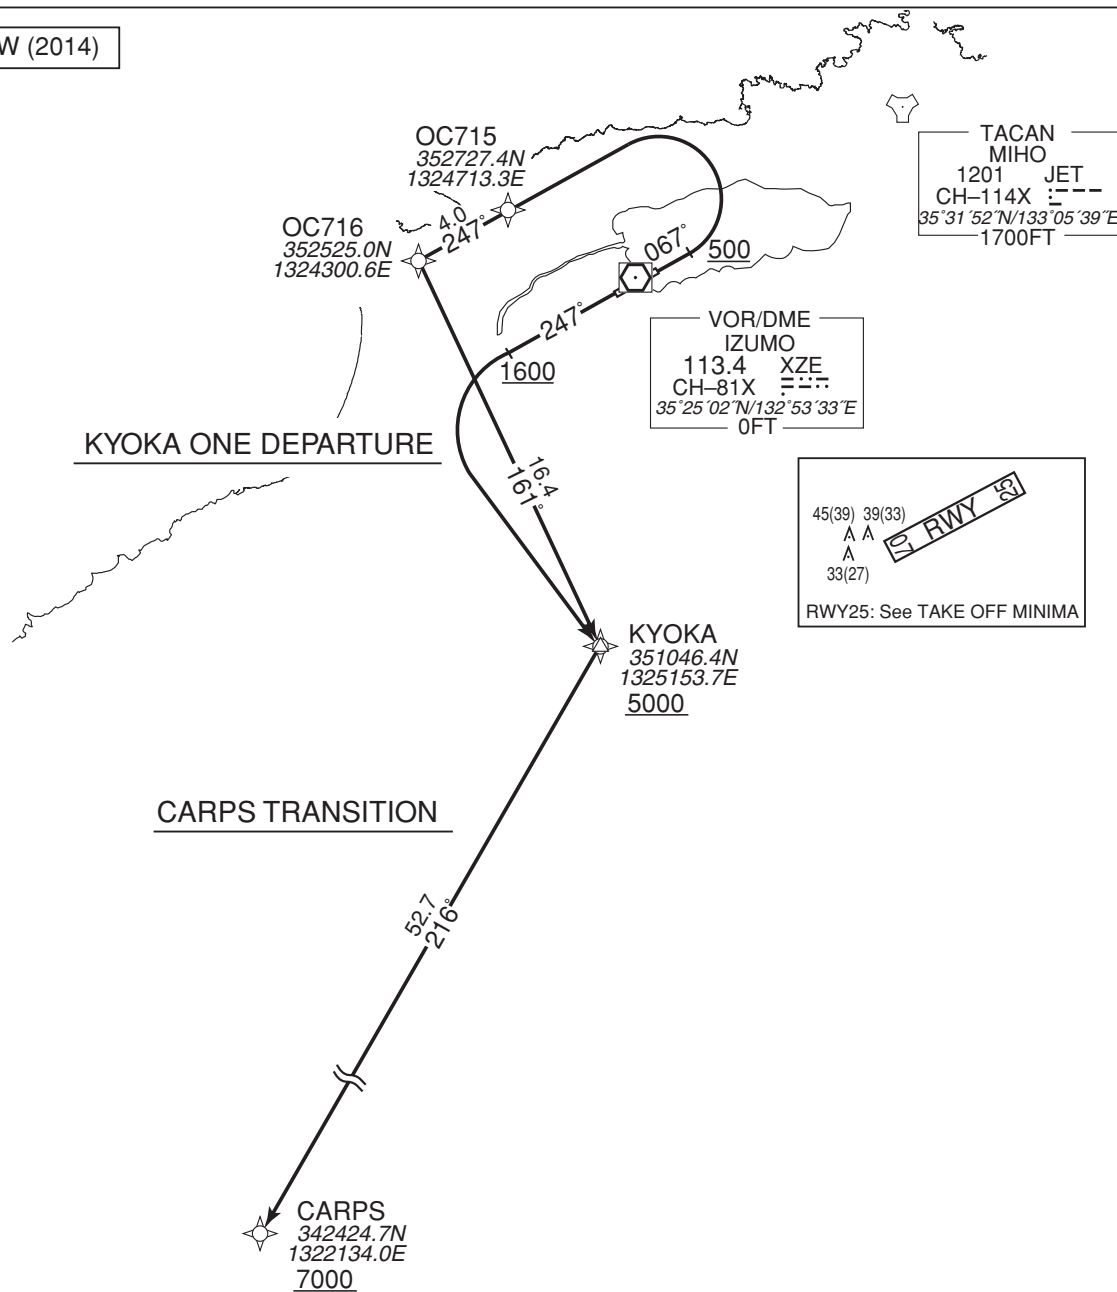

KYOKA ONE DEPARTURE

RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC715, to OC716, to KYOKA at or above 5000FT.

RWY25 : Climb on HDG247° at or above 1600FT, turn left direct to KYOKA at or above 5000FT.

NOTE RWY07 : 4.6% climb gradient required up to 1800FT.

OBST ALT 1739FT located at 6.3NM 280° FM end of RWY07.

RWY25 : 3.8% climb gradient required up to 2400FT.

OBST ALT 1969FT located at 10.8NM 222°FM end of RWY25.

CARPS TRANSITION

From KYOKA, to CARPS at or above 7000FT.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID and TRANSITION

KYOKA ONE DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC715	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC716	—	247 (239.3)	-7.6	4.0	—	—	—	—	Basic RNP1
004	TF	KYOKA	—	161 (153.6)	-7.6	16.4	—	+5000	—	—	Basic RNP1


RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1600	—	—	Basic RNP1
002	DF	KYOKA	—	—	-7.6	—	L	+5000	—	—	Basic RNP1

CARPS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KYOKA	—	—	-7.6	—	—	+5000	—	—	Basic RNP1
002	TF	CARPS	—	216 (208.4)	-7.6	52.7	—	+7000	—	—	Basic RNP1

STANDARD ARRIVAL CHART - INSTRUMENT

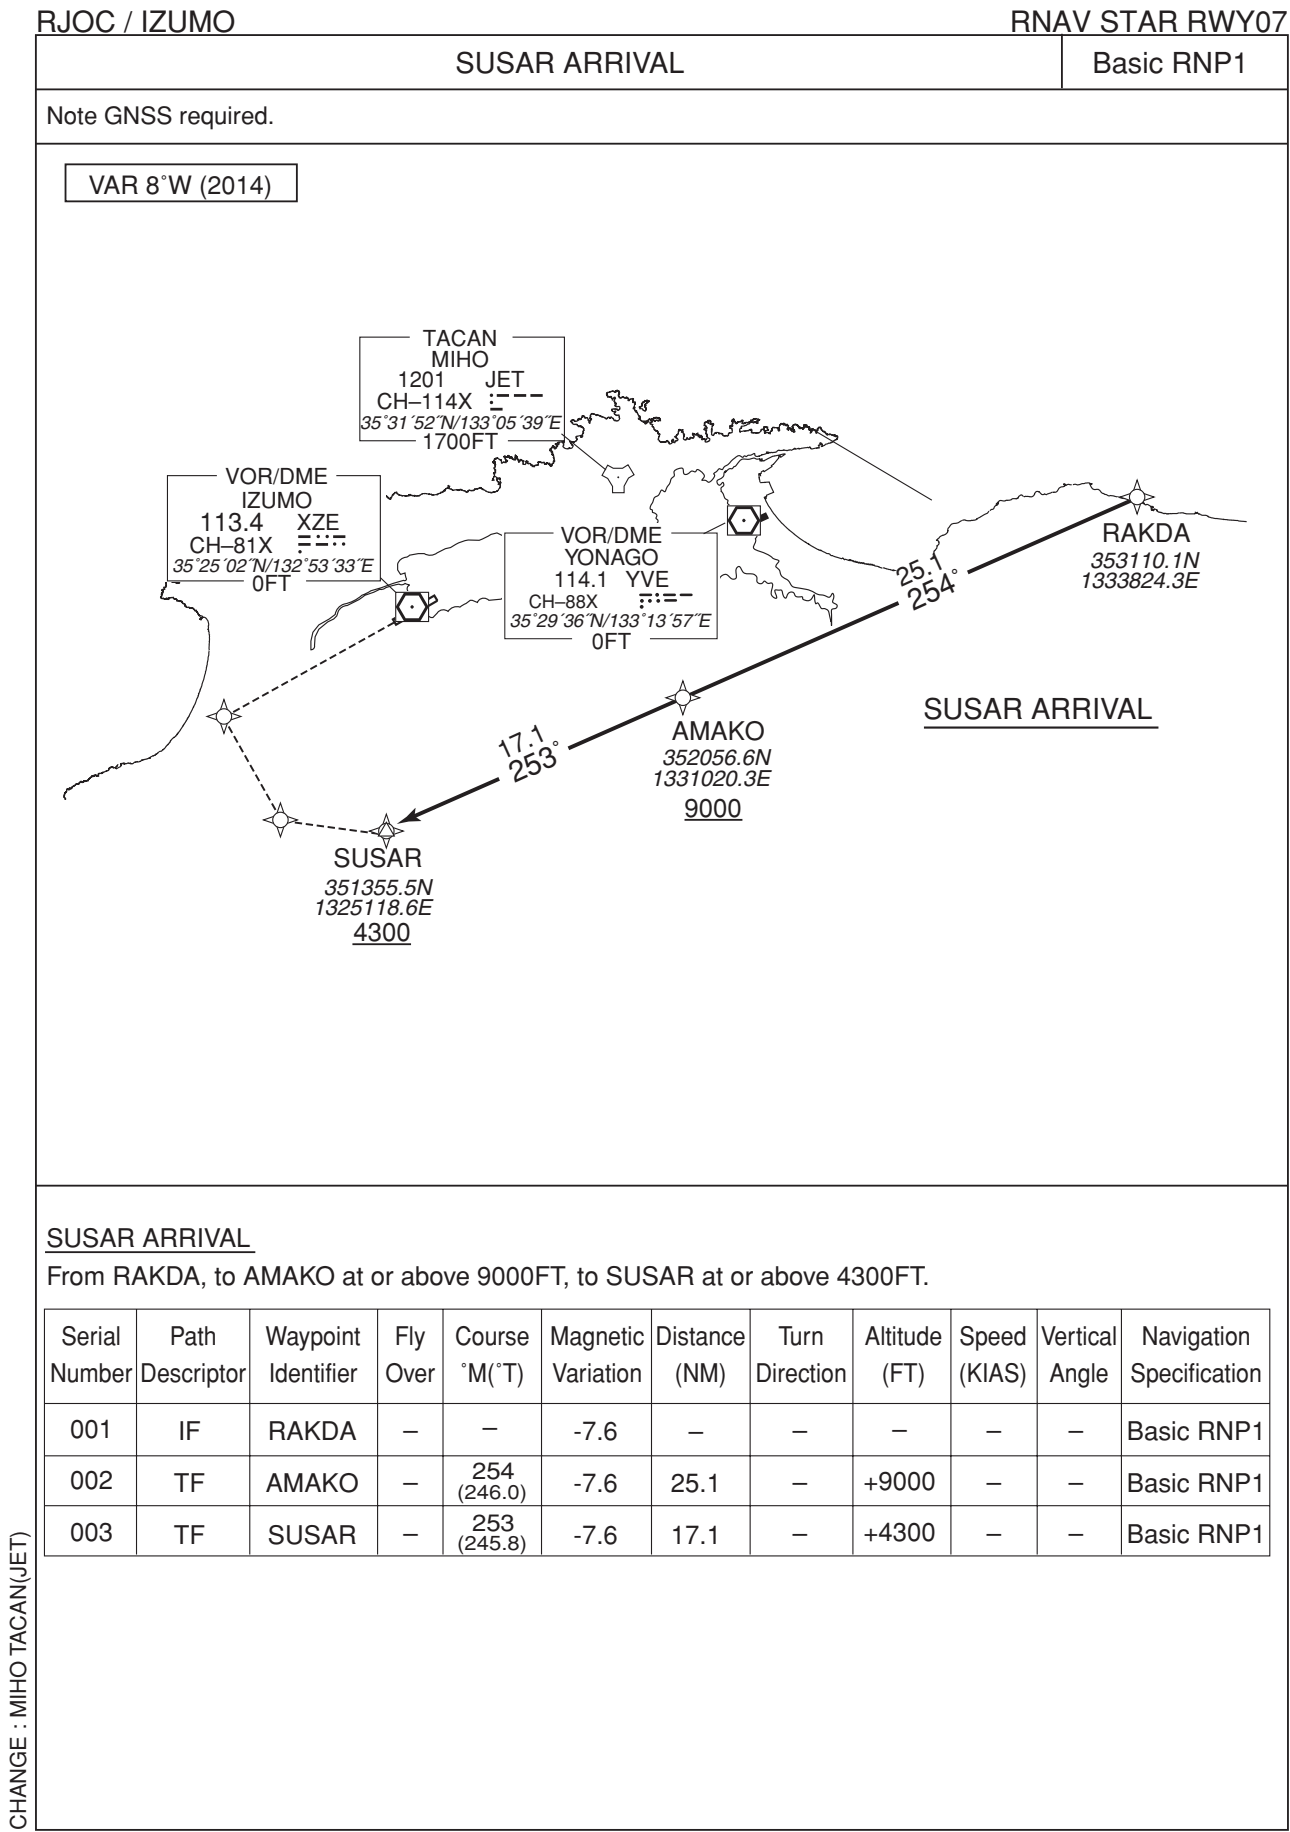

CHANGE : MIHO TACAN(JET)

Civil Aviation Bureau,Japan (EFF:28 FEB 2019)

31/1/19


STANDARD ARRIVAL CHART - INSTRUMENT

RJOC / IZUMO RNAV STAR RWY07

OKUNI ARRIVAL Basic RNP1

Note GNSS required.

VAR 8°W (2016)

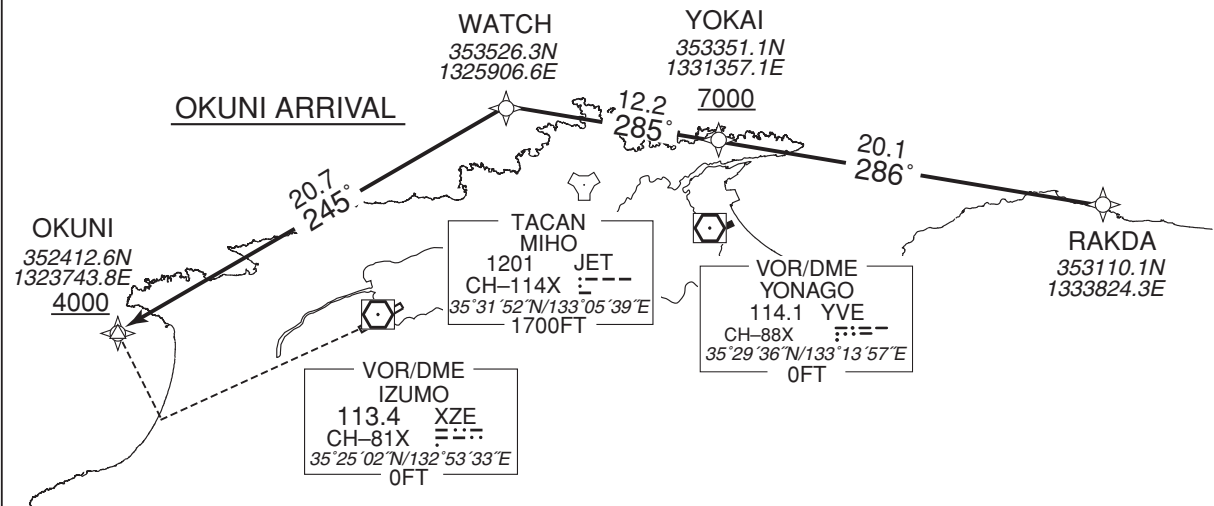


OKUNI ARRIVAL

From RAKDA, to YOKAI at or above 7000FT, to WATCH, to OKUNI at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RAKDA	—	—	-7.9	—	—	—	—	—	Basic RNP1
002	TF	YOKAI	—	286 (277.8)	-7.9	20.1	—	+7000	—	—	Basic RNP1
003	TF	WATCH	—	285 (277.6)	-7.9	12.2	—	—	—	—	Basic RNP1
004	TF	OKUNI	—	245 (237.3)	-7.9	20.7	—	+4000	—	—	Basic RNP1

CHANGE : MIHO TACAN(JET)

STANDARD ARRIVAL CHART - INSTRUMENT

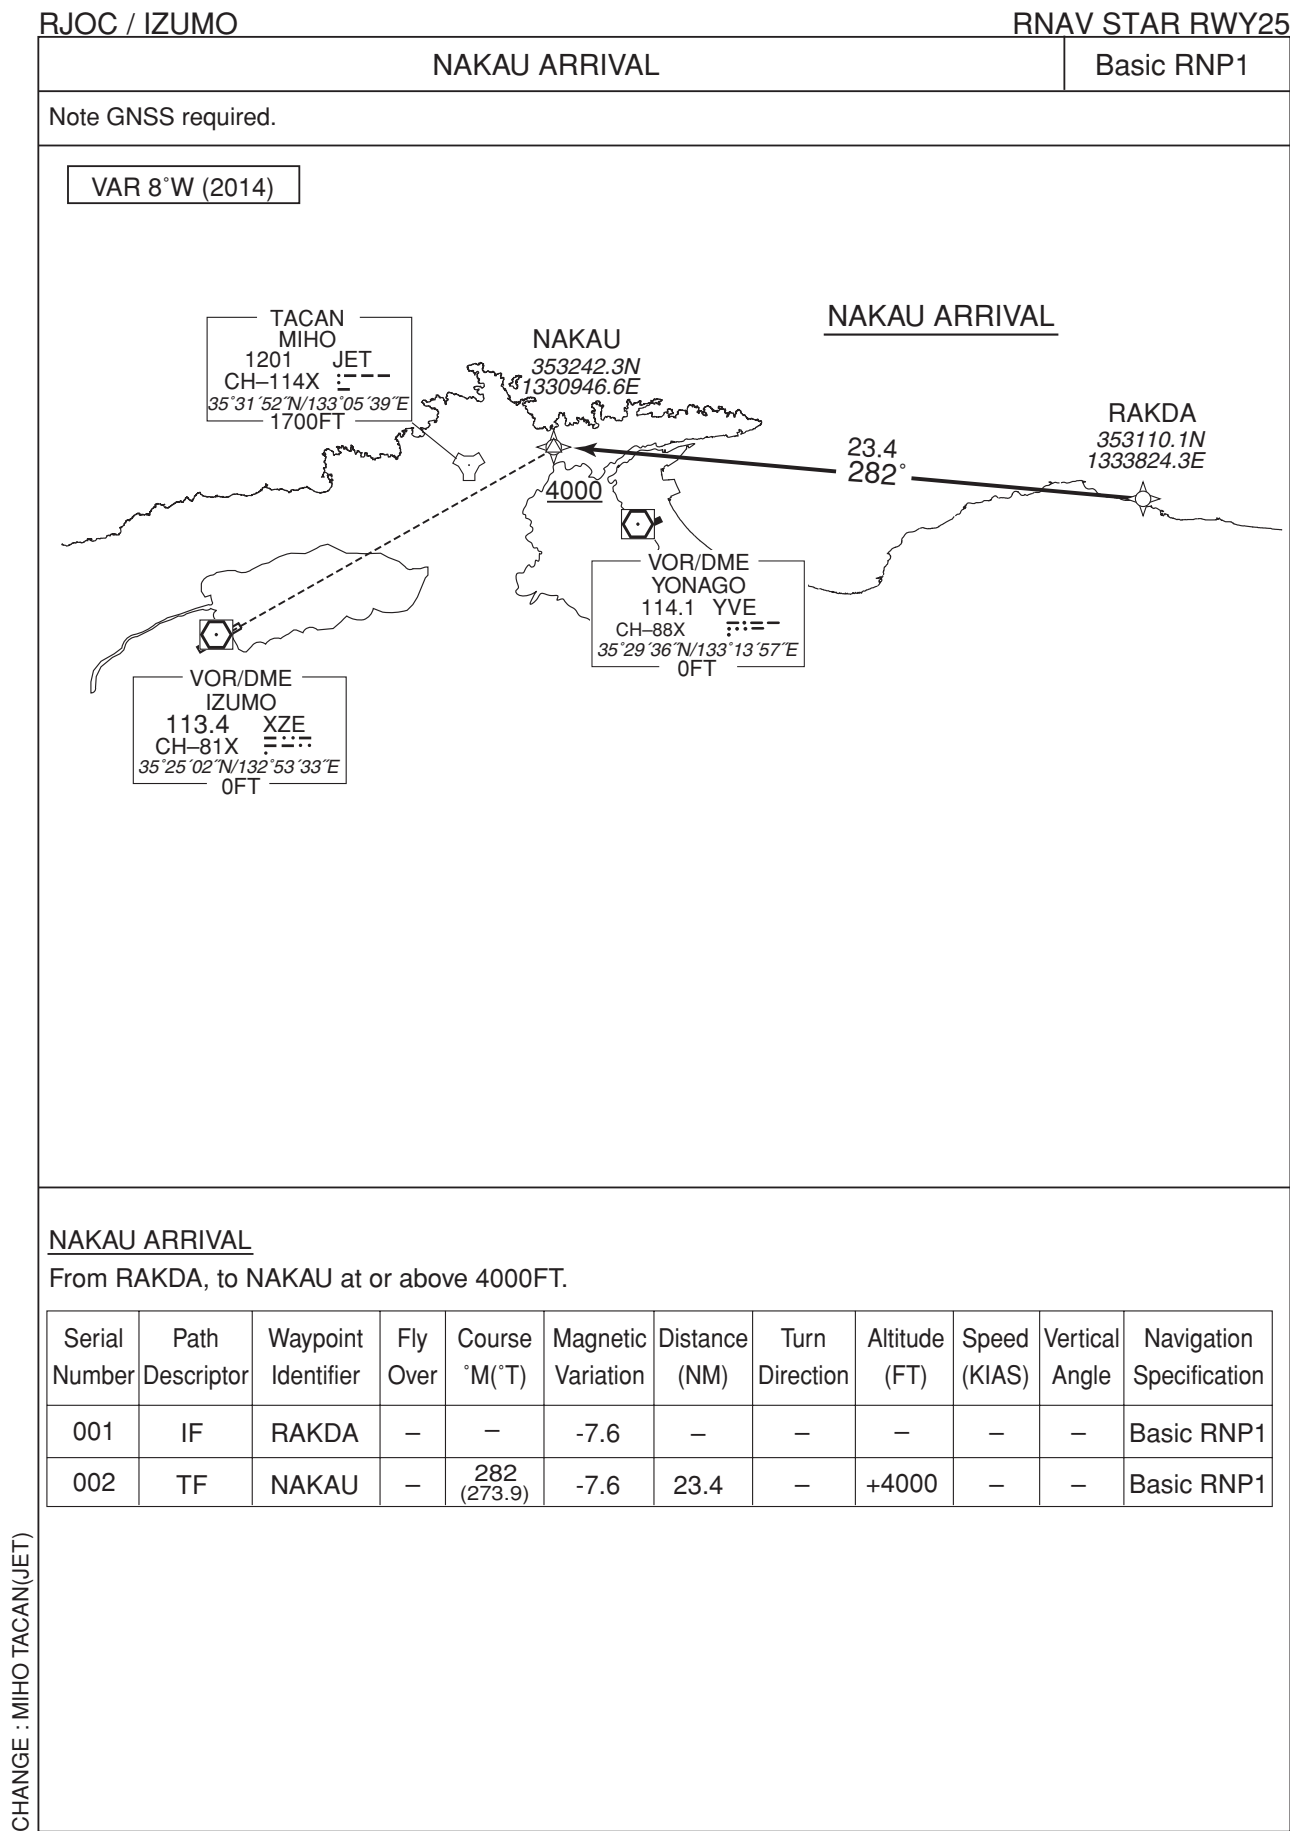

INSTRUMENT APPROACH CHART

RJOC / IZUMO


LOC Z RWY25



INSTRUMENT APPROACH CHART

RJOC / IZUMO

LOC Y RWY25

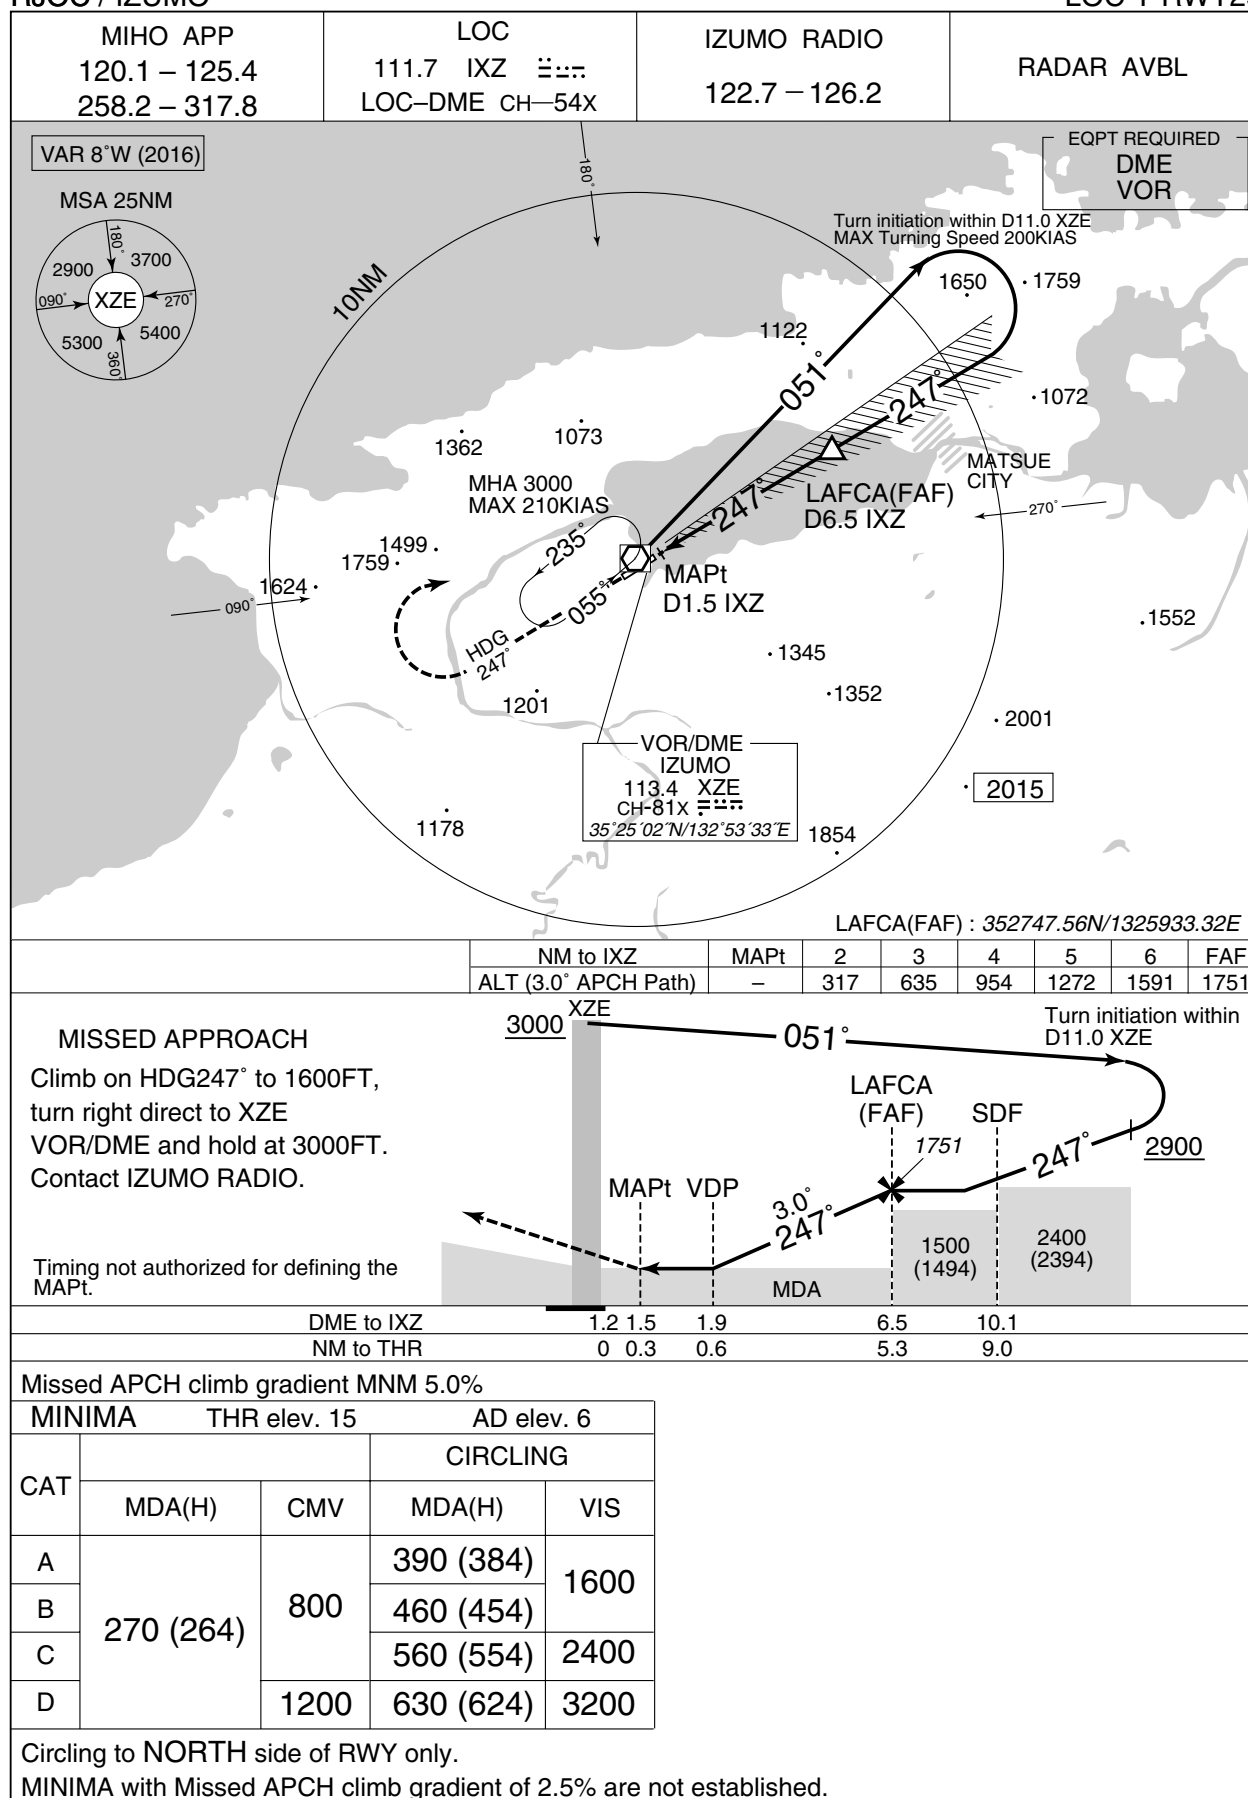

INSTRUMENT APPROACH CHART

RJOC / IZUMO

VOR RWY25



RJOC / IZUMO


RNAV(GNSS) RWY07

MIHO APP 120.1 – 125.4 258.2 – 317.8	1. DME/DME RNP0.3 not authorized. 2. RNP0.3 required. 3. GNSS required.	IZUMO RADIO 122.7 – 126.2	RADAR AVBL
--	---	------------------------------	------------


Baro-VNAV not authorized below -10°C

VAR 8°W (2016)

OKUNI (IAF)	352412.59N 1323743.79E
SUSAR (IAF)	351355.52N 1325118.61E
ENMUH	351352.39N 1324512.46E
OC750	351627.49N 1324320.47E
SUBIE (IF)	351902.56N 1324128.37E
ENYAH (FAF)	352135.67N 1324643.83E
OC751	352255.02N 1324927.62E
RW07 (MAPt)	352432.83N 1325249.80E
OC753 (MATF)	352751.24N 1325940.95E
XZE (MAHF)	352502.06N 1325332.54E



NM to Next Fix	FAF	5	4	3	2	MAPt
Alt (3.0° APCH Path)	1900	1647	1329	1010	692	—

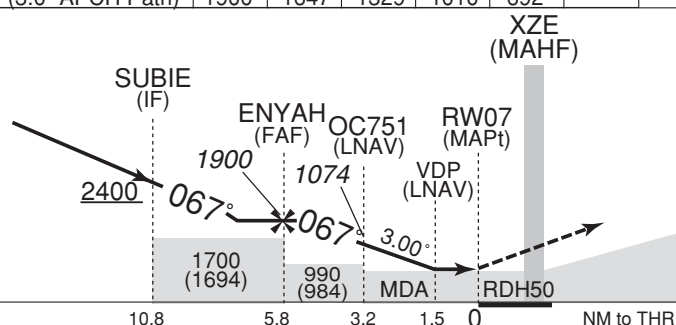

MISSED APPROACH
Climb direct to OC753, turn left
direct to XZE and hold at 3000FT.
Contact IZUMO RADIO.

(For using VOR/DME)


Climb to 1300FT via XZE R067,
turn left, direct to XZE VOR/DME
and hold at 3000FT.
Contact IZUMO RADIO.

MINIMA		THR elev. 6		AD elev. 6		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	510 (504)	1500	510 (504)	1500	510 (504)	1600
B						
C		2000		2000	560 (554)	2400
D					630 (624)	3200

Circling to NORTH side of RWY only.


CHANGE : MIHO TACAN(JET)

INSTRUMENT APPROACH CHART

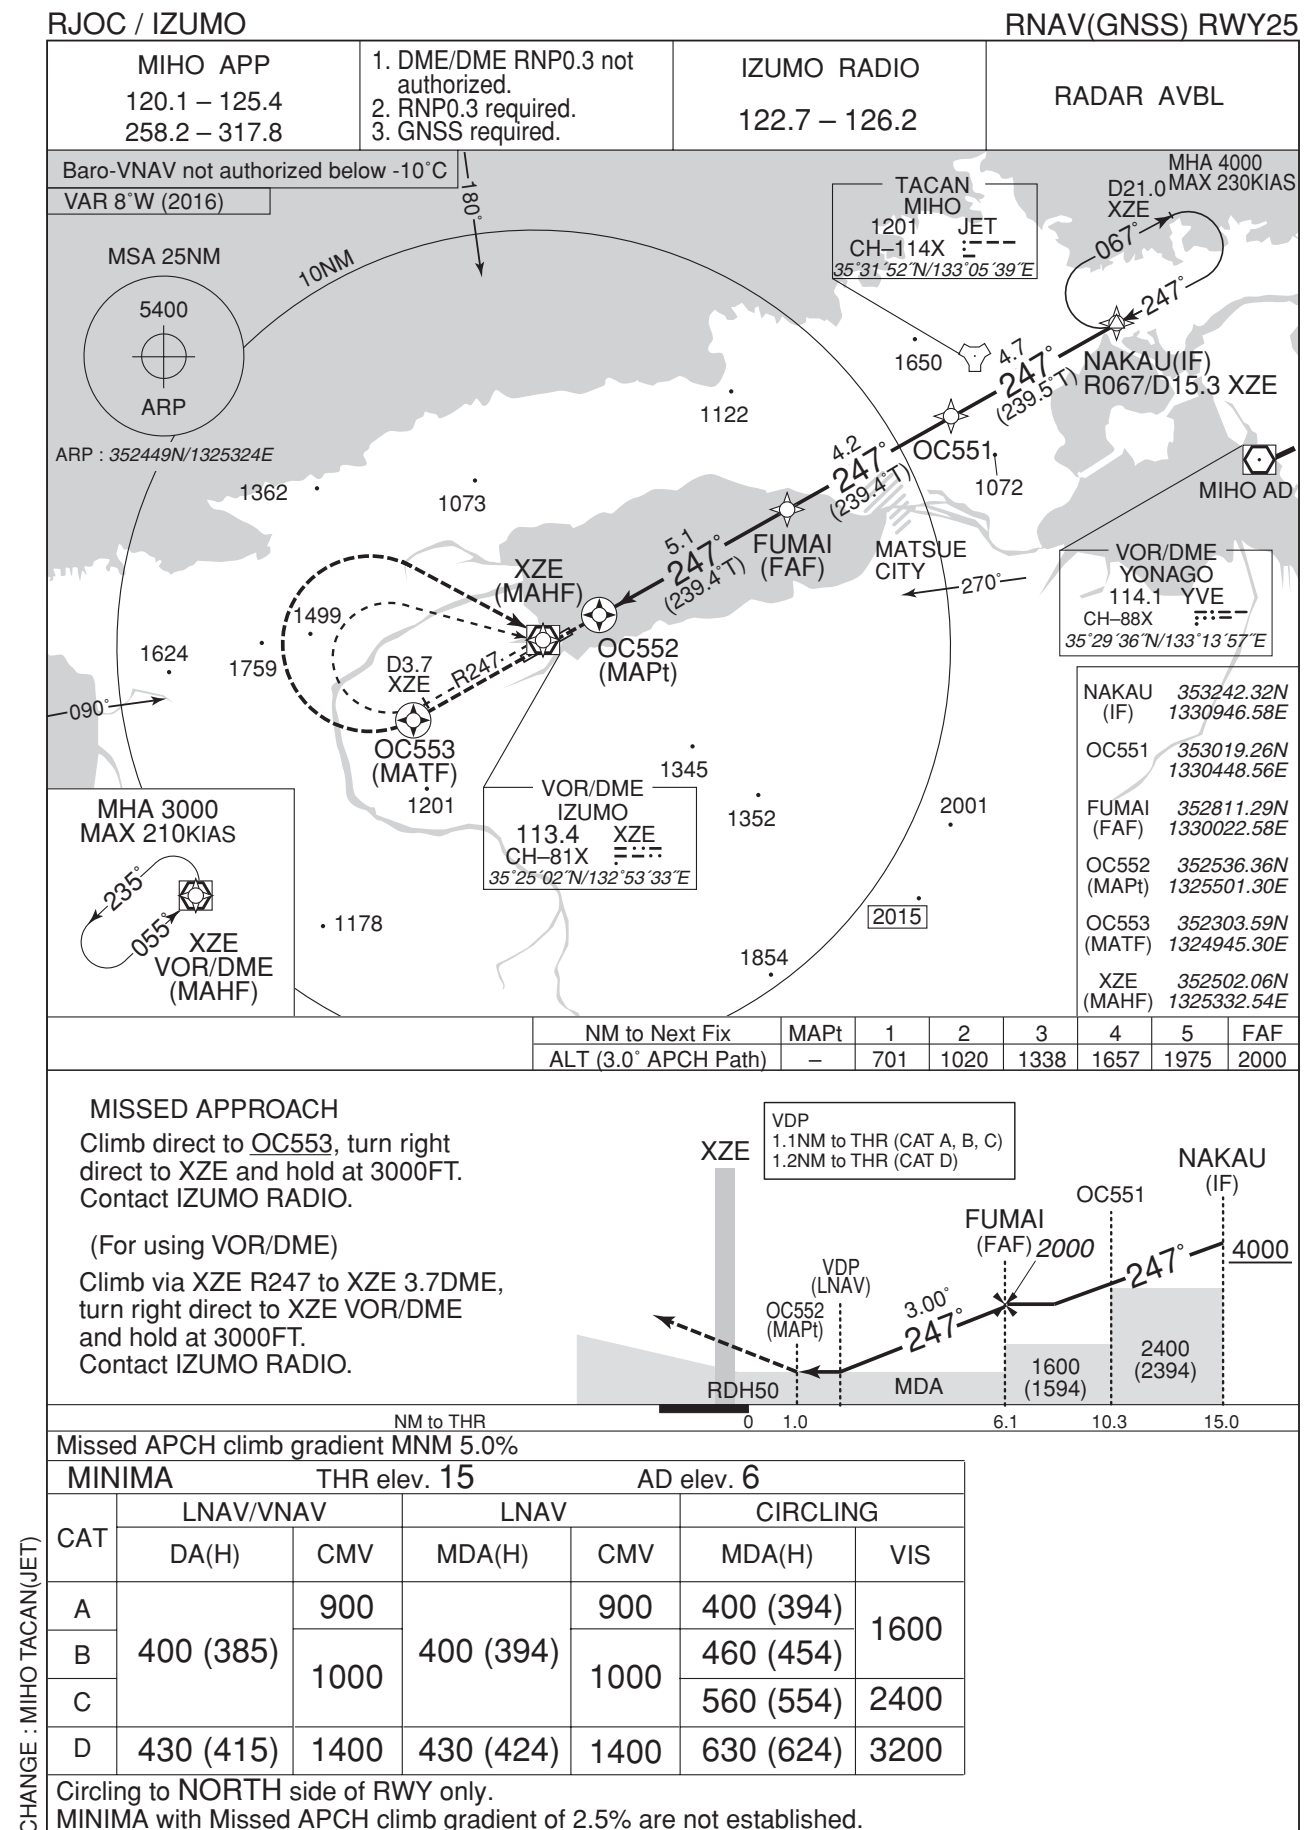


RJOC / IZUMO

Visual REP

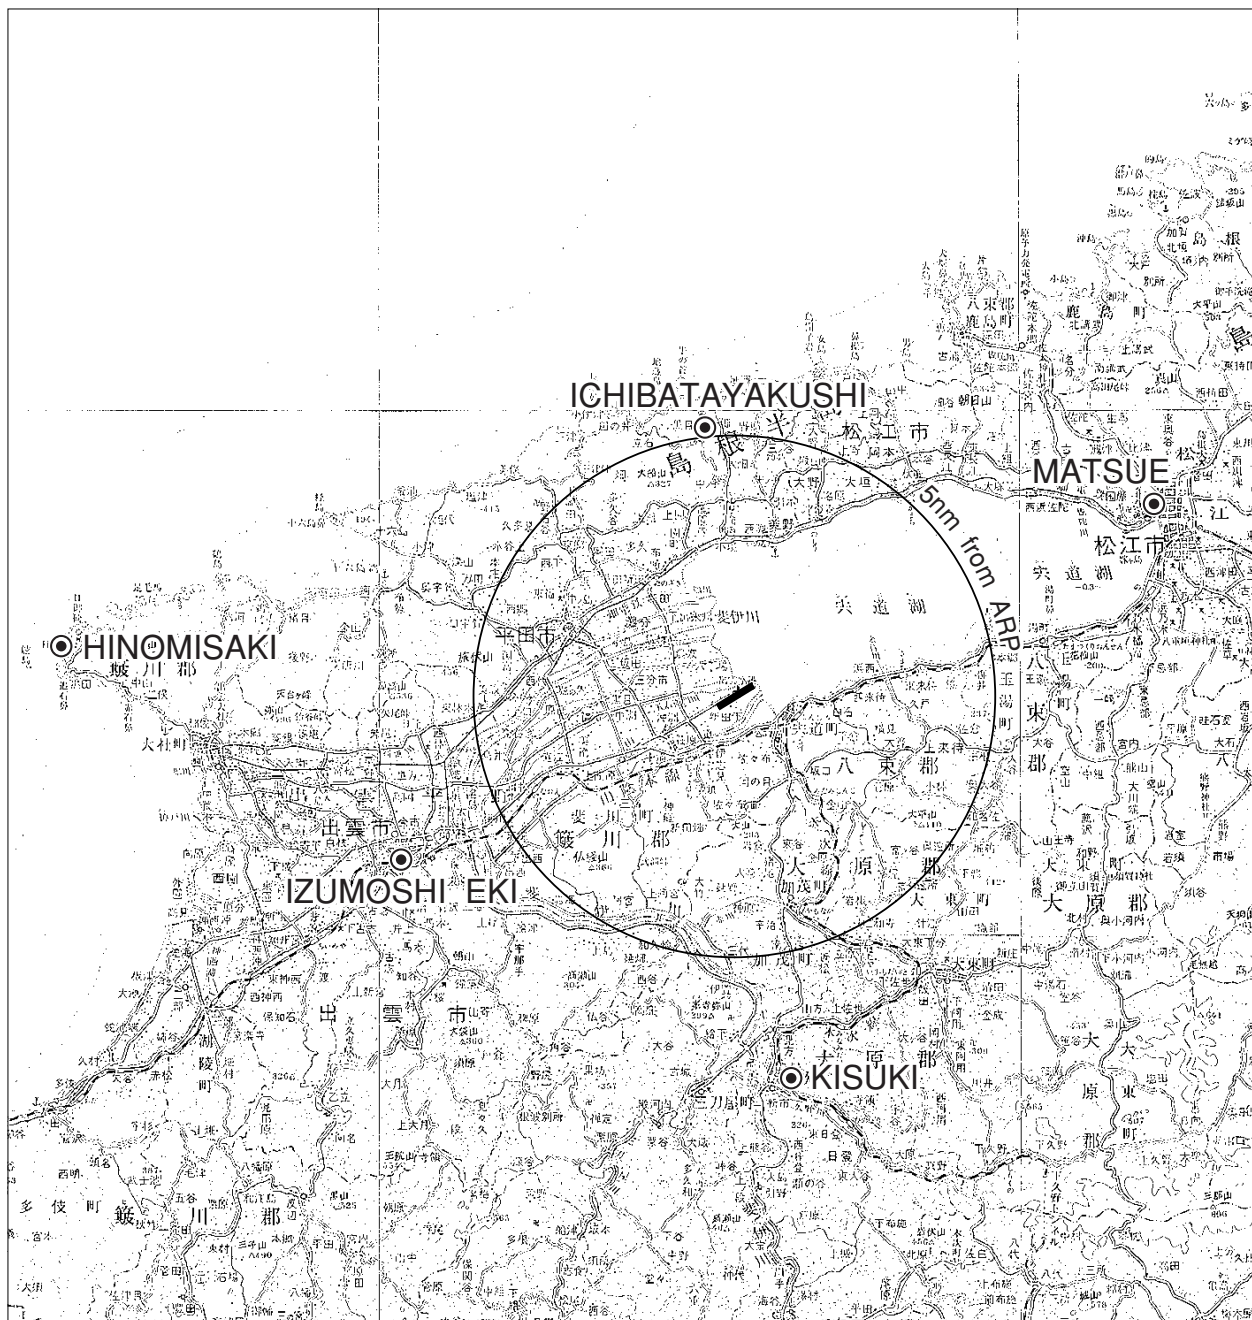

Call sign	BRG / DIST from ARP	Remarks
松江 Matsue	072°/9.1NM	松江城 Castle
出雲市駅 Izumoshi eki	251°/7.4NM	JR Station
一畑薬師 Ichibatayakushi	360°/5.3NM	寺 Temple
木次 Kisuki	181°/7.8NM	電々公社アンテナ Antenna
日御碕 Hinomisaki	280°/12.5NM	灯台 Lighthouse

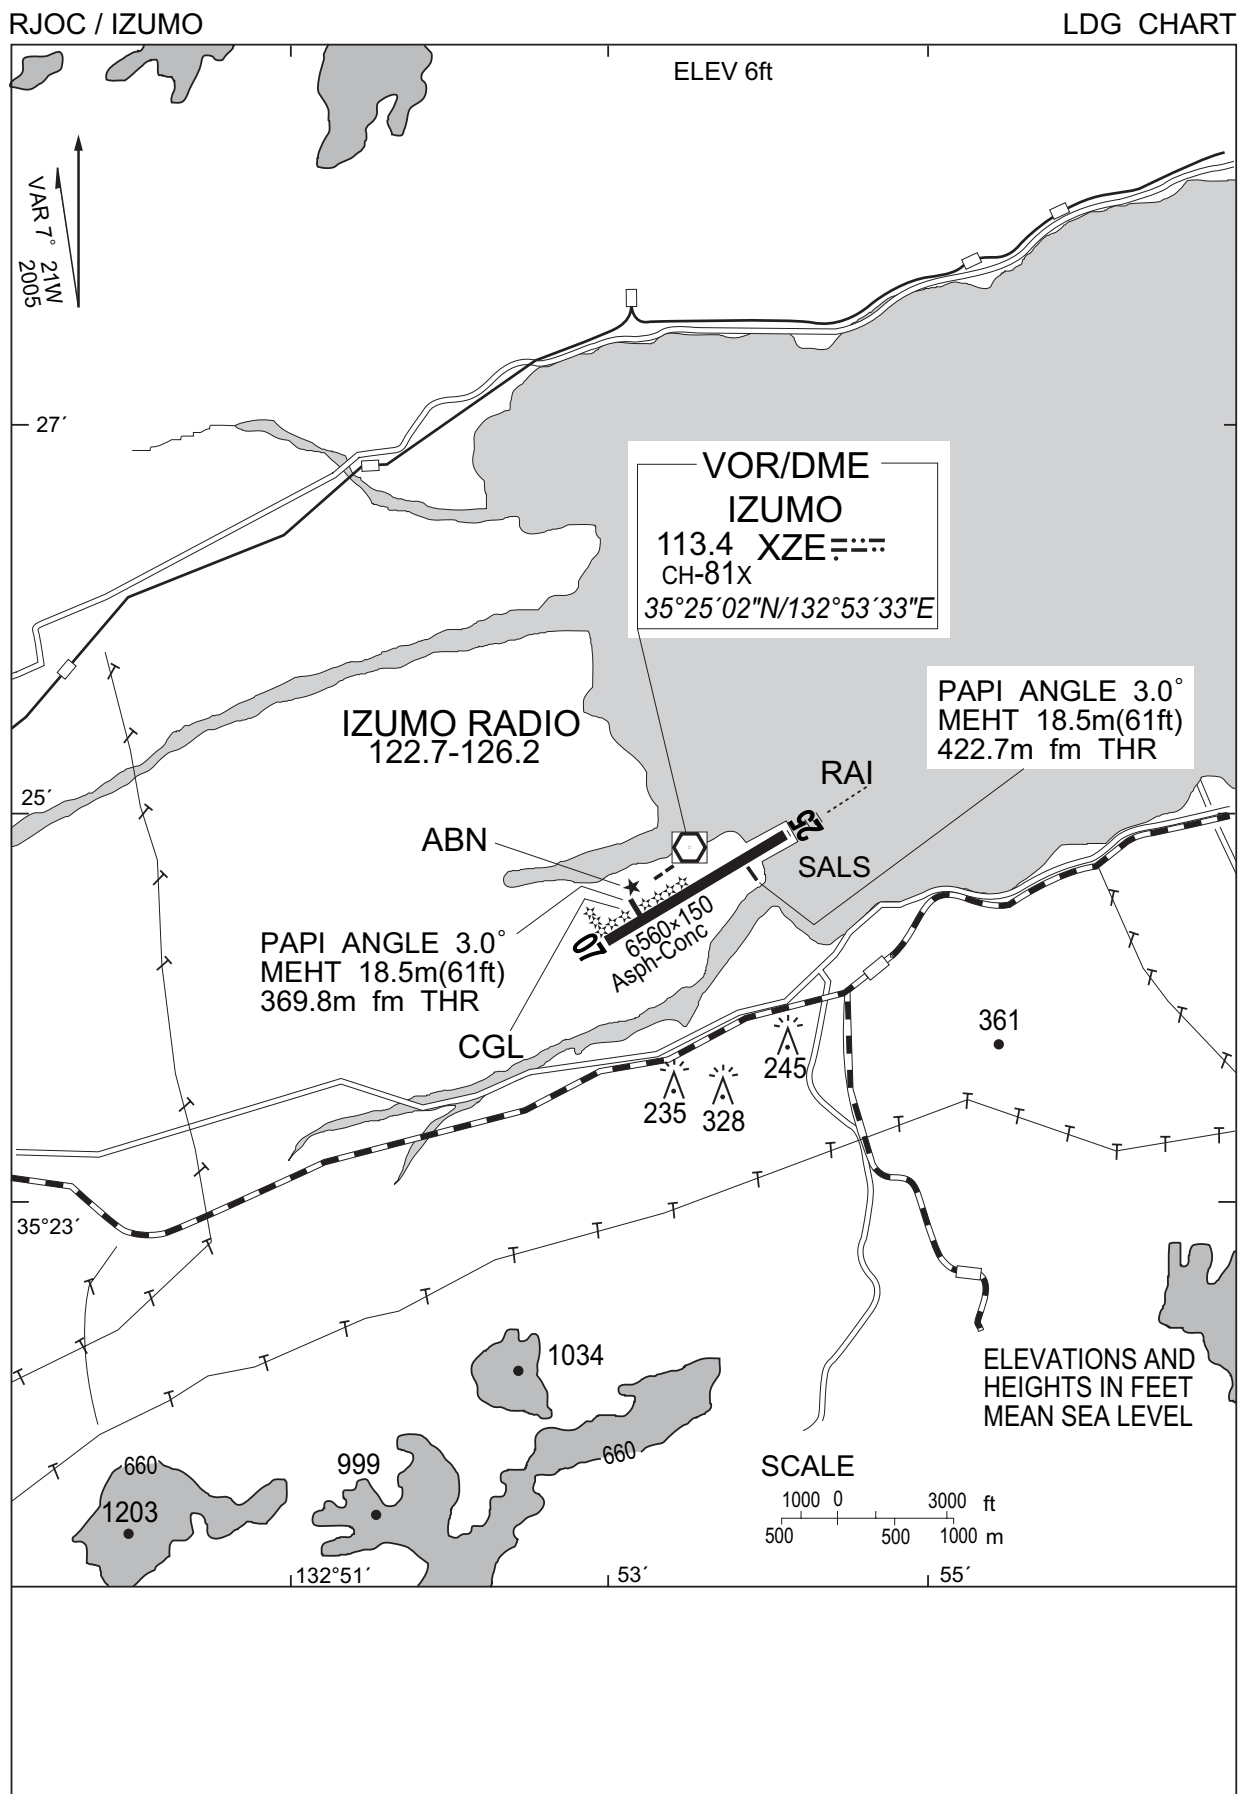

RJOC / IZUMO

Minimum Vectoring Altitude CHART

VAR 8°W (2013)



CENTER : 353003N/1331413E (RJOC RADAR SITE)