


RJTY / YOKOTA


AD CHART

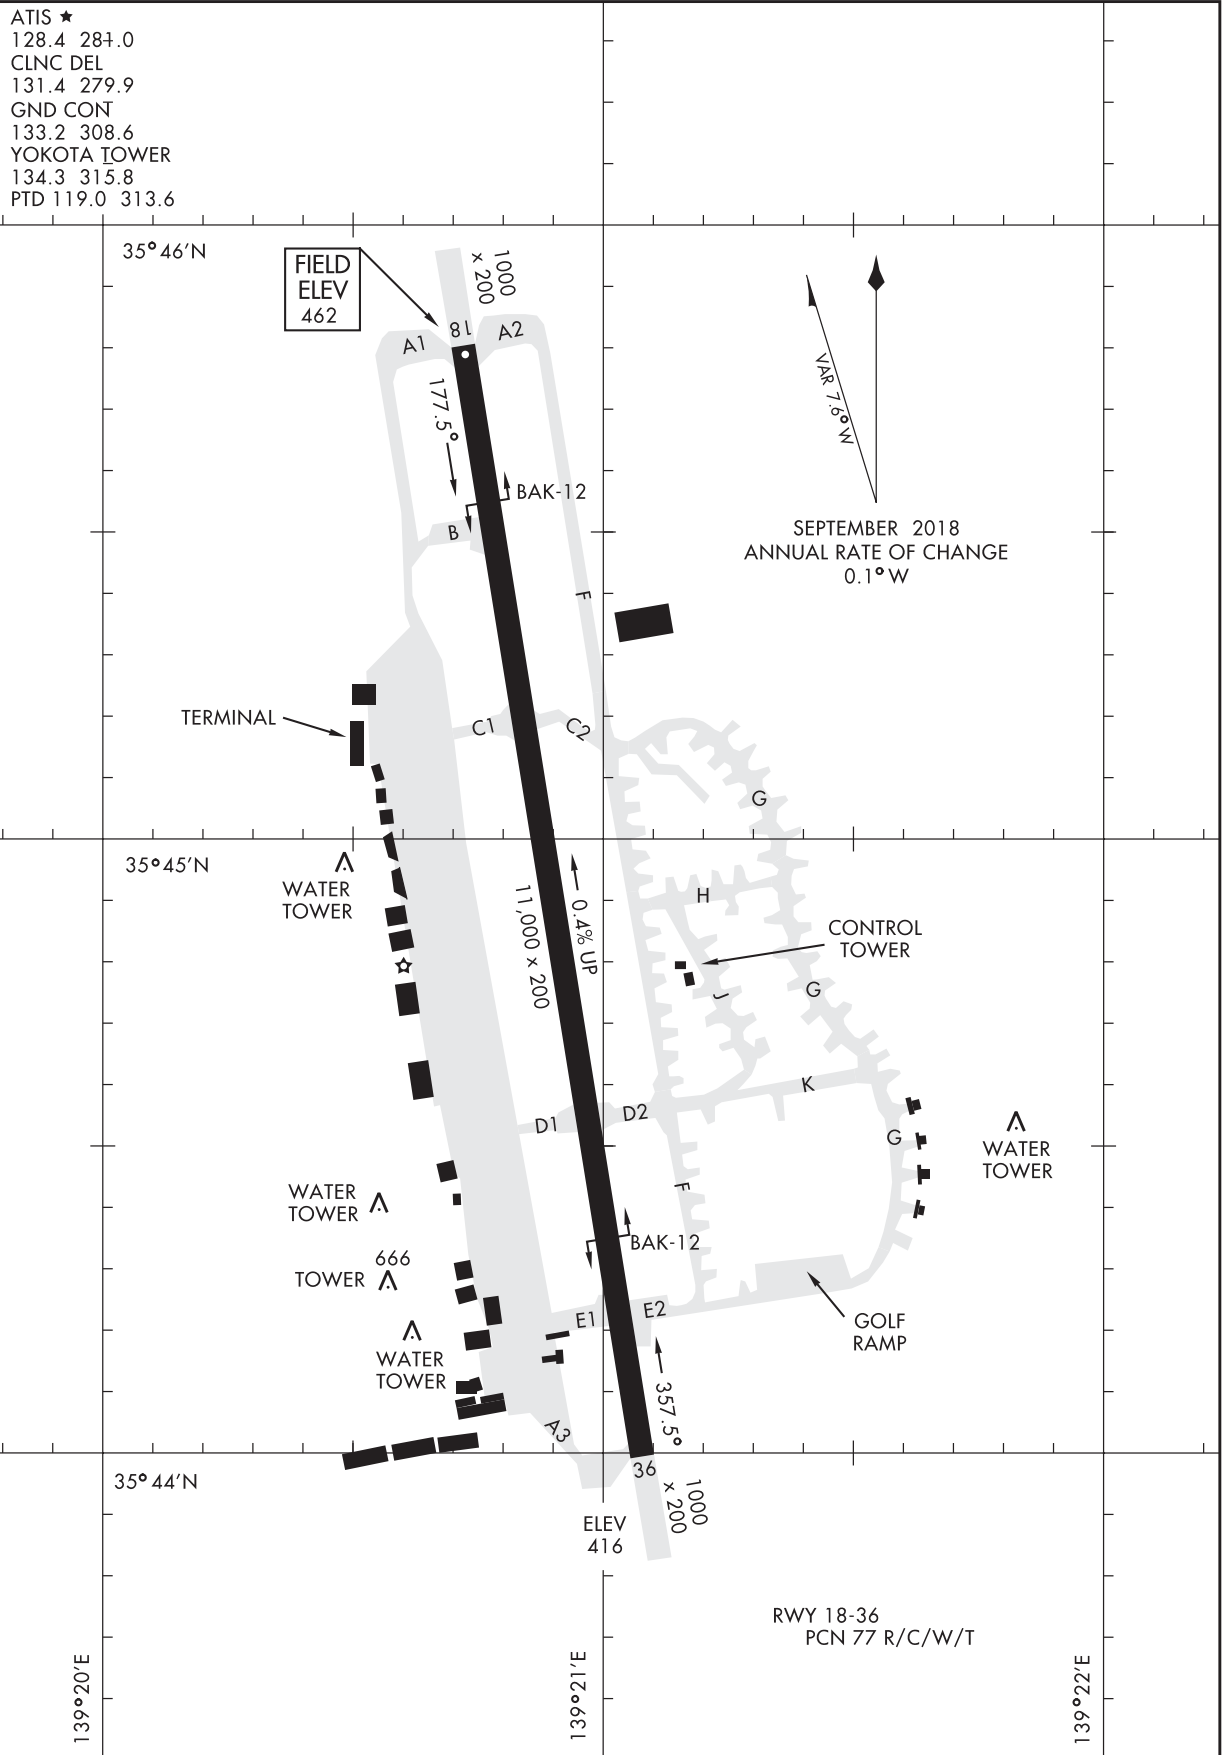

NOTE: REPRINTING DOD FLIP

## RJTY / YOKOTA

BREEE FOUR DEPARTURE (OBSTACLE)



## DEPARTURE ROUTE DESCRIPTION

CHANGE : Update

Civil Aviation Bureau, Japan (EFF:8 NOV 2018)


## STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FOUR DEPARTURE (OBSTACLE)

ATIS ★ 128.4 281.0  
 CLNC DEL  
 131.4 279.9  
 GND CON  
 133.2 308.6  
 YOKOTA TOWER  
 134.3 315.8  
 YOKOTA DEP CON  
 122.1 363.8

SL-1458 [USAF]

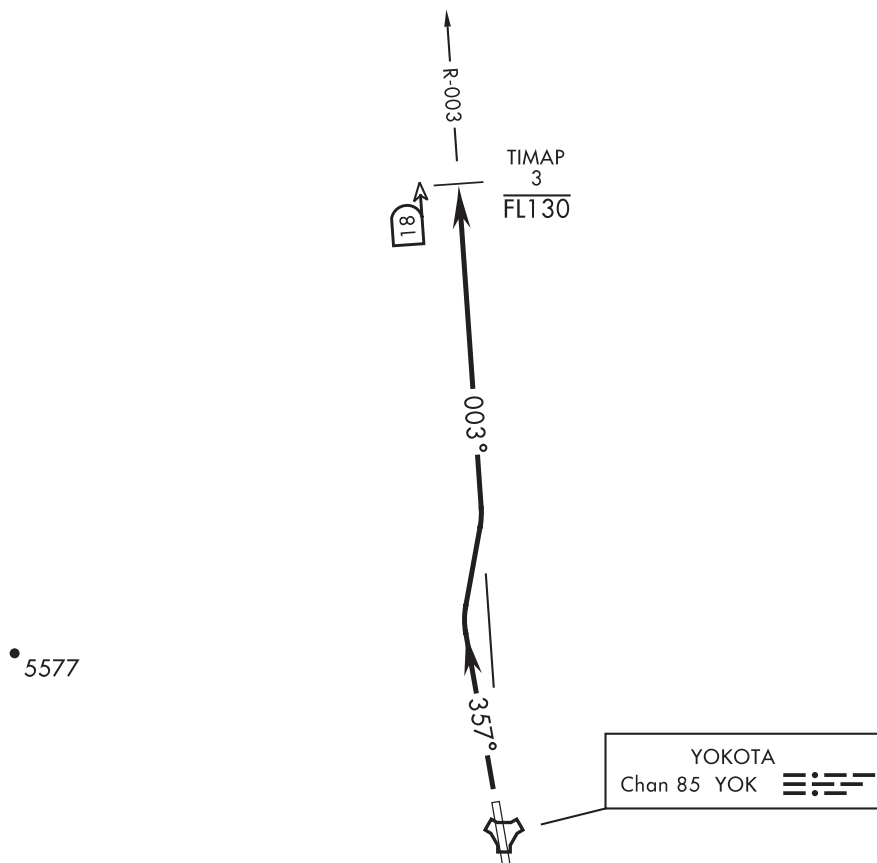

TA 14,000



## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.  
 Cross TIMAP at or below FL130. Continue as assigned by ATC.

CHANGE : Update

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a) V/V(fpm)		360	720	1080	1440	1800	2160
† 18 (b) V/V(fpm)		465	930	1395	1860	2325	2790
* 36 (c) V/V(fpm)		383	766	1149	1532	1915	2298
† 36 (b) V/V(fpm)		476	952	1428	1904	2380	2856

\* Minimum † ATC Climb Rate  
(a) to 8000  
(b) to 13,400  
(c) to 7900



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : New PROC

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

FISAB TWO DEPARTURE (RNAV)

ATIS★ 128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

TAKE-OFF OBSTACLES:  
(1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.  
(2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.  
(3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

5577

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000

▼

DEPARTURE ROUTE DESCRIPTION


TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY /YOKOTA

GERGE TWO DEPARTURE (RNAV)

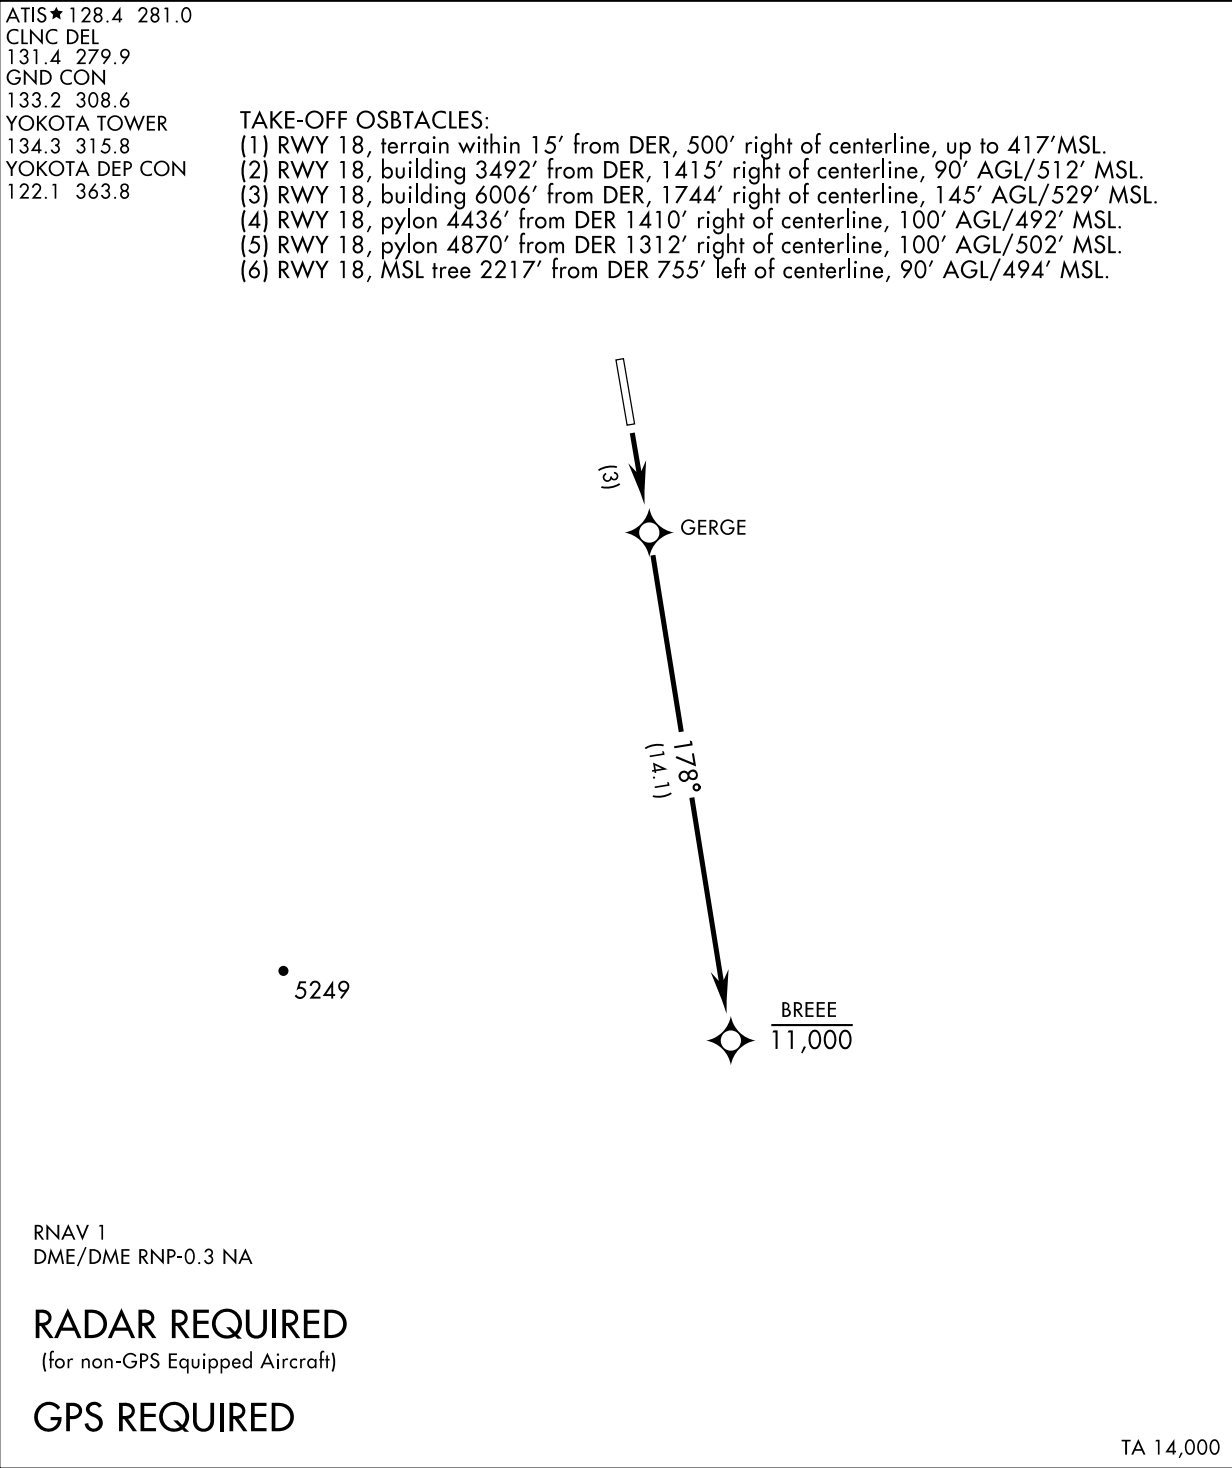

DEPARTURE ROUTE DESCRIPTION


TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

NOTE: REPRINTING DOD FLIP

**INTENTIONALLY LEFT BLANK**

## INSTRUMENT APPROACH CHART


## RJTY / YOKOTA

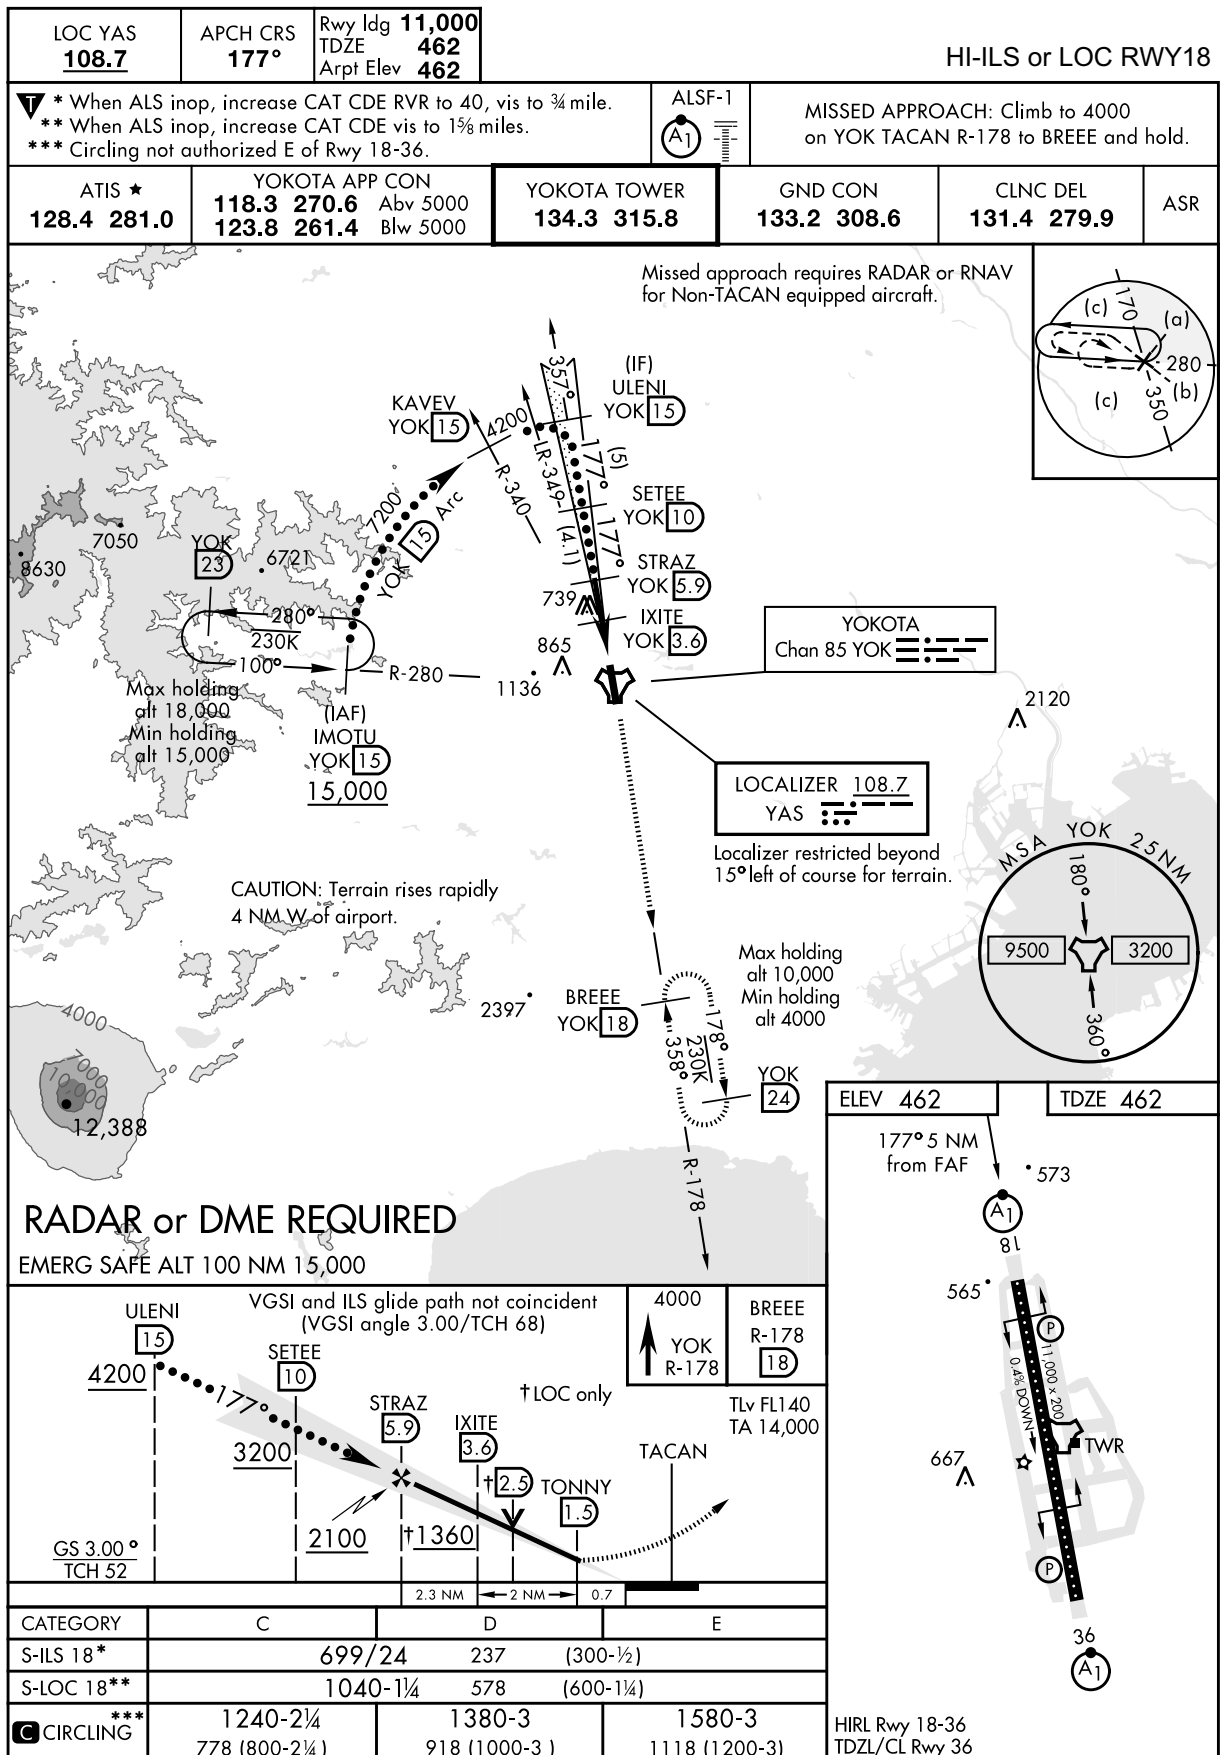



## INSTRUMENT APPROACH CHART


RJTY / YOKOTA

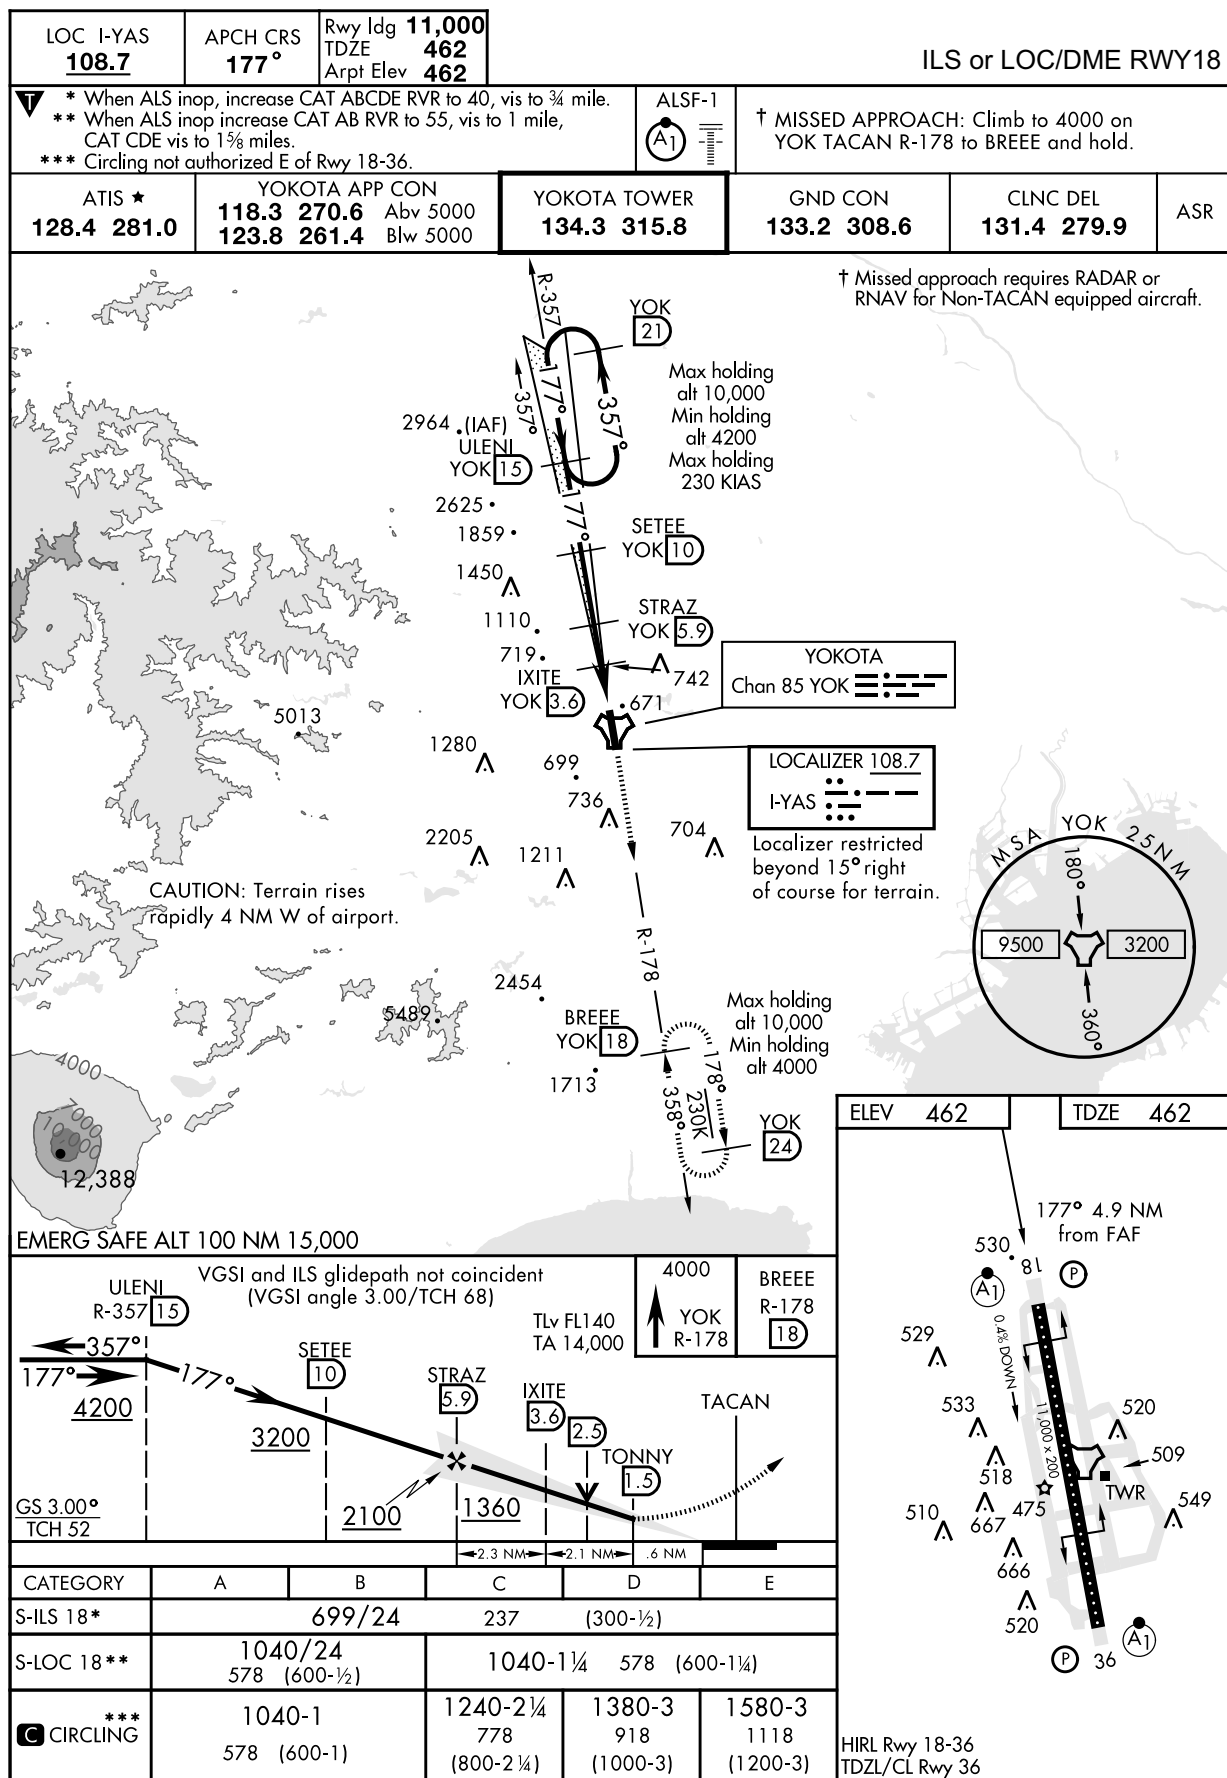

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART


RJTY / YOKOTA

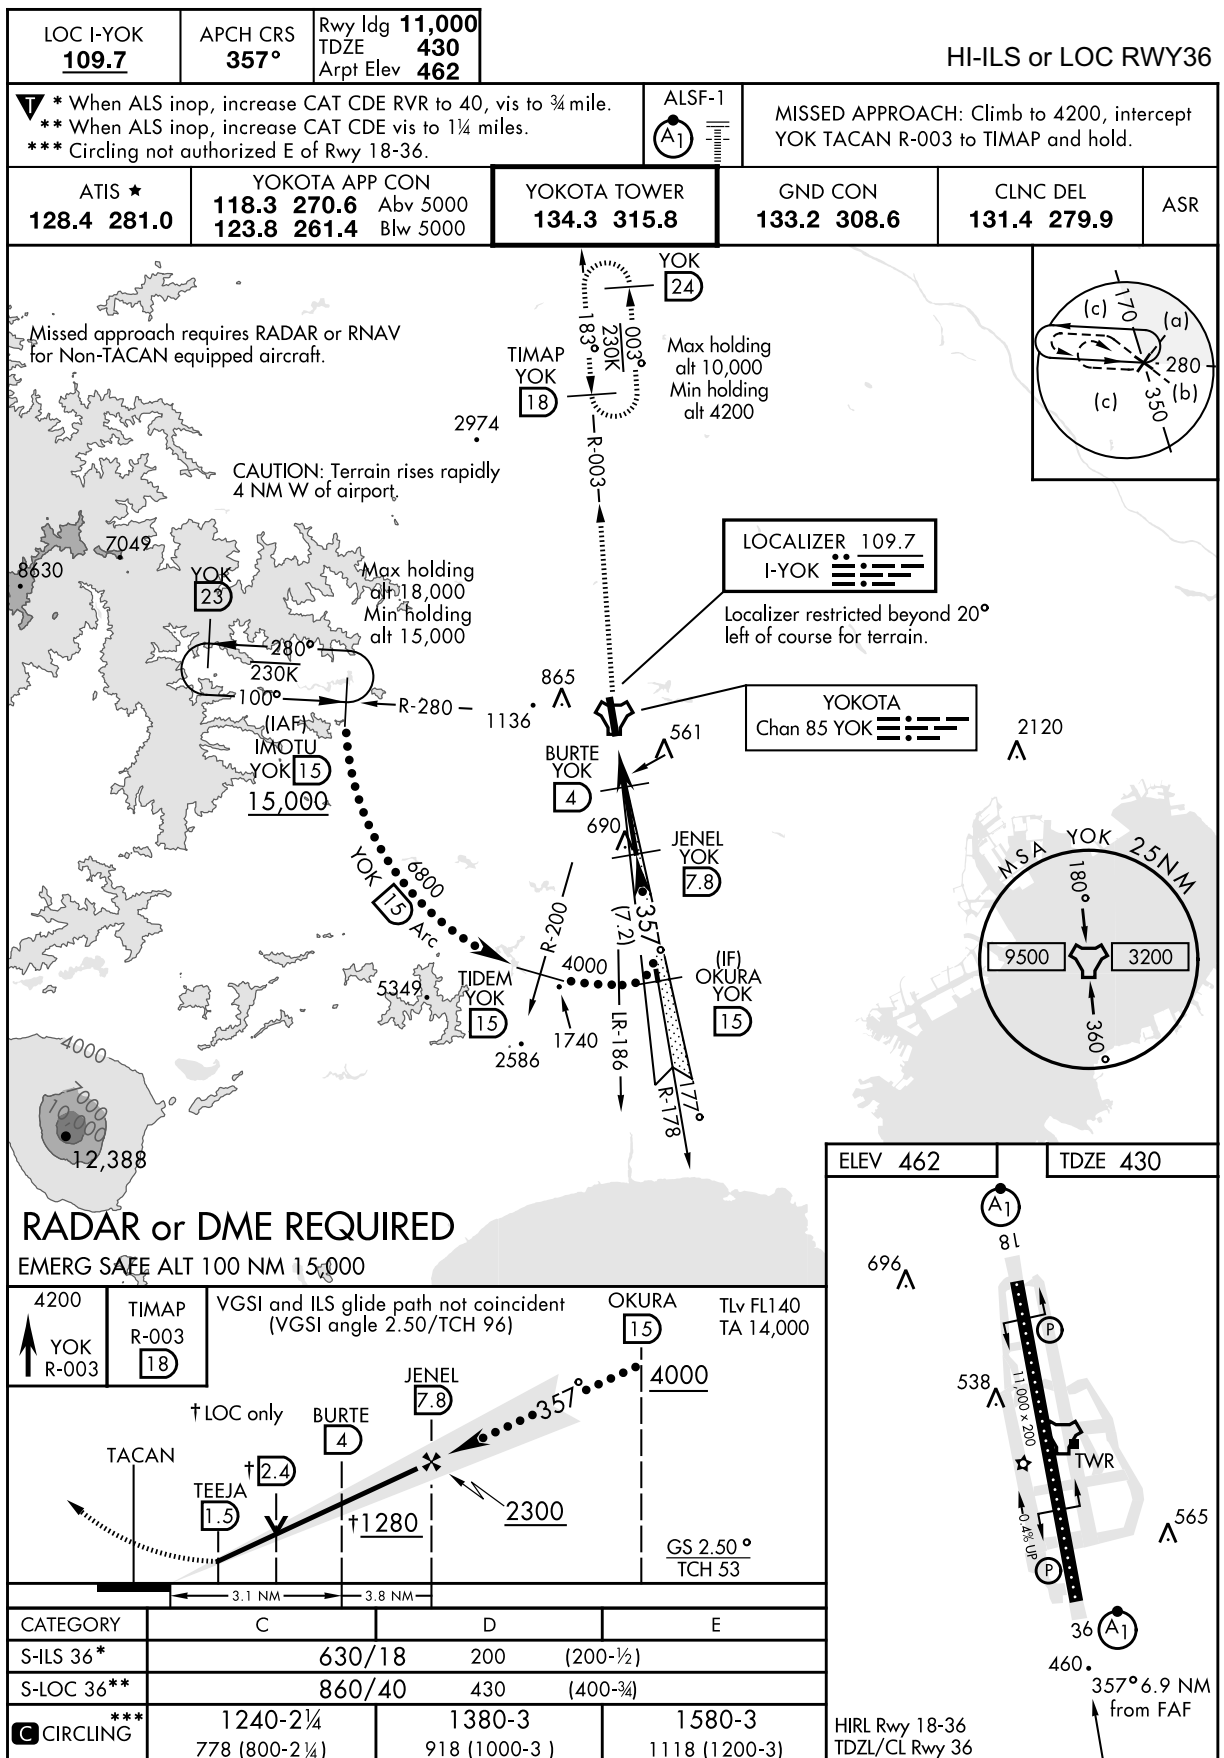

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

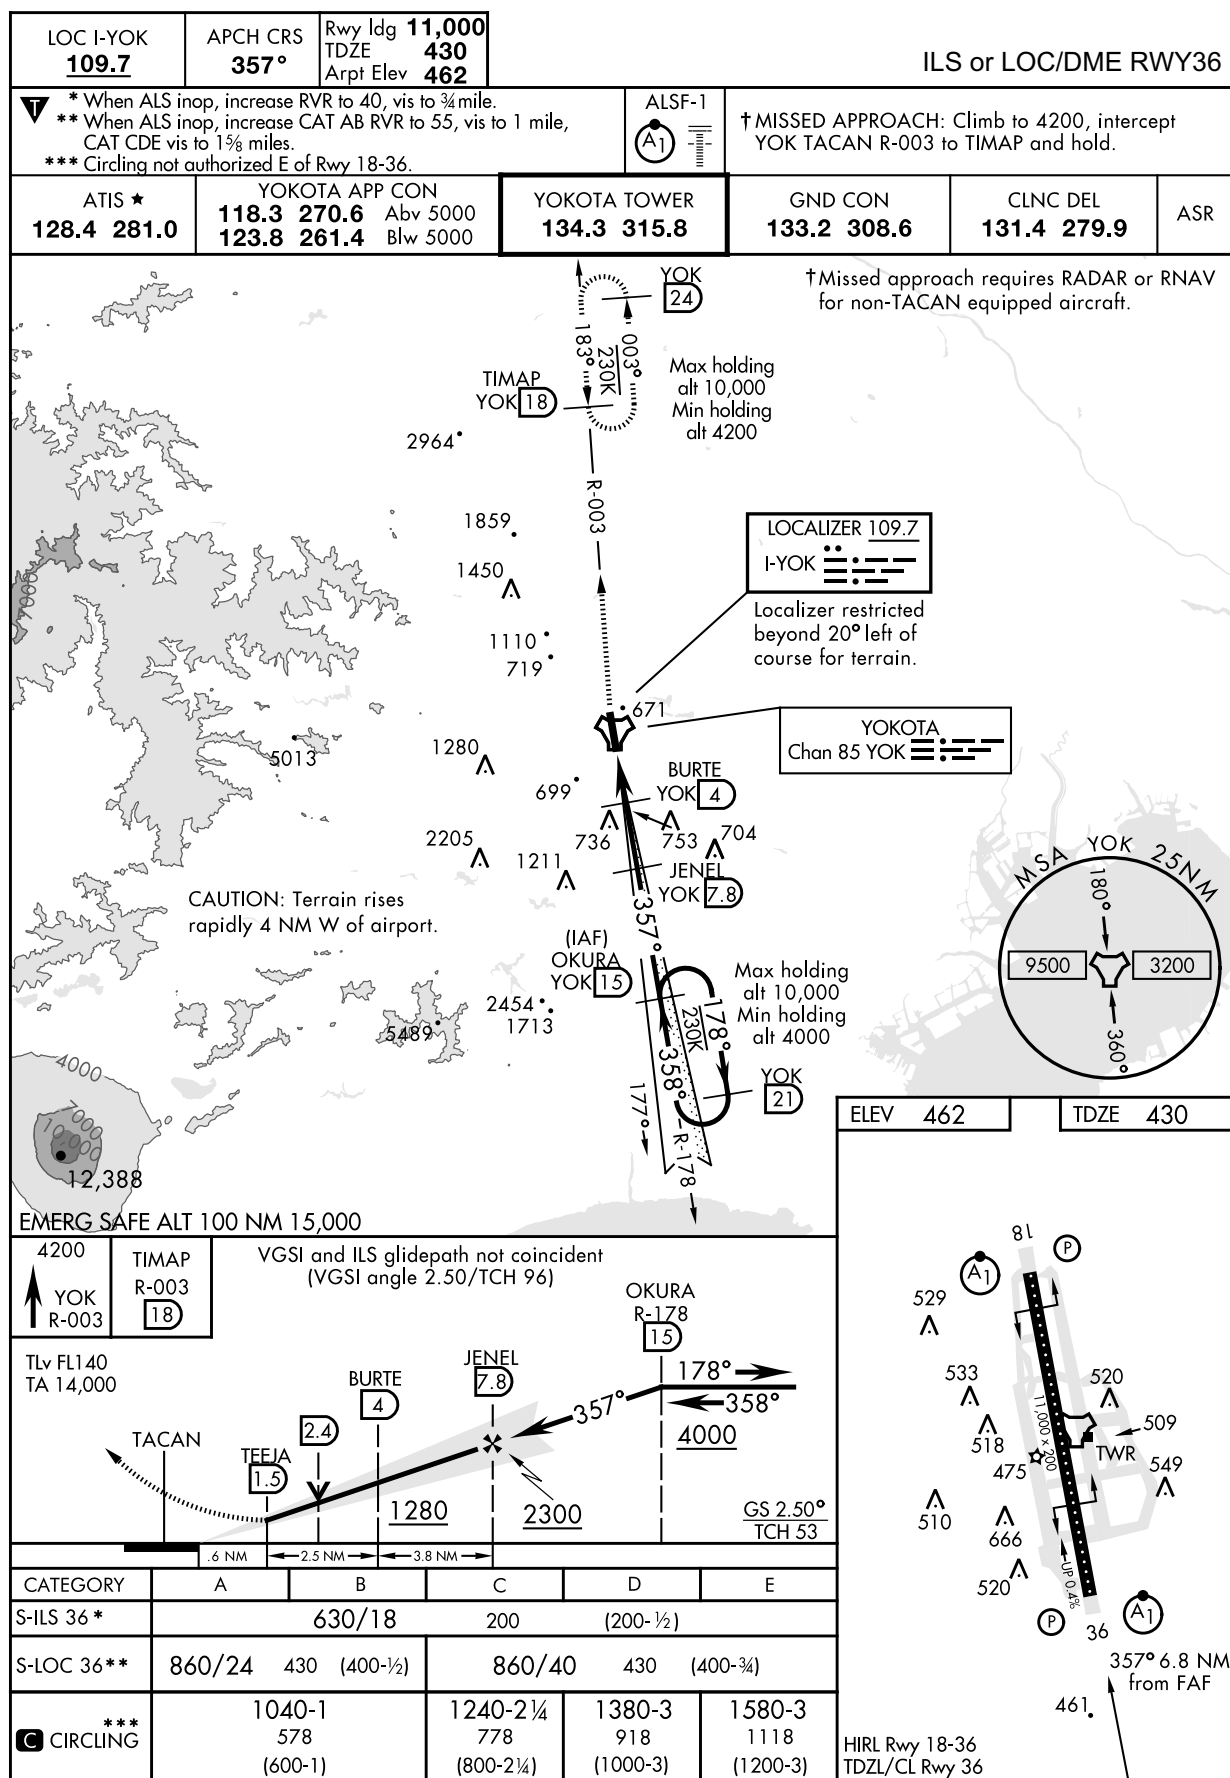

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS <b>177°</b>	Rwy ldg <b>11,000</b> TDZE <b>462</b> Arpt Elev <b>462</b>
-------------------------	--

RNAV (GPS) RWY18

<p>▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/4 miles. ** Circling not authorized E of Rwy 18-36.</p>		<p>ALSIF-1 A1</p>	<p>MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.</p>		
<p>ATIS ★ <b>128.4 281.0</b></p>	<p>YOKOTA APP CON <b>118.3 270.6</b> Abv 5000 <b>123.8 261.4</b> Blw 5000</p>	<p>YOKOTA TOWER <b>134.3 315.8</b></p>	<p>GND CON <b>133.2 308.6</b></p>	<p>CLNC DEL <b>131.4 279.9</b></p>	<p>ASR</p>

DME/DME RNR - 0.3 NA



EMERG SAFE ALT 100 NM 15,000

<div><div>← 357°</div><div>177° →</div><div>4200</div></div> <div>BODAI</div>			<div>TLv FL 140 TA 14,000</div> <div>4000</div> <div>MESTR</div>			<div>ELEV 462</div> <div>TDZE 462</div>		
<div>3.09°</div> <div>TCH 68</div>			<div>177°</div> <div>2500</div> <div>RISSA</div>			<div>1.4 NM to RW18</div> <div>HANIV</div> <div>1340</div> <div>RW18</div>		
			<div>3.5 NM</div> <div>2.5 NM</div>			<div>558</div> <div>652</div> <div>529</div> <div>533</div> <div>518</div> <div>475</div> <div>510</div> <div>666</div> <div>520</div> <div>177° to RW18</div> <div>0.45 DOWN</div> <div>11,000 × 200</div> <div>520</div> <div>509</div> <div>TWR</div> <div>549</div> <div>36</div>		
CATEGORY	A	B	C	D				
LNAV MDA *	960/24 498 (500-½)	960/50 498 (500-1)						
CIRCLING **	1020-1 558 (600-1)	1040-1 578 (600-1)	1240-2¼ 778 (800-2¼)	1380-3 918 (1000-3)	HIRL Rwy 18-36 TDZL/CL Rwy 36			

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
357°	TDZE	430
	Arpt Elev	462


RNAV (GPS) RWY36

**T** \* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.  
\*\* Circling not authorized East of Rwy 18-36.



MISSED APPROACH: Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.

ATIS★ 128.4 281.0	APP CON 118.3 261.4	TOWER★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9	ASR
----------------------	------------------------	-----------------------	------------------------	-------------------------	-----

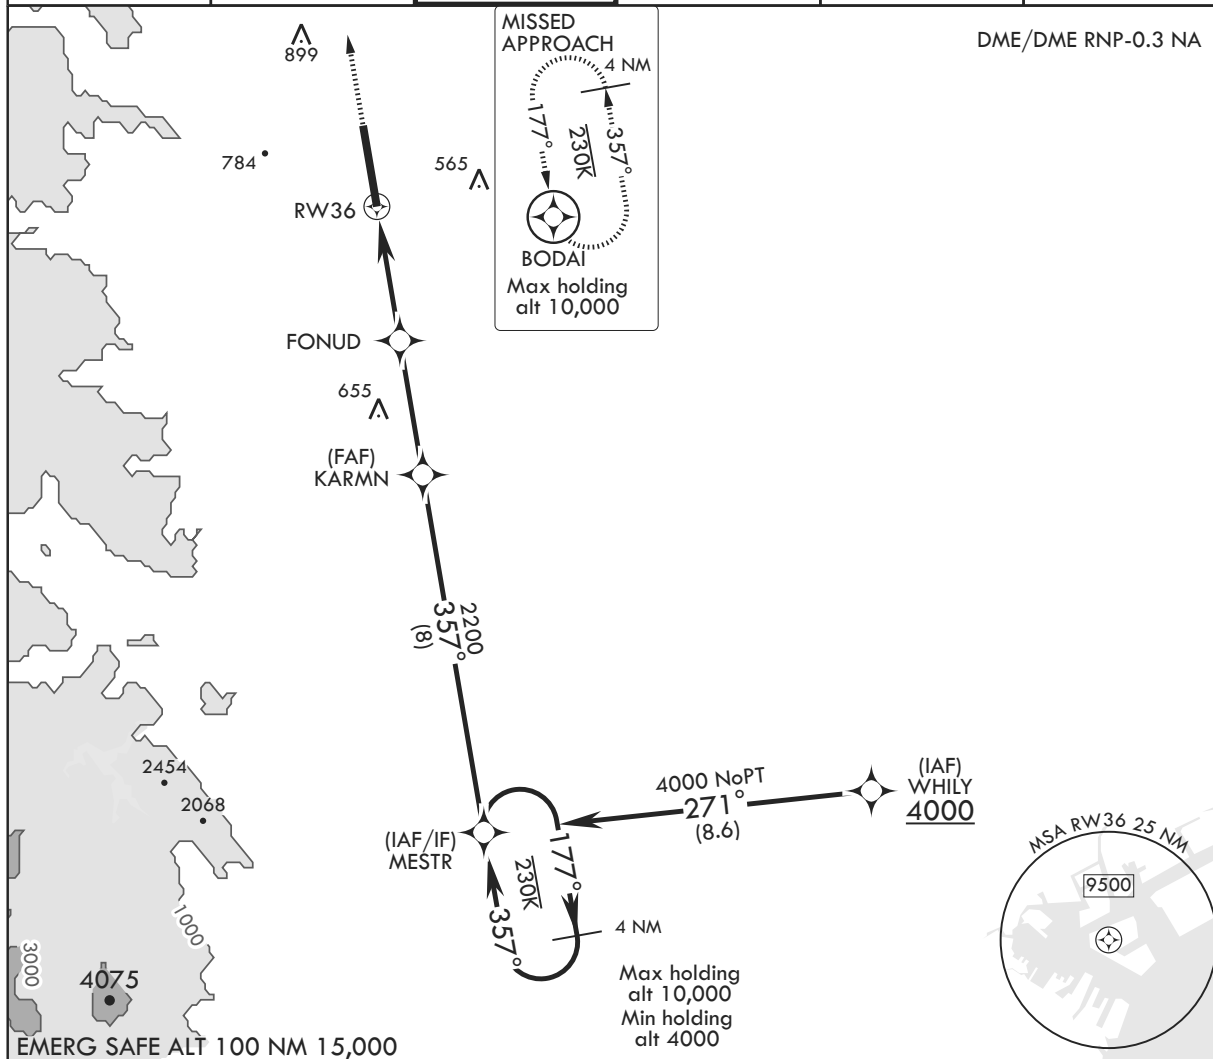

5300

BODAI

TLv FL140

TA 14,000

VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96).

MESTR

177°

4000

357°

KARMN

357°

2200

FONUD

1100

1.6 NM to RW36

RW36

3 NM

3 NM

≤ 2.68°

TCH 75

CATEGORY	A		B		C		D	
LNAV MDA*	940/24		510	(500-½)	940/55		510	(500-1)
<div>CIRCLING**</div>	1040-1		578	(600-1)	1240-2¼ 778 (800-2¼)		1380-3 918 (1000-3)	

ELEV 462

TDZE 430

529

533

518

510

666

666

520

549

509

BCN 475

81

11,000 x 200

0.4% UP

36

357° to RW36

HIRL all Rwys

TDZL/CL Rwy 36

NOTE: REPRINTING DOD FLIP