

CHANGE : WIND SPEED METER added.



**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

SID

ESASI TWO DEPARTURE

RWY13 : Turn left,...

RWY31 : Climb via RWY HDG until 1500FT or above, complete left turn within  
ORE 10DME,...

...climb via ORE R115 to ESASI.

Cross ESASI at assigned or specified altitude.

Note : When take off from RWY13, following climb gradient should be  
maintained until 700FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050


CHANGE : TAKE OFF MINIMA deleted.



## STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

RNAV SID

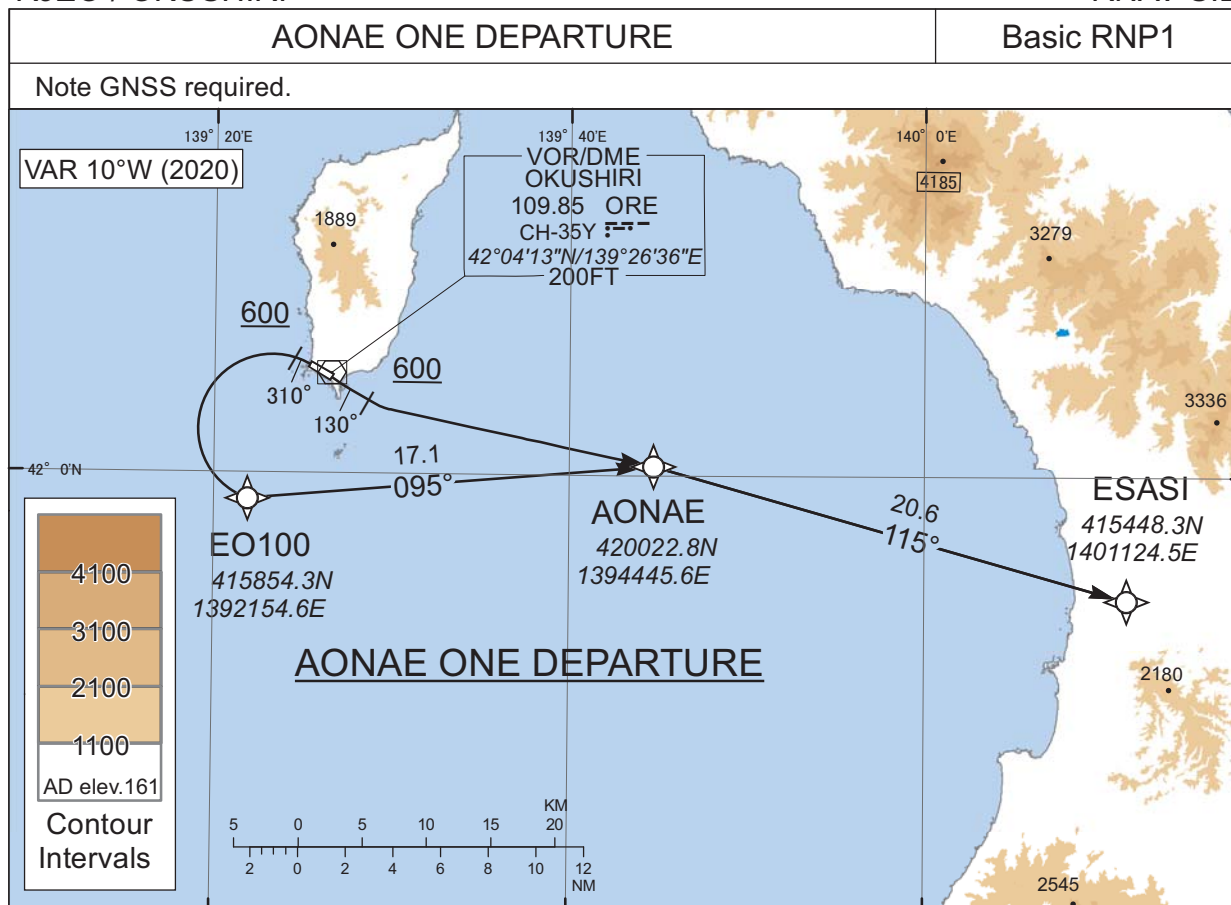**AONAE ONE DEPARTURE**

RWY13: Climb on HDG 130° at or above 600FT, turn left direct to AONAE, to ESASI.

RWY31: Climb on HDG 310° at or above 600FT, turn left direct to EO100, to AONAE, to ESASI.

Note RWY31: 4.5% climb gradient required up to 600FT.

OBST ALT 209FT located at 0.1NM 354°FM end of RWY31

**RWY13**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	130 (120.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	AONAE	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

**RWY31**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	310 (300.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	EO100	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	AONAE	-	095 (084.9)	-9.8	17.1	-	-	-	-	Basic RNP1
004	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

CHANGE : New PROC

STANDARD ARRIVAL CHART - INSTRUMENT

RJEO / OKUSHIRI

RNAV STAR RWY31



IKORU ARRIVAL

From ESASI at or above 5000FT, to IKORU at or above 3000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESASI	-	-	-9.8	-	-	+5000	-	-	Basic RNP1
002	TF	IKORU	-	296 (285.9)	-9.8	23.7	-	+3000	-	-	Basic RNP1

CHANGE : New PROC


**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR RWY31

SAPPORO CONTROL 119.3 – 276.5 134.25 – 260.4	OKUSHIRI 109.85 CH-35Y 42°04'13"N / 139°26'36"E	VOR/DME ORE 122.7	OKUSHIRI REMOTE 122.7	NO RADAR
--	--	-------------------------	--------------------------	----------

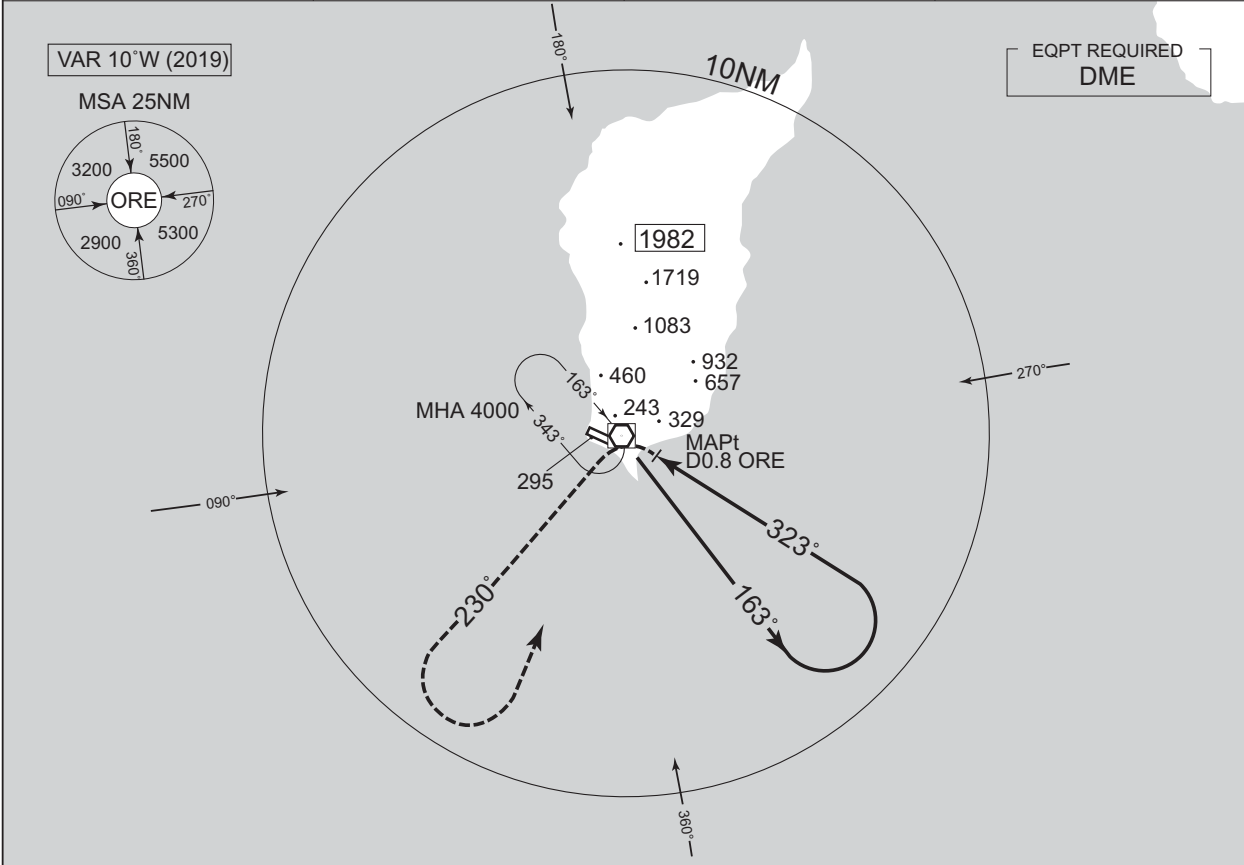

**MISSED APPROACH**

Turn left, climb to 3000FT or above via ORE R230, turn left direct to ORE VOR/DME within ORE 10.0DME and hold at 4000FT.  
Contact OKUSHIRI REMOTE.

Remain within ORE 10.0DME

DME to ORE 0.8 1.4

MINIMA		THR elev. 141	AD elev. 161
CAT	CIRCLING		
	MDA(H)	CMV	MDA(H) VIS
A	600 (459)	1500	600 (439) 1600
B			620 (459) 2400
C		2000	
D	–	–	–


Circling to SOUTH side of RWY only.

CHANGE : VAR,MSA

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR RWY13

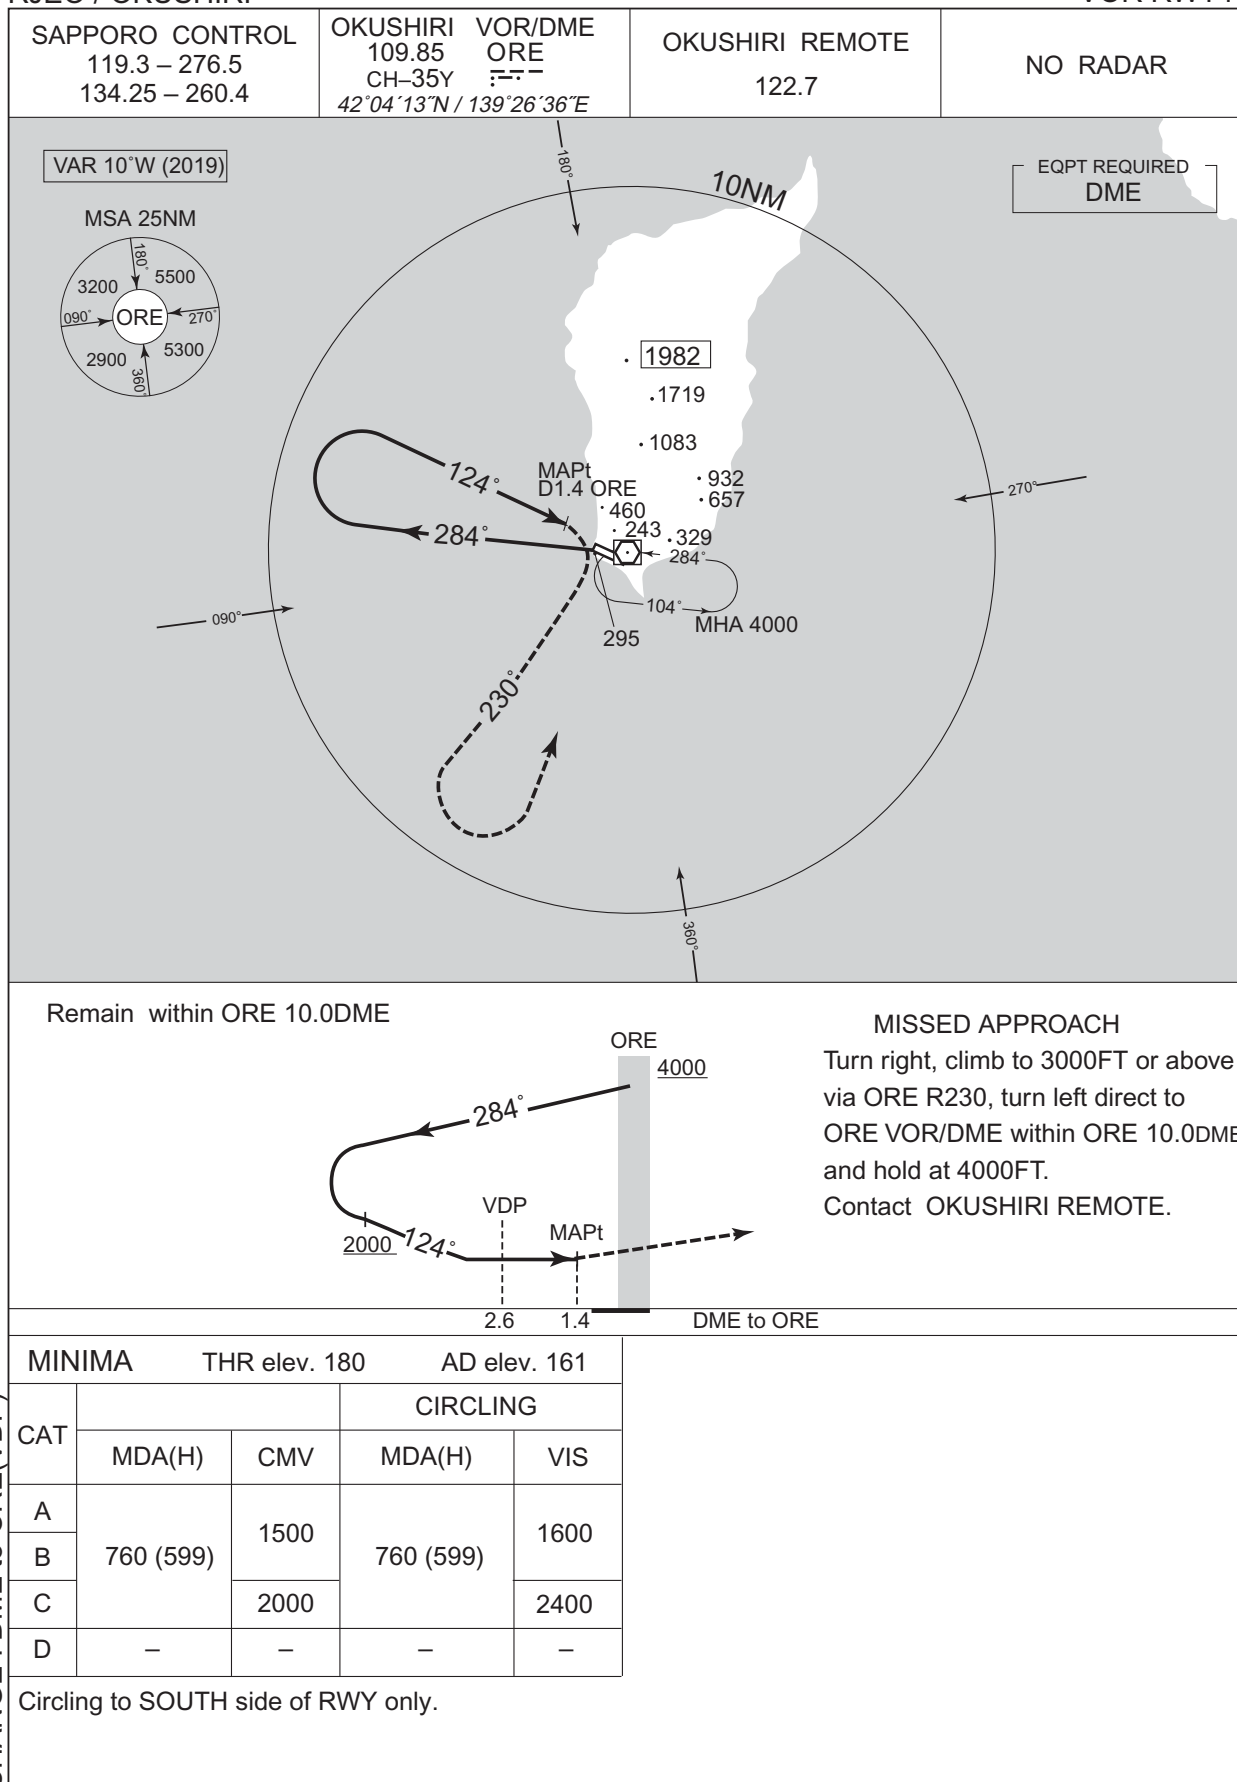




INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI


VOR A

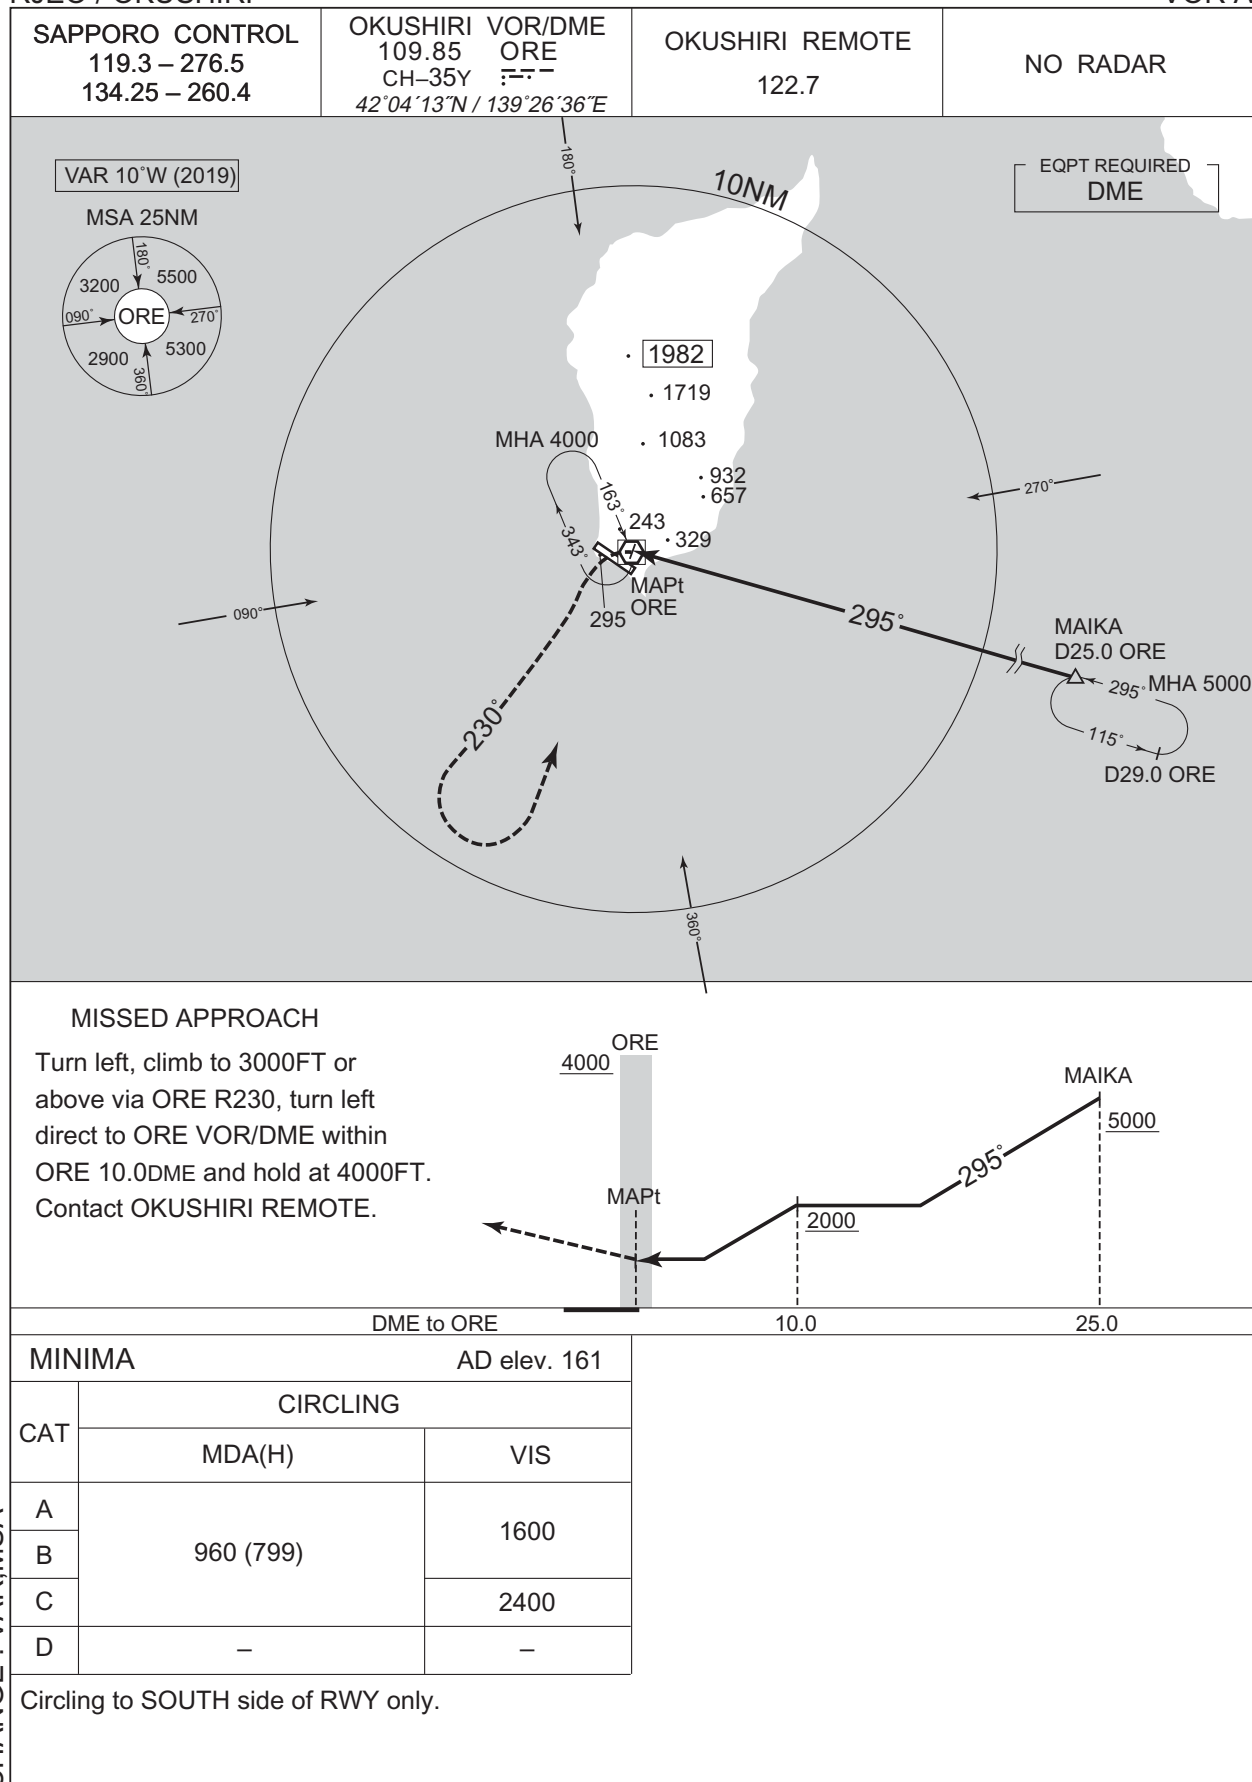

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

RNAV(GNSS) RWY31

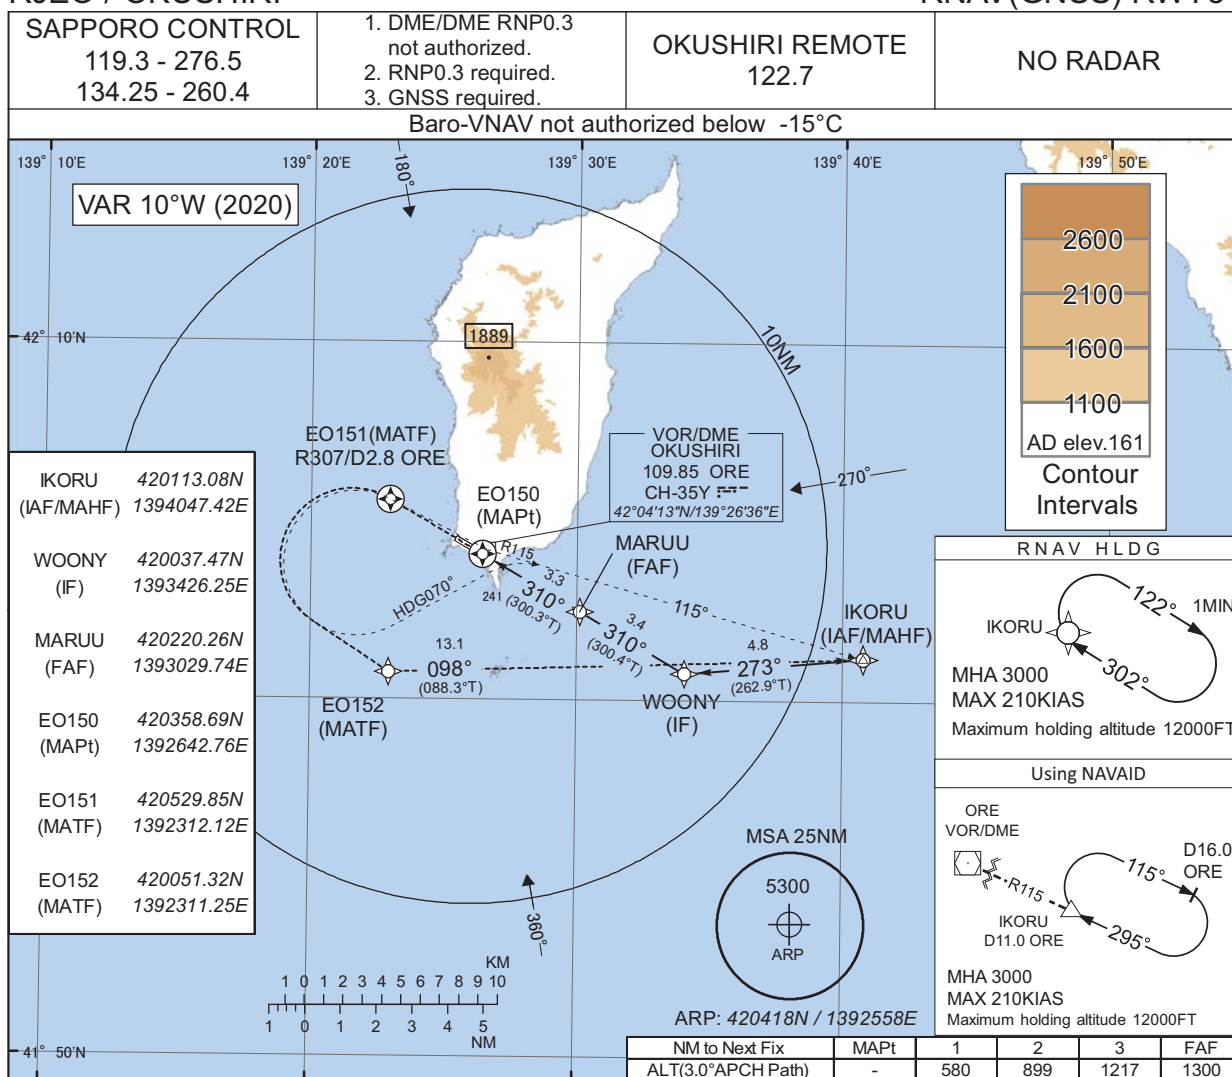


## MISSED APPROACH

Direct to EO151, turn left direct to EO152, to IKORU and hold at 3000FT. Contact OKUSHIRI REMOTE.

(For using VOR/DME)

Climb via ORE R307 to ORE 2.8DME, turn left HDG070° to intercept and proceed via ORE R115 to IKORU and hold at 3000FT. Contact OKUSHIRI REMOTE.

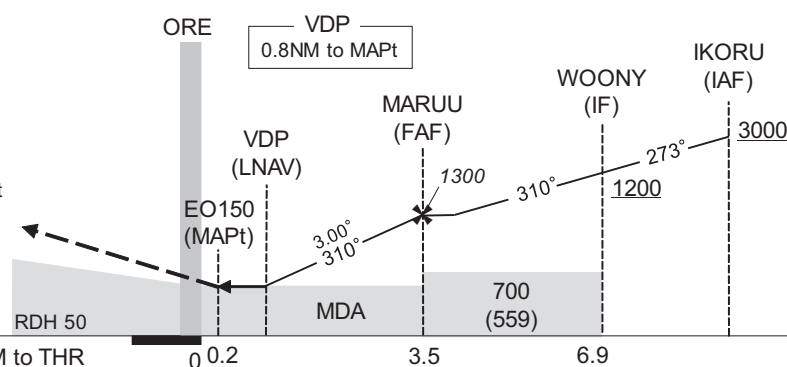

**MINIMA** THR elev. 141 AD elev. 161

CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	490(349)	1500	490(349)	1500	600(439)	1600
B		1800		1800	620(459)	
C		-		-	-	
D	-	-	-	-	-	-

Circling to SOUTH side of RWY only.

CHANGE : New PROC

RJEO / OKUSHIRI

Visual REP



CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
稲穂岬 Inahomisaki	028°T / 12.0NM	灯台 Lighthouse
10NM E	090°T / 10.0NM	海上 Over the sea
10NM SE	135°T / 10.0NM	海上 Over the sea

**INTENTIONALLY LEFT BLANK**