

RJOC / IZUMO

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

DOZEN FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left ...

RWY25 : Climb RWY HDG to 1700FT, turn right HDG077°...

... to intercept and proceed via XZE R032(OIE R213) to DOZEN.

Cross DOZEN at or above 5000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.

OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.



## STANDARD DEPARTURE CHART -INSTRUMENT

RJOC / IZUMO

SID

IZUMO REVERSAL FOUR DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn left to intercept and proceed via XZE R032 to 3000FT, turn left direct to XZE VOR/DME.

Cross XZE VOR/DME at or above 7000FT.

RWY25 : Climb RWY HDG to 1700FT, turn right to intercept and proceed via XZE R260 to XZE 10.5DME, turn right direct to XZE VOR/DME.

Cross XZE VOR/DME at or above 7000FT.

Note RWY07: 4.6% climb gradient required up to 1300FT.


OBST ALT 1074FT located at 4.8NM 028° FM end of RWY07.

RWY25: 4.7% climb gradient required up to 2200FT.

OBST ALT 1838FT located at 6.3NM 279° FM end of RWY25.

IZUMO REVERSAL FOUR DEPARTURE

STANDARD DEPARTURE CHART - INSTRUMENT

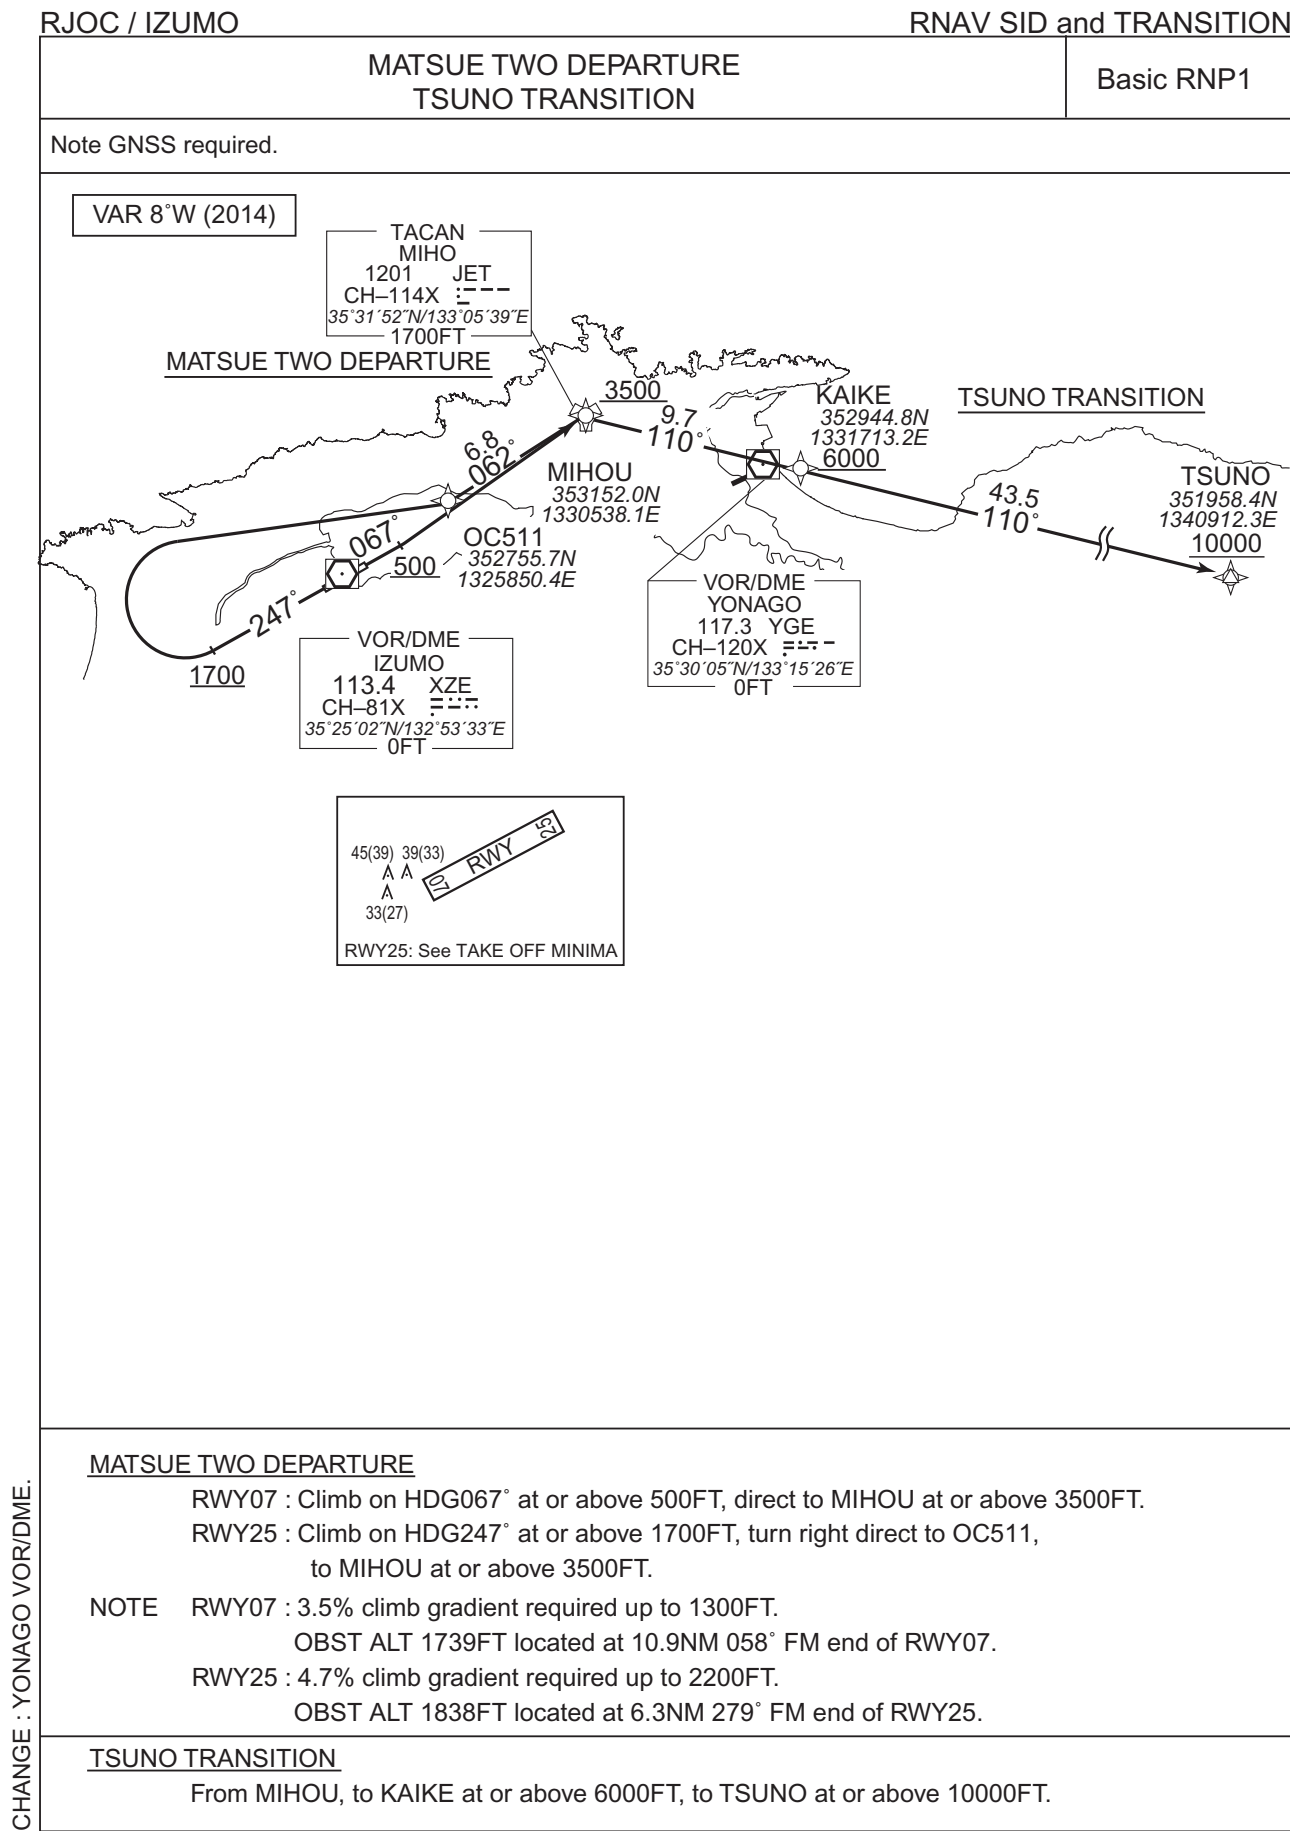

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJOC / IZUMO

## RNAV SID and TRANSITION

MATSUE TWO DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1


## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC511	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	MIHOU	—	062 (054.5)	-7.6	6.8	—	+3500	—	—	Basic RNP1

TSUNO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MIHOU	—	—	-7.6	—	—	+3500	—	—	Basic RNP1
002	TF	KAIKE	—	110 (102.6)	-7.6	9.7	—	+6000	—	—	Basic RNP1
003	TF	TSUNO	—	110 (102.7)	-7.6	43.5	—	+10000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

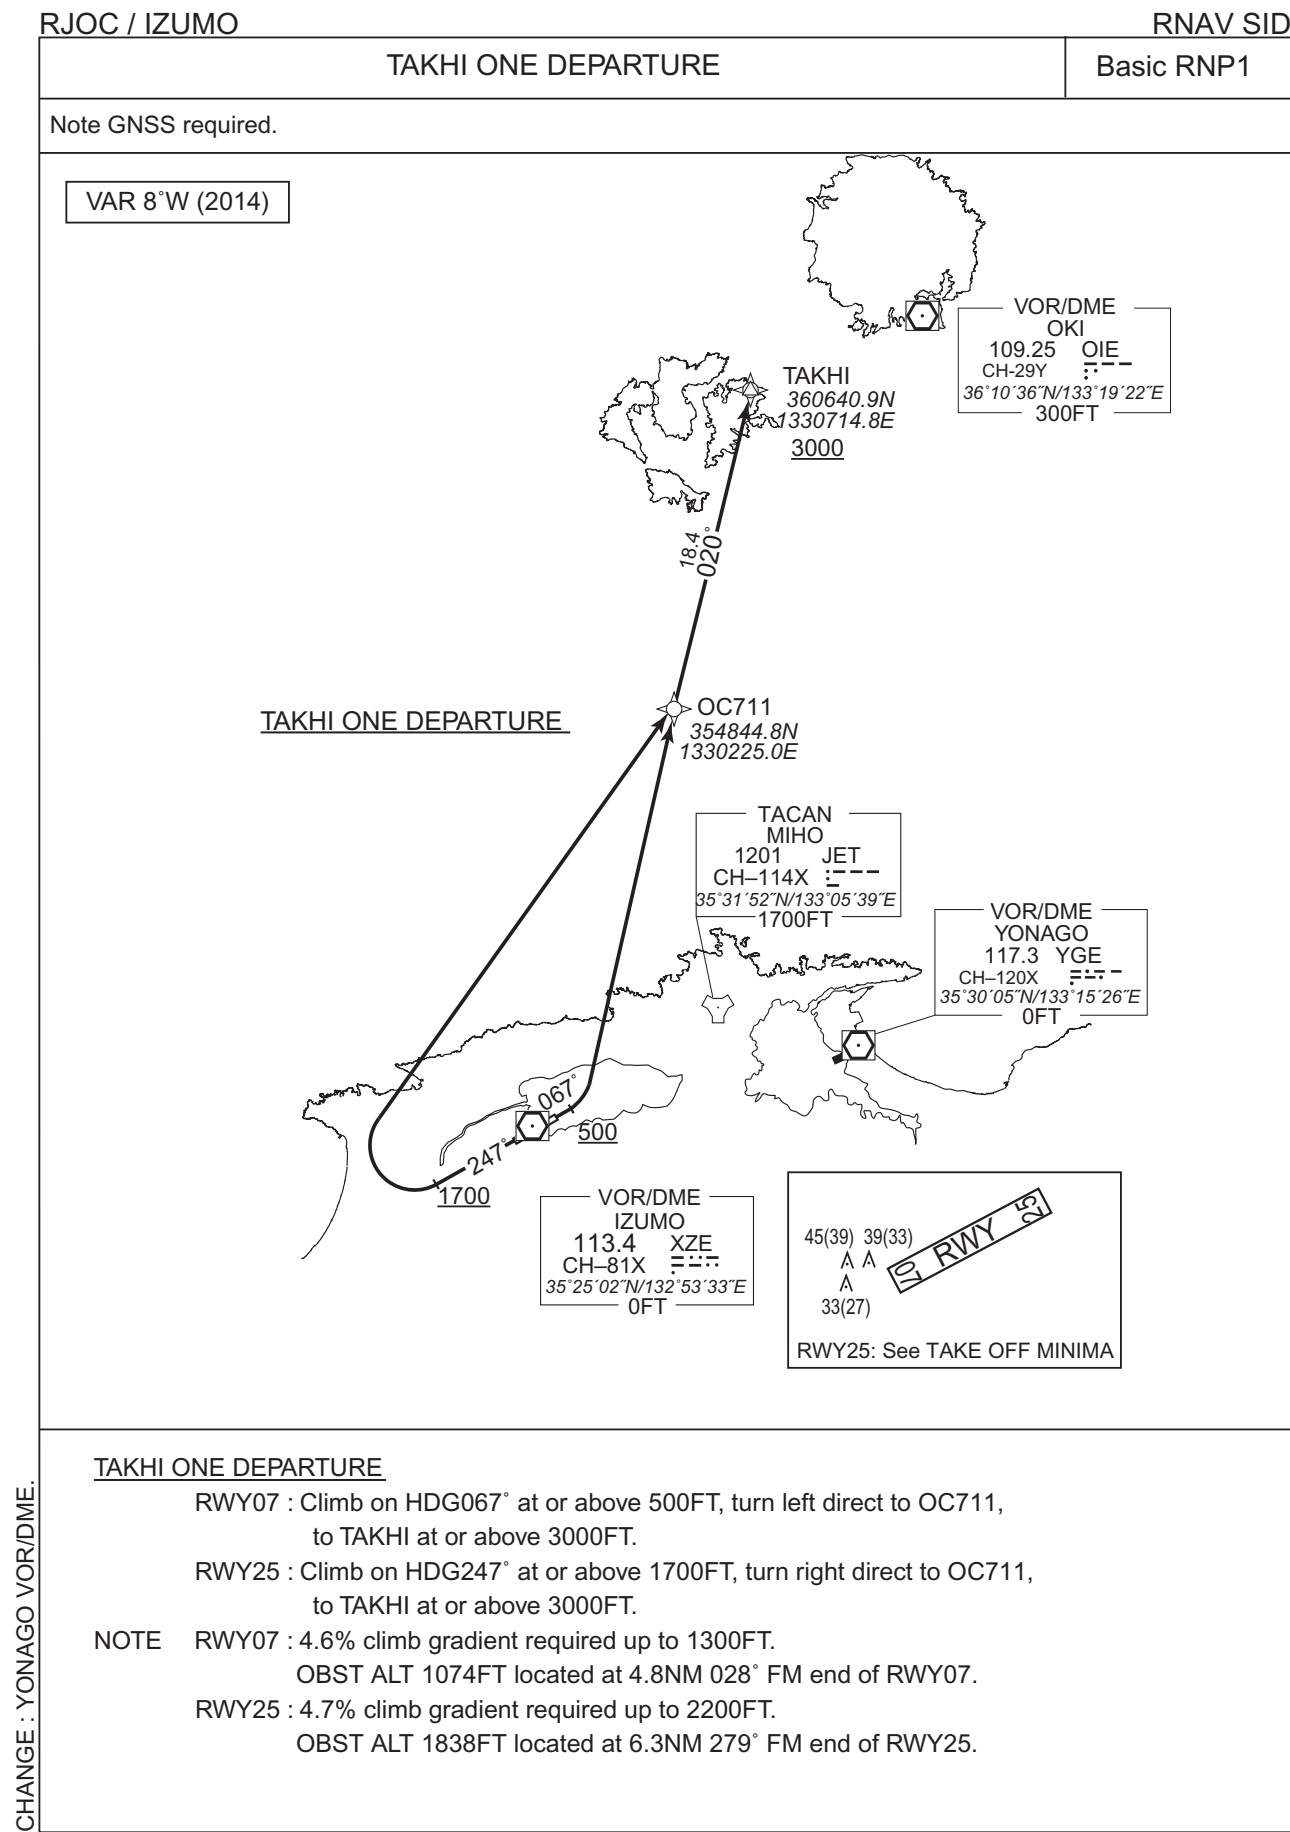

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

TAKHI ONE DEPARTURE


## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC711	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	TAKHI	—	020 (012.3)	-7.6	18.4	—	+3000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

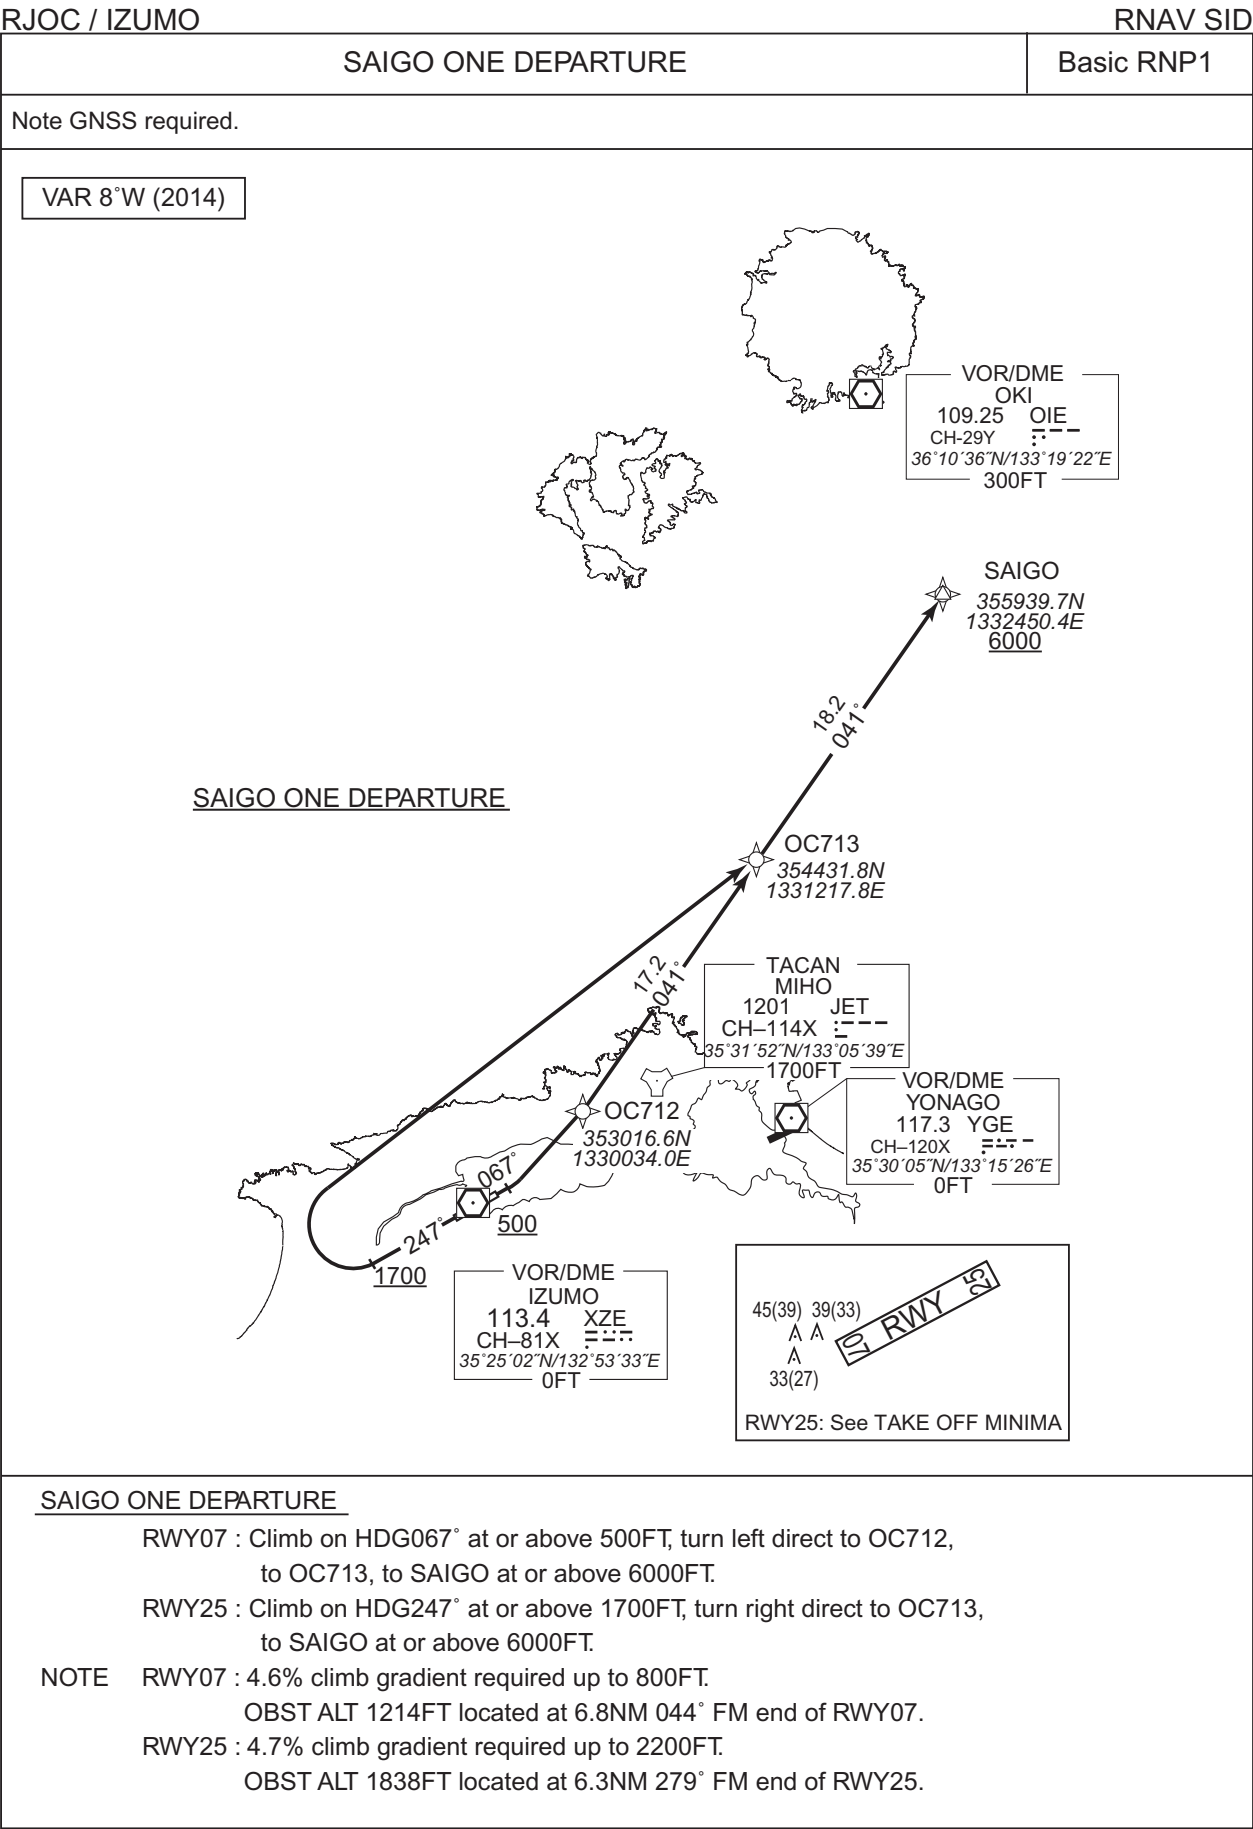

CHANGE : YONAGO VOR/DME.

Civil Aviation Bureau,Japan (EFF:31 DEC 2020)

5/11/20



## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO

RNAV SID

SAIGO ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC712	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC713	—	041 (033.7)	-7.6	17.2	—	—	—	—	Basic RNP1
004	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1700	—	—	Basic RNP1
002	DF	OC713	—	—	-7.6	—	R	—	—	—	Basic RNP1
003	TF	SAIGO	—	041 (033.8)	-7.6	18.2	—	+6000	—	—	Basic RNP1

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOC / IZUMO


RNAV SID and TRANSITION

KYOKA ONE DEPARTURE  
CARPS TRANSITION

Basic RNP1

Note GNSS required.

VAR 8°W (2014)

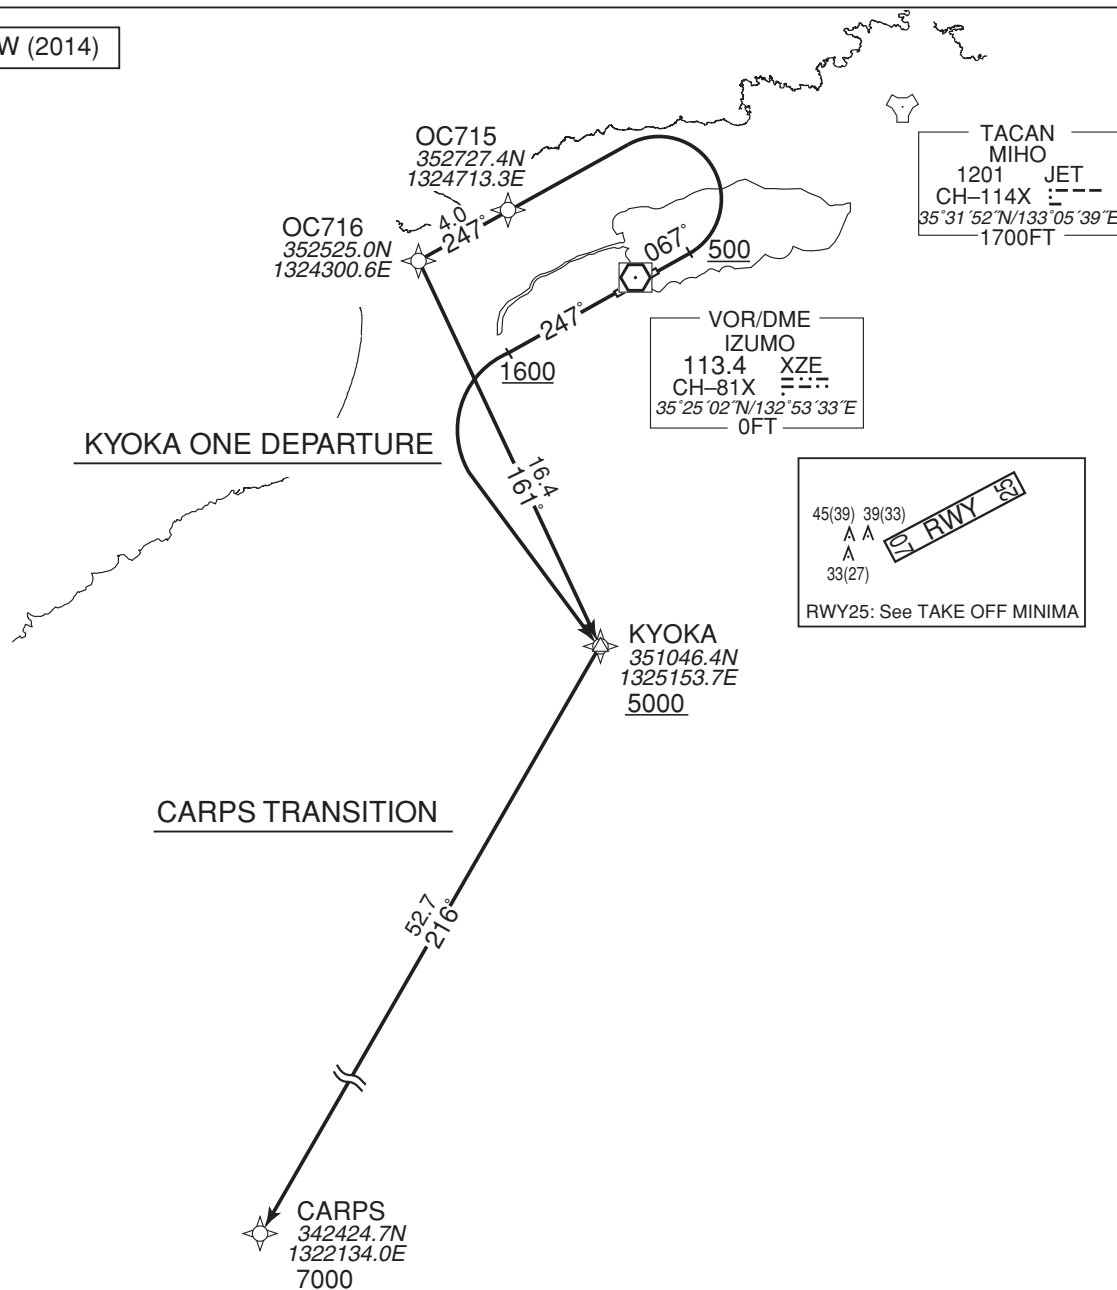**KYOKA ONE DEPARTURE**

RWY07 : Climb on HDG067° at or above 500FT, turn left direct to OC715, to OC716, to KYOKA at or above 5000FT.

RWY25 : Climb on HDG247° at or above 1600FT, turn left direct to KYOKA at or above 5000FT.

NOTE RWY07 : 4.6% climb gradient required up to 1800FT.

OBST ALT 1739FT located at 6.3NM 280° FM end of RWY07.

RWY25 : 3.8% climb gradient required up to 2400FT.

OBST ALT 1969FT located at 10.8NM 222° FM end of RWY25.

**CARPS TRANSITION**

From KYOKA, to CARPS at or above 7000FT.

CHANGE : MIHO TACAN(JET)

## STANDARD DEPARTURE CHART - INSTRUMENT

## RJOC / IZUMO

## RNAV SID and TRANSITION

KYOKA ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.3)	-7.6	—	—	+500	—	—	Basic RNP1
002	DF	OC715	—	—	-7.6	—	L	—	—	—	Basic RNP1
003	TF	OC716	—	247 (239.3)	-7.6	4.0	—	—	—	—	Basic RNP1
004	TF	KYOKA	—	161 (153.6)	-7.6	16.4	—	+5000	—	—	Basic RNP1


## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.3)	-7.6	—	—	+1600	—	—	Basic RNP1
002	DF	KYOKA	—	—	-7.6	—	L	+5000	—	—	Basic RNP1

CARPS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KYOKA	—	—	-7.6	—	—	+5000	—	—	Basic RNP1
002	TF	CARPS	—	216 (208.4)	-7.6	52.7	—	+7000	—	—	Basic RNP1

STANDARD ARRIVAL CHART - INSTRUMENT

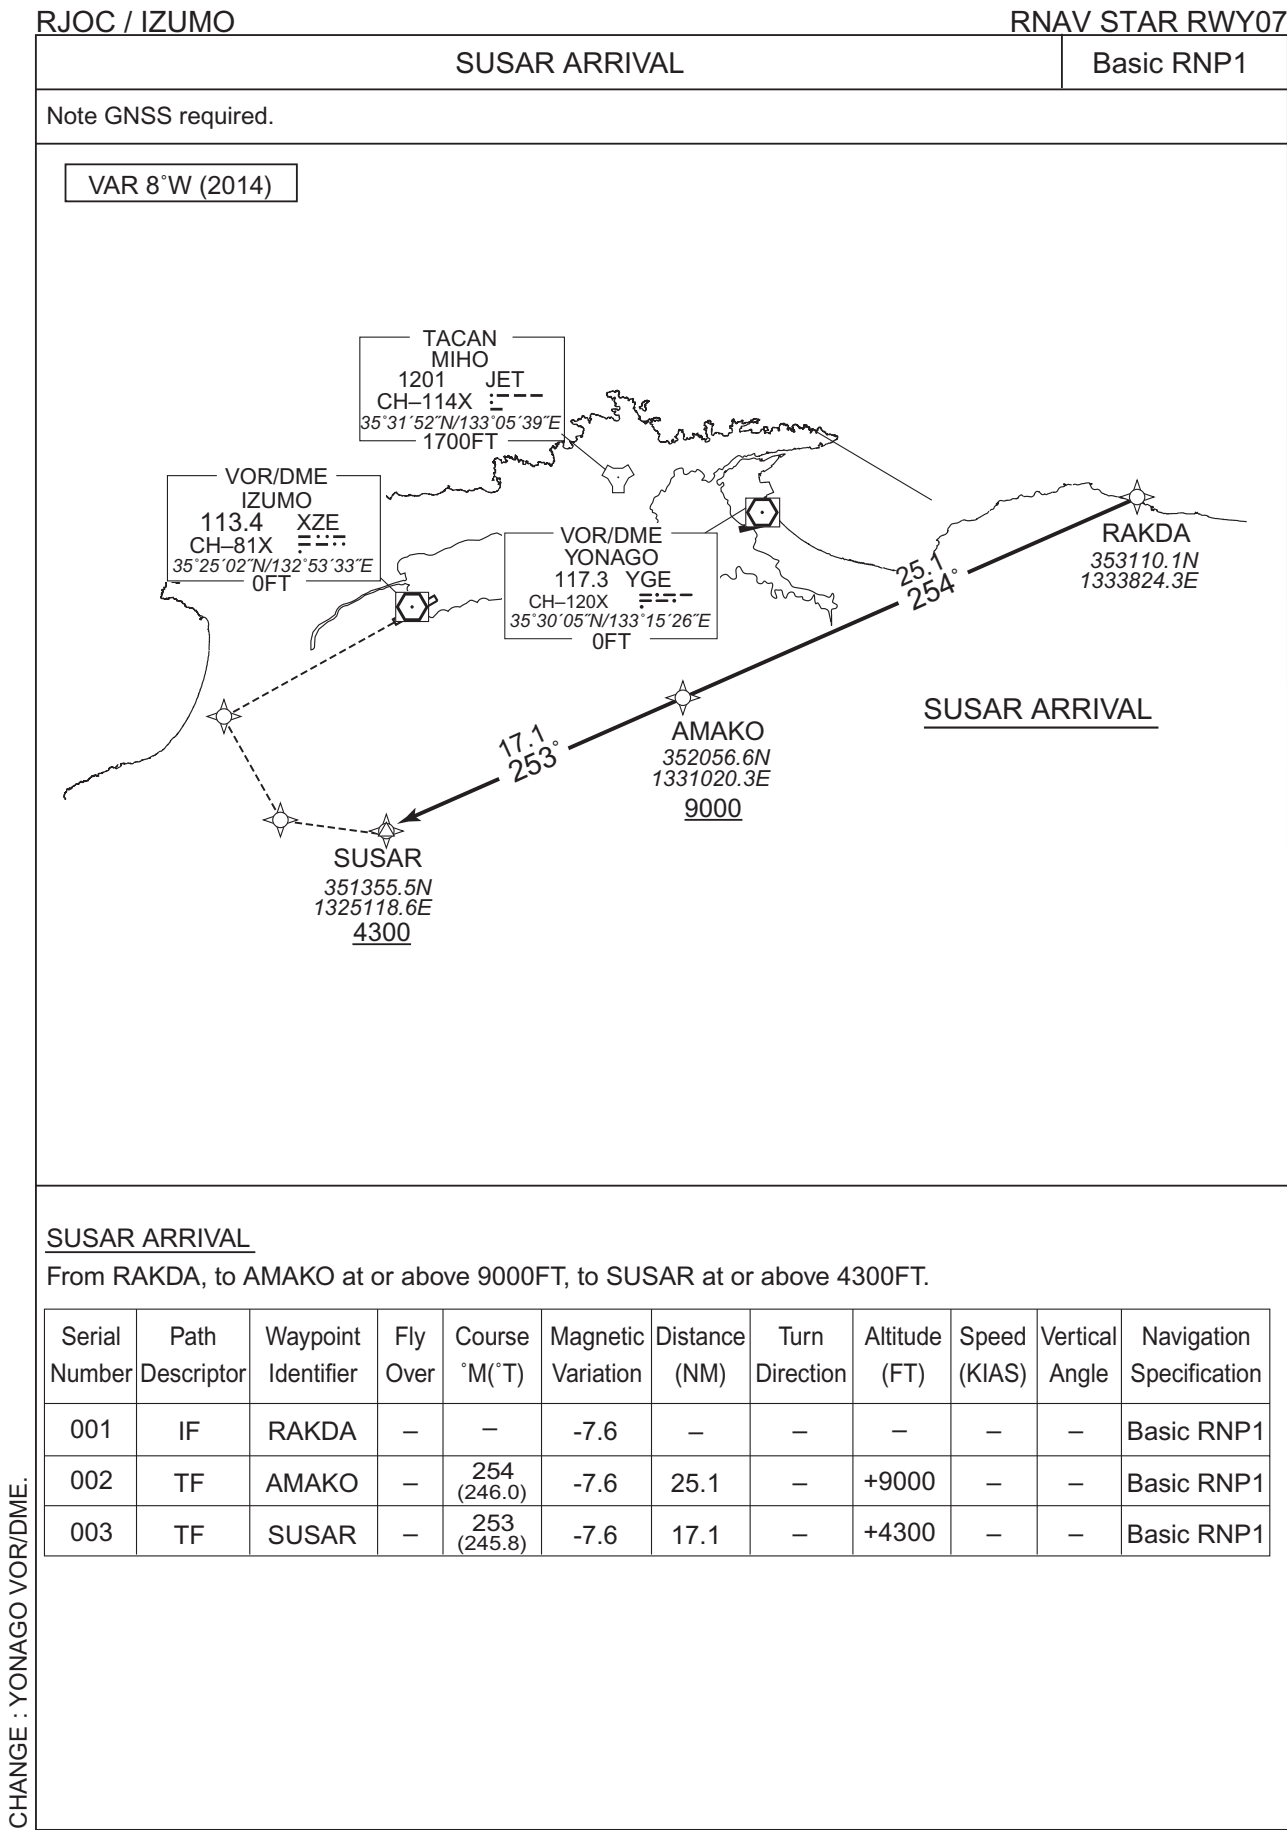

CHANGE : YONAGO VOR/DME.

STANDARD ARRIVAL CHART - INSTRUMENT

RJOC / IZUMO


RNAV STAR RWY07

OKUNI ARRIVAL

Basic RNP1

Note GNSS required.

VAR 8°W (2016)

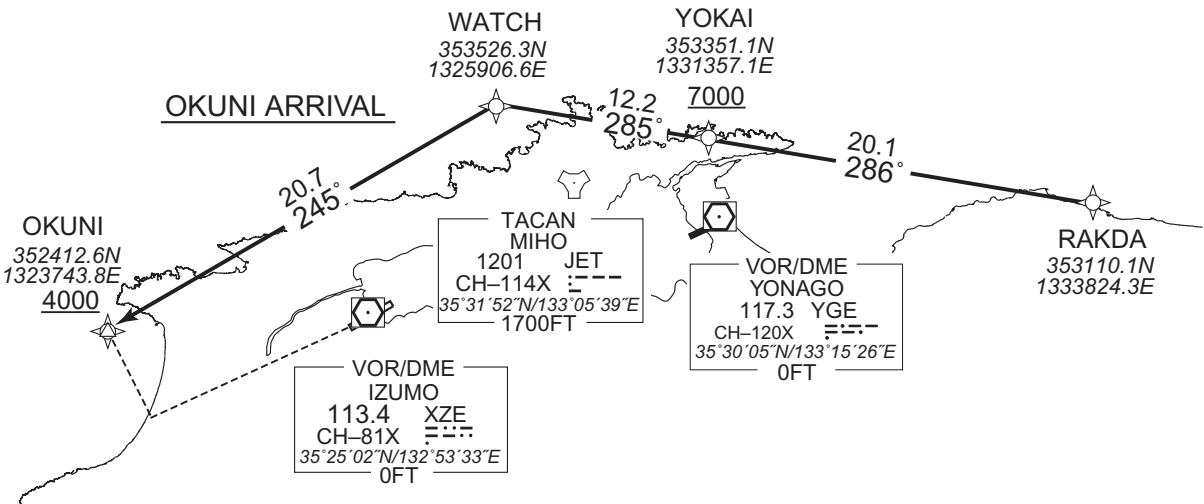


OKUNI ARRIVAL

From RAKDA, to YOKAI at or above 7000FT, to WATCH, to OKUNI at or above 4000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RAKDA	—	—	-7.9	—	—	—	—	—	Basic RNP1
002	TF	YOKAI	—	286 (277.8)	-7.9	20.1	—	+7000	—	—	Basic RNP1
003	TF	WATCH	—	285 (277.6)	-7.9	12.2	—	—	—	—	Basic RNP1
004	TF	OKUNI	—	245 (237.3)	-7.9	20.7	—	+4000	—	—	Basic RNP1

CHANGE : YONAGO VOR/DME.

STANDARD ARRIVAL CHART - INSTRUMENT

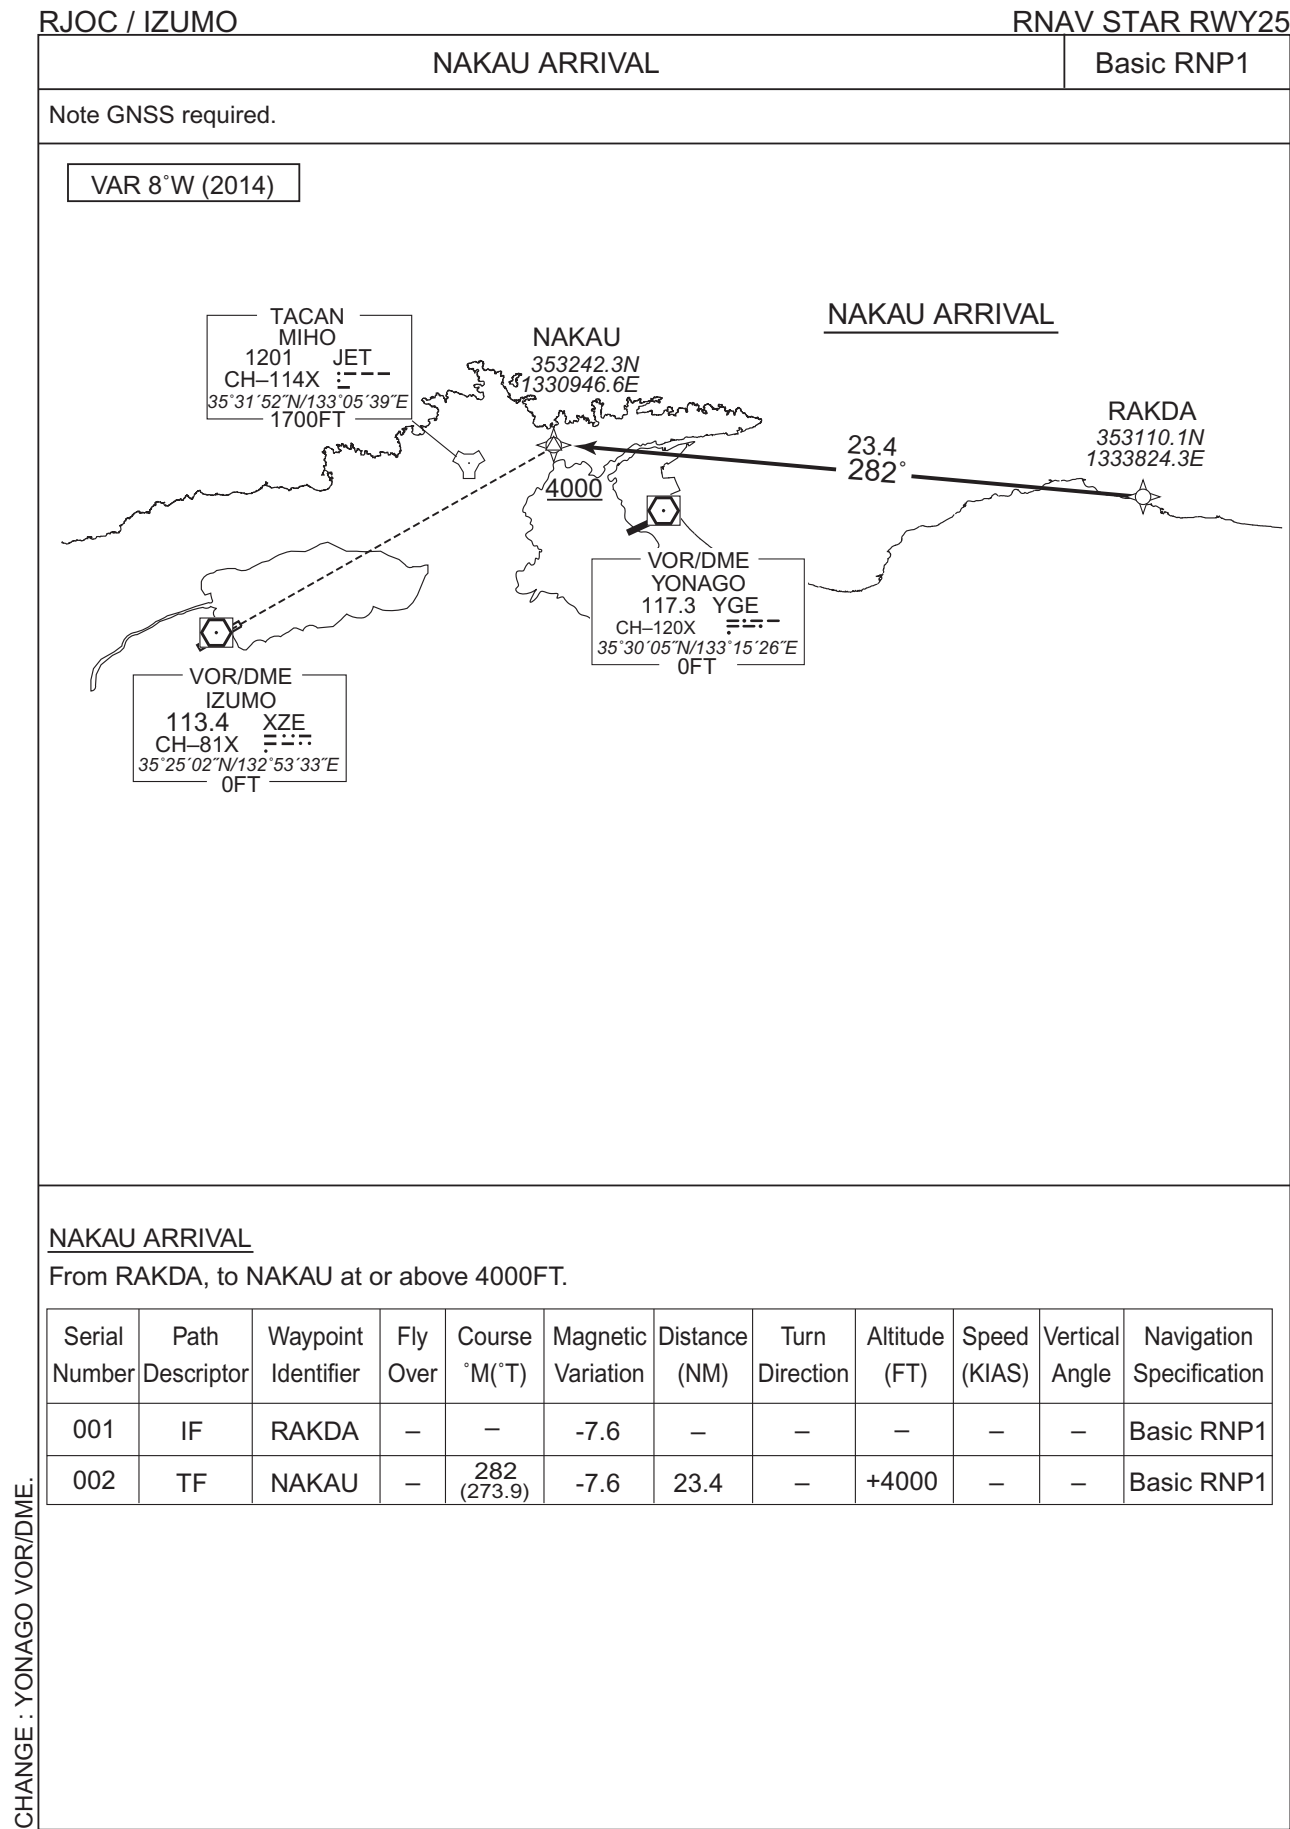

## INSTRUMENT APPROACH CHART

RJOC / IZUMO

LOC Z RWY25



## INSTRUMENT APPROACH CHART

RJOC / IZUMO


LOC Y RWY25



## MISSED APPROACH

Climb on HDG247° to 1600FT,  
turn right direct to XZE  
VOR/DME and hold at 3000FT.  
Contact IZUMO RADIO.

Timing not authorized for defining the  
MAPt.

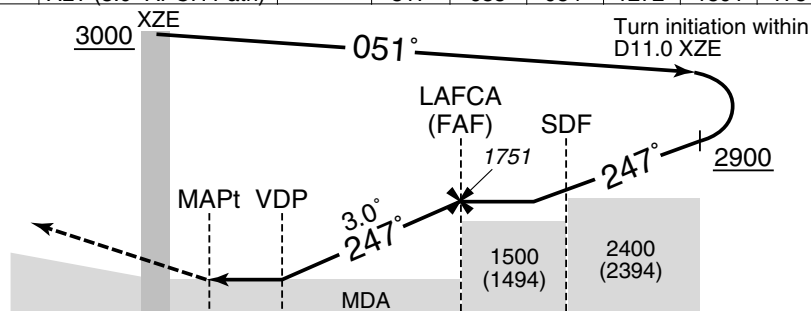

DME to IXZ	1.2	1.5	1.9	6.5	10.1
NM to THR	0	0.3	0.6	5.3	9.0

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 15	AD elev. 6	
CAT	CIRCLING			
	MDA(H)	CMV	MDA(H)	VIS
A	270 (264)	800	390 (384)	1600
B			460 (454)	
C			560 (554)	
D		1200	630 (624)	3200

Circling to NORTH side of RWY only.

MINIMA with Missed APCH climb gradient of 2.5% are not established.



## INSTRUMENT APPROACH CHART

RJOC / IZUMO


VOR RWY25



## INSTRUMENT APPROACH CHART

RJOC / IZUMO


RNAV(GNSS) RWY07

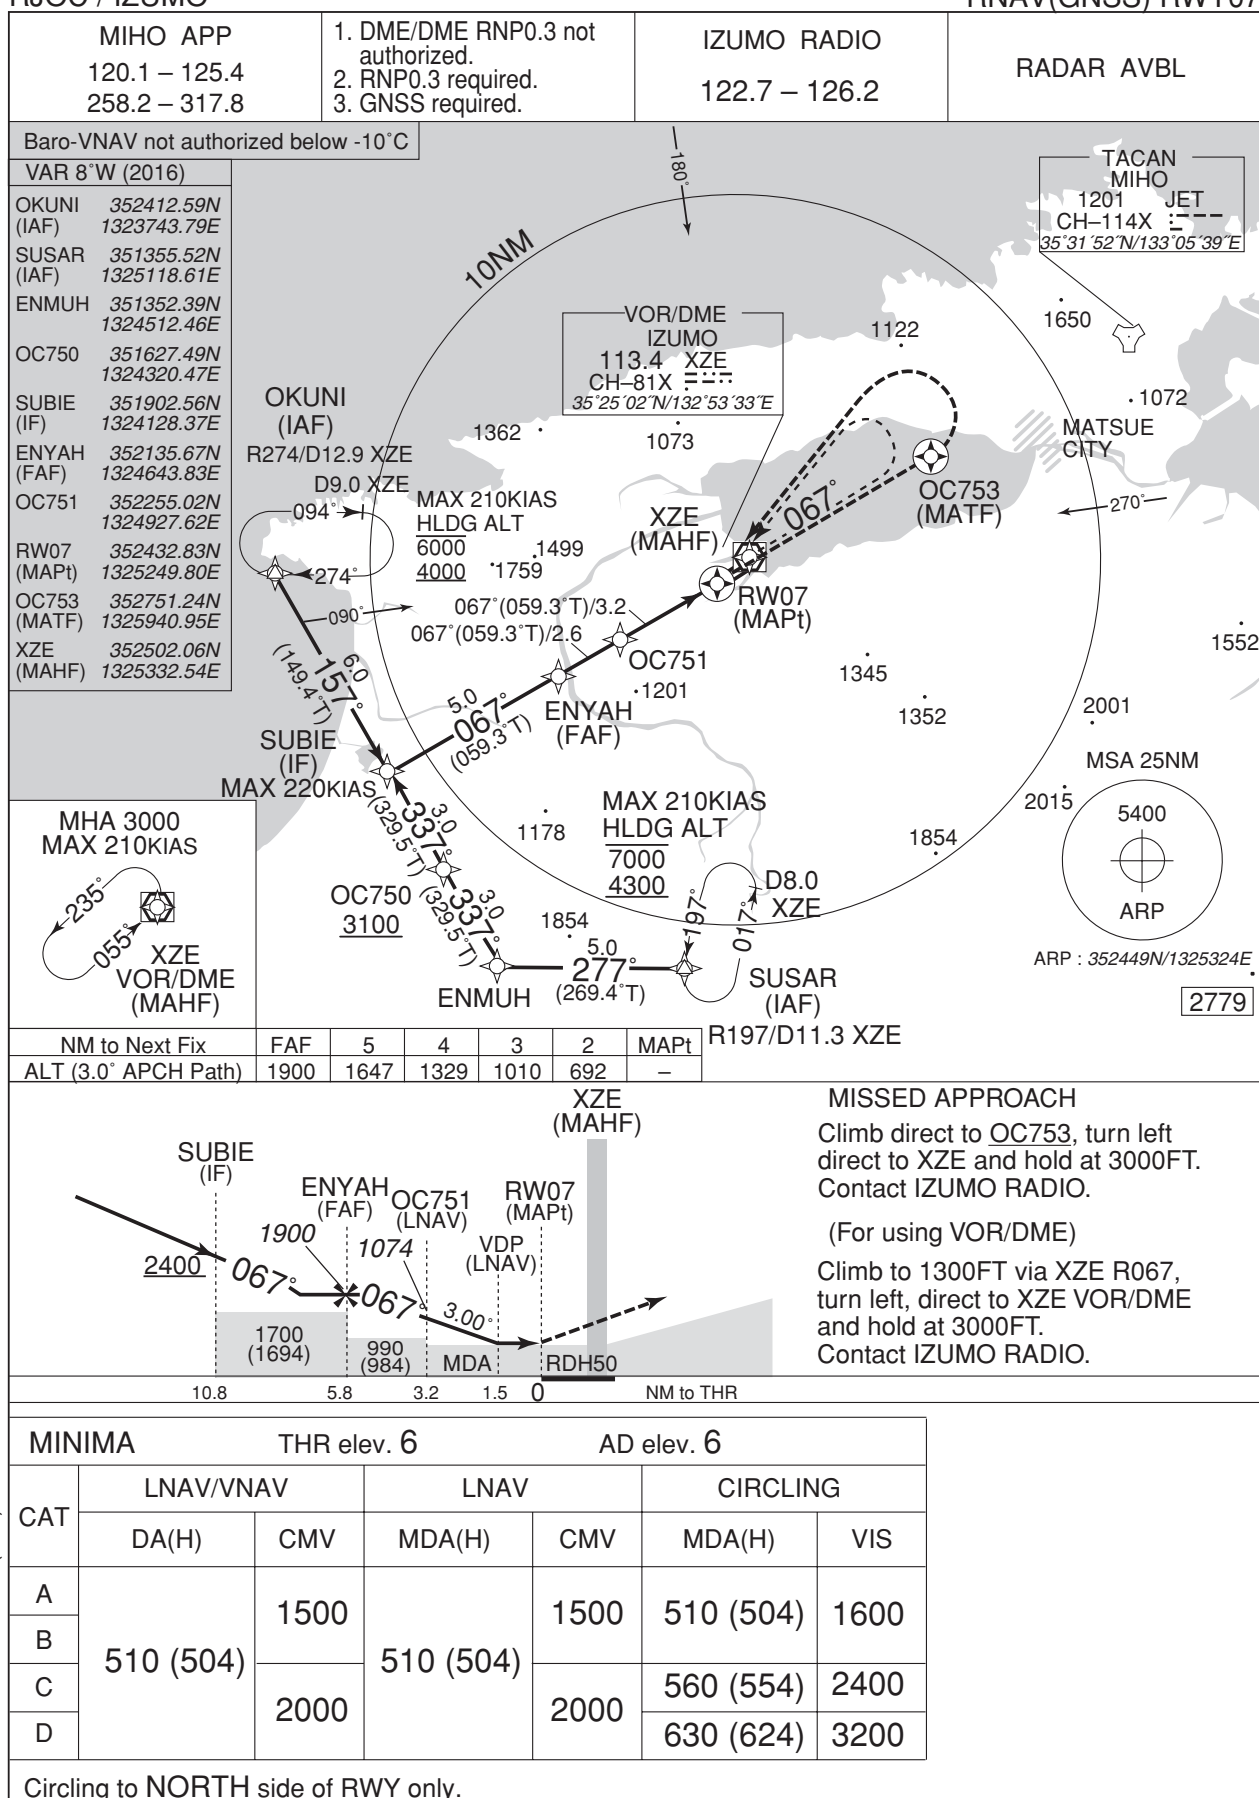

CHANGE : MIHO TACAN(JET)

## RJOC / IZUMO


RNAV(GNSS) RWY25

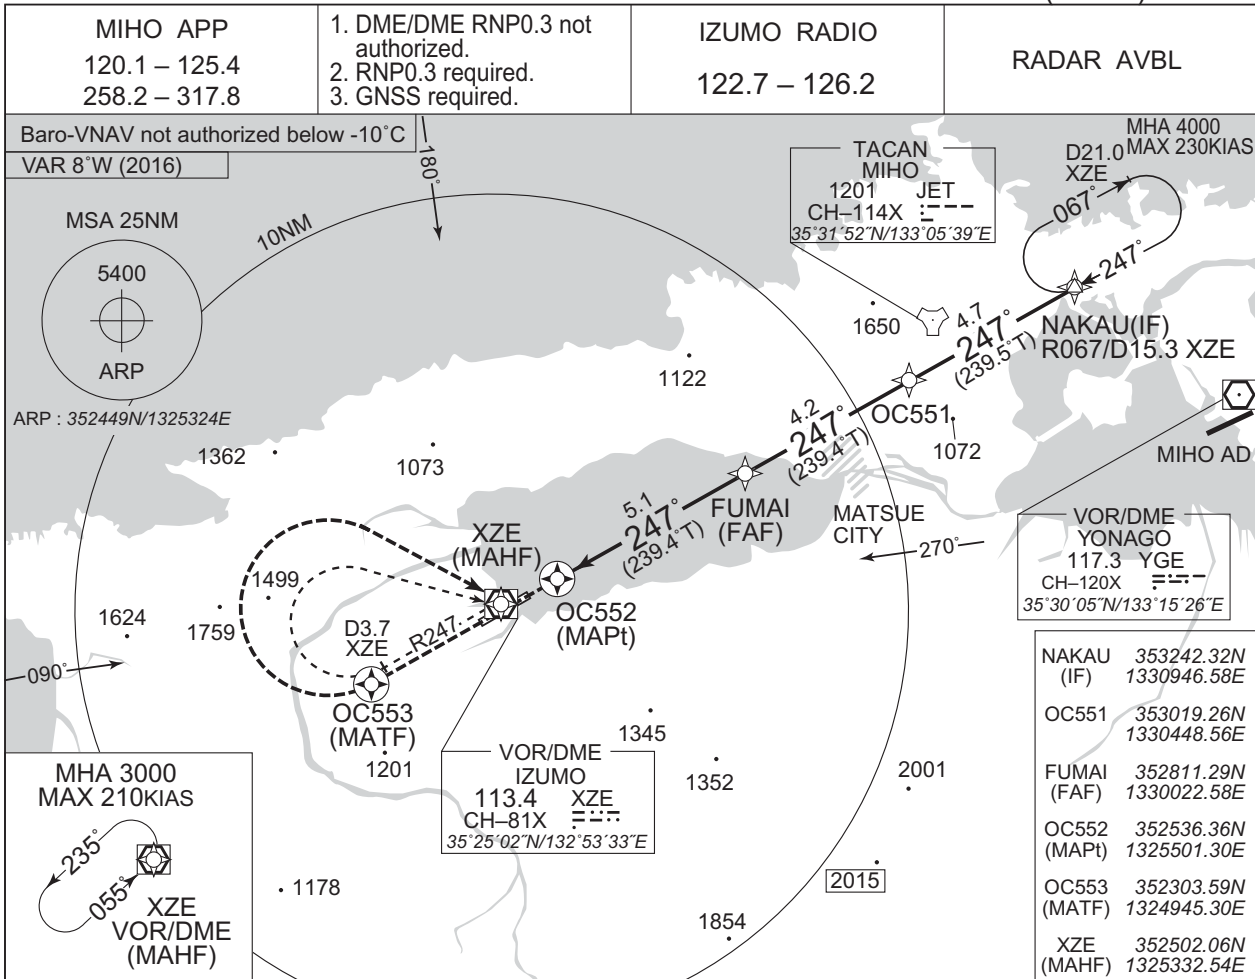

NM to Next Fix	MAPt	1	2	3	4	5	FAF
ALT (3.0° APCH Path)	—	701	1020	1338	1657	1975	2000

Climb direct to OC553, turn right  
direct to XZE and hold at 3000FT.  
Contact IZUMO RADIO.

Climb via XZE R247 to XZE 3.7DME,  
turn right direct to XZE VOR/DME  
and hold at 3000FT.  
Contact IZUMO RADIO.

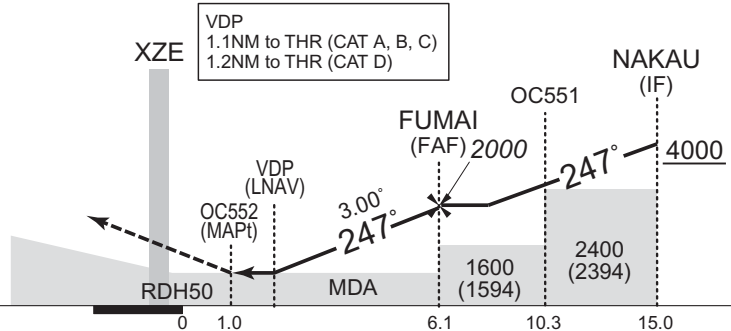

MINIMA		THR elev. 15		AD elev. 6		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	400 (385)	900	400 (394)	900	400 (394)	1600
B		1000		1000	460 (454)	
C					560 (554)	
D	430 (415)	1400	430 (424)	1400	630 (624)	3200

Circling to **NORTH** side of RWY only.  
MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : YONAGO VOR/DME.

RJOC / IZUMO

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
一畑薬師 Ichibatayakushi	351°T / 5.0NM	寺 Temple
松江 Matsue	064°T / 8.7NM	城 Castle
日御碕 Hinomisaki	275°T / 12.8NM	灯台 Lighthouse
出雲市駅 Izumoshi Eki	244°T / 7.2NM	JR駅 Station
三刀屋木次 Mitoyakisuki	180°T / 7.0NM	IC Interchange

CHANGE : Map updated. BRG/DIST from ARP. Mitoyakisuki established. Kisuki abolished.

RJOC / IZUMO

LDG CHART



RJOC / IZUMO

Minimum Vectoring Altitude CHART

VAR 8°W (2013)



CENTER : 353003N/1331413E (RJOC RADAR SITE)