


RJFS / SAGA

AD CHART

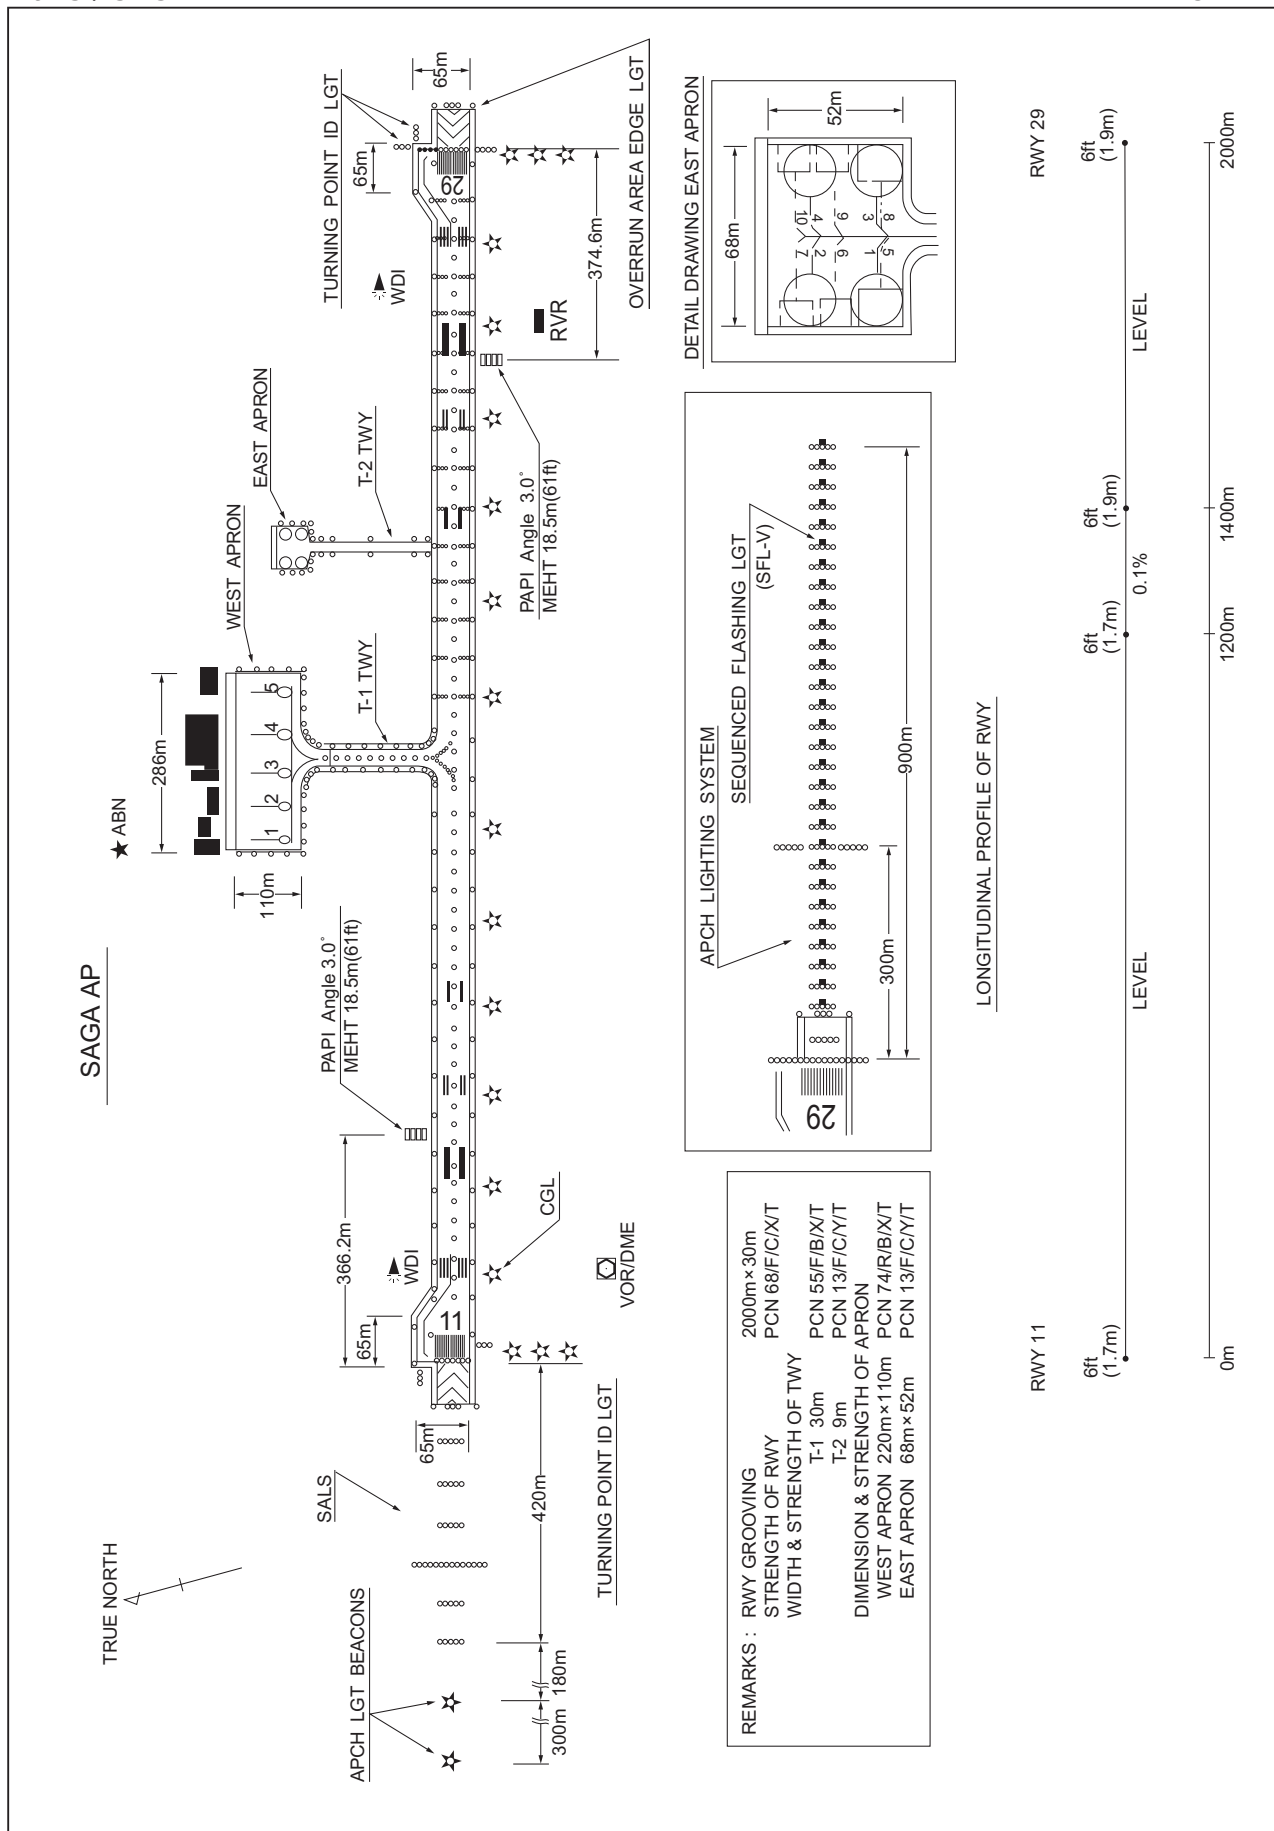

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

SAGA REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...
...via SGE R135 to 9.0DME, turn left, direct to SGE VOR/DME.

Cross SGE VOR/DME at 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.

ARIAKE REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right HDG 288°...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 198°...

...to intercept and proceed via SGE R243 to 7.0DME, turn right, direct to SGE VOR/DME.
Cross SGE VOR/DME at or above 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.

ARIAKE REVERSAL
TWO DEPARTURESAGA REVERSAL
TWO DEPARTURE

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

TRANSITION

KUMAMOTO TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn left, via KUE R271 to KUE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.

NAGASAKI TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn right, direct to OLE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

KIKYU FIVE DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG075° to intercept and proceed...
... via SGE R120 to 9.0DME, turn left HDG048° to intercept
and proceed via SGE R093 to KIKYU.

Cross KIKYU at or above 13000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

TRANSITION

MUSASHI TRANSITION

From over KIKYU, via TFE R253 to TFE VOR/DME.

Cross TFE R253/38.0DME at or above FL140, cross TFE R253/31.0DME at or above FL170.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV TRANSITION

| OOITA TRANSITION | | | RNAV1 |
|---|-----------------------|---|-------|
| NOTE 1) DME/DME/IRU or GNSS required. 2) RADAR service required. | Critical DME | — | |
| | DME GAP | — | |
| | Inappropriate Navaids | See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1 | |

VAR 7° W(2016)

OOITA TRANSITION

From KIKYU at or above 13000FT, to WAITA at or above FL170, to OOITA.

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | KIKYU | — | — | -7.2 | — | — | +13000 | — | — | RNAV1 |
| 002 | TF | WAITA | — | 094 (086.3) | -7.2 | 8.1 | — | +FL170 | — | — | RNAV1 |
| 003 | TF | OOITA | — | 094 (086.4) | -7.2 | 30.9 | — | — | — | — | RNAV1 |

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

BALLOON ONE DEPARTURE

RWY11

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 106 (099.3) | -7.2 | — | — | +500 | — | — | Basic RNP1 |
| 002 | CF | FS100 | — | 120 (113.2) | -7.2 | — | — | — | — | — | Basic RNP1 |
| 003 | TF | KIKYU | — | 084 (076.8) | -7.2 | 24.3 | — | +13000 | — | — | Basic RNP1 |

RWY29

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 286 (279.3) | -7.2 | — | — | +500 | — | — | Basic RNP1 |
| 002 | DF | FS900 | — | — | -7.2 | — | L | — | — | — | Basic RNP1 |
| 003 | TF | FS100 | — | 089 (081.8) | -7.2 | 8.4 | — | — | — | — | Basic RNP1 |
| 004 | TF | KIKYU | — | 084 (076.8) | -7.2 | 24.3 | — | +13000 | — | — | Basic RNP1 |

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

SOIGI ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 7° W(2016)



SOIGI ONE DEPARTURE

RWY11 : Climb on HDG106° at or above 500FT, turn right direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

RWY29 : Climb on HDG286° at or above 500FT, turn left direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

NOTE RWY29 : 3.5% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

SOIGI ONE DEPARTURE

RWY11

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 106 (099.3) | -7.2 | — | — | +500 | — | — | Basic RNP1 |
| 002 | DF | FS110 | — | — | -7.2 | — | R | — | — | — | Basic RNP1 |
| 003 | TF | FS111 | — | 153 (145.5) | -7.2 | 6.6 | — | +6000 | — | — | Basic RNP1 |
| 004 | TF | FS112 | — | 153 (145.6) | -7.2 | 6.8 | — | — | — | — | Basic RNP1 |
| 005 | TF | KUE | — | 091 (083.4) | -7.2 | 19.2 | — | — | — | — | Basic RNP1 |

RWY29

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 286 (279.3) | -7.2 | — | — | +500 | — | — | Basic RNP1 |
| 002 | DF | FS110 | — | — | -7.2 | — | L | — | — | — | Basic RNP1 |
| 003 | TF | FS111 | — | 153 (145.5) | -7.2 | 6.6 | — | +6000 | — | — | Basic RNP1 |
| 004 | TF | FS112 | — | 153 (145.6) | -7.2 | 6.8 | — | — | — | — | Basic RNP1 |
| 005 | TF | KUE | — | 091 (083.4) | -7.2 | 19.2 | — | — | — | — | Basic RNP1 |

STANDARD ARRIVAL CHART-INSTRUMENT

RJFS / SAGA

STAR

IRPIN NORTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP, via SGE R194 to SGE VOR/DME via UGAMU.

Cross MILEP at 6000FT, cross SGE VOR/DME at or above 5000FT.

IRPIN SOUTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP.

Cross MILEP at 6000FT.

CHANGE: New PROC



INTENTIONALLY LEFT BLANK

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

ILS or LOC RWY29



INSTRUMENT APPROACH CHART

RJFS / SAGA

VOR RWY29

FUKUOKA RADAR
119.7 – 279.2SAGA VOR/DME
114.75 SGE
CH-94Y
33°08'55"N/130°17'34"ESAGA RADIO
118.025 – 126.2
(2130–2300(UTC)
1030–1500
SAGA REMOTE
118.025

NO RADAR

VAR 7°W (2014)

3431

1647

EQPT REQUIRED
DME

1328

•1194

MSA 25NM



1703

1122

1345

MHA 5000
MAX 210KIAS

• 3529

CAUTION:
After HIGH-STATION(SGE VOR/DME),
maintain 5000FT or above until
intercepting outbound SGE R118MOSSA(FAF)
D6.0 SGE

204

282°

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643

1643


1643

1643

MISSED APPROACH

Climb to 500FT via SGE R282,
turn left HDG090° to intercept and
proceed via SGE R135 to 9.0DME,
turn left, direct to SGE VOR/DME
and hold at 5000FT.
Contact FUKUOKA RADAR.

Timing not authorized for defining the MAPt.

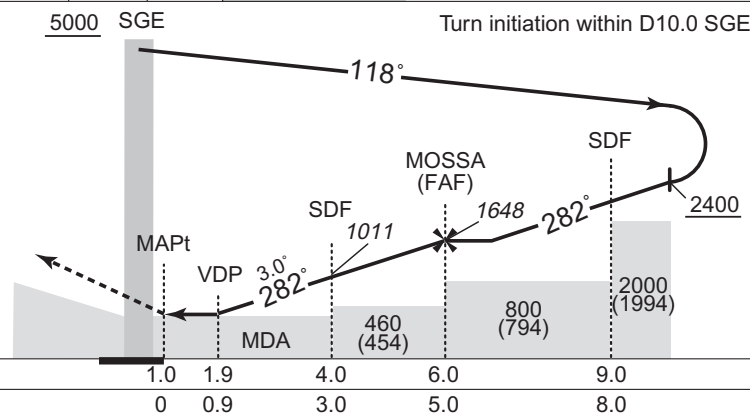

DME to SGE

NM to THR

1.0

0

1.9

0.9

4.0

3.0

6.0

5.0

9.0

8.0

MINIMA

THR elev. 6

AD elev. 6

| CAT | | | CIRCLING | |
|-----|-----------|-------------|-----------|------|
| | MDA(H) | RVR/ CMV | MDA(H) | VIS |
| A | 320 (314) | 900 | 360 (354) | 1600 |
| B | | 1000 | 460 (454) | |
| C | | | | 2400 |
| D | | 1400 | 560 (554) | 3200 |

Circling to SOUTH side of RWY only.

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY29

| | | | | |
|--------------------------------|-----------------------|-------------------------------|--|----------|
| FUKUOKA RADAR 119.7 – 279.2 | GNSS and RF required. | SAGA RADIO 118.025 – 126.2 | (2130–2300(UTC) 1030–1500 SAGA REMOTE 118.025 | NO RADAR |
|--------------------------------|-----------------------|-------------------------------|--|----------|


For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C



MISSED APPROACH

From RW29 on track 287° at or above 500FT, turn left direct to FS955, direct to SGE and hold at 5000FT.

Contact FUKUOKA RADAR.

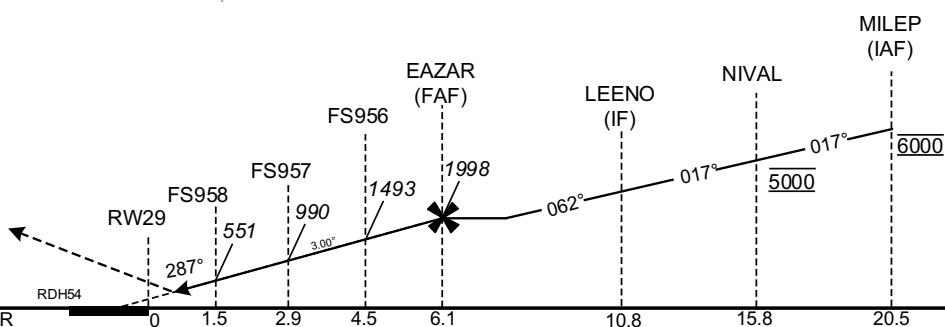

| MINIMA | THR elev.6 | AD elev.6 |
|--------|------------|-----------|
| CAT | RNP 0.30 | |
| | DA(H) | RVR/CMV |
| A | — | — |
| B | — | — |
| C | 306 (300) | 1000 |
| D | — | 1400 |

RNP AR

Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY29

RNAV(RNP) RWY29Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001 | IF | MILEP | - | - | -7.5 | - | - | 6000 | - | - | - |
| 002 | TF | NIVAL | - | 017 (009.2) | -7.5 | 4.7 | - | 5000 | - | - | 0.3 |
| 003 | TF | LEENO | - | 017 (009.2) | -7.5 | 5.0 | - | - | - | - | 0.3 |
| 004 | TF | EAZAR | - | 062 (054.2) | -7.5 | 4.7 | - | 1998 | -165 | - | 0.3 |
| 005 | RF Center: FSRF8 r=2.02NM | FS956 | - | - | -7.5 | 1.6 | L | 1493 | - | -3.00 | 0.3 |
| 006 | RF Center: FSRF9 r=1.98NM | FS957 | - | - | -7.5 | 1.6 | L | 990 | - | -3.00 | 0.3 |
| 007 | RF Center: FSRF0 r=1.75NM | FS958 | - | - | -7.5 | 1.4 | L | 551 | - | -3.00 | 0.3 |
| 008 | TF | RW29 | Y | 287 (279.3) | -7.5 | 1.5 | - | 60 | - | -3.00/54 | 0.3 |
| 009 | FA | - | - | 287 (279.3) | -7.5 | - | - | +500 | - | - | 1.0 |
| 010 | DF | FS955 | Y | - | -7.5 | - | L | - | - | - | 1.0 |
| 011 | DF | SGE | - | - | -7.5 | - | L | 5000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|------------------------|--------------------------|------------------------|
| MILEP | 325250.49N/1301501.22E | FSRF8 | 330645.72N/1301958.78E |
| NIVAL | 325726.55N/1301554.33E | FSRF9 | 330646.63N/1302001.15E |
| LEENO | 330223.31N/1301651.53E | FSRF0 | 330654.73N/1302014.52E |
| EAZAR | 330507.25N/1302122.72E | | |
| FS956 | 330626.19N/1302220.91E | | |
| FS957 | 330756.35N/1302156.32E | | |
| FS958 | 330838.87N/1302034.72E | | |
| RW29 | 330853.77N/1301846.08E | | |
| FS955 | 330424.77N/1301815.75E | | |
| SGE | 330855.03N/1301734.43E | | |



CHANGE: Update

RJFS / SAGA

RNAV(RNP) RWY11

| | | | | |
|--------------------------------|-----------------------|-------------------------------|--|----------|
| FUKUOKA RADAR 119.7 – 279.2 | GNSS and RF required. | SAGA RADIO 118.025 – 126.2 | (2130–2300(UTC) 1030–1500 SAGA REMOTE 118.025 | NO RADAR |
|--------------------------------|-----------------------|-------------------------------|--|----------|

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

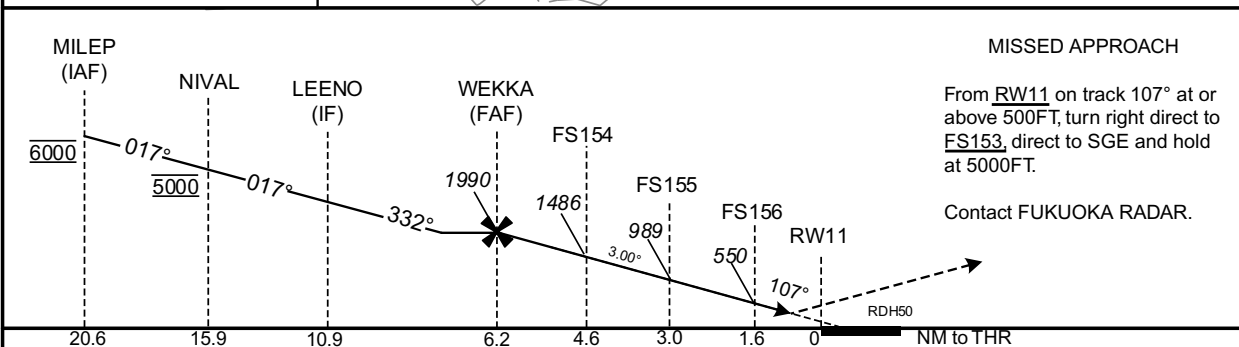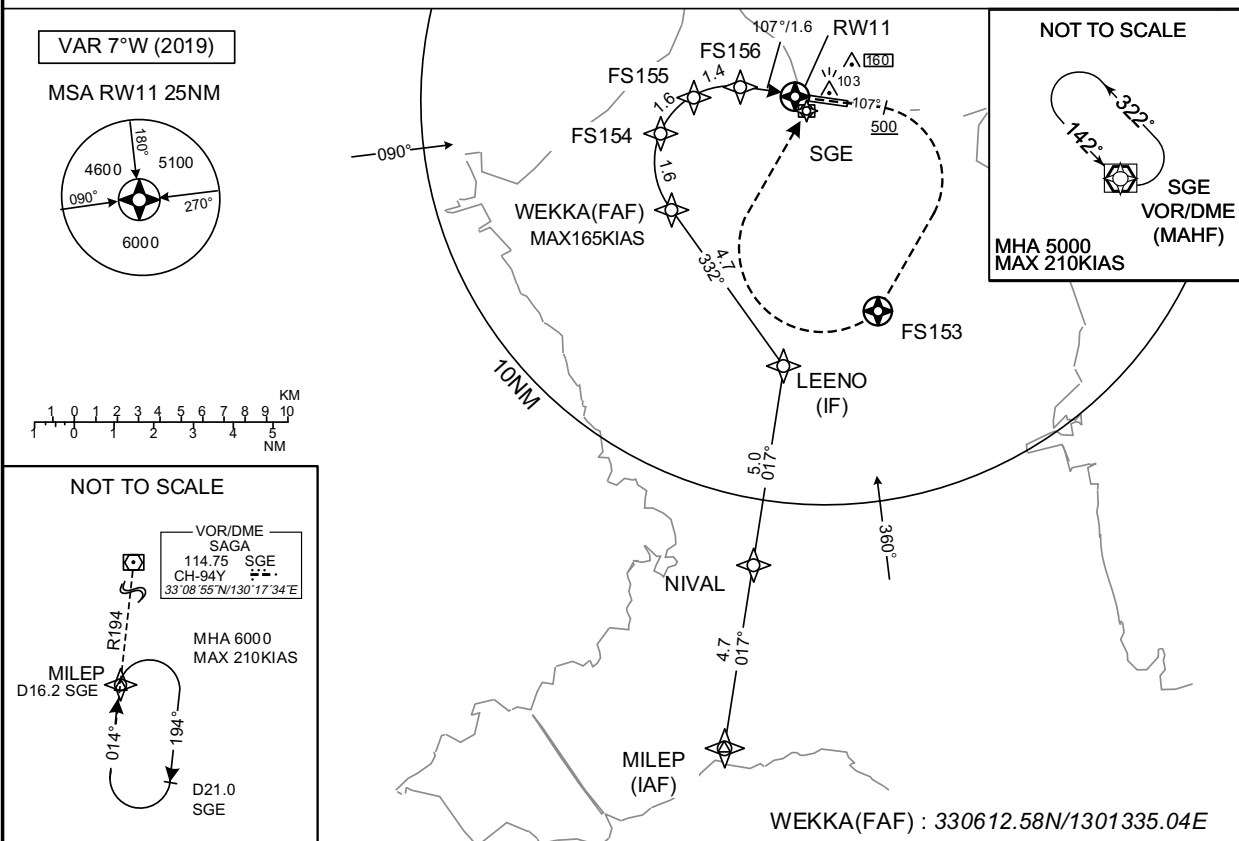

Missed APCH climb gradient MNM 3.0%

| MINIMA | | THR elev.6 | AD elev.6 |
|--------|-----------|------------|-----------|
| CAT | RNP 0.30 | | |
| | DA(H) | CMV | |
| A | — | — | |
| B | | | |
| C | 306 (300) | 1400 | |
| D | | 1600 | |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY11

RNAV(RNP) RWY11Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|-----------|
| 001 | IF | MILEP | - | - | -7.5 | - | - | 6000 | - | - | - |
| 002 | TF | NIVAL | - | 017 (009.2) | -7.5 | 4.7 | - | 5000 | - | - | 0.3 |
| 003 | TF | LEENO | - | 017 (009.2) | -7.5 | 5.0 | - | - | - | - | 0.3 |
| 004 | TF | WEKKA | - | 332 (324.3) | -7.5 | 4.7 | - | 1990 | -165 | - | 0.3 |
| 005 | RF Center: FSRF5 r=2.02NM | FS154 | - | - | -7.5 | 1.6 | R | 1486 | - | -3.00 | 0.3 |
| 006 | RF Center: FSRF6 r=1.98NM | FS155 | - | - | -7.5 | 1.6 | R | 989 | - | -3.00 | 0.3 |
| 007 | RF Center: FSRF7 r=1.77NM | FS156 | - | - | -7.5 | 1.4 | R | 550 | - | -3.00 | 0.3 |
| 008 | TF | RW11 | Y | 107 (099.3) | -7.5 | 1.6 | - | 56 | - | -3.00/50 | 0.3 |
| 009 | FA | - | - | 107 (099.3) | -7.5 | - | - | +500 | - | - | 1.0 |
| 010 | DF | FS153 | Y | - | -7.5 | - | R | - | - | - | 1.0 |
| 011 | DF | SGE | - | - | -7.5 | - | R | 5000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|------------------------|--------------------------|------------------------|
| MILEP | 325250.49N/1301501.22E | FSRF5 | 330723.51N/1301531.82E |
| NIVAL | 325726.55N/1301554.33E | FSRF6 | 330723.80N/1301529.68E |
| LEENO | 330223.31N/1301651.53E | FSRF7 | 330735.05N/1301520.05E |
| WEKKA | 330612.58N/1301335.04E | | |
| FS154 | 330742.91N/1301309.63E | | |
| FS155 | 330900.65N/1301406.71E | | |
| FS156 | 330919.21N/1301540.15E | | |
| RW11 | 330904.20N/1301729.91E | | |
| FS153 | 330340.13N/1301934.46E | | |
| SGE | 330855.03N/1301734.43E | | |

CHANGE: Update

INSTRUMENT APPROACH CHART

RJFS/SAGA

VOR A



CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.


INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJFS/SAGA


VOR C

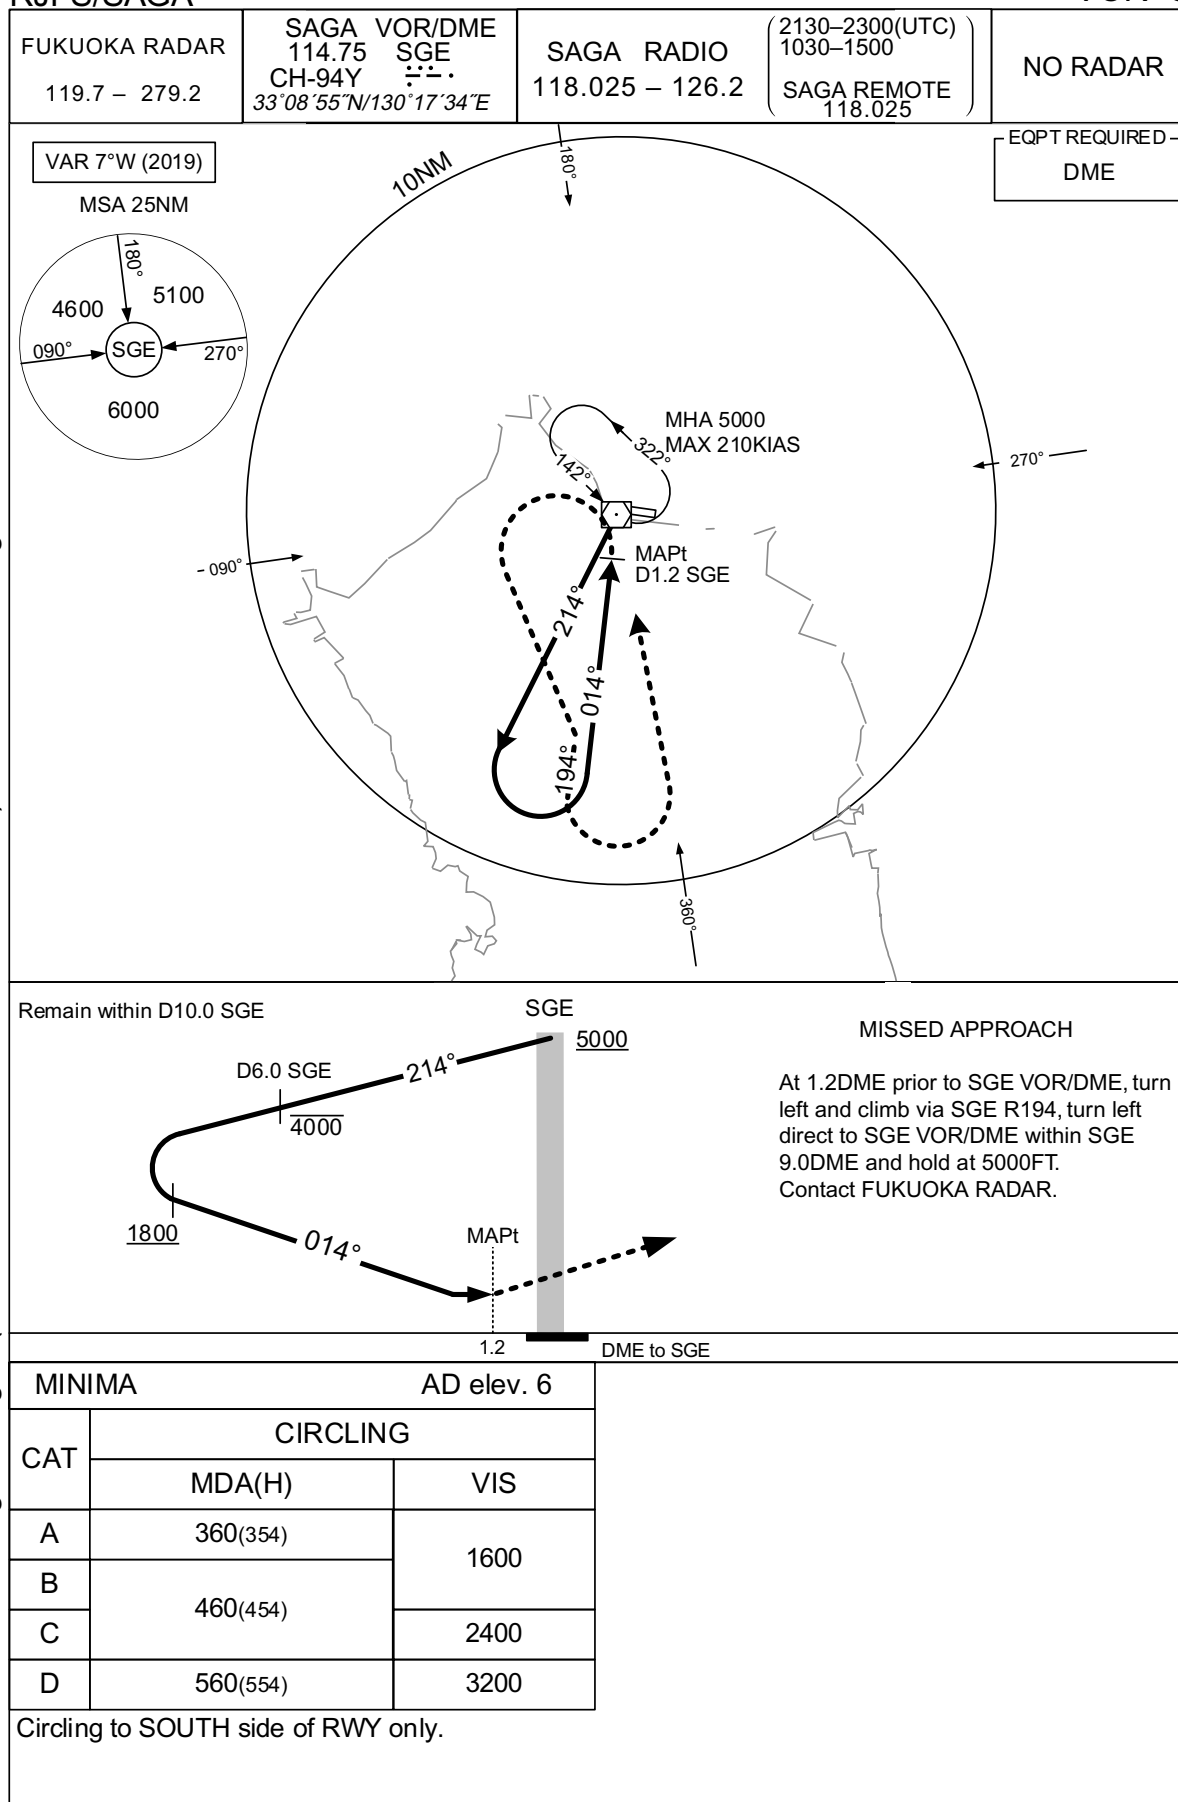

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

RJFS / SAGA

Visual REP

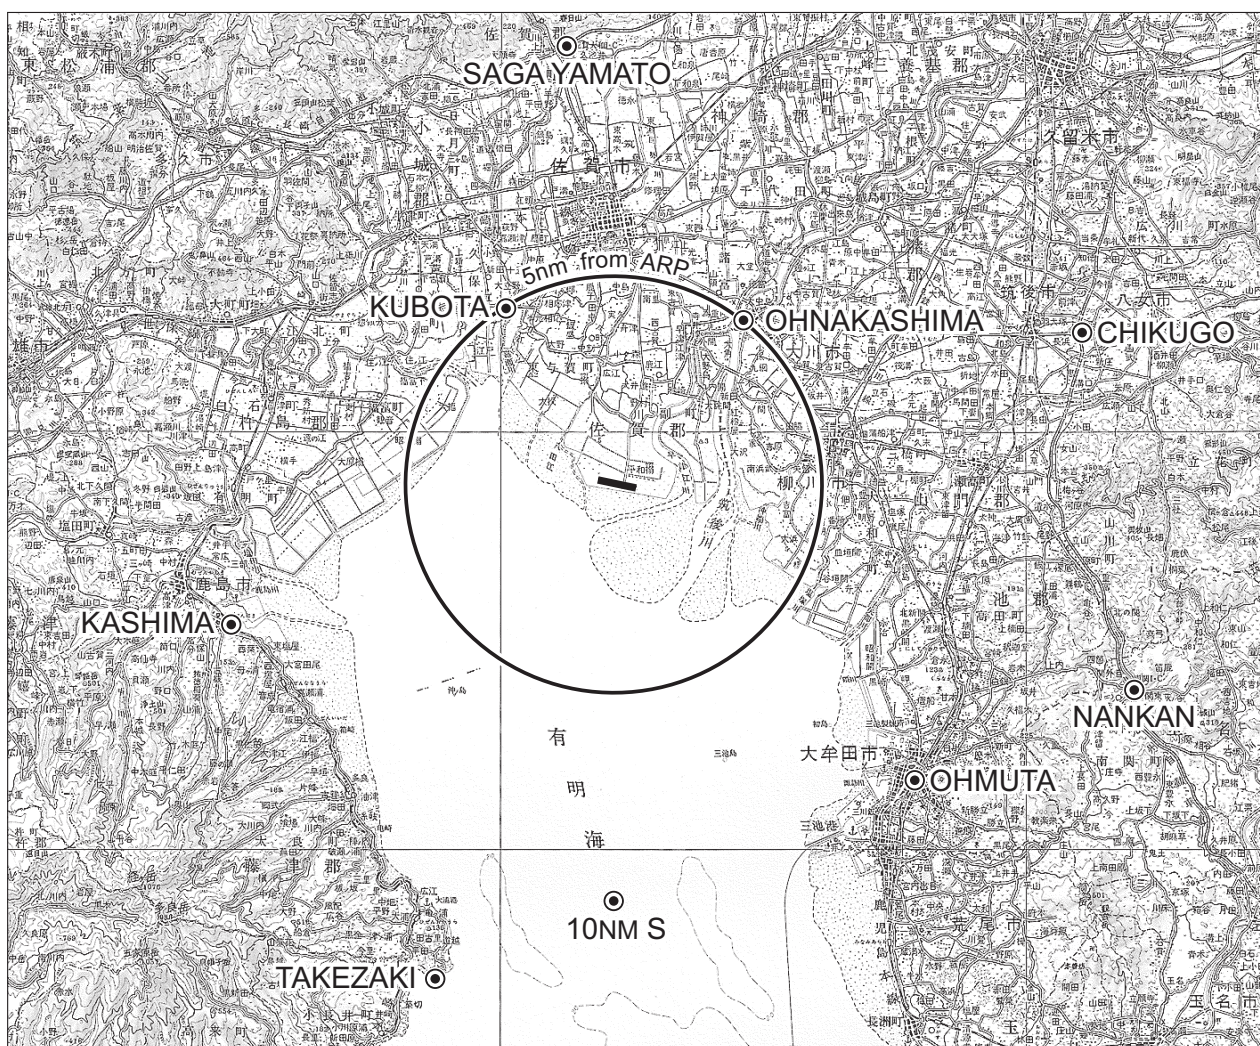

| Call sign | BRG / DIST from ARP | Remarks |
|-----------------------|---------------------|-----------------------------|
| 鹿 島 Kashima | 250°/ 9.9NM | 新浜大橋 Bridge |
| 竹 崎 Takezaki | 199°/12.3NM | 竹崎港 Harbor |
| 大 牟 田 Ohmuta | 135°/10.1NM | JR大牟田駅 Station |
| 筑 後 Chikugo | 071°/11.8NM | 八女インターチェンジ Interchange |
| 大 中 島 Ohnakashima | 038°/ 5.0NM | 筑後川昇開橋 Bridge |
| 久 保 田 Kubota | 329°/ 5.0NM | 久保田橋 Bridge |
| 佐 賀 大 和 Sagayamato | 354°/10.5NM | 佐賀大和インターチェンジ Interchange |
| 南 関 Nankan | 111°/13.2NM | 南関インターチェンジ Interchange |
| 10NM S | 180°/10.0NM | 海上 Over the sea |

RJFS / SAGA

BALLOON

熱気球の飛行が下図区域内で行われる。(期間：5月中旬から6月中旬まで及び10月中旬から2月下旬まで：RJFSノータム参照)

Hot air balloon flight will be conducted within below area.
(Period: from mid MAY to mid JUN and from mid OCT to late FEB: see NOTAM RJFS)



飛行高度 3000ft 以下
FLT ALT At or below 3000ft

飛行高度 4000ft 以下
FLT ALT At or below 4000ft

I Balloon FLT area Nr1

II Balloon FLT area Nr2*

III Balloon FLT area Nr3*

* 佐賀空港を発着する航空機に対し、熱気球に係る情報(飛行空域2及び3内で飛行する気球の概数等)の提供が佐賀ディオまたは佐賀エーエムにより行われる。

* The information of hot air balloon(aprx number of balloon etc.in flight area number 2 and 3) will be provided for departing/arriving acft from/to SAGA airport by SAGA RADIO or SAGA REMOTE.

Example of phraseology: "Two flying balloons reported in balloon flight area number two."

CHANGE : NOTAM location (RJFF→RJFS).

RJFS / SAGA

Minimum Vectoring Altitude CHART

