

RJAF / MATSUMOTO

AD CHART

CHANGE: Aircraft stand lead-in line (Spot 6,10,11) changed.



INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJAF / MATSUMOTO

SID

MATSUMOTO REVERSAL ONE DEPARTURE

- RWY 18 : Climb RWY HDG to 2700FT, turn left HDG321° to intercept and proceed via MBE R006 to 5.0DME, turn right direct to MBE VOR/DME.
Cross MBE R006/5.0DME at or above 6000FT, cross MBE VOR/DME at or above 10000FT.
- RWY 36 : Climb via MBE R006 to 5900FT, turn right direct to MBE VOR/DME.
Cross MBE VOR/DME at or above 10000FT.

NOTE RWY18 : 1) 6.6% climb gradient required up to 4200FT.

OBST ALT 3740FT located at 111°/4.40NM FM end of RWY18.

2) Departure turn limited to 150KIAS maximum until completing left turn.



STANDARD DEPARTURE CHART-INSTRUMENT

RJAF / MATSUMOTO

SID

HAPPO ONE DEPARTURE

RWY 18 : Climb RWY HDG to 2700FT, turn left HDG321° to intercept and proceed via MBE R006 to HAPPO.

RWY 36 : Climb via MBE R006 to HAPPO.

NOTE RWY18 : 1) 6.6% climb gradient required up to 4200FT.

OBST ALT 3740FT located at 111°/4.40NM FM end of RWY18.


2) Departure turn limited to 150KIAS maximum until completing left turn.



STANDARD DEPARTURE CHART-INSTRUMENT

RJAF / MATSUMOTO

RNAV SID

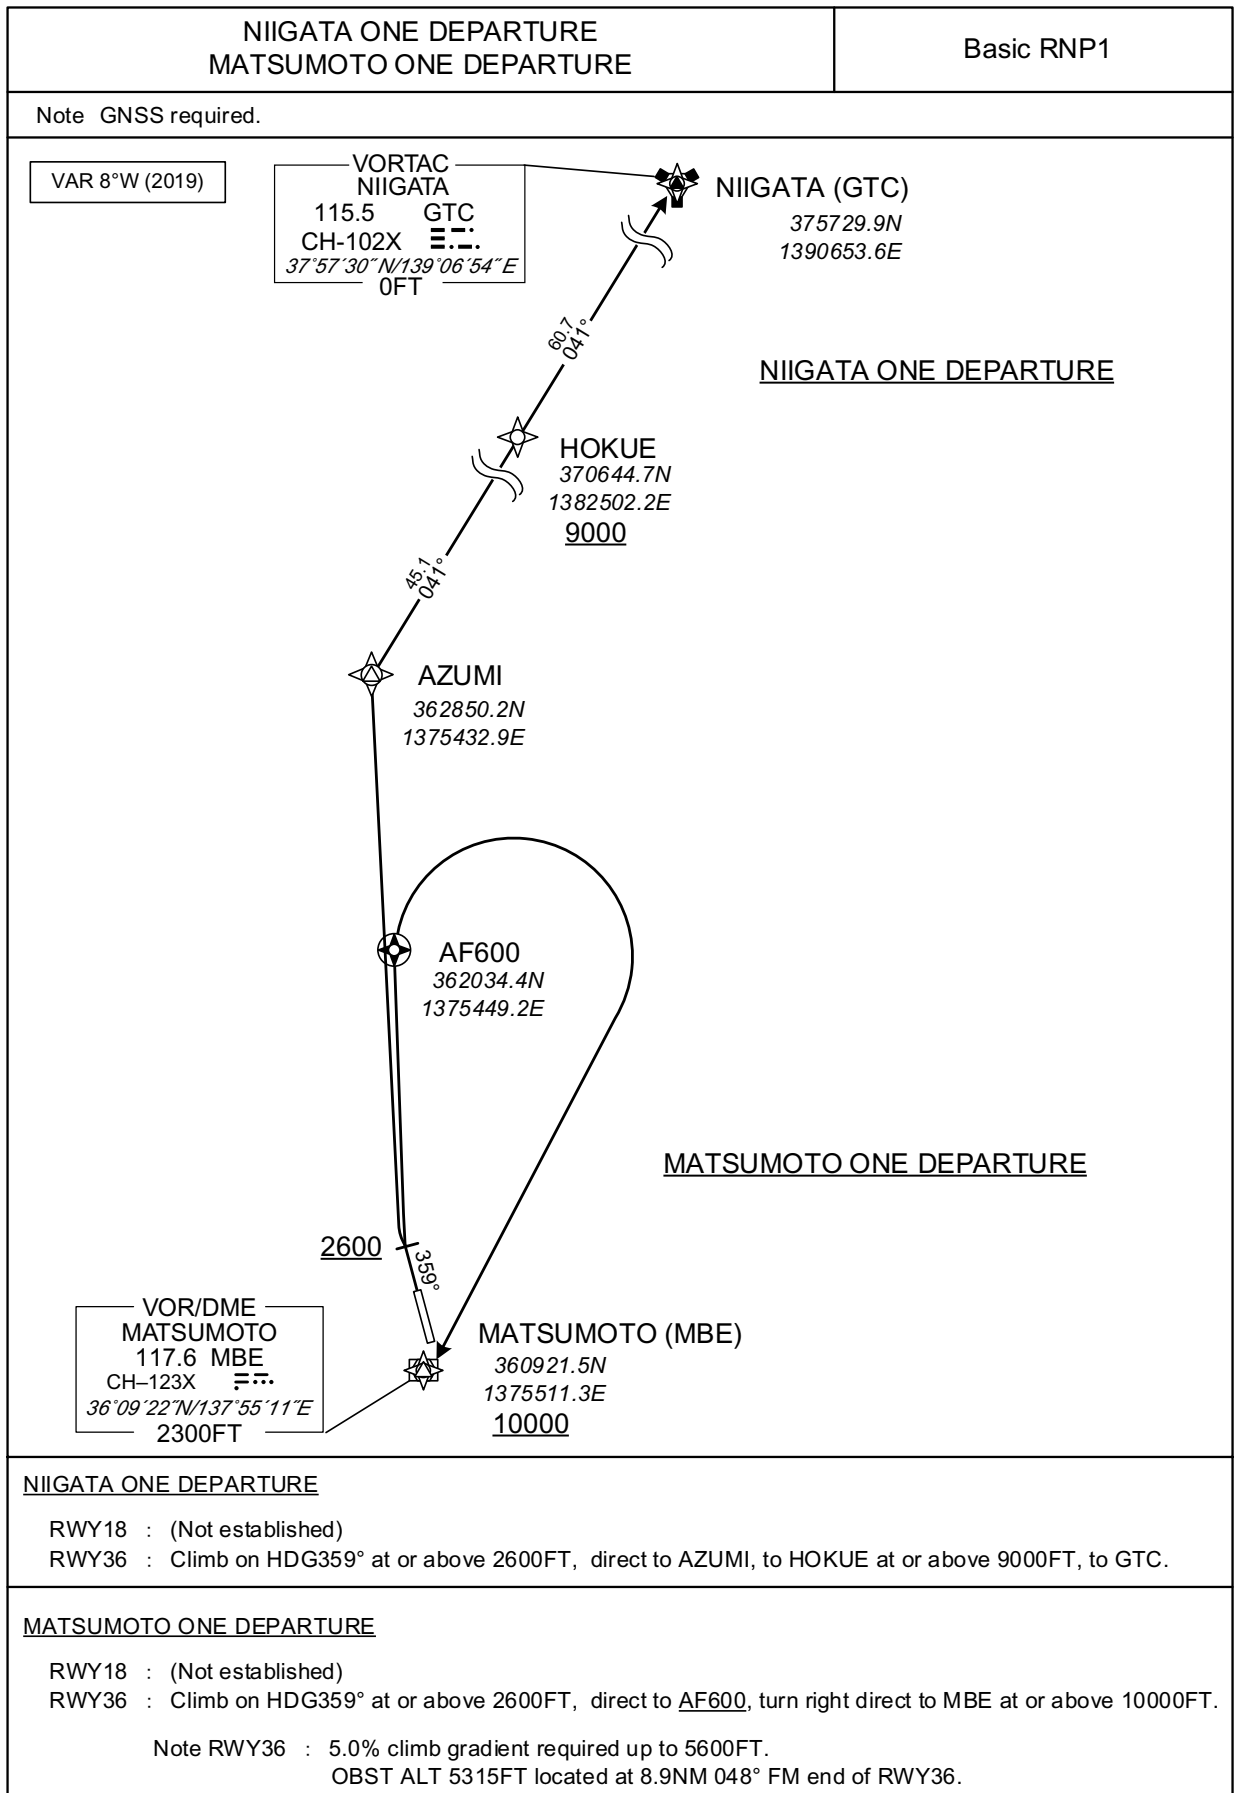

CHANGE:New PROC

STANDARD DEPARTURE CHART-INSTRUMENT

RJAF / MATSUMOTO

RNAV SID

NIIGATA ONE DEPARTURE

RWY36

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | - | - | 359 (351.4) | -8.0 | - | - | +2600 | - | - | Basic RNP1 |
| 002 | DF | AZUMI | - | - | -8.0 | - | - | - | - | - | Basic RNP1 |
| 003 | TF | HOKUE | - | 041 (032.6) | -8.0 | 45.1 | - | +9000 | - | - | Basic RNP1 |
| 004 | TF | GTC | - | 041 (033.0) | -8.0 | 60.7 | - | - | - | - | Basic RNP1 |

MATSUMOTO ONE DEPARTURE

RWY36

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | - | - | 359 (351.4) | -8.0 | - | - | +2600 | - | - | Basic RNP1 |
| 002 | DF | AF600 | Y | - | -8.0 | - | - | - | - | - | Basic RNP1 |
| 003 | DF | MBE | - | - | -8.0 | - | R | +10000 | - | - | Basic RNP1 |

CHANGE:New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

VOR RWY18




INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART


RJAF / MATSUMOTO

RNAV(RNP) Z RWY18

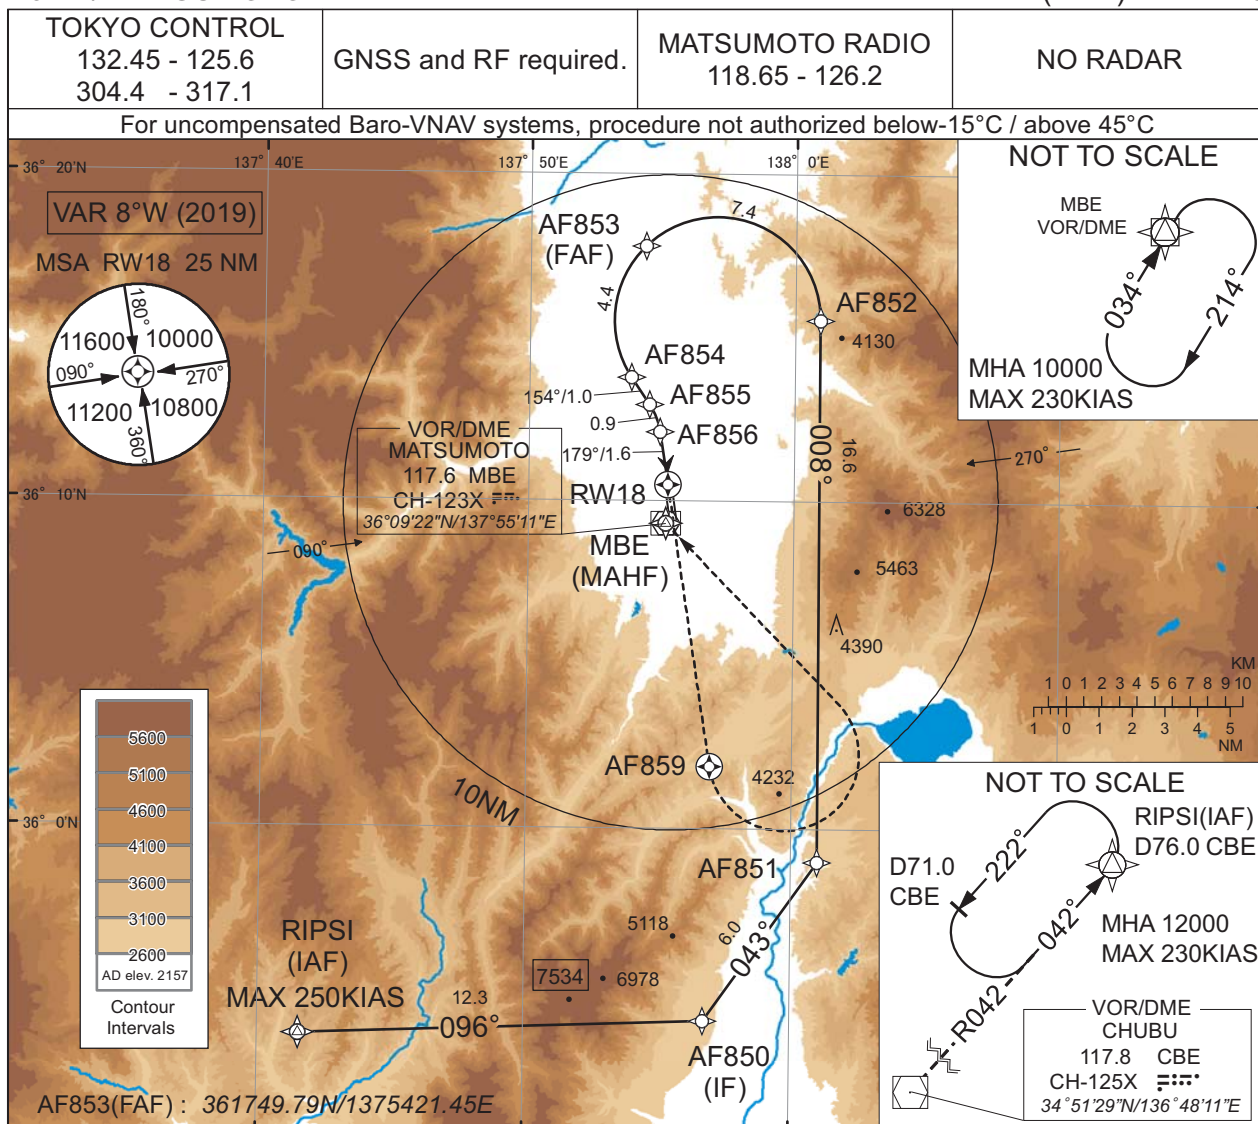

MISSED APPROACH

Climb to 10000FT, direct to AF859,
turn left, direct to MBE and hold.
Contact MATSUMOTO RADIO.

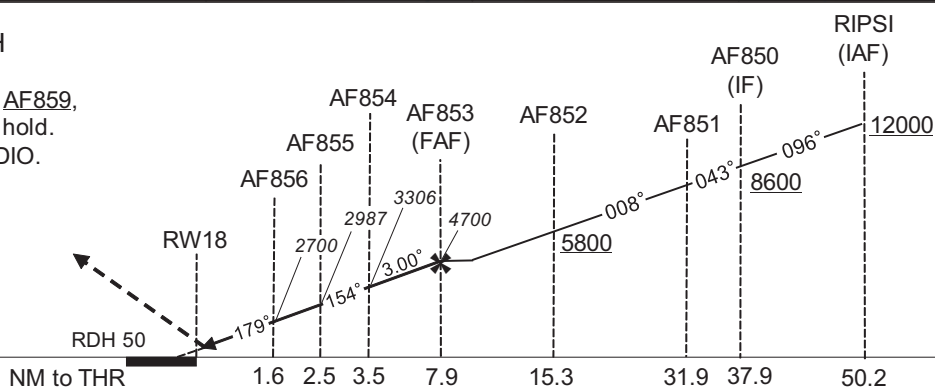

Missed APCH climb gradient MNM 7.0%

| CAT | THR elev. 2132 | | AD elev. 2157 | |
|-----|----------------|------|---------------|------|
| | RNP 0.20 | | RNP 0.30 | |
| | DA(H) | CMV | DA(H) | CMV |
| A | - | - | - | - |
| B | - | - | - | - |
| C | 2432(300) | 1000 | 2448(316) | 1000 |
| D | - | - | - | - |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

RNAV(RNP) Z RWY18

RNAV(RNP) Z RWY18Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|------------|
| 001 | IF | RIPSI | - | - | -8.0 | - | - | +12000 | -250 | - | - |
| 002 | TF | AF850 | - | 096 (087.7) | -8.0 | 12.3 | - | +8600 | - | - | 1.0 |
| 003 | TF | AF851 | - | 043 (035.2) | -8.0 | 6.0 | - | - | - | - | 0.3 |
| 004 | TF | AF852 | - | 008 (359.9) | -8.0 | 16.6 | - | +5800 | - | - | 0.3 |
| 005 | RF Center: AFRF5 r=3.15NM | AF853 | - | - | -8.0 | 7.4 | L | 4700 | - | - | 0.3 |
| 006 | RF Center: AFRF5 r=3.15NM | AF854 | - | - | -8.0 | 4.4 | L | 3306 | - | -3.00 | 0.2 0.3 |
| 007 | TF | AF855 | - | 154 (146.1) | -8.0 | 1.0 | - | 2987 | - | -3.00 | 0.2 0.3 |
| 008 | RF Center: AFRF6 r=2.06NM | AF856 | - | - | -8.0 | 0.9 | R | 2700 | - | -3.00 | 0.2 0.3 |
| 009 | TF | RW18 | Y | 179 (171.1) | -8.0 | 1.6 | - | 2182 | - | -3.00/50 | 0.2 0.3 |
| 010 | DF | AF859 | Y | - | -8.0 | - | - | - | - | - | 1.0 |
| 011 | DF | MBE | - | - | -8.0 | - | L | 10000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| RIPSI | 355340.33N / 1374133.41E | AFRF5 | 361534.43N / 1375704.35E |
| AF850 | 355408.74N / 1375645.79E | AFRF6 | 361149.74N / 1375225.49E |
| AF851 | 355901.18N / 1380100.60E | | |
| AF852 | 361534.92N / 1380057.71E | | |
| AF853 | 361749.79N / 1375421.45E | | |
| AF854 | 361348.83N / 1375350.85E | | |
| AF855 | 361259.03N / 1375432.28E | | |
| AF856 | 361209.11N / 1375456.52E | | |
| RW18 | 361032.37N / 1375515.37E | | |
| AF859 | 360155.80N / 1375655.84E | | |
| MBE | 360921.51N / 1375511.34E | | |

CHANGE : Correction of misdescription (AFRF6 Coordinates).

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

RNAV(RNP) Y RWY18



MISSED APPROACH

Climb to 10000FT, direct to AF859,
turn left, direct to MBE and hold.
Contact MATSUMOTO RADIO.



Missed APCH climb gradient MNM 7.0%

| CAT | RNP 0.20 | | RNP 0.30 | |
|-----|-----------|------|-----------|------|
| | DA(H) | CMV | DA(H) | CMV |
| A | - | - | - | - |
| B | - | - | - | - |
| C | 2432(300) | 1000 | 2448(316) | 1000 |
| D | - | - | - | - |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

RNAV(RNP) Y RWY18

RNAV(RNP) Y RWY18Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|-----------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|-----------------|------------|
| 001 | IF | PAPNA | - | - | -8.0 | - | - | +12000 | - | - | - |
| 002 | TF | AF857 | - | 221 (212.8) | -8.0 | 13.6 | - | +5200 | - | - | 1.0 |
| 003 | TF | AF858 | - | 179 (171.0) | -8.0 | 9.9 | - | 4000 | - | - | 1.0 |
| 004 | TF | RW18 | Y | 179 (171.1) | -8.0 | 5.7 | - | 2182 | - | -3.00/50 | 0.2 0.3 |
| 005 | DF | AF859 | Y | - | -8.0 | - | - | - | - | - | 1.0 |
| 006 | DF | MBE | - | - | -8.0 | - | L | 10000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates |
|---------------------|--------------------------|
| PAPNA | 363721.74N / 1380122.92E |
| AF857 | 362557.23N / 1375214.72E |
| AF858 | 361611.17N / 1375409.31E |
| RW18 | 361032.37N / 1375515.37E |
| AF859 | 360155.80N / 1375655.84E |
| MBE | 360921.51N / 1375511.34E |

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO


RNAV(RNP) Z RWY36



MISSED APPROACH

From RW36 on track 359°, at or above 7000FT turn right, direct to MBE and hold at 10000FT. Contact MATSUMOTO RADIO.

PAPI not coincident with VPA.

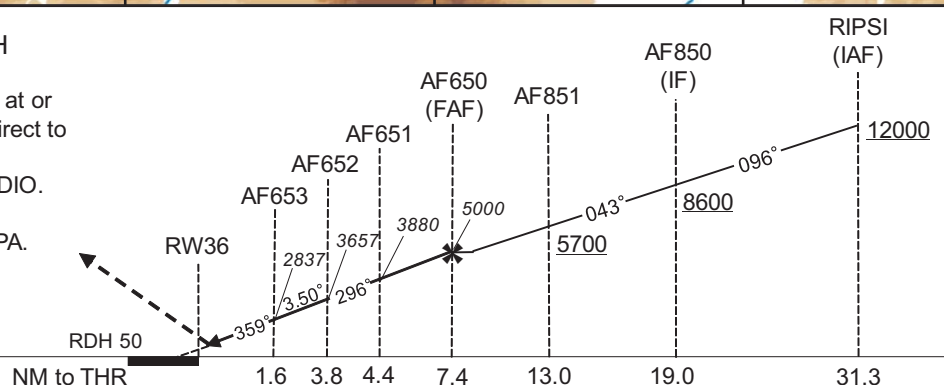

Missed APCH climb gradient MNM 3.0%

| CAT | THR elev. 2182 | | AD elev. 2157 | |
|-----|----------------|------|---------------|------|
| | RNP 0.20 | | RNP 0.30 | |
| | DA(H) | CMV | DA(H) | CMV |
| A | - | - | - | - |
| B | - | - | - | - |
| C | 2482(300) | 1800 | 2551(369) | 1800 |
| D | - | - | - | - |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

RNAV(RNP) Z RWY36

RNAV(RNP) Z RWY36Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|------------|
| 001 | IF | RIPSI | - | - | -8.0 | - | - | +12000 | -250 | - | - |
| 002 | TF | AF850 | - | 096 (087.7) | -8.0 | 12.3 | - | +8600 | - | - | 1.0 |
| 003 | TF | AF851 | - | 043 (035.2) | -8.0 | 6.0 | - | +5700 | - | - | 1.0 |
| 004 | RF Center: AFRF1 r=4.60NM | AF650 | - | - | -8.0 | 5.6 | L | 5000 | - | - | 1.0 |
| 005 | RF Center: AFRF1 r=4.60NM | AF651 | - | - | -8.0 | 3.0 | L | 3880 | - | -3.50 | 0.2 0.3 |
| 006 | TF | AF652 | - | 296 (288.3) | -8.0 | 0.6 | - | 3657 | - | -3.50 | 0.2 0.3 |
| 007 | RF Center: AFRF2 r=2.02NM | AF653 | - | - | -8.0 | 2.2 | R | 2837 | - | -3.50 | 0.2 0.3 |
| 008 | TF | RW36 | Y | 359 (351.1) | -8.0 | 1.6 | - | 2232 | - | -3.50/50 | 0.2 0.3 |
| 009 | FA | - | - | 359 (351.1) | -8.0 | - | - | +7000 | - | - | 1.0 |
| 010 | DF | MBE | - | - | -8.0 | - | R | 10000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| RIPSI | 355340.33N / 1374133.41E | AFRF1 | 360141.27N / 1375622.53E |
| AF850 | 355408.74N / 1375645.79E | AFRF2 | 360810.39N / 1375813.97E |
| AF851 | 355901.18N / 1380100.60E | | |
| AF650 | 360417.29N / 1380104.24E | | |
| AF651 | 360604.23N / 1375809.40E | | |
| AF652 | 360615.53N / 1375727.24E | | |
| AF653 | 360751.55N / 1375546.68E | | |
| RW36 | 360928.29N / 1375527.85E | | |
| MBE | 360921.51N / 1375511.34E | | |

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO


RNAV(RNP) Y RWY36



MISSED APPROACH

From RW36 on track 359°, at or above 7000FT turn right, direct to MBE and hold at 10000FT. Contact MATSUMOTO RADIO.

PAPI not coincident with VPA.

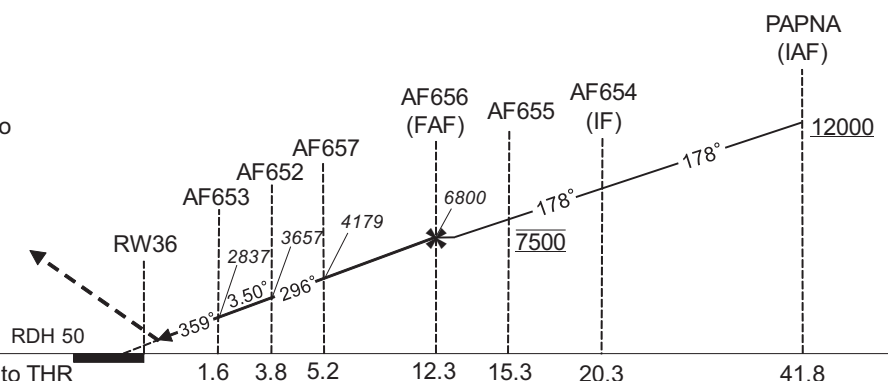

Missed APCH climb gradient MNM 3.0%

| CAT | THR elev. 2182 | | AD elev. 2157 | |
|-----|----------------|------|---------------|------|
| | RNP 0.20 | | RNP 0.30 | |
| | DA(H) | CMV | DA(H) | CMV |
| A | - | - | - | - |
| B | - | - | - | - |
| C | 2482(300) | 1800 | 2551(369) | 1800 |
| D | - | - | - | - |

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJAF / MATSUMOTO

RNAV(RNP) Y RWY36

RNAV(RNP) Y RWY36Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|------------|
| 001 | IF | PAPNA | - | - | -8.0 | - | - | +12000 | - | - | - |
| 002 | TF | AF654 | - | 178 (170.2) | -8.0 | 21.5 | - | - | - | - | 1.0 |
| 003 | TF | AF655 | - | 178 (170.3) | -8.0 | 5.0 | - | 7500 | - | - | 0.3 |
| 004 | RF Center: AFRF4 r=4.89NM | AF656 | - | - | -8.0 | 3.0 | R | 6800 | - | - | 0.3 |
| 005 | RF Center: AFRF4 r=4.89NM | AF657 | - | - | -8.0 | 7.1 | R | 4179 | - | -3.50 | 0.2 0.3 |
| 006 | TF | AF652 | - | 296 (288.4) | -8.0 | 1.4 | - | 3657 | - | -3.50 | 0.2 0.3 |
| 007 | RF Center: AFRF2 r=2.02NM | AF653 | - | - | -8.0 | 2.2 | R | 2837 | - | -3.50 | 0.2 0.3 |
| 008 | TF | RW36 | Y | 359 (351.1) | -8.0 | 1.6 | - | 2232 | - | -3.50/50 | 0.2 0.3 |
| 009 | FA | - | - | 359 (351.1) | -8.0 | - | - | +7000 | - | - | 1.0 |
| 010 | DF | MBE | - | - | -8.0 | - | R | 10000 | - | - | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| PAPNA | 363721.74N / 1380122.92E | AFRF4 | 361027.73N / 1380059.34E |
| AF654 | 361613.48N / 1380553.24E | AFRF2 | 360810.39N / 1375813.97E |
| AF655 | 361117.56N / 1380656.02E | | |
| AF656 | 360820.76N / 1380625.54E | | |
| AF657 | 360549.12N / 1375905.80E | | |
| AF652 | 360615.53N / 1375727.24E | | |
| AF653 | 360751.55N / 1375546.68E | | |
| RW36 | 360928.29N / 1375527.85E | | |
| MBE | 360921.51N / 1375511.34E | | |

CHANGE : New PROC

RJAF / MATSUMOTO

Visual REP



| Call sign | BRG / DIST from ARP | Remarks |
|------------------------------------|---------------------|-----------------------------------|
| 安曇野インターチェンジ Azumino Interchange | 008°/8.0NM | 長野自動車道 安曇野インターチェンジ Interchange |
| 松本ステーション Matsumoto Station | 036°/4.3NM | JR駅 Station |
| 美ヶ原 Utsukushigahara | 075°/9.6NM | 美ヶ原王ヶ頭 Peak |
| 島島 Shimashima | 292°/5.0NM | 松本電鉄新島島駅 Station |
| 塩尻インターチェンジ Shiojiri Interchange | 142°/4.1NM | 長野自動車道 塩尻インターチェンジ Interchange |
| 諏訪湖 Suwako | 140°/10NM | 諏訪湖上空 Lake |
| 鳥居峠 Torii touge | 213°/14.4NM | 峠 Mountain Pass |



RJAF / MATSUMOTO

Minimum Vectoring Altitude CHART

