

AD CHART

SAGA AP

★ ABN

286m

110m

WEST APRON

EAST APRON

T-2 TWY

T-1 TWY

PAPI Angle 3.0°
MEHT 18.5m(61ft)

366.2m

65m

WDI

11

65m

420m

300m 180m

TURNING POINT ID LGT

VOR/DME

CGL

PAPI Angle 3.0°
MEHT 18.5m(61ft)

374.6m

OVERRUN AREA EDGE LGT

DETAIL DRAWING EAST APRON

68m

52m

101

2

4

6

8

9

5

3

7

APCH LGT BEACONS

SALS

65m

WDI

TURNING POINT ID LGT

APCH LIGHTING SYSTEM

SEQUENCED FLASHING LGT (SFL-V)

29

300m

900m

REMARKS :

- RWY GROOVING 2000m × 30m
- STRENGTH OF RWY PCN 68/F/C/X/T
- WIDTH & STRENGTH OF TWY
 - T-1 30m
 - T-2 9m
- DIMENSION & STRENGTH OF APRON
 - WEST APRON 220m × 110m
 - EAST APRON 68m × 52m

PCN 55/F/B/X/T

PCN 13/F/C/Y/T

PCN 74/R/B/X/T

PCN 13/F/C/Y/T

LONGITUDINAL PROFILE OF RWY

Profile view of Runway 11 and Runway 29 showing a 0.1% slope. The diagram includes a horizontal line representing the runway surface, with points marked at 6ft (1.7m) intervals. The slope is indicated as 0.1%. The runways are labeled RWY 11 and RWY 29. A vertical scale on the right shows 0m, 1200m, 1400m, and 2000m.

REMARKS :	RWY GROOVING	200m×30m
	STRENGTH OF RWY	PCN 68/F/C/X/T
	WIDTH & STRENGTH OF TWY	
	T-1 30m	PCN 55/F/B/X/T
	T-2 9m	PCN 13/F/C/Y/T
	DIMENSION & STRENGTH OF APRON	
	WEST APRON 220m×110m	PCN 74/R/B/X/T
	EAST APRON 68m×52m	PCN 13/F/C/Y/T

DETAIL DRAWING EAST APRON

68m

52m

10 4 9 3 8 1 5 6 2 7

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

SAGA REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...
...via SGE R135 to 9.0DME, turn left, direct to SGE VOR/DME.

Cross SGE VOR/DME at 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.


ARIAKE REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right HDG 288°...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 198°...

...to intercept and proceed via SGE R243 to 7.0DME, turn right, direct to SGE VOR/DME.
Cross SGE VOR/DME at or above 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.

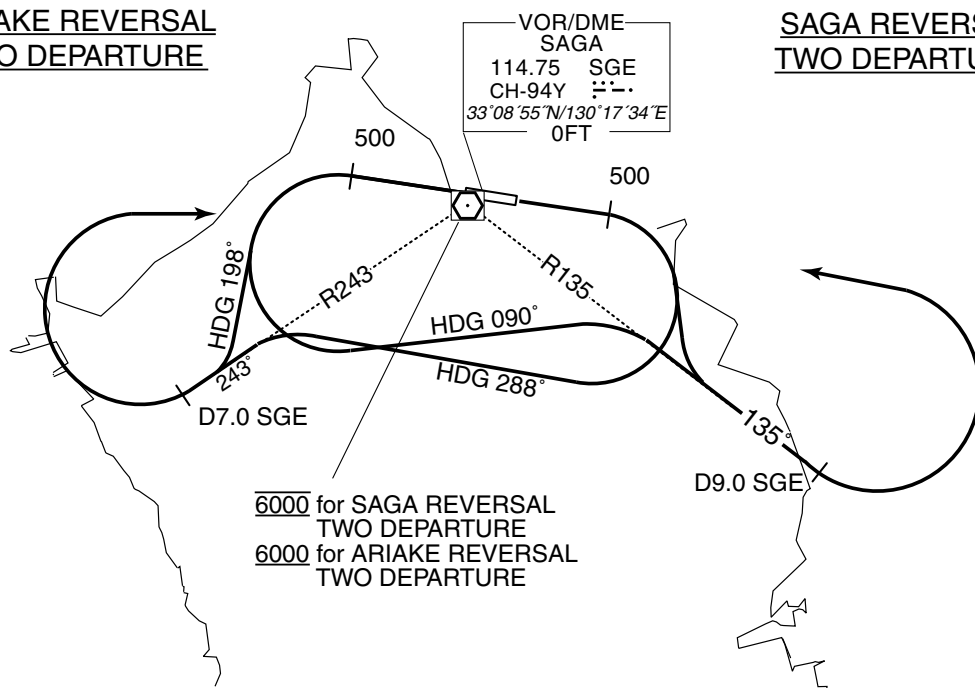ARIAKE REVERSAL
TWO DEPARTURESAGA REVERSAL
TWO DEPARTURE

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

TRANSITION

KUMAMOTO TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn left, via KUE R271 to KUE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.

NAGASAKI TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn right, direct to OLE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

KIKYU FIVE DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG075° to intercept and proceed...
... via SGE R120 to 9.0DME, turn left HDG048° to intercept
and proceed via SGE R093 to KIKYU.

Cross KIKYU at or above 13000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

TRANSITION

MUSASHI TRANSITION

From over KIKYU, via TFE R253 to TFE VOR/DME.

Cross TFE R253/38.0DME at or above FL140, cross TFE R253/31.0DME at or above FL170.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV TRANSITION

OOITA TRANSITION			RNAV1
NOTE 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—	
	DME GAP	—	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 7° W(2016)

OOITA TRANSITION

From KIKYU at or above 13000FT, to WAITA at or above FL170, to OOITA.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIKYU	—	—	-7.2	—	—	+13000	—	—	RNAV1
002	TF	WAITA	—	094 (086.3)	-7.2	8.1	—	+FL170	—	—	RNAV1
003	TF	OOITA	—	094 (086.4)	-7.2	30.9	—	—	—	—	RNAV1

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

BALLOON ONE DEPARTURE

RWY11

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	106 (099.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	CF	FS100	—	120 (113.2)	-7.2	—	—	—	—	—	Basic RNP1
003	TF	KIKYU	—	084 (076.8)	-7.2	24.3	—	+13000	—	—	Basic RNP1

RWY29

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	286 (279.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS900	—	—	-7.2	—	L	—	—	—	Basic RNP1
003	TF	FS100	—	089 (081.8)	-7.2	8.4	—	—	—	—	Basic RNP1
004	TF	KIKYU	—	084 (076.8)	-7.2	24.3	—	+13000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA


RNAV SID

SOIGI ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 7° W(2016)

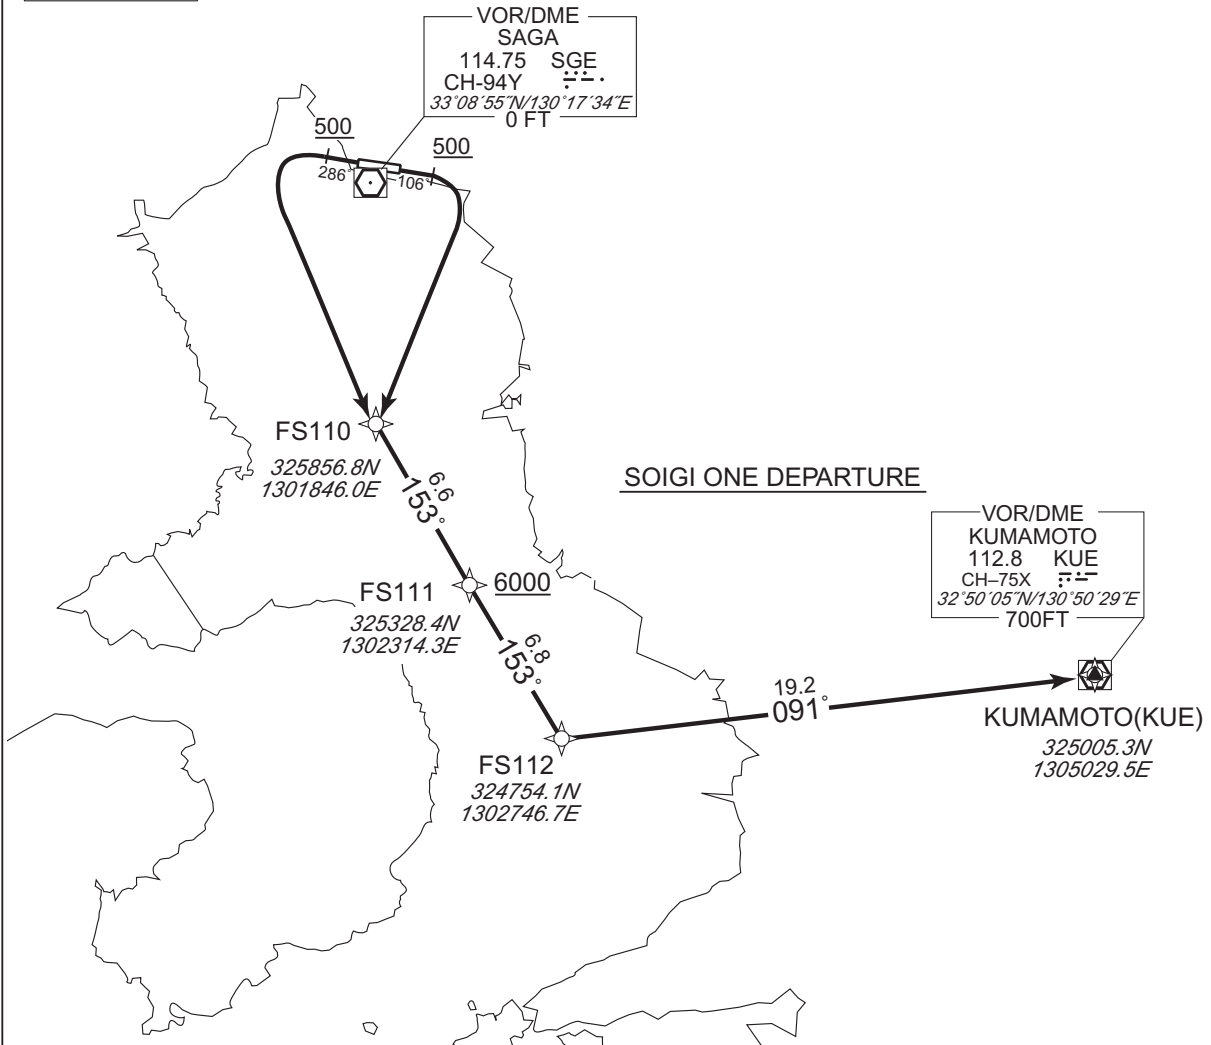

SOIGI ONE DEPARTURE

RWY11 : Climb on HDG106° at or above 500FT, turn right direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

RWY29 : Climb on HDG286° at or above 500FT, turn left direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

NOTE RWY29 : 3.5% climb gradient required up to 500FT.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

SOIGI ONE DEPARTURE

RWY11

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	106 (099.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS110	—	—	-7.2	—	R	—	—	—	Basic RNP1
003	TF	FS111	—	153 (145.5)	-7.2	6.6	—	+6000	—	—	Basic RNP1
004	TF	FS112	—	153 (145.6)	-7.2	6.8	—	—	—	—	Basic RNP1
005	TF	KUE	—	091 (083.4)	-7.2	19.2	—	—	—	—	Basic RNP1

RWY29

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	286 (279.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS110	—	—	-7.2	—	L	—	—	—	Basic RNP1
003	TF	FS111	—	153 (145.5)	-7.2	6.6	—	+6000	—	—	Basic RNP1
004	TF	FS112	—	153 (145.6)	-7.2	6.8	—	—	—	—	Basic RNP1
005	TF	KUE	—	091 (083.4)	-7.2	19.2	—	—	—	—	Basic RNP1

STANDARD ARRIVAL CHART-INSTRUMENT

RJFS / SAGA

STAR

IRPIN NORTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP, via SGE R194 to SGE VOR/DME via UGAMU.

Cross MILEP at 6000FT, cross SGE VOR/DME at or above 5000FT.

IRPIN SOUTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP.

Cross MILEP at 6000FT.

CHANGE: New PROC



INTENTIONALLY LEFT BLANK

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

ILS or LOC RWY29



INSTRUMENT APPROACH CHART

RJFS / SAGA

VOR RWY29

FUKUOKA RADAR
119.7 – 279.2SAGA VOR/DME
114.75 SGE
CH-94Y
33°08'55"N/130°17'34"ESAGA RADIO
118.025 – 126.2
(2130–2300(UTC)
1030–1500
SAGA REMOTE
118.025

NO RADAR

VAR 7°W (2014)

3431

1647

EQPT REQUIRED
DME

1328

1194

MSA 25NM



1703

1122

1345

MHA 5000
MAX 210KIAS

3529

CAUTION:
After HIGH-STATION(SGE VOR/DME),
maintain 5000FT or above until
intercepting outbound SGE R118

MOSSA(FAF)

D6.0 SGE

204

282°

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

1647

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE
MAX Turning Speed 190KIAS

1643

1046

1394</

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY29

FUKUOKA RADAR 119.7 – 279.2	GNSS and RF required.	SAGA RADIO 118.025 – 126.2	(2130–2300(UTC) 1030–1500 SAGA REMOTE 118.025	NO RADAR
--------------------------------	-----------------------	-------------------------------	--	----------


For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C



MISSED APPROACH

From RW29 on track 287° at or above 500FT, turn left direct to FS955, direct to SGE and hold at 5000FT.

Contact FUKUOKA RADAR.

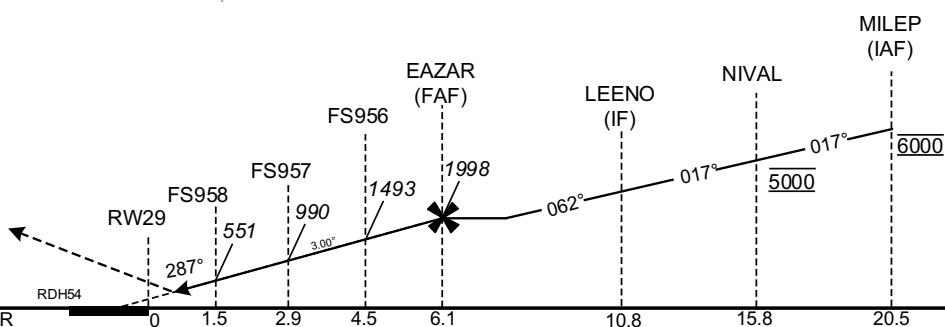

MINIMA	THR elev.6	AD elev.6
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	—	—
B	—	—
C	306 (300)	1000
D	—	1400

RNP AR

Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY29

RNAV(RNP) RWY29Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MILEP	-	-	-7.5	-	-	6000	-	-	-
002	TF	NIVAL	-	017 (009.2)	-7.5	4.7	-	5000	-	-	0.3
003	TF	LEENO	-	017 (009.2)	-7.5	5.0	-	-	-	-	0.3
004	TF	EAZAR	-	062 (054.2)	-7.5	4.7	-	1998	-165	-	0.3
005	RF Center: FSRF8 r=2.02NM	FS956	-	-	-7.5	1.6	L	1493	-	-3.00	0.3
006	RF Center: FSRF9 r=1.98NM	FS957	-	-	-7.5	1.6	L	990	-	-3.00	0.3
007	RF Center: FSRF0 r=1.75NM	FS958	-	-	-7.5	1.4	L	551	-	-3.00	0.3
008	TF	RW29	Y	287 (279.3)	-7.5	1.5	-	60	-	-3.00/54	0.3
009	FA	-	-	287 (279.3)	-7.5	-	-	+500	-	-	1.0
010	DF	FS955	Y	-	-7.5	-	L	-	-	-	1.0
011	DF	SGE	-	-	-7.5	-	L	5000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MILEP	325250.49N/1301501.22E	FSRF8	330645.72N/1301958.78E
NIVAL	325726.55N/1301554.33E	FSRF9	330646.63N/1302001.15E
LEENO	330223.31N/1301651.53E	FSRF0	330654.73N/1302014.52E
EAZAR	330507.25N/1302122.72E		
FS956	330626.19N/1302220.91E		
FS957	330756.35N/1302156.32E		
FS958	330838.87N/1302034.72E		
RW29	330853.77N/1301846.08E		
FS955	330424.77N/1301815.75E		
SGE	330855.03N/1301734.43E		

CHANGE: Update


INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY11

FUKUOKA RADAR 119.7 – 279.2	GNSS and RF required.	SAGA RADIO 118.025 – 126.2	(2130–2300(UTC) 1030–1500 SAGA REMOTE 118.025	NO RADAR
--------------------------------	-----------------------	-------------------------------	--	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

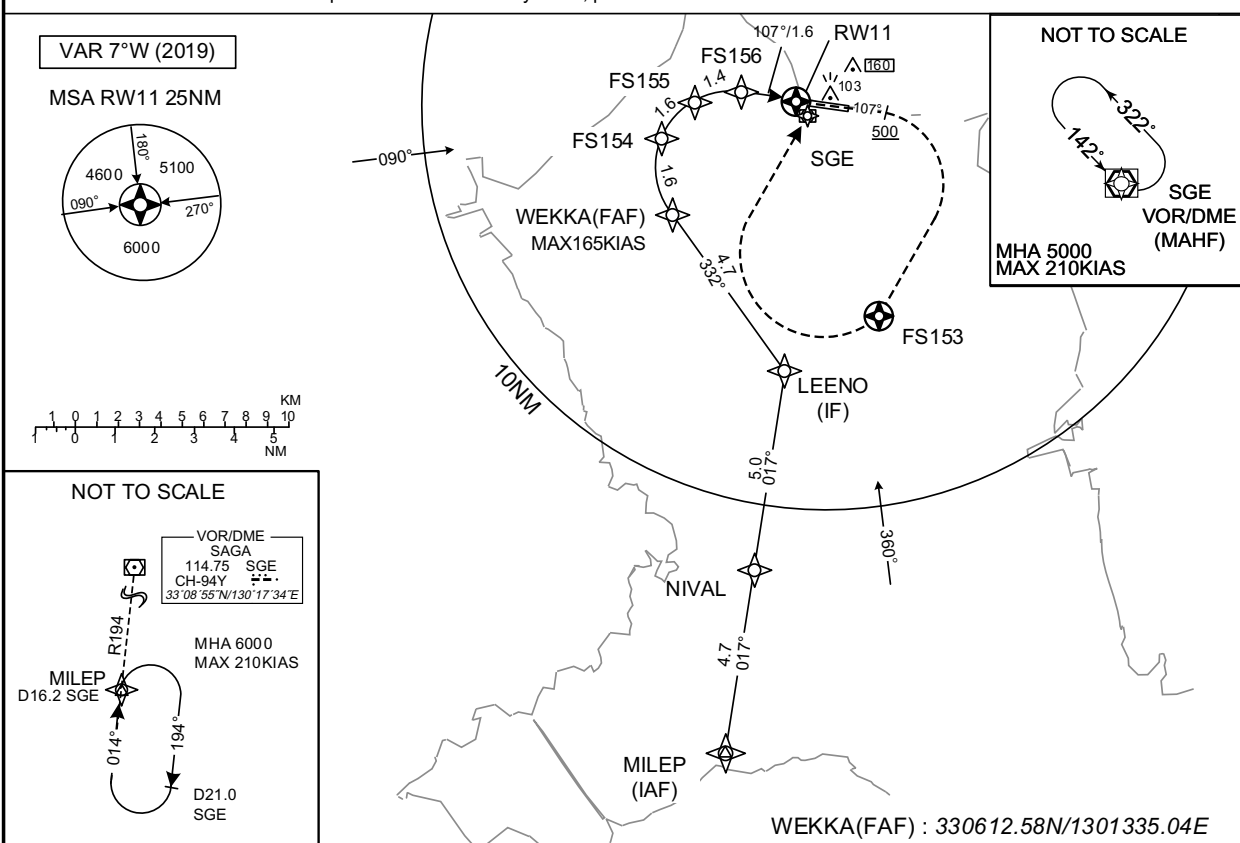

Missed APCH climb gradient MNM 3.0%

MINIMA	THR elev.6	AD elev.6
CAT	RNP 0.30	
	DA(H)	CMV
A	—	—
B	—	—
C	306 (300)	1400
D	—	1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY11

RNAV(RNP) RWY11Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MILEP	-	-	-7.5	-	-	6000	-	-	-
002	TF	NIVAL	-	017 (009.2)	-7.5	4.7	-	5000	-	-	0.3
003	TF	LEENO	-	017 (009.2)	-7.5	5.0	-	-	-	-	0.3
004	TF	WEKKA	-	332 (324.3)	-7.5	4.7	-	1990	-165	-	0.3
005	RF Center: FSRF5 r=2.02NM	FS154	-	-	-7.5	1.6	R	1486	-	-3.00	0.3
006	RF Center: FSRF6 r=1.98NM	FS155	-	-	-7.5	1.6	R	989	-	-3.00	0.3
007	RF Center: FSRF7 r=1.77NM	FS156	-	-	-7.5	1.4	R	550	-	-3.00	0.3
008	TF	RW11	Y	107 (099.3)	-7.5	1.6	-	56	-	-3.00/50	0.3
009	FA	-	-	107 (099.3)	-7.5	-	-	+500	-	-	1.0
010	DF	FS153	Y	-	-7.5	-	R	-	-	-	1.0
011	DF	SGE	-	-	-7.5	-	R	5000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MILEP	325250.49N/1301501.22E	FSRF5	330723.51N/1301531.82E
NIVAL	325726.55N/1301554.33E	FSRF6	330723.80N/1301529.68E
LEENO	330223.31N/1301651.53E	FSRF7	330735.05N/1301520.05E
WEKKA	330612.58N/1301335.04E		
FS154	330742.91N/1301309.63E		
FS155	330900.65N/1301406.71E		
FS156	330919.21N/1301540.15E		
RW11	330904.20N/1301729.91E		
FS153	330340.13N/1301934.46E		
SGE	330855.03N/1301734.43E		

CHANGE: Update

INSTRUMENT APPROACH CHART

RJFS/SAGA

VOR A



CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.


INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJFS/SAGA


VOR C

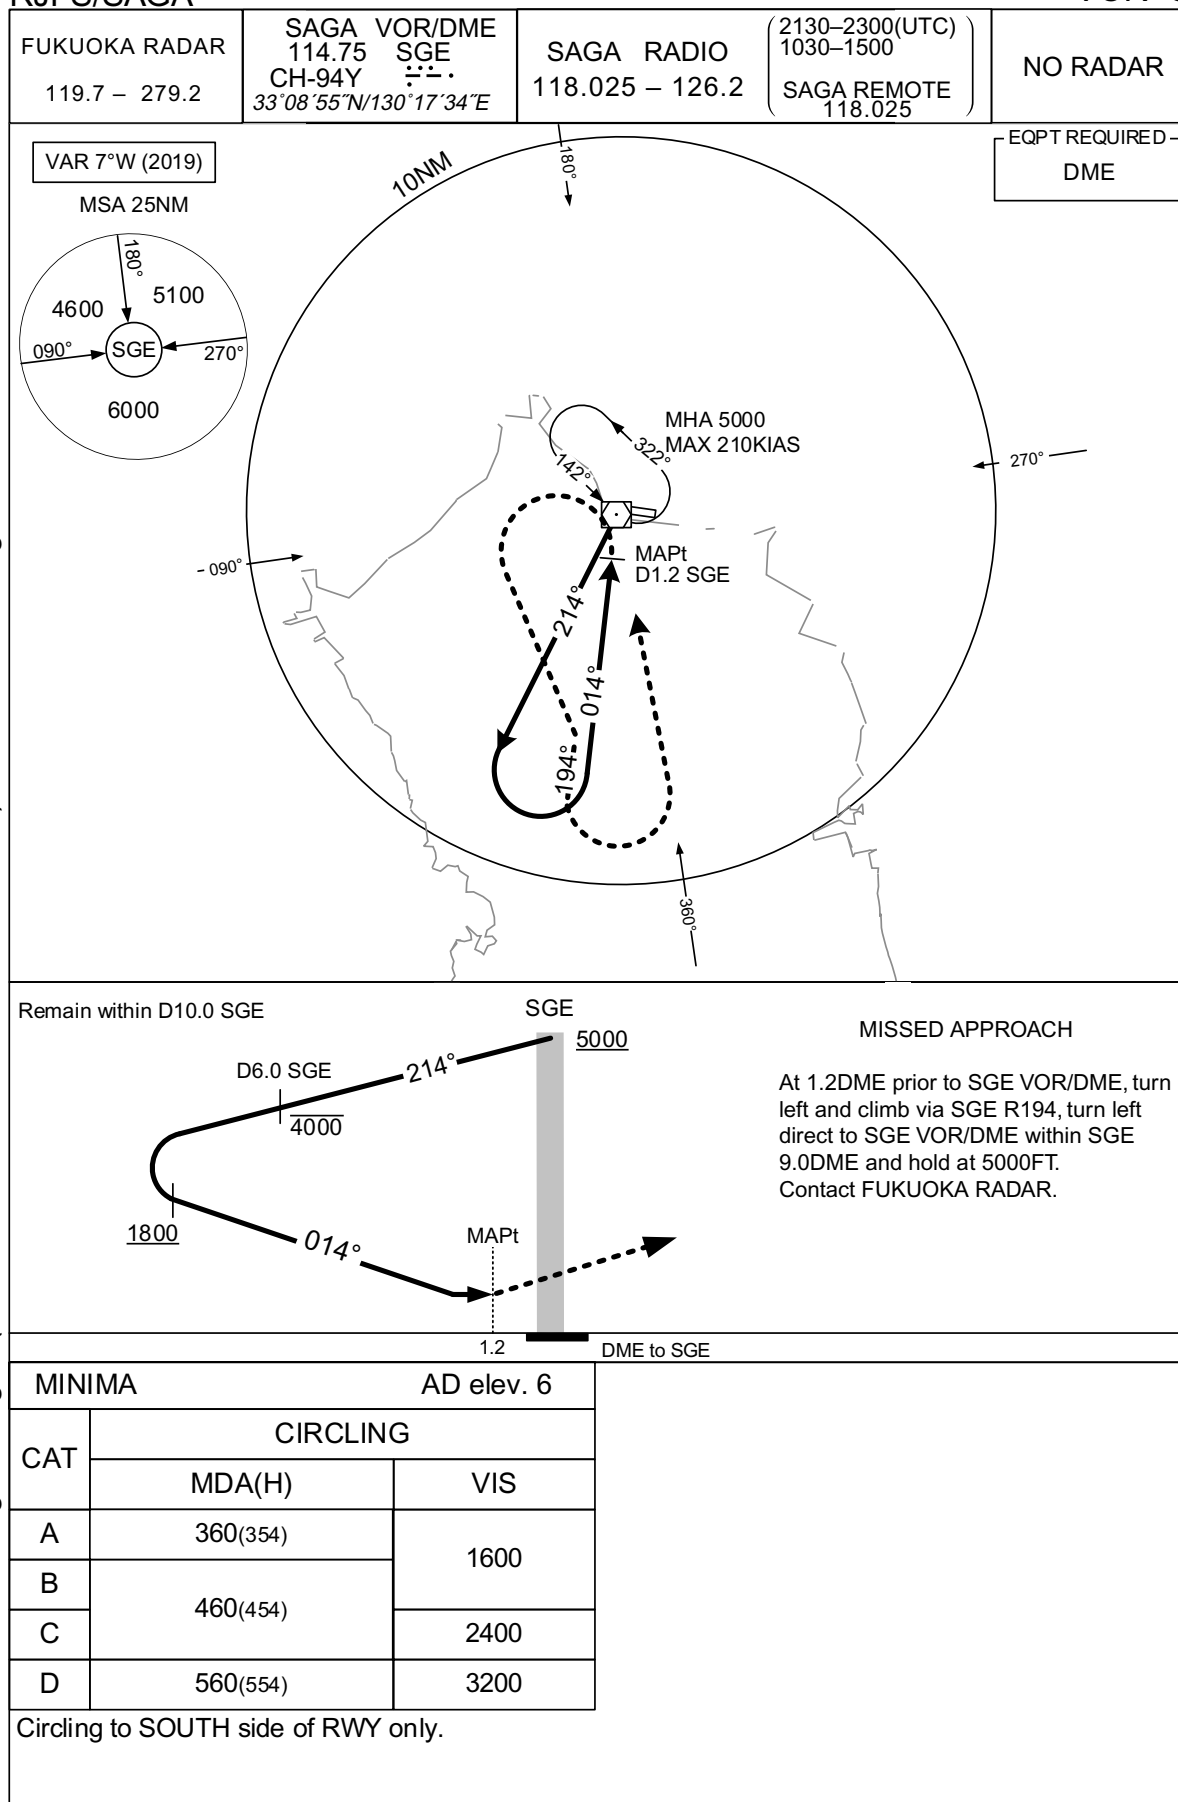

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

RJFS / SAGA

Visual REP

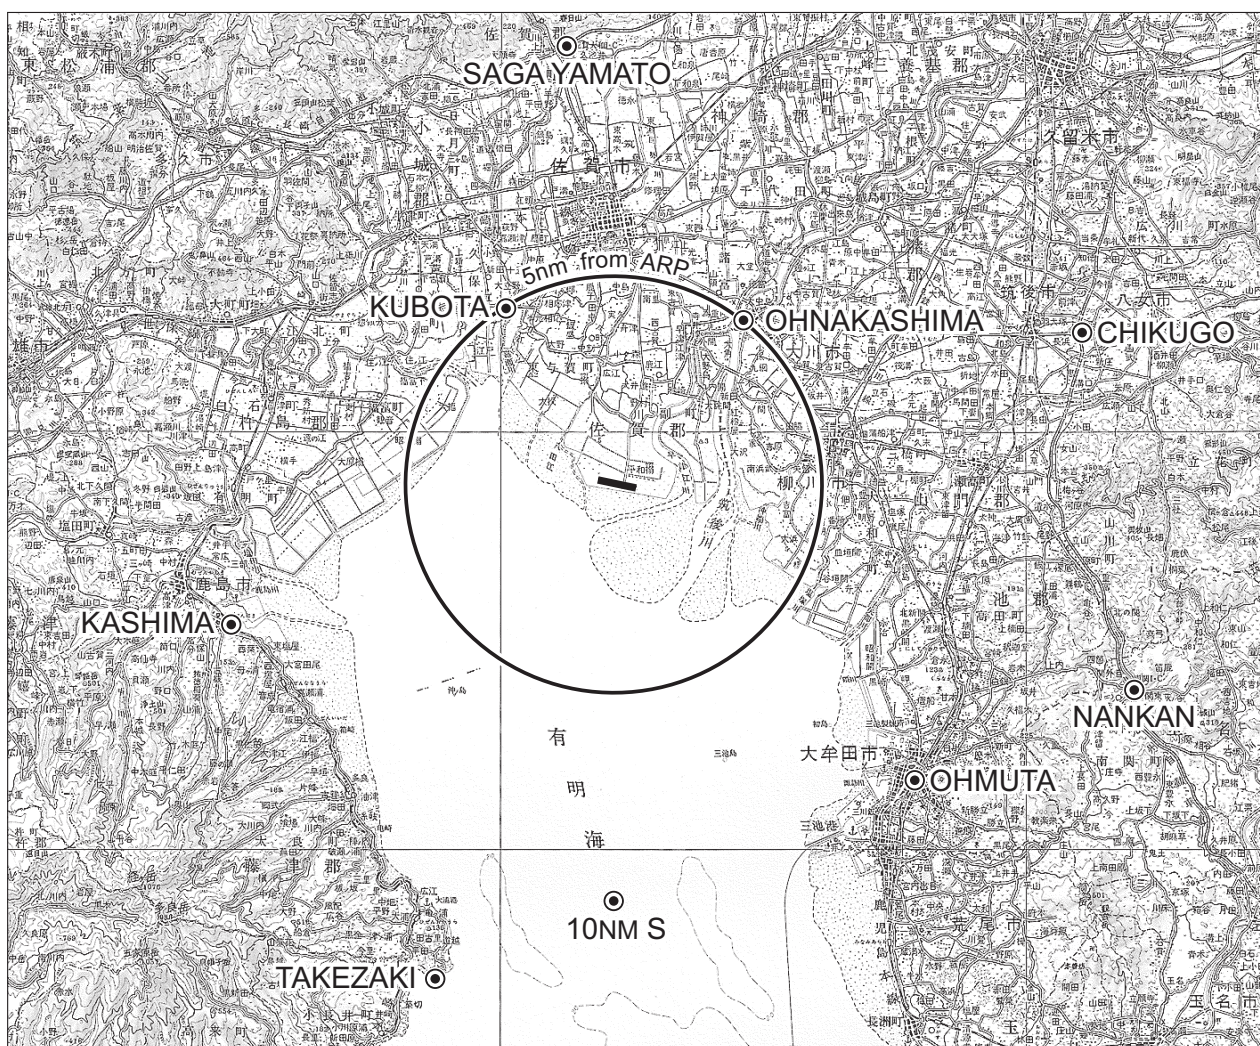

Call sign	BRG / DIST from ARP	Remarks
鹿 島 Kashima	250°/ 9.9NM	新浜大橋 Bridge
竹 崎 Takezaki	199°/12.3NM	竹崎港 Harbor
大 牟 田 Ohmuta	135°/10.1NM	JR大牟田駅 Station
筑 後 Chikugo	071°/11.8NM	八女インターチェンジ Interchange
大 中 島 Ohnakashima	038°/ 5.0NM	筑後川昇開橋 Bridge
久 保 田 Kubota	329°/ 5.0NM	久保田橋 Bridge
佐 賀 大 和 Sagayamato	354°/10.5NM	佐賀大和インターチェンジ Interchange
南 関 Nankan	111°/13.2NM	南関インターチェンジ Interchange
10NM S	180°/10.0NM	海上 Over the sea

RJFS / SAGA

BALLOON

熱気球の飛行が下図区域内で行われる。(期間：5月中旬から6月中旬まで及び10月中旬から2月下旬まで：RJFSノータム参照)

Hot air balloon flight will be conducted within below area.
(Period: from mid MAY to mid JUN and from mid OCT to late FEB: see NOTAM RJFS)



飛行高度 3000ft 以下
FLT ALT At or below 3000ft

飛行高度 4000ft 以下
FLT ALT At or below 4000ft

I Balloon FLT area Nr1 II Balloon FLT area Nr2* III Balloon FLT area Nr3*

* 佐賀空港を発着する航空機に対し、熱気球に係る情報(飛行空域2及び3内で飛行する気球の概数等)の提供が佐賀ディオまたは佐賀ヘドにより行われる。

* The information of hot air balloon(aprx number of balloon etc.in flight area number 2 and 3) will be provided for departing/arriving acft from/to SAGA airport by SAGA RADIO or SAGA REMOTE.

Example of phraseology:"Two flying balloons reported in balloon flight area number two."

CHANGE : NOTAM location (RJFF→RJFS).

RJFS / SAGA

Minimum Vectoring Altitude CHART

