


RJTY / YOKOTA

AD CHART

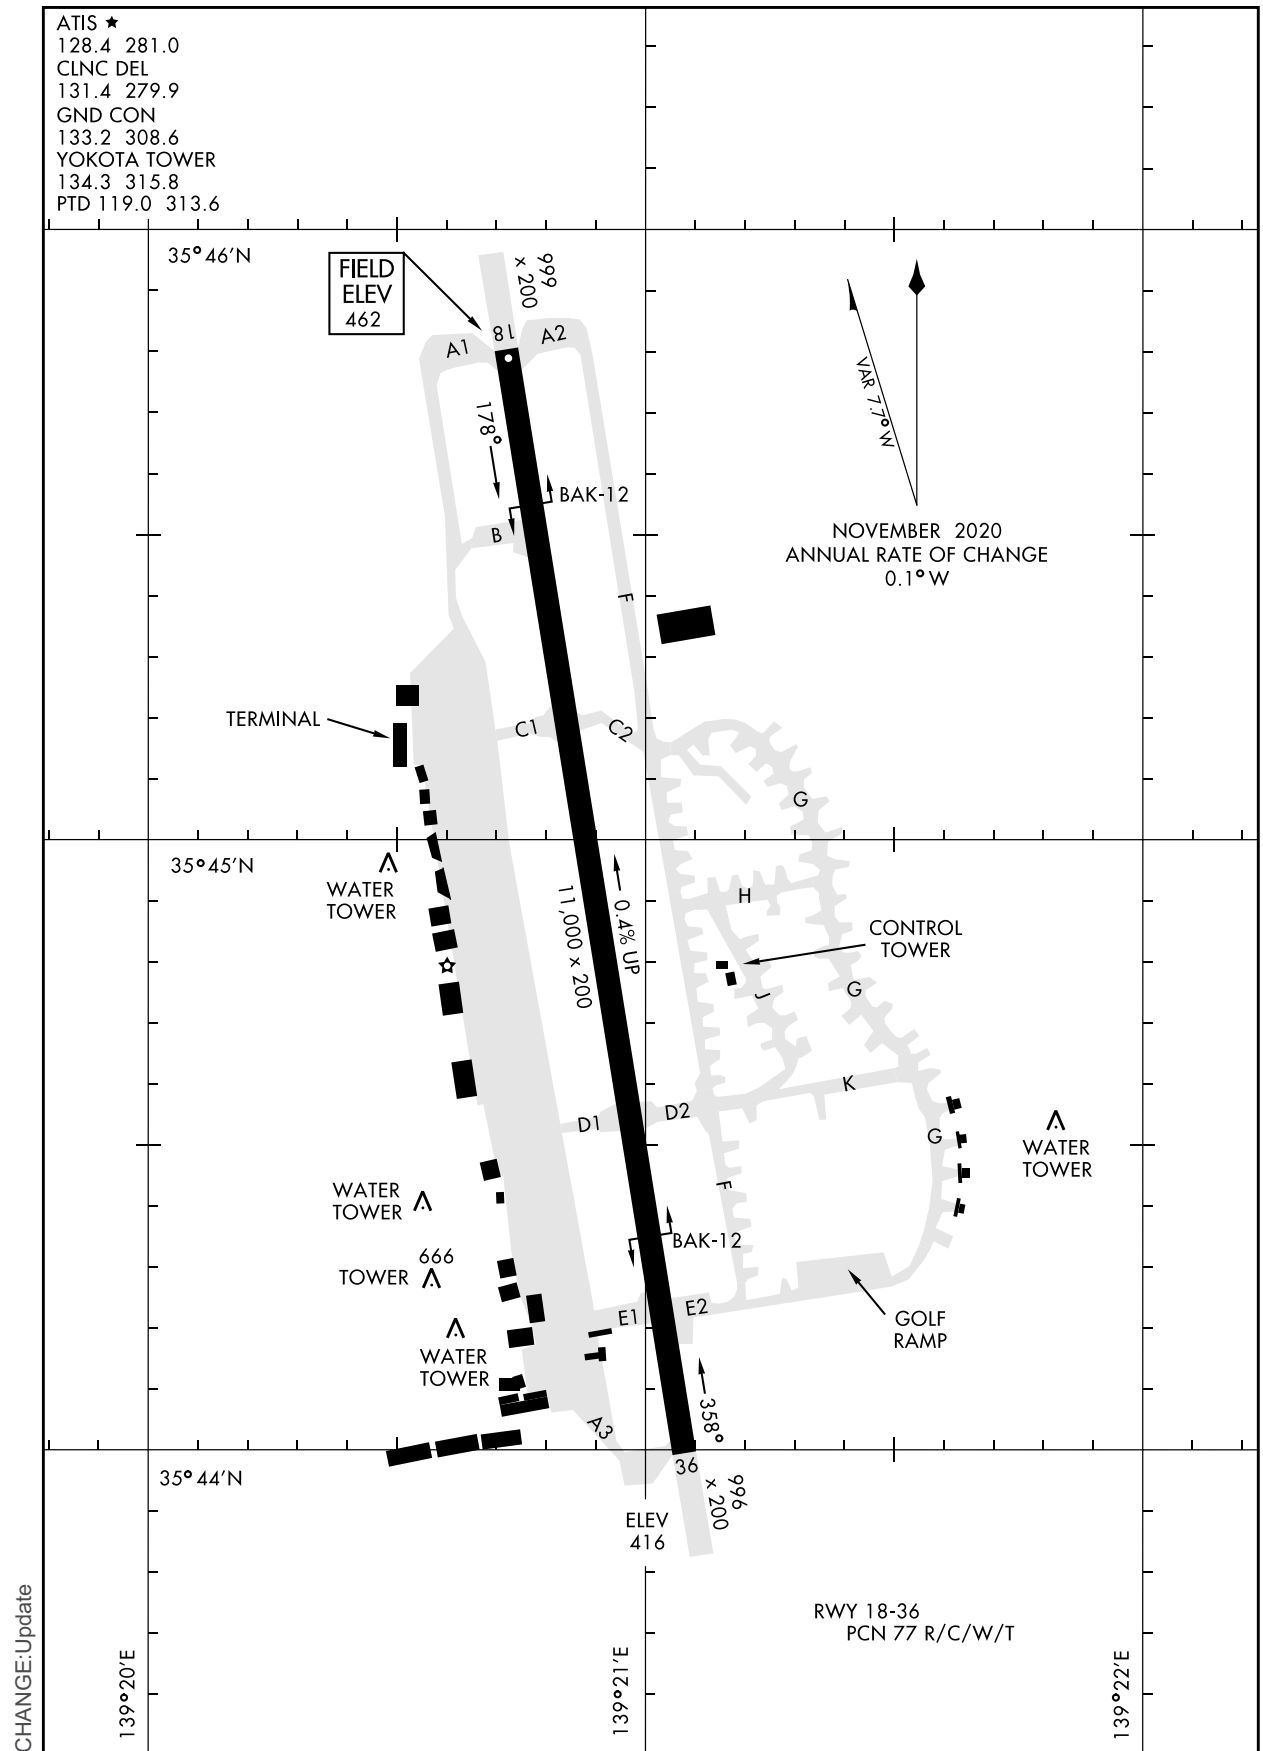


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

BREEE FOUR DEPARTURE (OBSTACLE)

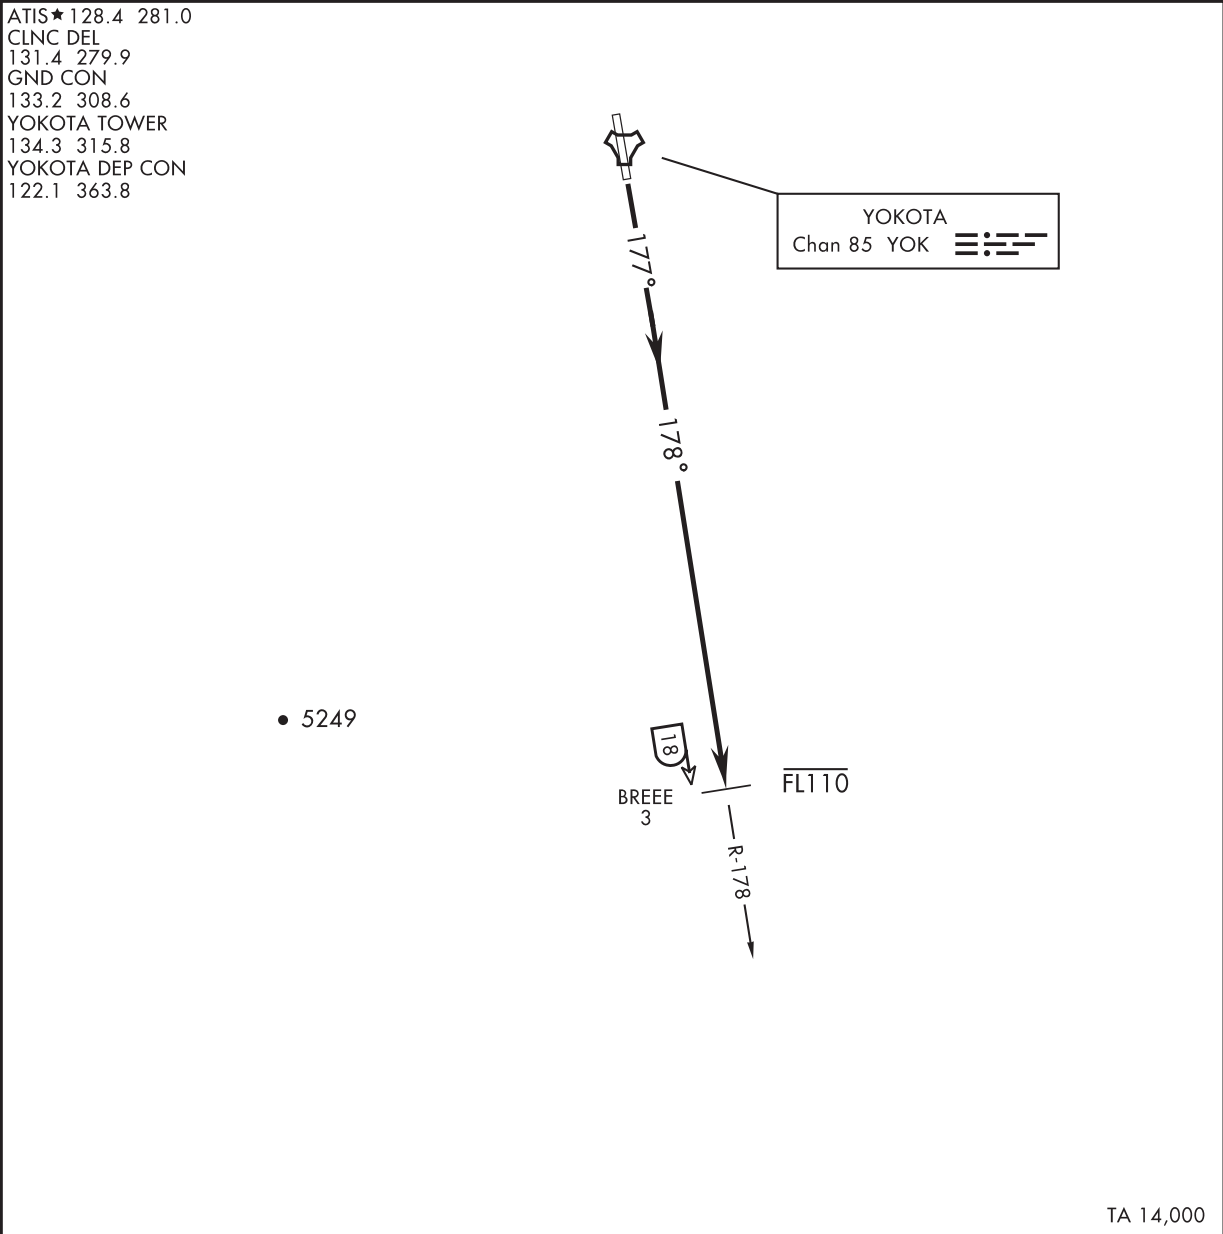

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.
Cross BREEE at or below FL110. Continue as assigned by ATC.

CHANGE : Update

NOTE: REPRINTING DOD FLIP


STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FOUR DEPARTURE (OBSTACLE)

ATIS ★ 128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 YOKOTA TOWER
 134.3 315.8
 YOKOTA DEP CON
 122.1 363.8

SL-1458 [USAF]

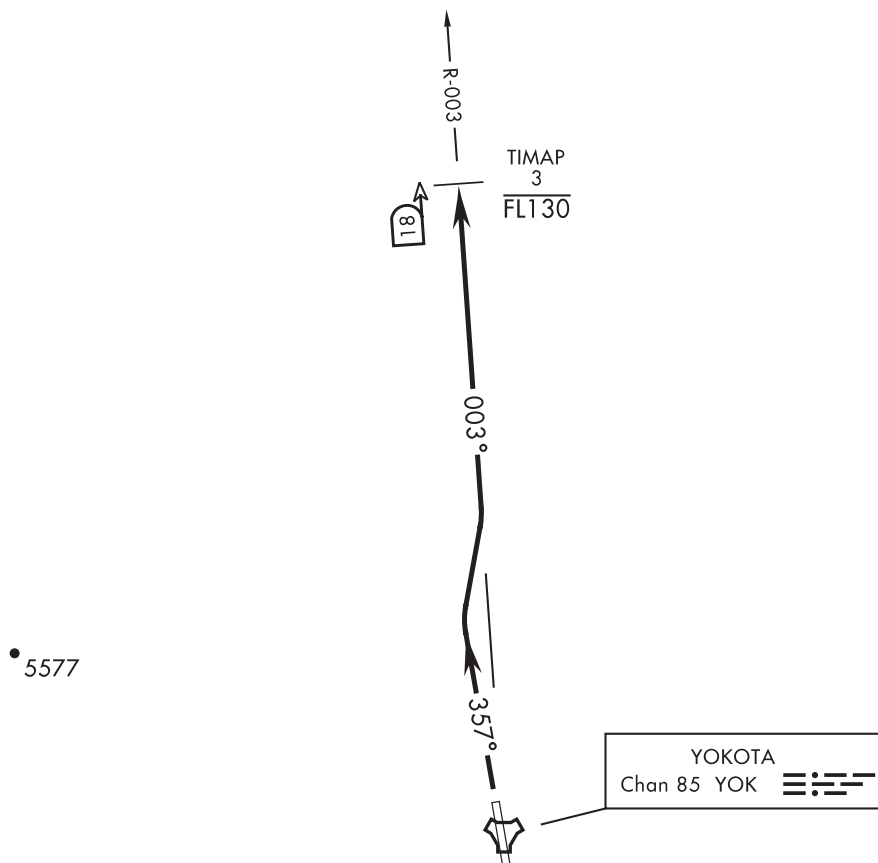


DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.
 Cross TIMAP at or below FL130. Continue as assigned by ATC.

CHANGE : Update

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

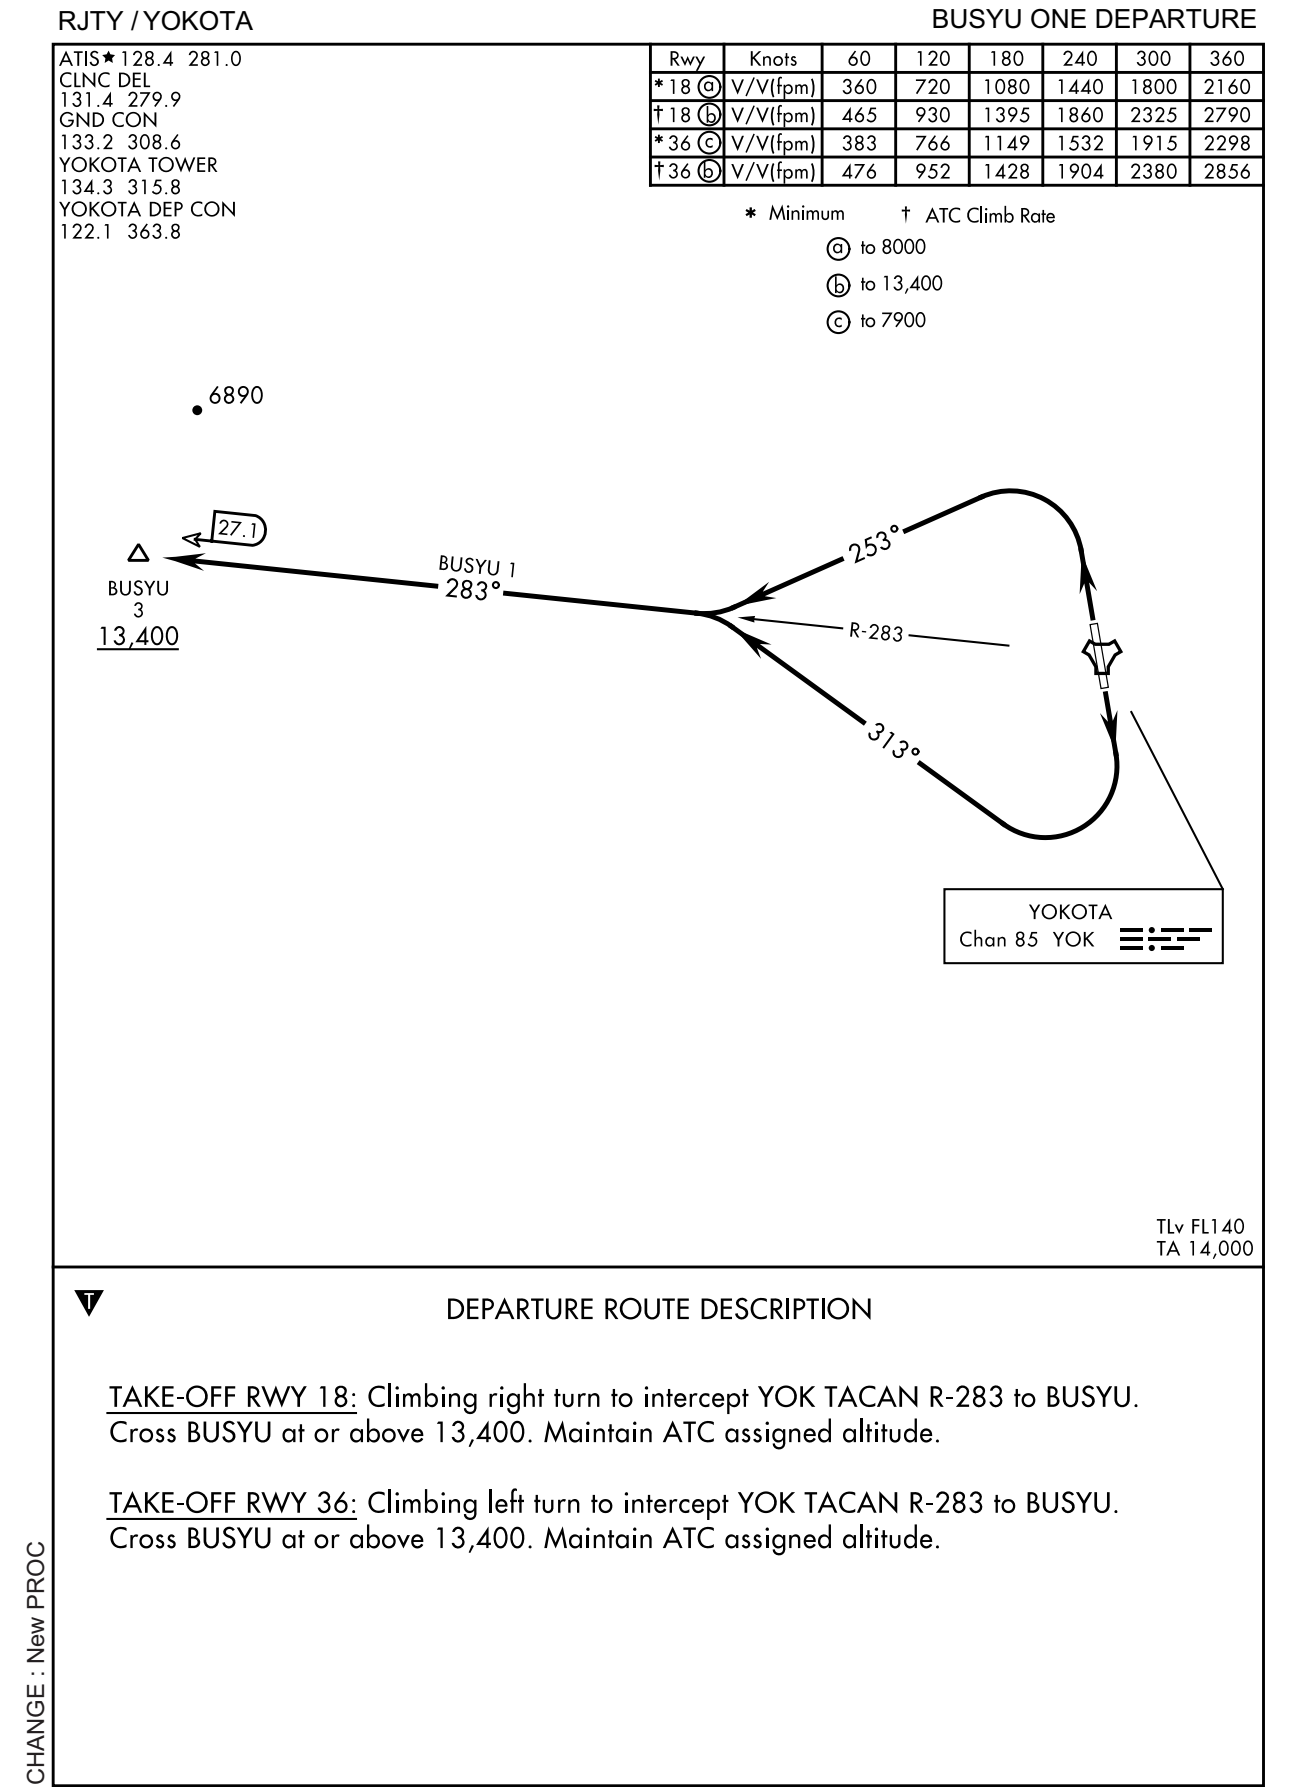

STANDARD DEPARTURE CHART - INSTRUMENT


RJTY / YOKOTA

FISAB TWO DEPARTURE (RNAV)

ATIS★ 128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 YOKOTA TOWER
 134.3 315.8
 YOKOTA DEP CON
 122.1 363.8

TAKE-OFF OBSTACLES:

- (1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.
 (2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.
 (3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

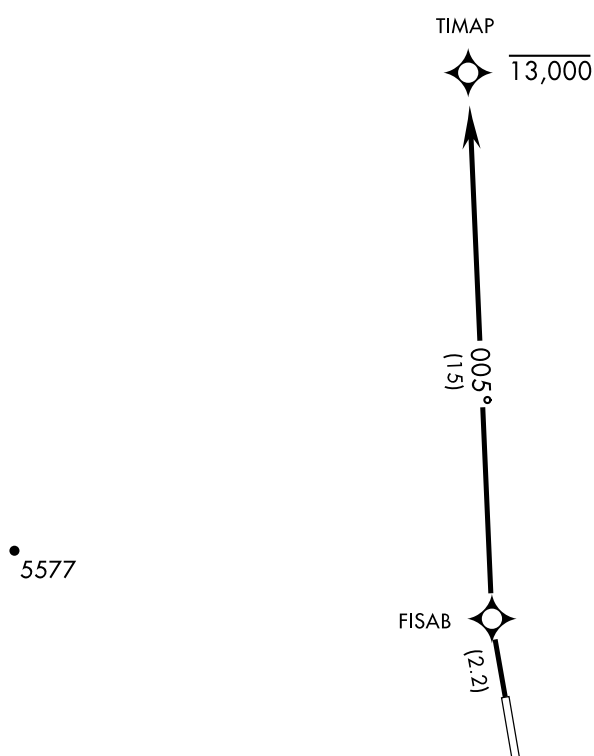

RNAV 1
 DME/DME RNP-0.3 NA

RADAR REQUIRED
 (for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY /YOKOTA

GERGE TWO DEPARTURE (RNAV)

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
YOKOTA TOWER
134.3 315.8
YOKOTA DEP CON
122.1 363.8

TAKE-OFF OSBTACLES:

- (1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
- (2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
- (3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
- (4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
- (5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
- (6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.



RNAV 1
DME/DME RNP-0.3 NA

RADAR REQUIRED

(for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

NOTE: REPRINTING DOD FLIP

INTENTIONALLY LEFT BLANK


RJTY / YOKOTA

CHANGE: Update

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART


RJTY / YOKOTA

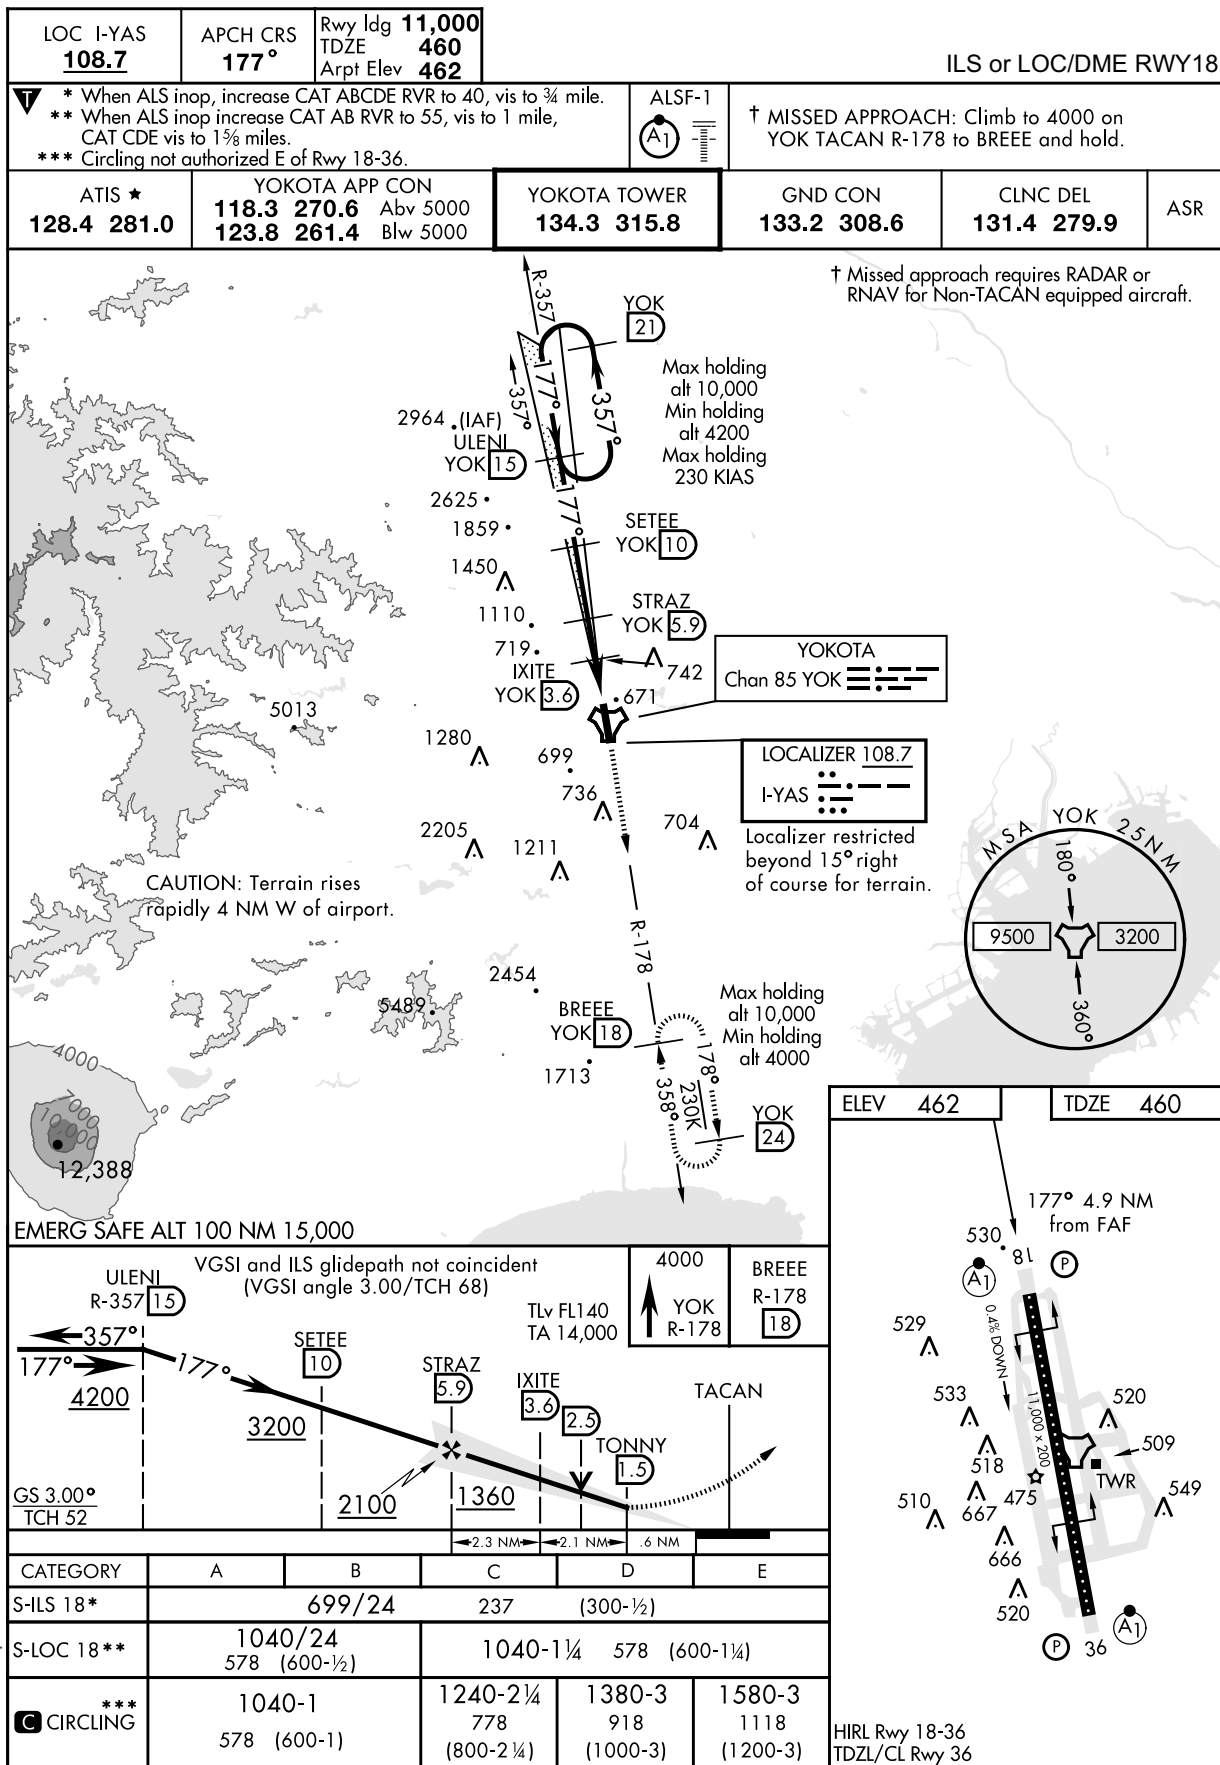

NOTE: REPRINTING DOD FLIP


INSTRUMENT APPROACH CHART

RJTY / YOKOTA

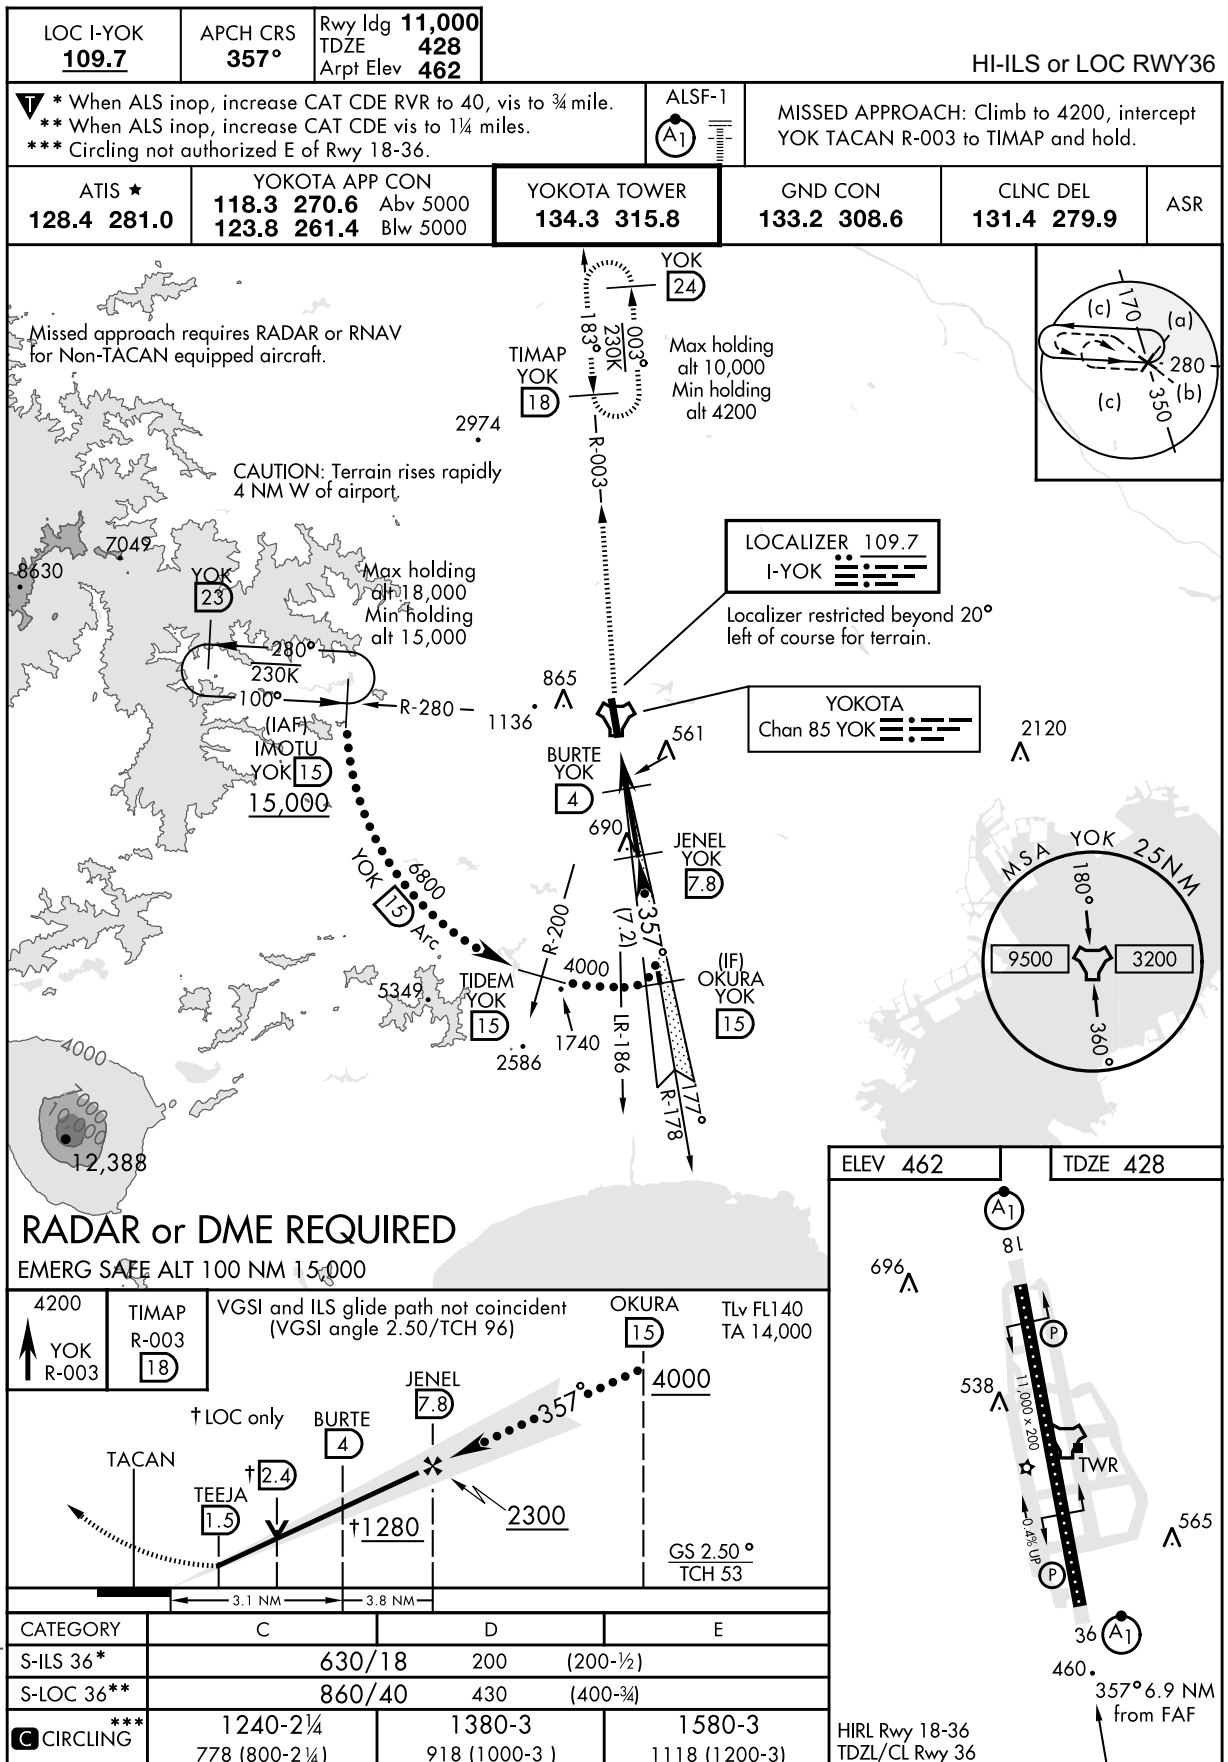

INSTRUMENT APPROACH CHART


RJTY / YOKOTA

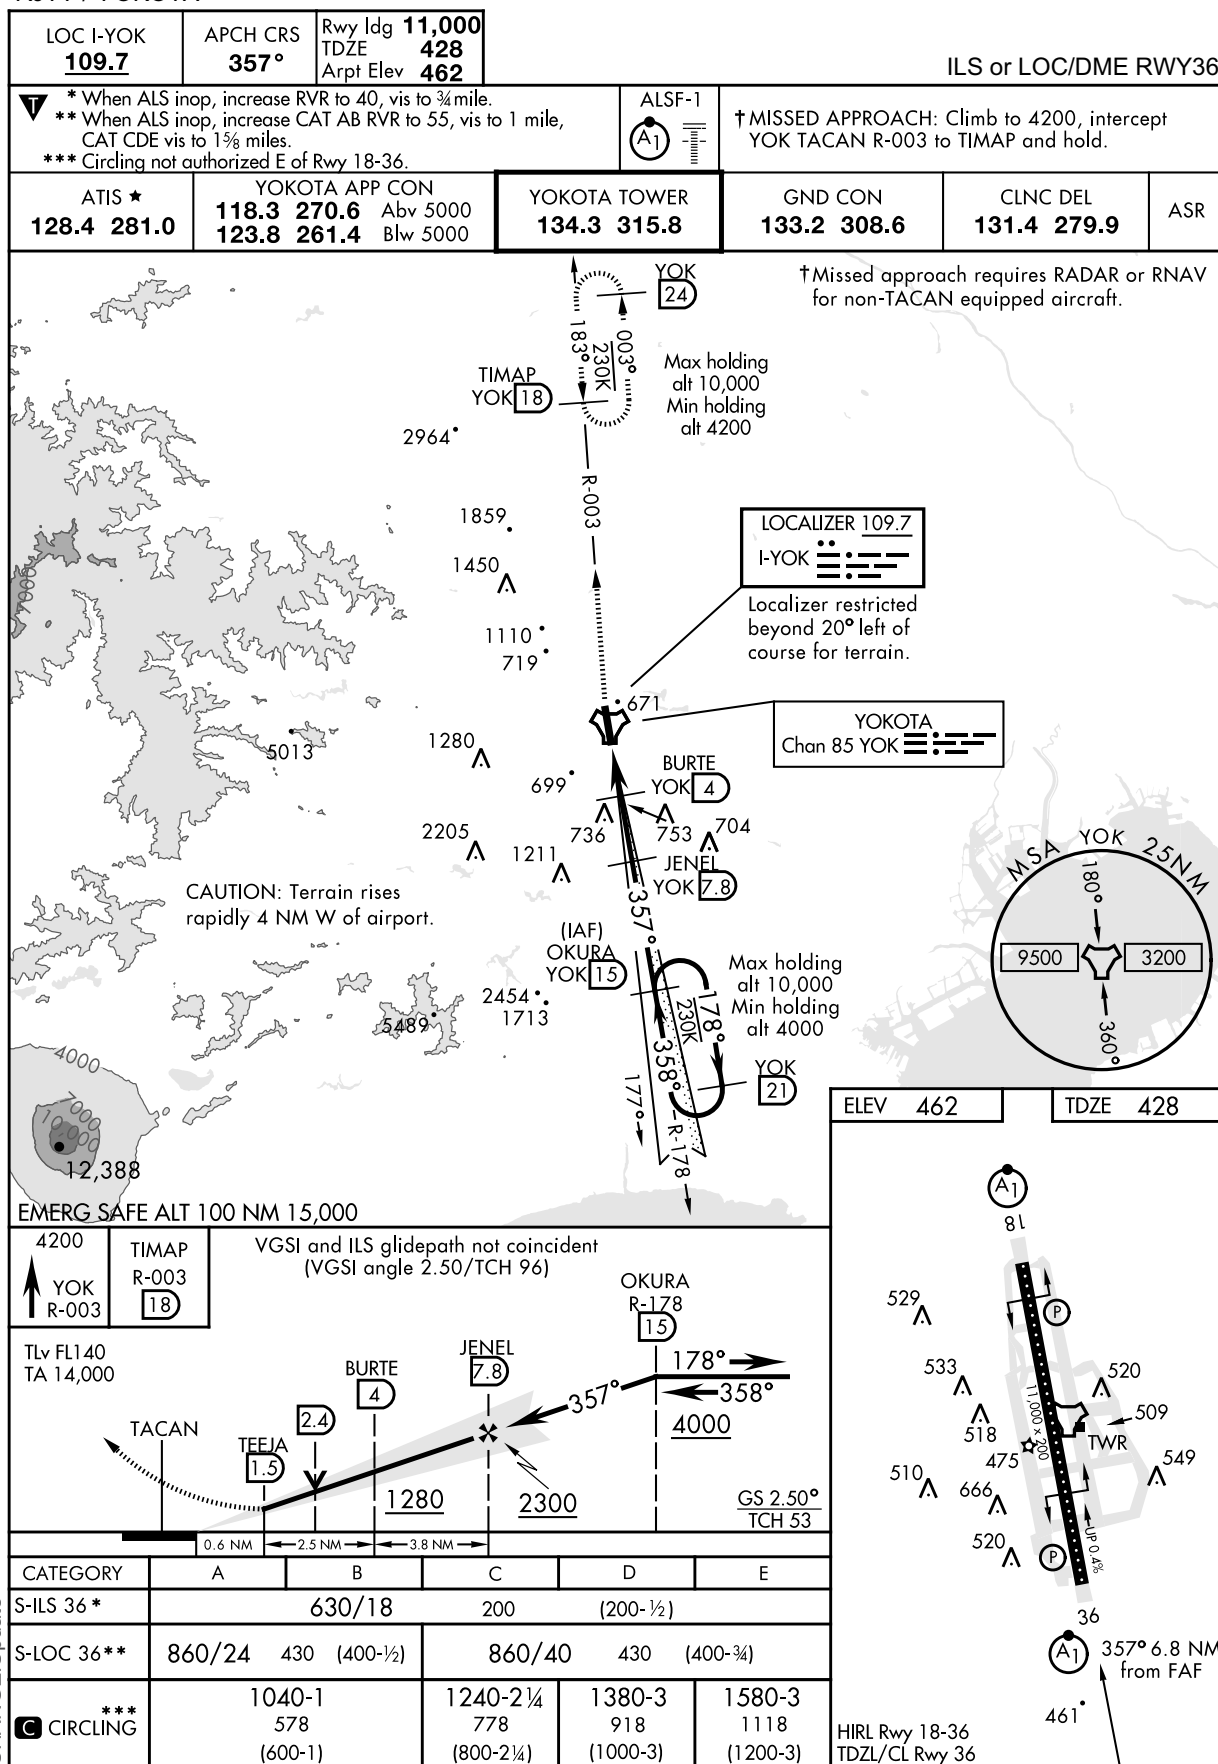

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART




RJTY / YOKOTA

APCH CRS 177°	Rwy ldg 11,000 TDZE 460 Arpt Elev 462	RNAV(GPS) RWY18			
▽ *When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles. **Circling not authorized E of Rwy 18-36.		ALSIF-1 	MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.		
ATIS ★ 128.4 281.0	YOKOTA APP CON 118.3 270.6 Abv 5000 123.8 261.4 Blw 5000	YOKOTA TOWER 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9	ASR

DME/DME RNR - 0.3 NA



EMERG SAFE ALT 100 NM 15,000

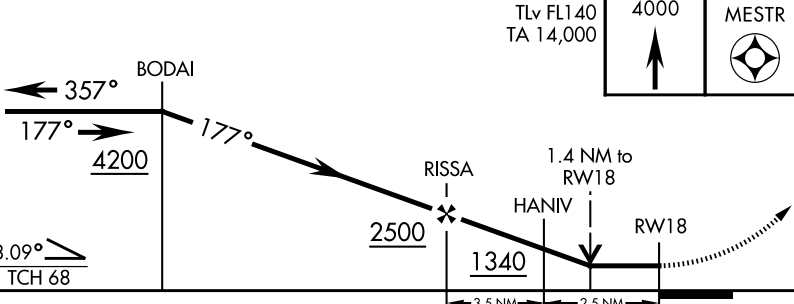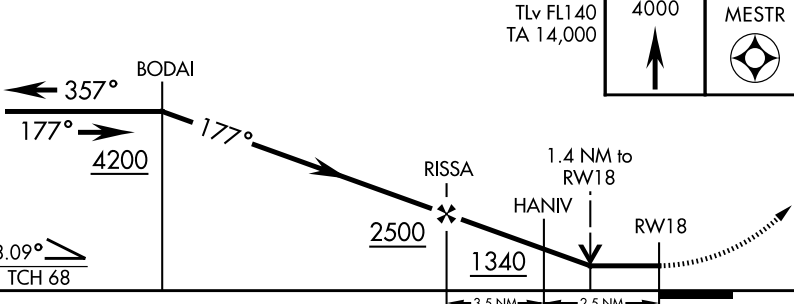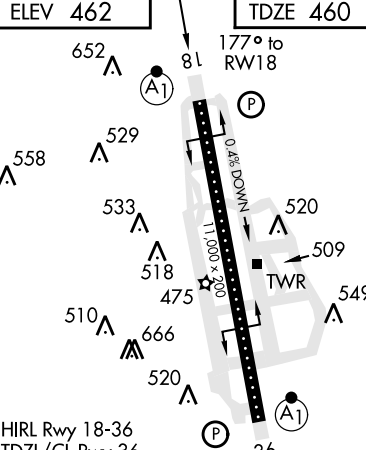		TLv FL140 TA 14,000	4000	MESTR	ELEV 462	TDZE 460
		3.09° TCH 68	3.5 NM	2.5 NM	1.4 NM to RW18	0.48% DOWN 11,000 x 250
CATEGORY	A	B	C	D		
LNAV MDA *	960/24 498 (500-1/2)	960/50 498 (500-1)	960/50 498 (500-1)	960/50 498 (500-1)		
CIRCLING **	1020-1 558 (600-1)	1040-1 578 (600-1)	1240-2 778 (800-2 1/4)	1380-3 918 (1000-3)		

CHANGE: Update

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS	Rwy ldg	11,000
357°	TDZE	428
	Arpt Elev	462


RNAV(GPS) RWY36

⚠ * When ALS inop, increase CAT A/B RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles.
 ** Circling not authorized East of Rwy 18-36.



MISSED APPROACH: Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.


ATIS★ 128.4 281.0	APP CON 118.3 261.4	TOWER★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9	ASR
----------------------	------------------------	-----------------------	------------------------	-------------------------	-----

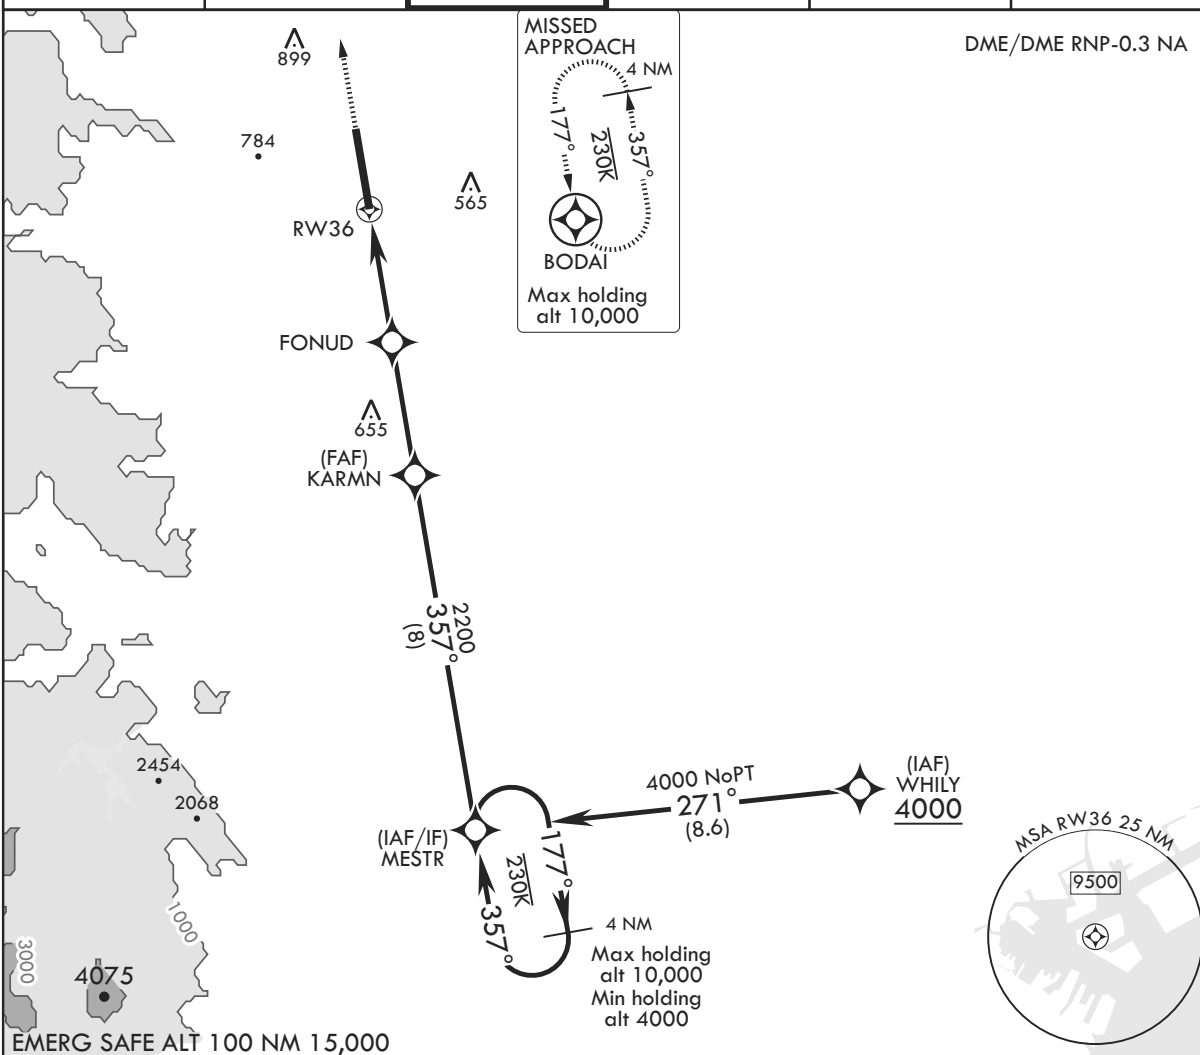

EMERG SAFE ALT 100 NM 15,000

5300	BODAI	VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96).
------	-------	--


TLv FL140
TA 14,000

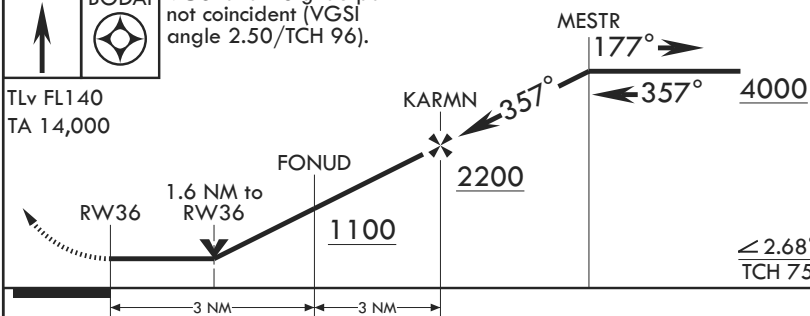

ELEV 462

TDZE 428

CATEGORY	A	B	C	D
LNVA MDA*	940/24 510 (500-1/2)	940/55 510 (500-1)	1240-2 1/4 778 (800-2 1/4)	1380-3 918 (1000-3)
CIRCLING**	1040-1 578 (600-1)			

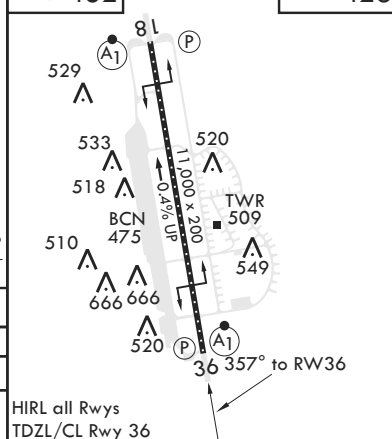

NOTE: REPRINTING DOD FLIP