

AD CHART



RJOI / IWAKUNI

Aircraft Parking / Docking Chart



STANDARD DEPARTURE CHART - INSTRUMENT



INSTRUMENT APPROACH CHART

RJOI / IWAKUNI



NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJOI / IWAKUNI

APCH CRS 015°	Rwy Idg 8007 TDZE 10 Arpt Elev 10
-------------------------	--

RNAV(GPS) RWY02

T * When ALS inop, increase CAT ABC vis to 7/8 mile. CAT D vis to 1 mile.
 ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.
 *** Circling not authorized W of Rwy 02-20. CAT D cir remain within 2.8 NM.

ALSF-1

† MISSED APPROACH: Climbing right turn to 6000 direct MYE VOR/DME and hold, continue climb-in-hold to 6000.

ATIS★ 128.4 283.0	APP CON 131.4 236.2	TOWER★ 123.8 340.2	GND CON 121.3 360.2	CLNC DEL 135.7 310.6	ASR/PAR
----------------------	------------------------	-----------------------	------------------------	-------------------------	---------



† CAUTION: Missed Approach
Minimum Climb Rate to 2100

Knots	60	120	180	240	300	360
V/V(fpm)	260	520	780	1040	1300	1560

Controlling Obstacle 1457'

For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below -15°C
(4°F) or above 43°C (110°F).

DME/DME RNP 0.3 NA

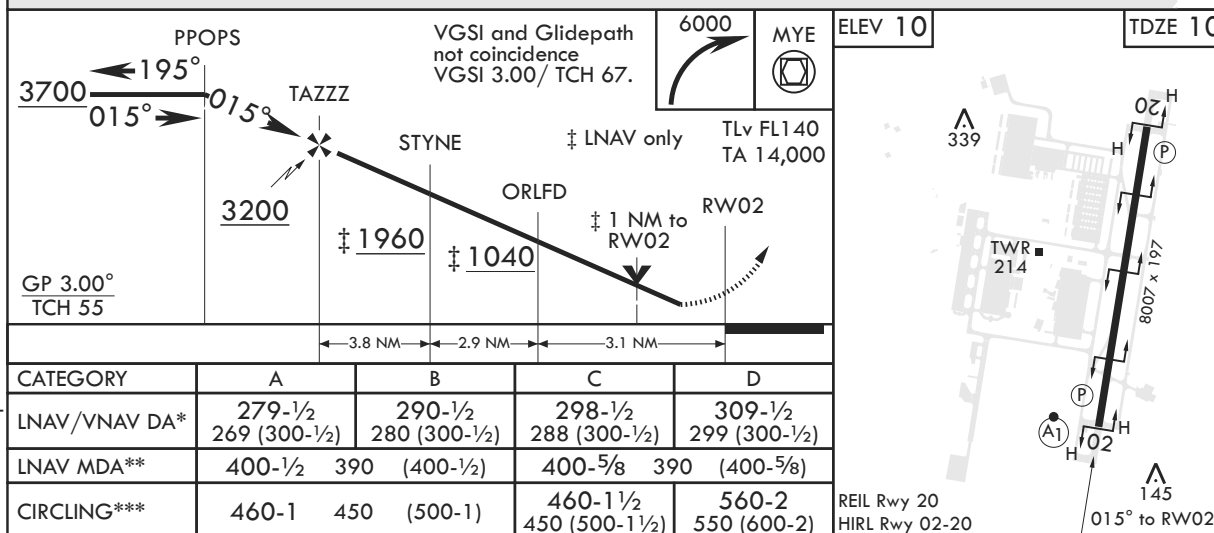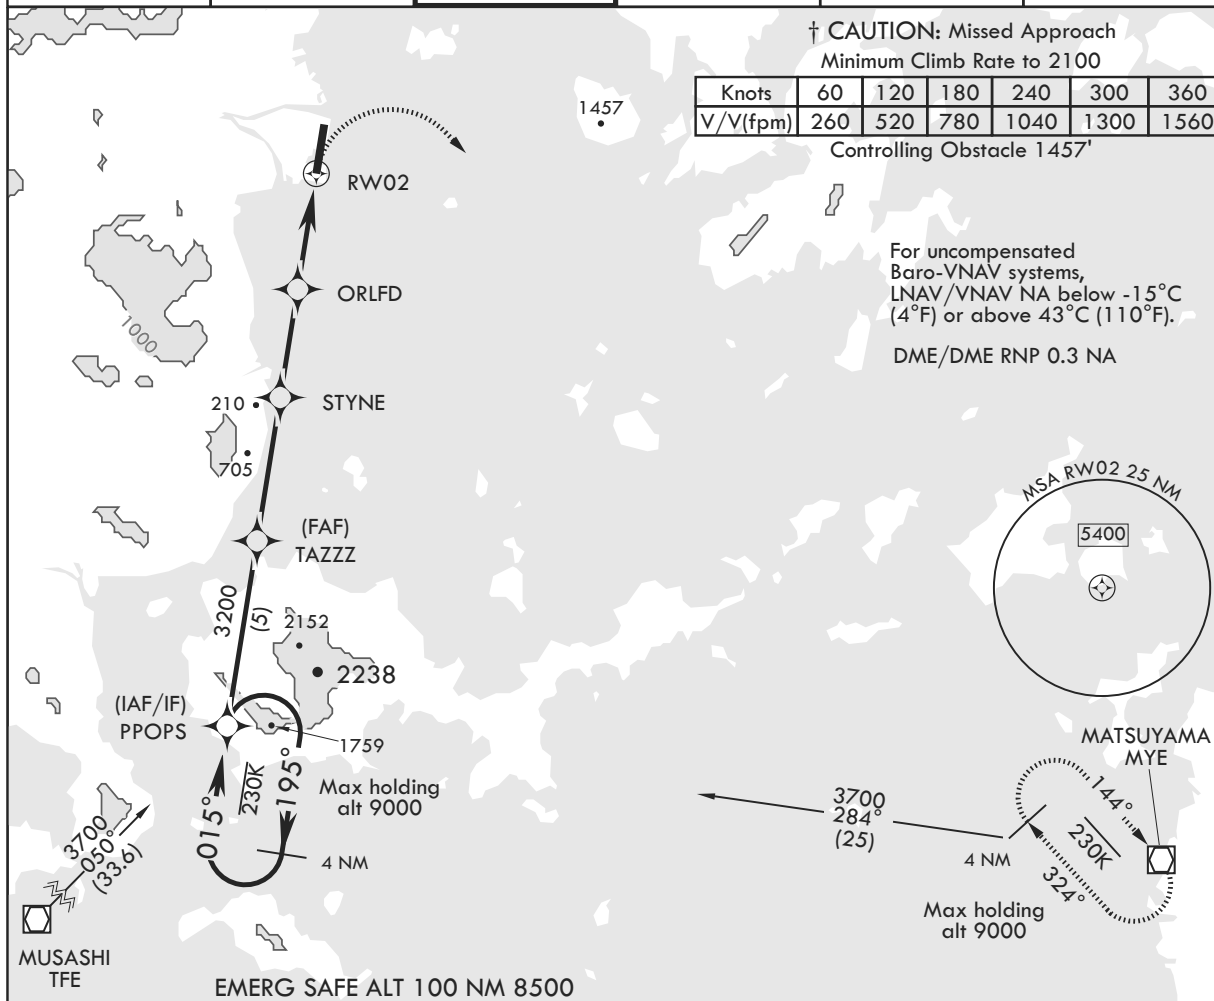

NOTE: REPRINTING DOD FLIP

RJOI / IWAKUNI

LDG CHART

SEALANE PATTERNS & VFR ARR PATTERNS



IWAKUNI SEALANE(TOWER) :
122.0 - 123.1x - 228.2 - 319.0

IWAKUNI APP : WEST
131.4 - 236.2
EAST 128.0 - 250.6

IWAKUNI TWR :
123.8 - 340.2

Minimum Vectoring Altitude CHART

