

## AD 2 AERODROMES

## RJEO AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJEO - OKUSHIRI

## RJEO AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	420418N/1392558E 120° / 0.75km from RWY31 THR
2	Direction and distance from (city)	65NM WNW FM Hakodate City
3	Elevation/ Reference temperature	161FT / 25°C(2004-2008)
4	Geoid undulation at AD ELEV PSN	108FT
5	MAG VAR/ Annual change	9°W(2000) / 0.9°E
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Hokkaido, Public AP Airport administration branch: 185-2, Yoneoka, Okushiri-cho, Okushiri-gun, Hokkaido. TEL:01397-3-2153
7	Types of traffic permitted(IFR/ VFR)	IFR/VFR
8	Remarks	Nil

## RJEO AD 2.3 OPERATIONAL HOURS

1	AD Administration	0000 - 0800
2	Customs and immigration	On request Customs: 0138-40-4213 Immigration: 0138-41-6922
3	Health and sanitation	Quarantine(human): On request(0138-59-0248) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (NEW CHITOSE)
7	ATS	0000 - 0800 Remarks:AFIS provided by New Chitose Airport Office.
8	Fuelling	Nil
9	Handling	0000 - 0800
10	Security	0000 - 0800
11	De-icing	Nil
12	Remarks	Nil

**RJEO AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

**RJEO AD 2.5 PASSENGER FACILITIES**

1	Hotels	Nil
2	Restaurants	Nil
3	Transportation	Buses and Taxis
4	Medical facilities	Hospital in Okushiri-cho 18km
5	Bank and Post Office	Post Office in Okushiri-cho
6	Tourist Office	Nil
7	Remarks	Nil

**RJEO AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	CAT 4
2	Rescue equipment	Chemical fire fighting truck x 1, Emergency medical equipments conveyance truck x 1
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

**RJEO AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Snow sweeper x 2 , Rotary x 1, Truck x 2, Dozer x 2, Motor grader x 1, Wheel Loader x 1, Anti freezing agent spreader x 1
2	Clearance priorities	1.RWY, 2:TWY, 3:Apron
3	Remarks	Nil

**RJEO AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

1	Apron surface and strength	Surface:asphalt-concrete, Strength:PCN 17/F/B/Y/T
2	Taxiway width, surface and strength	WIDTH : 18m Surface:asphalt-concrete, Strength:PCN 17/F/B/Y/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	(Spot NR) 1: 420419.44N/1392607.31E 2: 420420.37N/1392605.17E
6	Remarks	Nil

**RJEO AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:RWY13/31 (Marking):RWY designation, RWY CL, RWY THR, Aiming point, TDZ, RWY side stripe (LGT):REDL, RTHL, RENL, RWY DIST marker LGT TWY: (Marking):TWY CL, RWY HLDG PSN, TWY side stripe (LGT):TWY edge LGT
3	Stop bars	Nil
4	Remarks	(Marking):Overrun area, ACFT PRKG PSN, Apron TWY CL (LGT):Apron flood LGT

**RJEO AD 2.10 AERODROME OBSTACLES**

In approach/TKOF areas

RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil					

In circling area and at AD

Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Mountain•Tree	420537N/1392622E	425FT	- / LIM(Red)	

## RJEO AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NEW CHITOSE
2	Hours of service MET Office outside hours	H24 (NEW CHITOSE)
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at NEW CHITOSE
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> , P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	RADIO
10	Additional information(limitation of service, etc.)	Nil

## RJEO AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
13	120.15°	1500x45	PCN 17/F/B/Y/T Asphalt Concrete	420429.89N 1392530.71E 108FT	THR ELEV : 180FT
31	300.15°	1500x45	PCN 17/F/B/Y/T Asphalt Concrete	420405.46N 1392627.13E 109FT	THR ELEV : 141FT
Slope of RWY	Strip Dimensions(M)		RESA(Overrun) Dimensions(M)	Remarks	
7	10		11	14	
See AD2.24 AD CHART	1620x150		40x150 40x150	RWY grooving:1500m x 45m	

## RJEO AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
13	1500	1500	1500	1500	Nil
31	1500	1500	1500	1500	Nil

## RJEO AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
13	Nil	Green	PAPI 3.0°/LEFT 310.5m 45ft	Nil	Nil	1,500m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
31	Nil(*1)	Green	PAPI 3.0°/LEFT 238.7m 45ft	Nil	Nil	1,500m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
Remarks								
10								
3 APCH LGT beacon are installed at 270m intervals from RWY31 THR.(*1) Overrun area edge LGT(LEN:60m,Color:Red) (*2) RWY THR ID LGT for RWY 13/31 THR (Color: White)								

## RJEO AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN:420423N1392612E, White/Green EV4.3sec,HO
2	LDI location and LGT Anemometer location and LGT	LDI:Nil Anemometer: RWY13:450m from RWY13 THR, 67m from RWY CL RWY31:142m from RWY31 THR, 67m from RWY CL
3	TWY edge and centerline lighting	TWY edge LGT:Blue TWY CL LGT:Nil
4	Secondary power supply/switch-over time	Within 8 sec:ALL LGT
5	Remarks	WDI LGT

## RJEO AD 2.16 HELICOPTER LANDING AREA

Nil
-----

## RJEO AD 2.17 ATS AIRSPACE

Designation and lateral limits	Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1	2	3	4	6
Nil				

## RJEO AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
AFIS	Okushiri Radio	122.7MHz	0000 - 0800	Operated by New Chitose Airport Office.

## RJEO AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (10°W/2019)	ORE	109.85MHz	0000 - 0800	420413.09N/ 1392636.25E	-	VOR unusable: 360°-010° Beyond 15nm BLW 4,000ft. 010°-030° Beyond 10nm BLW 4,000ft. 030°-070° Beyond 30nm BLW 7,000ft. 350°-360° Beyond 30nm BLW 3,000ft.
DME	ORE	1122MHz (CH-35Y)	0000 - 0800	420413.09N/ 1392636.25E	168ft	DME unusable: 360°-010° Beyond 15nm BLW 4,000ft. 010°-030° Beyond 10nm BLW 4,000ft. 030°-050° Beyond 25nm BLW 7,000ft. 050°-070° Beyond 30nm BLW 7,000ft. 320°-350° Beyond 30nm BLW 3,000ft. 350°-360° Beyond 25nm BLW 3,000ft.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based.

## RJEO AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

## RJEO AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

**RJEO AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

	RWY	REDL AVBL	REDL OUT
		CEIL-VIS	CEIL-VIS
TKOF ALTN AP FILED	13	300´-1000m	300´-1200m
	31		
Other	13	AVBL LDG MINIMA	
	31		

NOTE: SIDs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

**2. TAKE OFF MINIMA for RNAV DEPARTURE**

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	13	A,B,C	-	-	-	400m	-	500m
	31	A,B,C	-	-	-	400m	-	500m
OTHER	13	A,B,C	AVBL LDG MINIMA					
	31							

**RJEO AD 2.23 ADDITIONAL INFORMATION**

Nil
-----

**RJEO AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart  
 Standard Departure Chart - Instrument (ESASI)\*  
 Standard Departure Chart - Instrument (AONAE-RNAV)  
 Standard Arrival Chart - Instrument (IKORU-RNAV)  
 Instrument Approach Chart (VOR RWY31)\*  
 Instrument Approach Chart (VOR RWY13)\*  
 Instrument Approach Chart (VOR A)\*  
 Instrument Approach Chart (RNP RWY31)  
 Instrument Approach Chart (RNP RWY13)  
 Other Chart(Visual REP)

\*: Designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.



CHANGE : WIND SPEED METER added.



**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

SID

ESASI TWO DEPARTURE

RWY13 : Turn left,...

RWY31 : Climb via RWY HDG until 1500FT or above, complete left turn within  
ORE 10DME,...

...climb via ORE R115 to ESASI.

Cross ESASI at assigned or specified altitude.

Note : When take off from RWY13, following climb gradient should be  
maintained until 700FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : TAKE OFF MINIMA deleted.



## STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

RNAV SID

**AONAE ONE DEPARTURE**

RWY13: Climb on HDG 130° at or above 600FT, turn left direct to AONAE, to ESASI.

RWY31: Climb on HDG 310° at or above 600FT, turn left direct to EO100, to AONAE, to ESASI.

Note RWY31: 4.5% climb gradient required up to 600FT.

OBST ALT 209FT located at 0.1NM 354°FM end of RWY31

**RWY13**


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	130 (120.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	AONAE	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

**RWY31**

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	310 (300.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	EO100	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	AONAE	-	095 (084.9)	-9.8	17.1	-	-	-	-	Basic RNP1
004	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

CHANGE : New PROC

STANDARD ARRIVAL CHART - INSTRUMENT

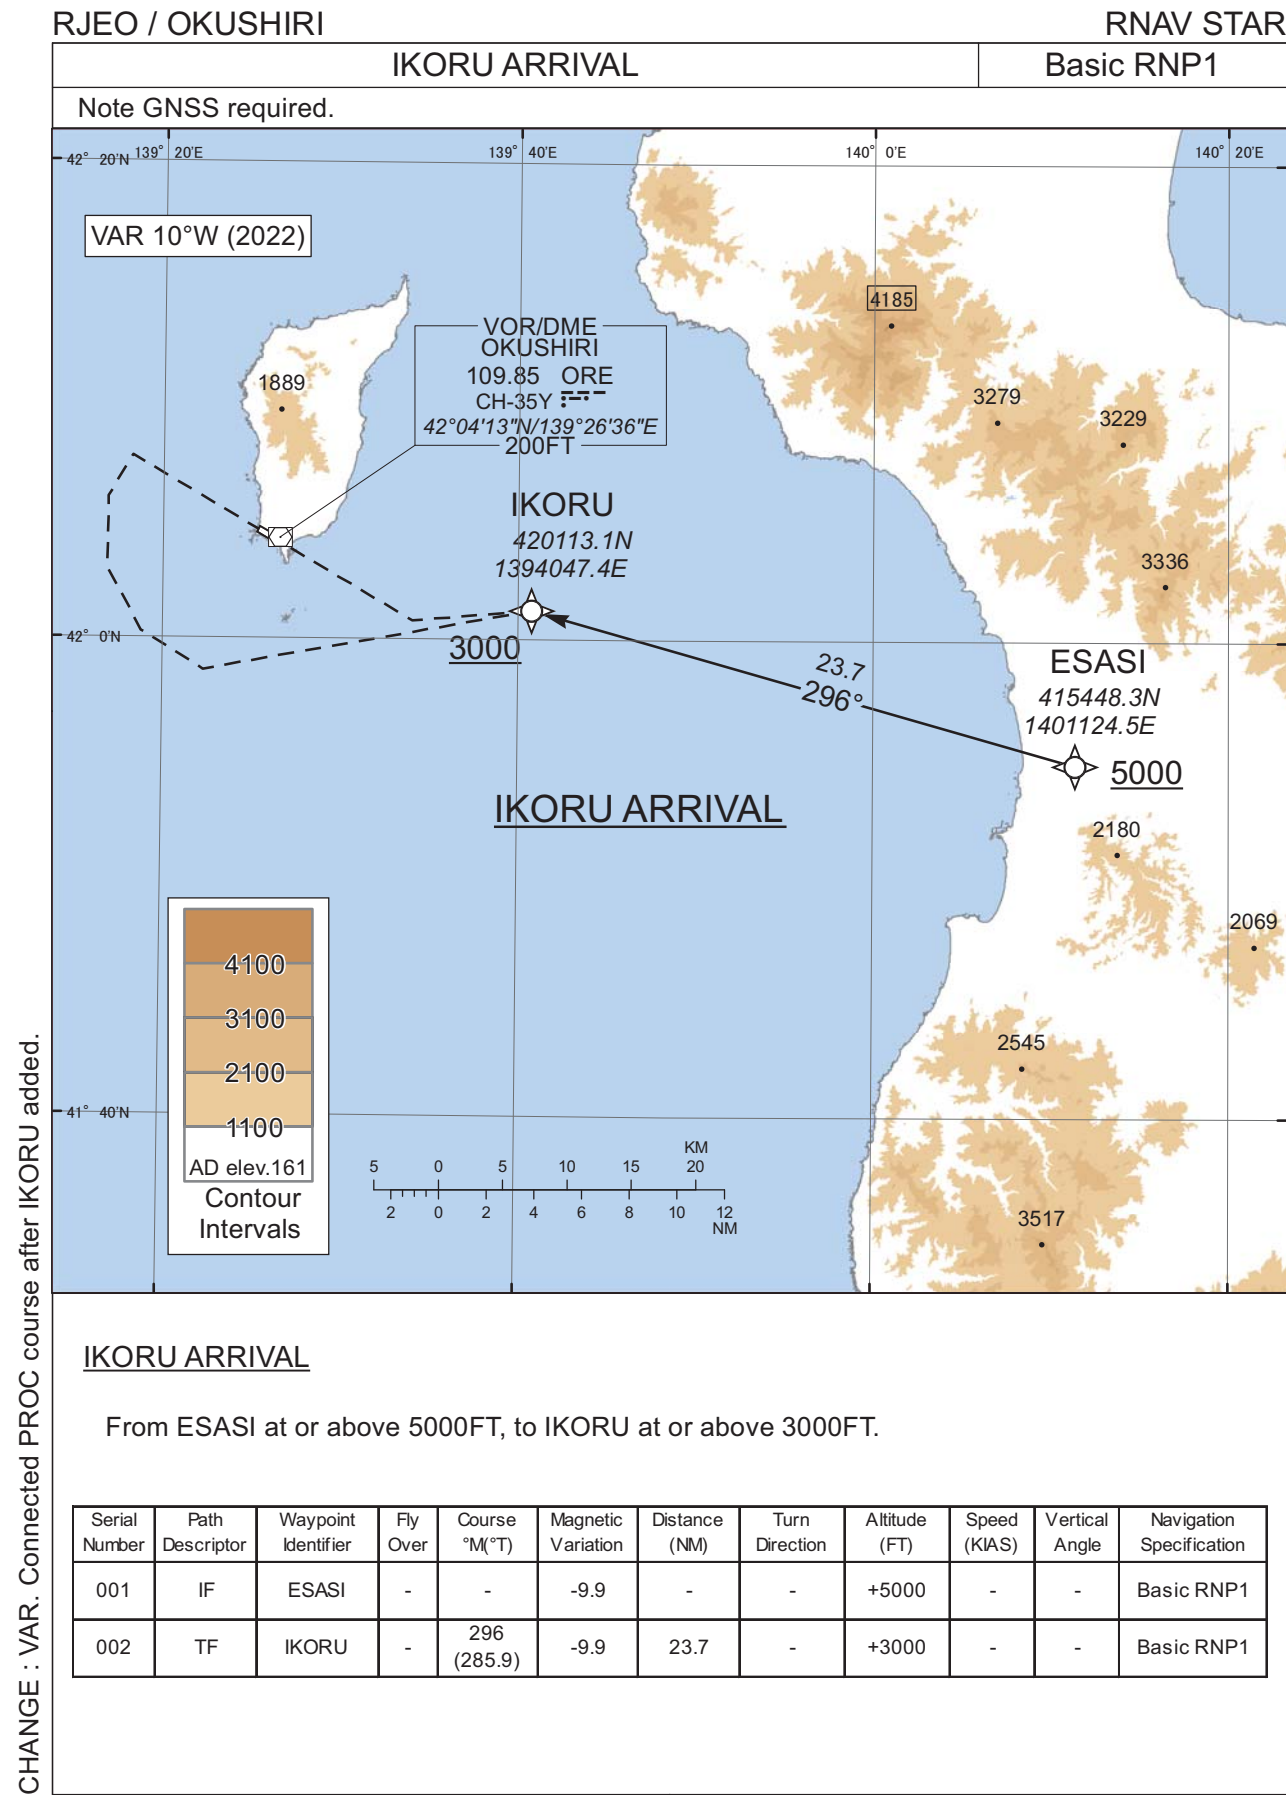

CHANGE : VAR. Connected PROC course after IKORU added.

**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR RWY31

SAPPORO CONTROL 119.3 – 276.5 134.25 – 260.4	OKUSHIRI 109.85 CH-35Y 42°04'13"N / 139°26'36"E	VOR/DME ORE 180° 109.85 CH-35Y	OKUSHIRI RADIO 122.7 AFIS provided by New Chitose Airport Office	NO RADAR
--	--	--	---	----------



**MISSED APPROACH**

Turn left, climb to 3000FT or above via ORE R230, turn left direct to ORE VOR/DME within ORE 10.0DME and hold at 4000FT.  
Contact OKUSHIRI RADIO.

ORE 4000

163°

323°

1800

VDP

MAPt

DME to ORE 0.8 1.4

Remain within ORE 10.0DME

MINIMA		THR elev. 141	AD elev. 161	
CAT	CIRCLING			
	MDA(H)	CMV	MDA(H)	VIS
A	600 (459)	1500	600 (439)	1600
B			620 (459)	
C		2000		2400
D	–	–	–	–

Circling to SOUTH side of RWY only.

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI


VOR RWY13

SAPPORO CONTROL  
119.3 – 276.5  
134.25 – 260.4OKUSHIRI VOR/DME  
109.85 ORE  
CH-35Y  
42°04'13"N / 139°26'36"EOKUSHIRI RADIO  
122.7  
AFIS provided  
by New Chitose Airport Office

NO RADAR

VAR 10°W (2019)

MSA 25NM

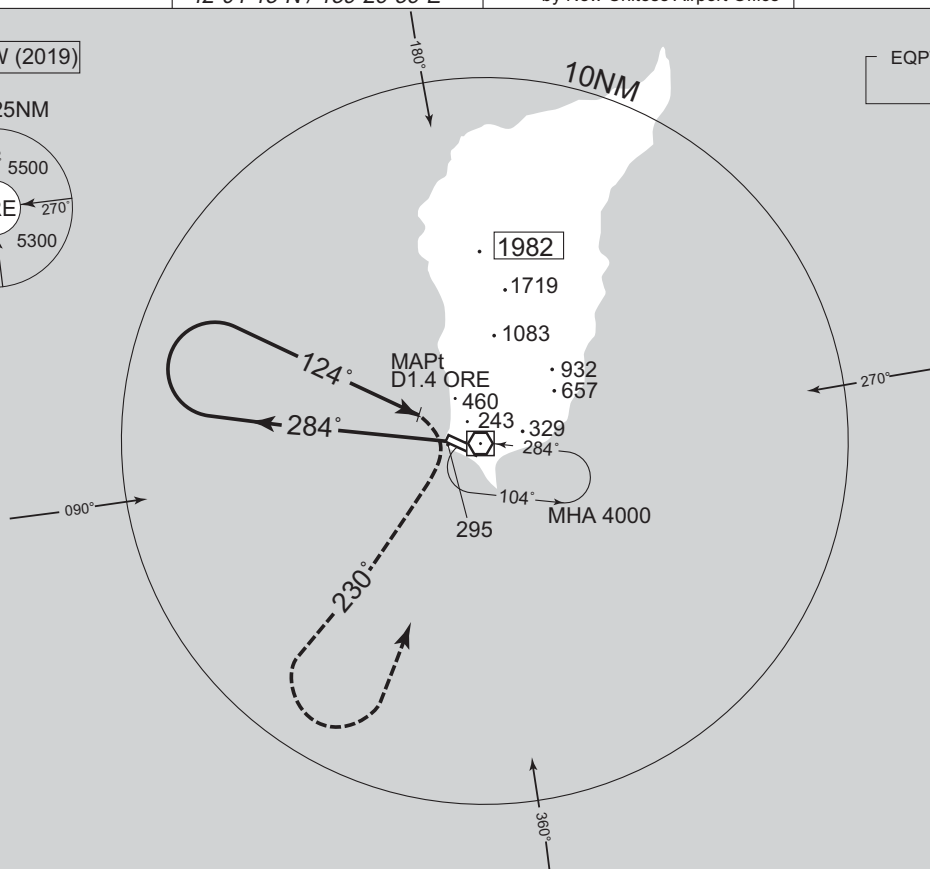EQPT REQUIRED  
DME

Remain within ORE 10.0DME



## MISSED APPROACH

Turn right, climb to 3000FT or above  
via ORE R230, turn left direct to  
ORE VOR/DME within ORE 10.0DME  
and hold at 4000FT.  
Contact OKUSHIRI RADIO.

MINIMA		THR elev. 180	AD elev. 161	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	760 (599)	1500	760 (599)	1600
B		2000		2400
C	–	–	–	–
D	–	–	–	–

Circling to SOUTH side of RWY only.


CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.



INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR A

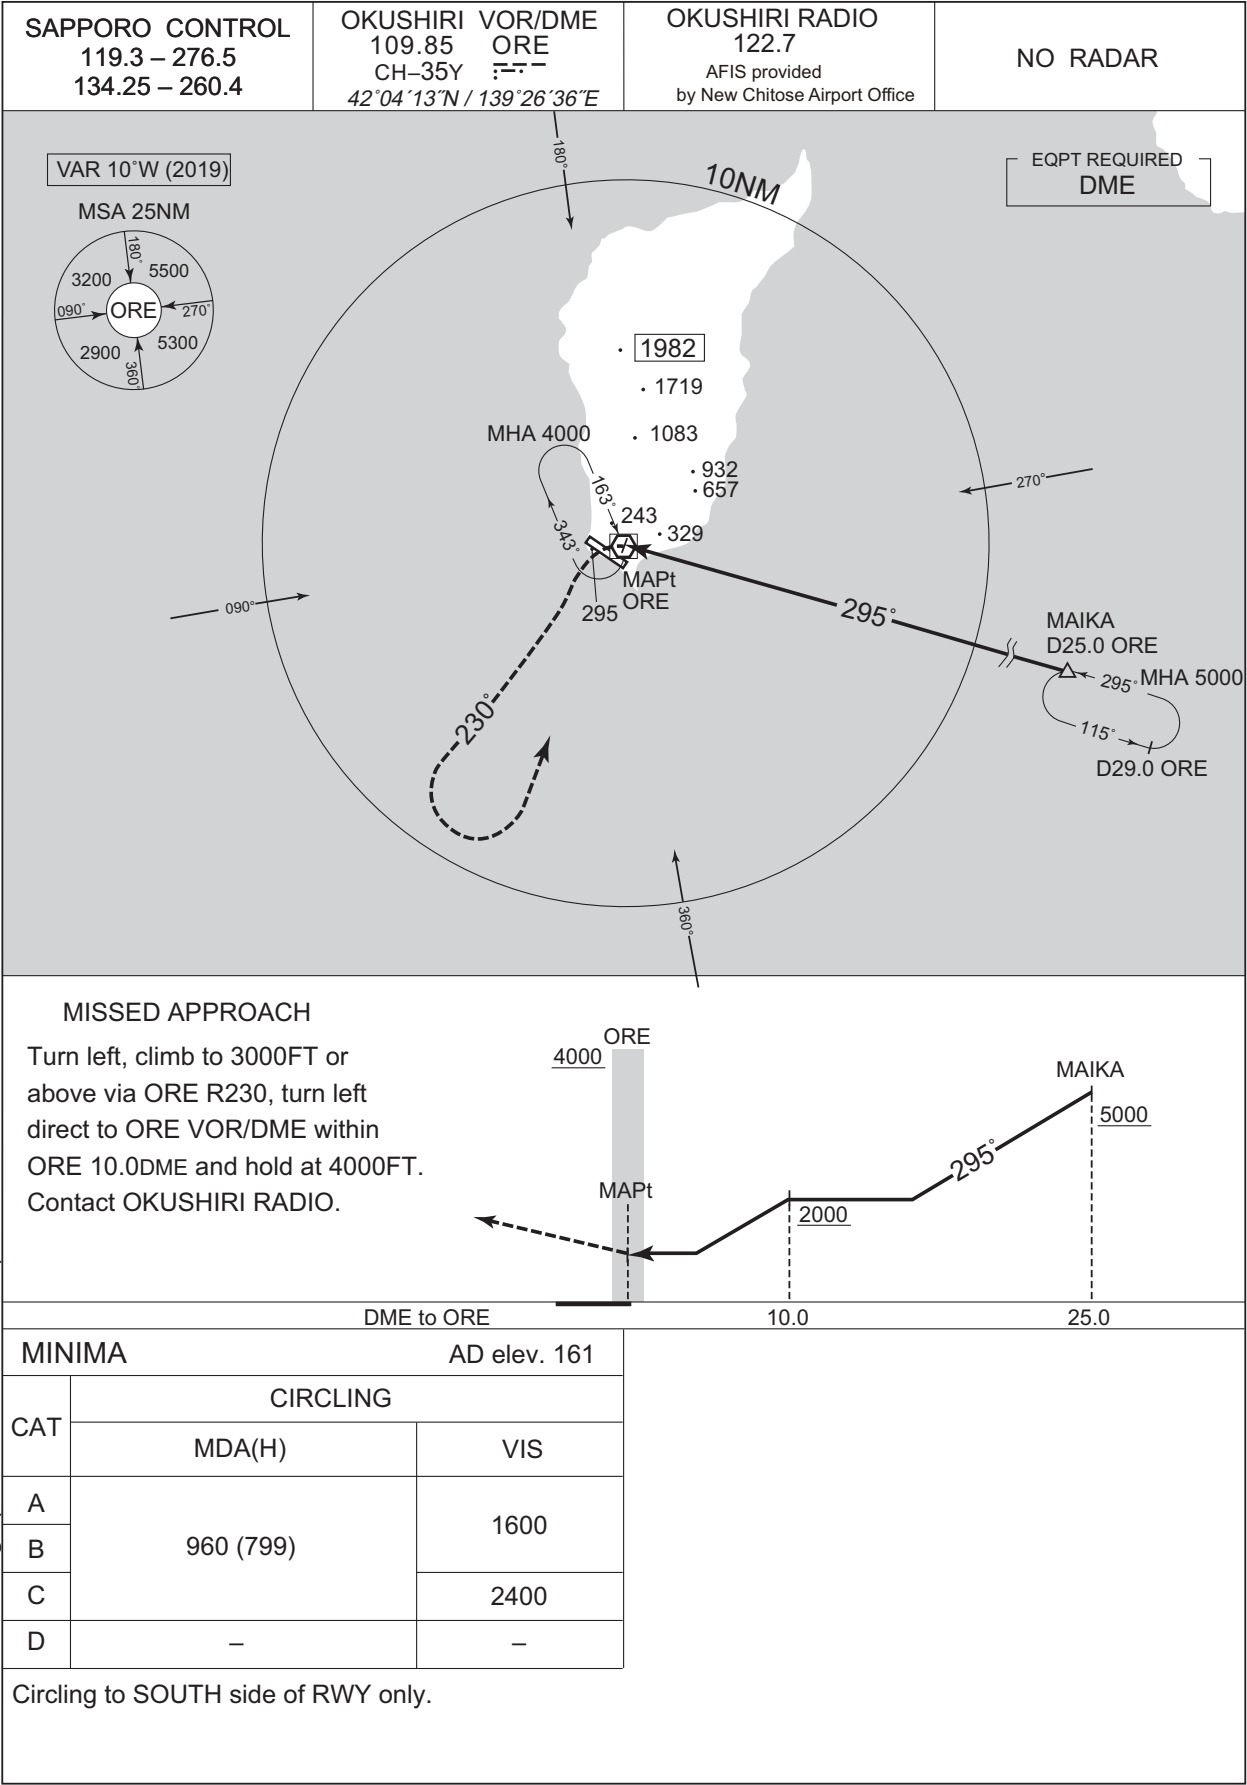

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

RNP RWY31



CHANGE : PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

RNP RWY31

**FAS DATA BLOCK**

Operation type	0	LTP/FTP ellipsoidal height	+00760
SBAS service provider identifier	2	FPAP Latitude	420433.0405N
Airport identifier	RJEO	FPAP Longitude	1392523.3970E
Runway	31	Threshold Crossing Height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M31A	∠ length offset	0192
LTP/FTP latitude	420405.4465N	HAL	40.0
LTP/FTP longitude	1392627.1545E	VAL	50.0
CRC remainder	D0B5F768		

**Required additional data**

LTP/FTP orthometric height	42.8
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

## INSTRUMENT APPROACH CHART

RJE0 / OKUSHIRI

RNP RWY13



CHANGE:PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

RNP RWY13

## FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00878
SBAS service provider identifier	2	FPAP Latitude	420402.2720N
Airport identifier	RJEO	FPAP Longitude	1392634.4865E
Runway	13	Threshold Crossing Height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M13A	∠ length offset	0192
LTP/FTP latitude	420429.8670N	HAL	40.0
LTP/FTP longitude	1392530.7315E	VAL	50.0
CRC remainder	D63254BC		

## Required additional data

LTP/FTP orthometric height	54.8
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

RJEO / OKUSHIRI

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Call sign(REMOTE→RADIO).

Call sign	BRG / DIST from ARP	Remarks
稲穂岬 Inahomisaki	028°T / 12.0NM	灯台 Lighthouse
10NM E	090°T / 10.0NM	海上 Over the sea
10NM SE	135°T / 10.0NM	海上 Over the sea

**INTENTIONALLY LEFT BLANK**