

AD 2 AERODROMES

ROKJ AD 2.1 AERODROME LOCATION INDICATOR AND NAME

ROKJ - KUMEJIMA

ROKJ AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	262149N/1264250E 021°/1.0km from RWY 03 THR
2	Direction and distance from (city)	
3	Elevation/ Reference temperature	22.7ft / 33°C (2004-2008)
4	Geoid undulation at AD ELEV PSN	103ft
5	MAG VAR/ Annual change	5° W(2009) / 3.3°W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	OKINAWA PREF. PUBLIC AP. Kumejima Airport Administration Office 566-2,aza-kitahara,kumejima-cho,shimajiri-gun,Okinawa pref. Tel:098-985-2939 Fax:098-985-2945
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Nil

ROKJ AD 2.3 OPERATIONAL HOURS

1	AD Administration	2300 - 1030
2	Customs and immigration	On request Customs: 098-862-8529 Immigration: 098-832-4185
3	Health and sanitation	Quarantine(human): On request(098-868-1674) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24(NAHA)
7	ATS	2300 - 1030 Remarks: AFIS provided by Naha Airport Office.
8	Fuelling	Nil
9	Handling	Ask AD administration
10	Security	Ask AD administration
11	De-icing	Nil
12	Remarks	Nil

ROKJ AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Conveyer belt, Lift for loading, etc
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

ROKJ AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotels in Kumejima town
2	Restaurants	At Airport In Kumejima town
3	Transportation	Buses and Taxi
4	Medical facilities	Hospital 6.5km from Airport
5	Bank and Post Office	Bank in Kumejima town / Post Office in Kumejima town
6	Tourist Office	In Kumejima town
7	Remarks	Nil

ROKJ AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 7
2	Rescue equipment	Chemical fire fighting truck x 2 Emergency medical equipments conveyance truck
3	Capability for removal of disabled aircraft	Incapable
4	Remarks	Nil

ROKJ AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Not Applicable
2	Clearance priorities	Not Applicable
3	Remarks	Nil

ROKJ AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface : Cement-concrete Strength : PCN 55/R/B/X/T
2	Taxiway width, surface and strength	Width : 30m Surface : Asphalt-concrete Strength : PCN 63/F/C/X/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Spot NR 1 262151.24N 1264300.15E 2 262153.06N 1264300.93E 3 262154.88N 1264301.71E 3' 262155.07N 1264301.18E
6	Remarks	Nil

ROKJ AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:RWY03/21 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point , TDZ, RWY side stripe (LGT) RCLL, REDL, RTHL, RENL, Turning point indicator LGT, TWY: (Marking) TWY CL, TWY side stripe (LGT) TWY edge LGT, TWY CL LGT
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area (LGT) Apron flood LGT

ROKJ AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

In Area3 To be developed

ROKJ AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NAHA
2	Hours of service MET Office outside hours	H24(NAHA)
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at NAHA
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	RADIO
10	Additional information(limitation of service, etc.)	Nil

ROKJ AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
03	021.17°	2000x45	PCN 63/F/C/X/T Asphalt Concrete	262118.32N 1264236.67E 103ft	THR ELEV:21.7ft
21	201.17°	2000x45	PCN 63/F/C/X/T Asphalt Concrete	262218.92N 1264302.73E 104ft	THR ELEV:18.7ft
Slope of RWY	Strip Dimensions(M)	RESA (Overrun) Dimensions (M)	Remarks		
7	10	11	14		
See AD2.24 AD chart	2120x150	194 x (MNM:84 MAX:186)*	Hills E and NE RWY GROOVING : 2000mx30m		
	2120x150	44 x (MNM:133 MAX:157)*	*For detail, ask airport administrator		

ROKJ AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
03	2000	2000	2000	2000	Nil
21	2000	2000	2000	2000	Nil

ROKJ AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
03	Nil	Green -	PAPI 3.0°/LEFT 403.8m 61ft	Nil	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*1)
21	Nil	Green -	PAPI 3.0°/LEFT 380m 61ft	Nil	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*1)
Remarks								
10								
Overrun area edge LGT(LEN:60m Color:Red) (*1) RWY THR ID LGT for RWY 03/21 THR (Color:White)								

ROKJ AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 262150N/1264307E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer: RWY03 : 264m inside FM RWY03 THR, LGTD RWY21 : 286m inside FM RWY21 THR, LGTD
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply / switch-over time	Within 15 sec: PAPI, RWY THR ID LGT, etc
5	Remarks	WDI LGT

ROKJ AD 2.16 HELICOPTER LANDING AREA

Nil

ROKJ AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
Kumejima Information Zone	Area within a radius of 5nm of Kumejima ARP (2622N/12643E), in the west side of a line connecting 262714N1264754E and 261214N1264754E.	----- 3000	E	Kumejima Radio En	

ROKJ AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
AFIS	Kumejima Radio	122.7MHz	2300 - 1030	Operated by Naha Airport Office. APP service provided by Naha APP.

ROKJ AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (5°W/2008)	KXC	116.7MHz	H24	262218.73N/ 1264319.43E		VOR Unusable: 080°-100° beyond 25nm BLW 4,000ft. 100°-120° beyond 30nm BLW 4,000ft. 130°-150° beyond 30nm BLW 4,000ft.
TACAN	KXC	1201MHz (CH-114X)	H24	262218.01N/ 1264317.89E	54ft	TACAN DME Unusable: 080°-090° beyond 25nm BLW 4,000ft. 090°-110° beyond 25nm BLW 4,000ft. 110°-120° beyond 25nm BLW 4,000ft. 120°-130° beyond 30nm BLW 4,000ft. 130°-150° beyond 25nm BLW 4,000ft. 160°-170° beyond 20nm BLW 2,000ft. 170°-180° beyond 25nm BLW 2,000ft. 180°-210° beyond 30nm BLW 2,000ft. TACAN AZM Unusable: 070°-080° beyond 20nm BLW 4,000ft. 080°-160° beyond 25nm BLW 4,000ft. 160°-180° beyond 20nm BLW 2,000ft. 180°-200° beyond 10nm BLW 2,000ft. 200°-220° beyond 15nm BLW 2,000ft. 220°-230° beyond 20nm BLW 2,000ft. 230°-240° beyond 30nm BLW 3,000ft.
LOC	IKX	110.95MHz	2300 - 1030	262226.05N/ 1264305.80E		235m(771ft) away FM RWY 21 THR, BRG 025°(MAG).
LOC-DME	IKX	1133MHz (CH-46Y)	2300 -1030	262225.79N/ 1264308.03E	31ft	251m(824ft) away FM RWY 21 THR, 61m(200ft) E of RCL.



REMARKS : 1. LOC beam BRG(MAG) 025°
2. ELEV of LOC-DME 9.4m(31ft)

ROKJ AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

ROKJ AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

ROKJ AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA

	RWY	REDL & RCLL AVBL		REDL or RCLL AVBL		REDL & RCLL OUT	
		CEIL-RVR	CEIL-VIS	CEIL-RVR	CEIL-VIS	CEIL-RVR	CEIL-VIS
TKOF ALTN AP FILED	03	-	300'-800m	-	300'-1000m	-	300'-1200m
	21						
OTHER	03	AVBL LDG MINIMA					
	21						

NOTE: SIDs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

2. Lost Communication procedures for arrival aircraft under radar navigational guidance

If radio communications with Naha Approach are lost for 1 minute, squawk Mode A/3 Code 7600 and :

- (1) Contact Kumejima Radio.
- (2) If unable, proceed in accordance with Visual Flight Rules.
- (3) If unable, proceed to DORIS at the last assigned altitude or 3,000FT whichever is higher and execute instrument approach.

Note : Procedures other than above will be issued when required.

ROKJ AD 2.23 ADDITIONAL INFORMATION

Nil

ROKJ AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
Standard Departure Chart - Instrument
Standard Arrival Chart - Instrument
Instrument Approach Chart (VOR RWY 03)
Instrument Approach Chart (LOC RWY 03)
Other Chart (Visual REP)
Other Chart (MVA Chart)

NOTE: SIDs and IAPs are designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

INTENTIONALLY LEFT BLANK

ROKJ / KUMEJIMA

AD CHART



INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

ROKJ / KUMEJIMA

SID and TRANSITION

DUFFY TWO DEPARTURE

RWY03 : Turn left....
RWY21 : Turn right....
....Climb via KXC R224 to DUFFY.
Cross DUFFY at or above 5000FT.

BISIS TRANSITION

After DUFFY, turn right KXC 18DME clockwise arc to intercept and proceed via KXC R337 to 25DME, then turn right to intercept via ONC R257 to BISIS.
Cross KXC R337/25DME at or above FL160.

SOUTH THREE DEPARTURE

RWY03 : Turn left....
RWY21 : Turn left....
....Climb via KXC R189 to DORIS.
Cross DORIS at or above 3000FT.



INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART-INSTRUMENT

ROKJ / KUMEJIMA


STAR

DUFFY ARRIVAL

From over BISIS, turn left to intercept and proceed via KXC R-337 to 18DME, then turn right KXC 18DME counterclockwise arc to DUFFY.

Cross DUFFY at or above 5,000ft.

CHANGE : Correction of misdescription (BISIS)

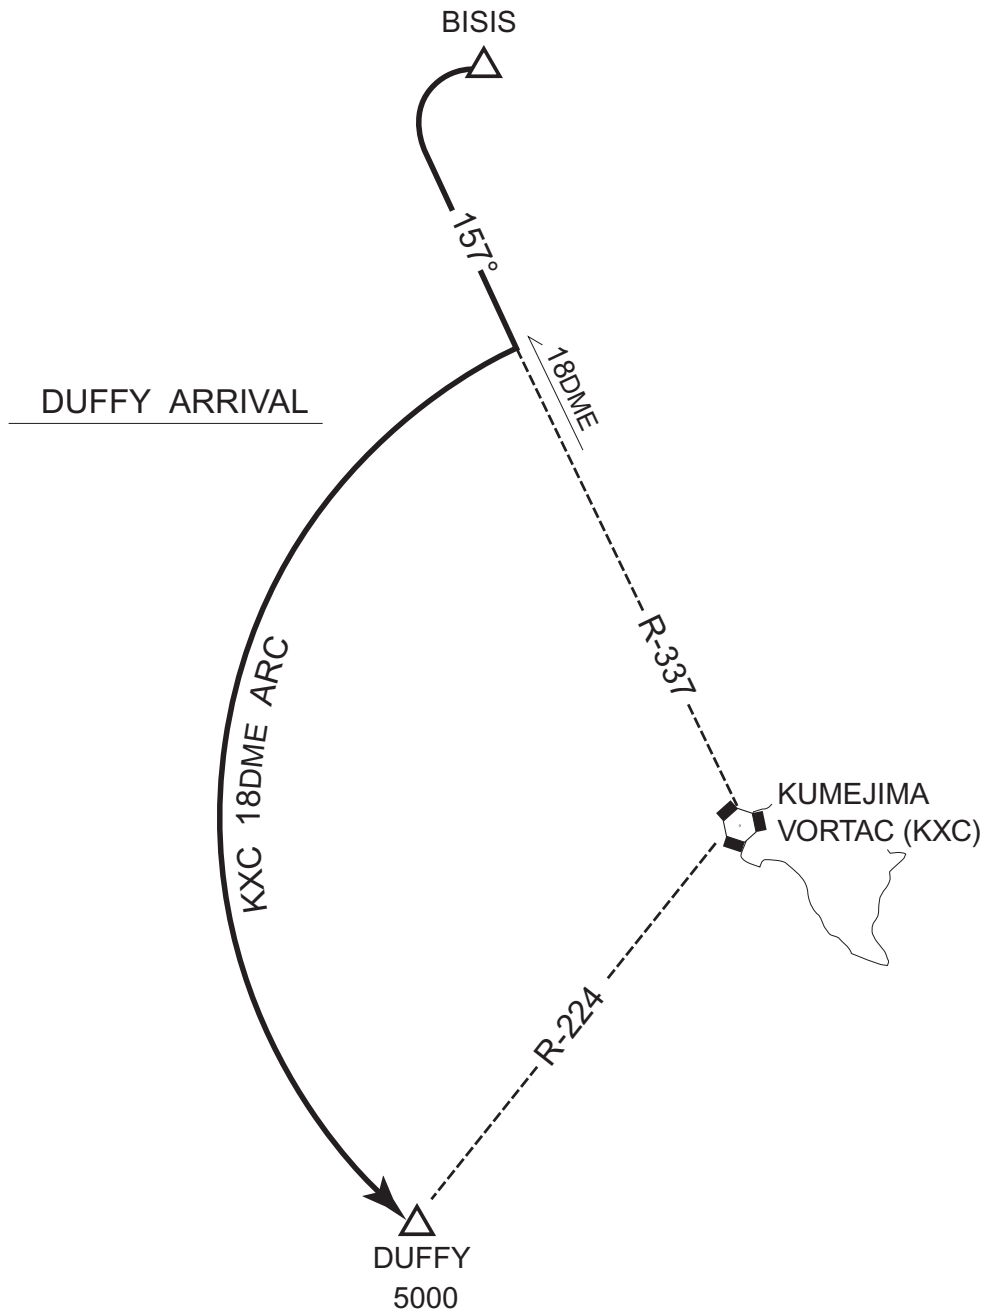

INTENTIONALLY LEFT BLANK

ROKJ / KUMEJIMA

VOR RWY 03

CHANGE : Editorial(Description of radial FM KXC).

Circling to WEST side of RWY only

ROKJ / KUMEJIMA

NAHA APP
119.1 - 335.8

LOC
110.95 IKX
LOC-DME CH-46Y

KUMEJIMA RADIO
122.7
AFIS provided
by Naha Airport Office

RADAR AVBL

VAR 5°W (2008)

MSA 25NM

VORTAC
KUMEJIMA
116.7 KXC
CH-114X
26°22'19"N/126°43'19"E

DUFFY
R224/18 DME

DORIS
R189/18 DME

KXC
18 DME ARC

IKX
1.5 DME

VDP
IKX
2.2 DME

R206

R224

R213

R200

R210

R218

R219

R220

R221

R222

R223

R224

R225

R226

R227

R228

R229

R230

R231

R232

R233

R234

R235

R236

R237

R238

R239

R240

R241

R242

R243

R244

R245

R246

R247

R248

R249

R250

R251

R252

R253

R254

R255

R256

R257

R258

R259

R260

R261

R262

R263

R264

R265

R266

R267

R268

R269

R270

R271

R272

R273

R274

R275

R276

R277

R278

R279

R280

R281

R282

R283

R284

R285

R286

R287

R288

R289

R290

R291

R292

R293

R294

R295

R296

R297

R298

R299

R300

R301

R302

R303

R304

R305

R306

R307

R308

R309

R310

R311

R312

R313

R314

R315

R316

R317

R318

R319

R320

R321

R322

R323

R324

R325

R326

R327

R328

R329

R330

R331

R332

R333

R334

R335

R336

R337

R338

R339

R340

R341

R342

R343

R344

R345

R346

R347

R348

R349

R350

R351

R352

R353

R354

R355

R356

R357

R358

R359

R360

R361

R362

R363

R364

R365

R366

R367

R368

R369

R370

R371

R372

R373

R374

R375

R376

R377

R378

R379

R380

R381

R382

R383

R384

R385

R386

R387

R388

R389

R390

R391

R392

R393

R394

R395

R396

R397

R398

R399

R400

R401

R402

R403

R404

R405

R406

R407

R408

R409

R410

R411

R412

R413

R414

R415

R416

R417

R418

R419

R420

R421

R422

R423

R424

R425

R426

R427

R428

R429

R430

R431

R432

R433

R434

R435

R436

R437

R438

R439

R440

R441

R442

R443

R444

R445

R446

R447

R448

R449

R450

R451

R452

R453

R454

R455

R456

R457

R458

R459

R460

R461

R462

R463

R464

R465

R466

R467

R468

R469

R470

R471

R472

R473

R474

R475

R476

R477

R478

R479

R480

R481

R482

R483

R484

R485

R486

R487

R488

R489

R490

R491

R492

R493

R494

R495

R496

R497

R498

R499

R500

R501

R502

R503

R504

R505

R506

R507

R508

R509

R510

R511

R512

R513

R514

R515

R516

R517

R518

R519

R520

R521

R522

R523

R524

R525

R526

R527

R528

R529

R530

R531

R532

R533

R534

R535

R536

R537

R538

R539

R540

R541

R542

R543

R544

R545

R546

R547

R548

R549

R550

R551

R552

R553

R554

R555

R556

R557

R558

R559

R560

R561

R562

R563

R564

R565

R566

R567

R568

R569

R570

R571

R572

R573

R574

R575

R576

R577

R578

R579

R580

R581

R582

R583

R584

R585

R586

R587

R588

R589

R590

R591

R592

R593

R594

R595

R596

R597

R598

R599

R600

R601

R602

R603

R604

R605

R606

R607

R608

R609

R610

R611

R612

R613

R614

R615

R616

R617

R618

R619

R620

R621

R622

R623

R624

R625

R626

R627

R628

R629

R630

R631

R632

R633

R634

R635

R636

R637

R638

R639

R640

R641

R642

R643

R644

R645

R646

R647

R648

R649

R650

R651

R652

R653

R654

R655

R656

R657

R658

R659

R660

R661

R662

R663

R664

R665

R666

R667

R668

R669

R670

R671

R672

R673

R674

R675

R676


R677

R678

R679

R6

CHANGE : Editorial(Description of radial FM KXC).

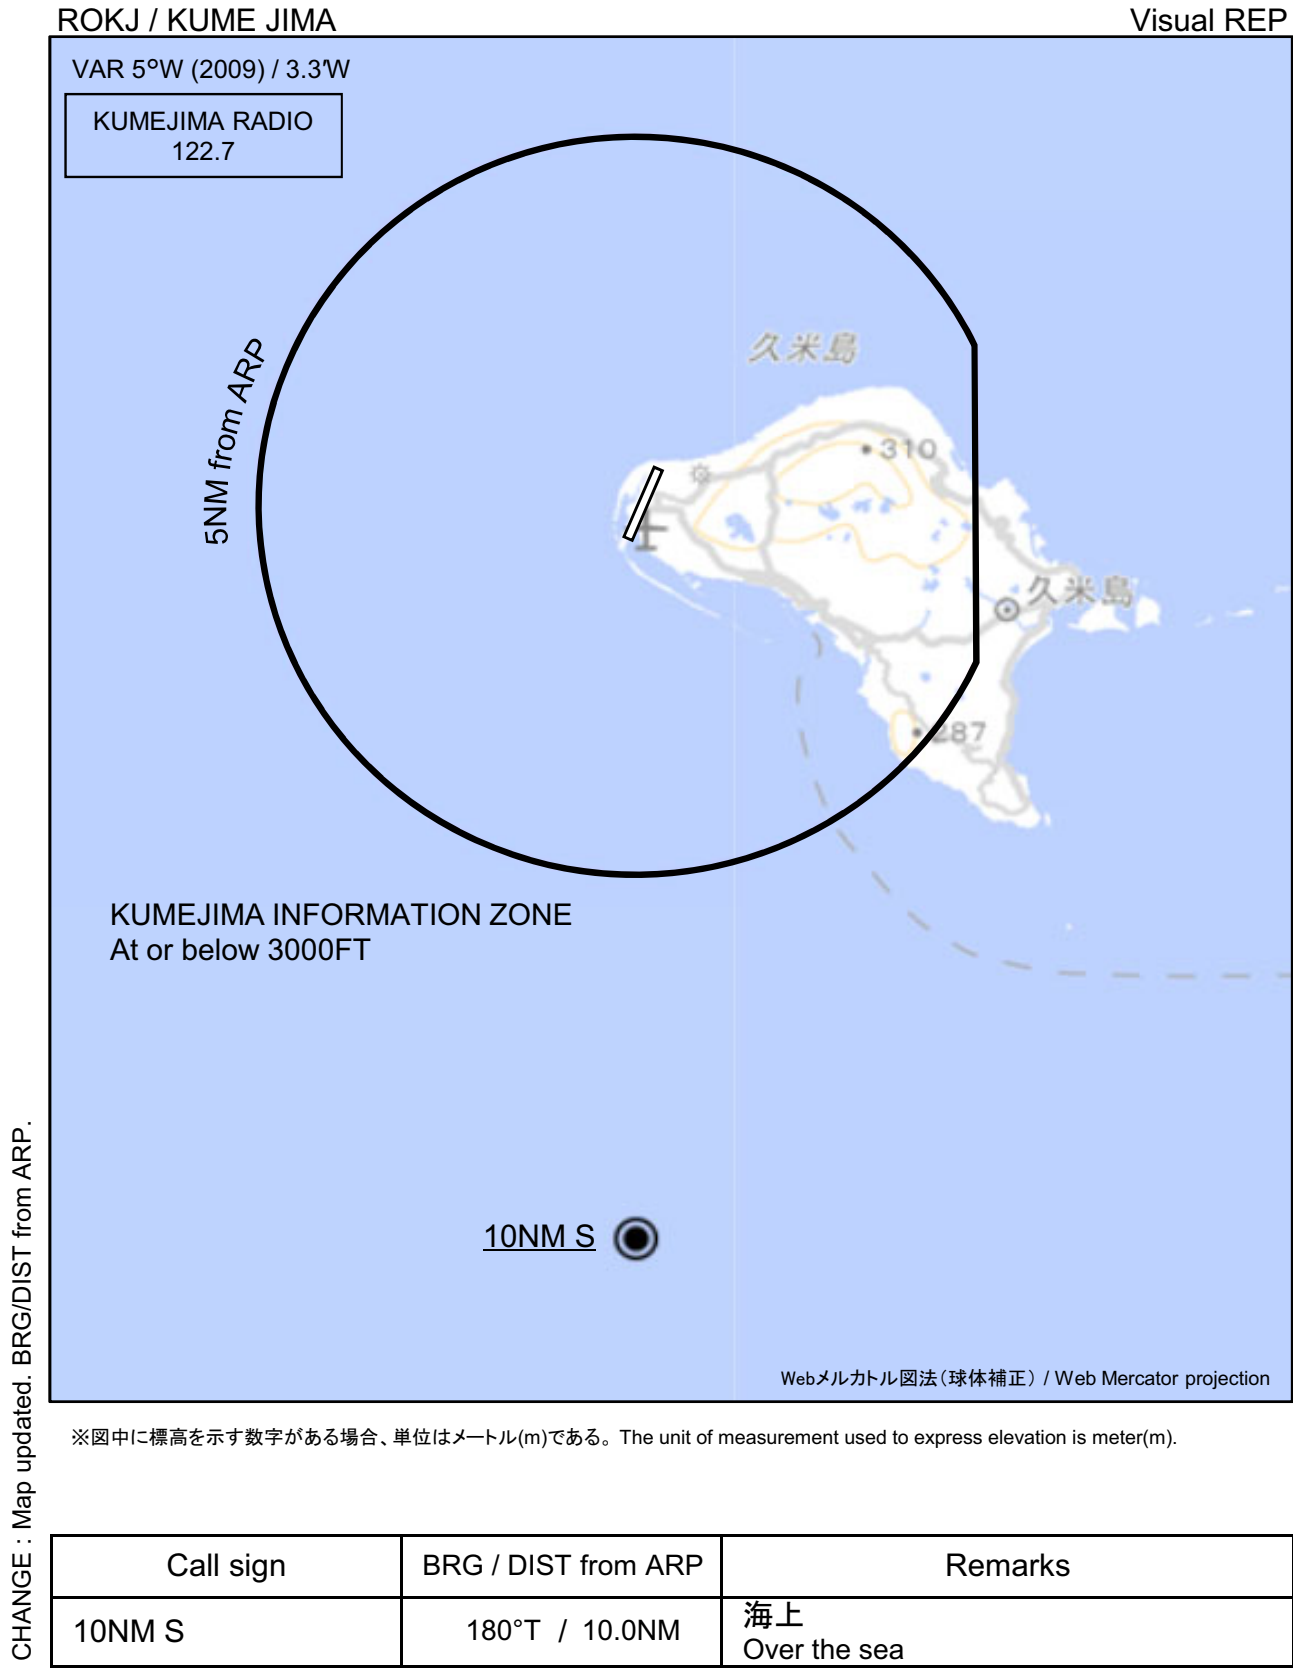

ROKJ / KUMEJIMA

Minimum Vectoring Altitude CHART

