


RJOA / HIROSHIMA

AD CHART

CHANGE : Marking added (spot H,I,J).

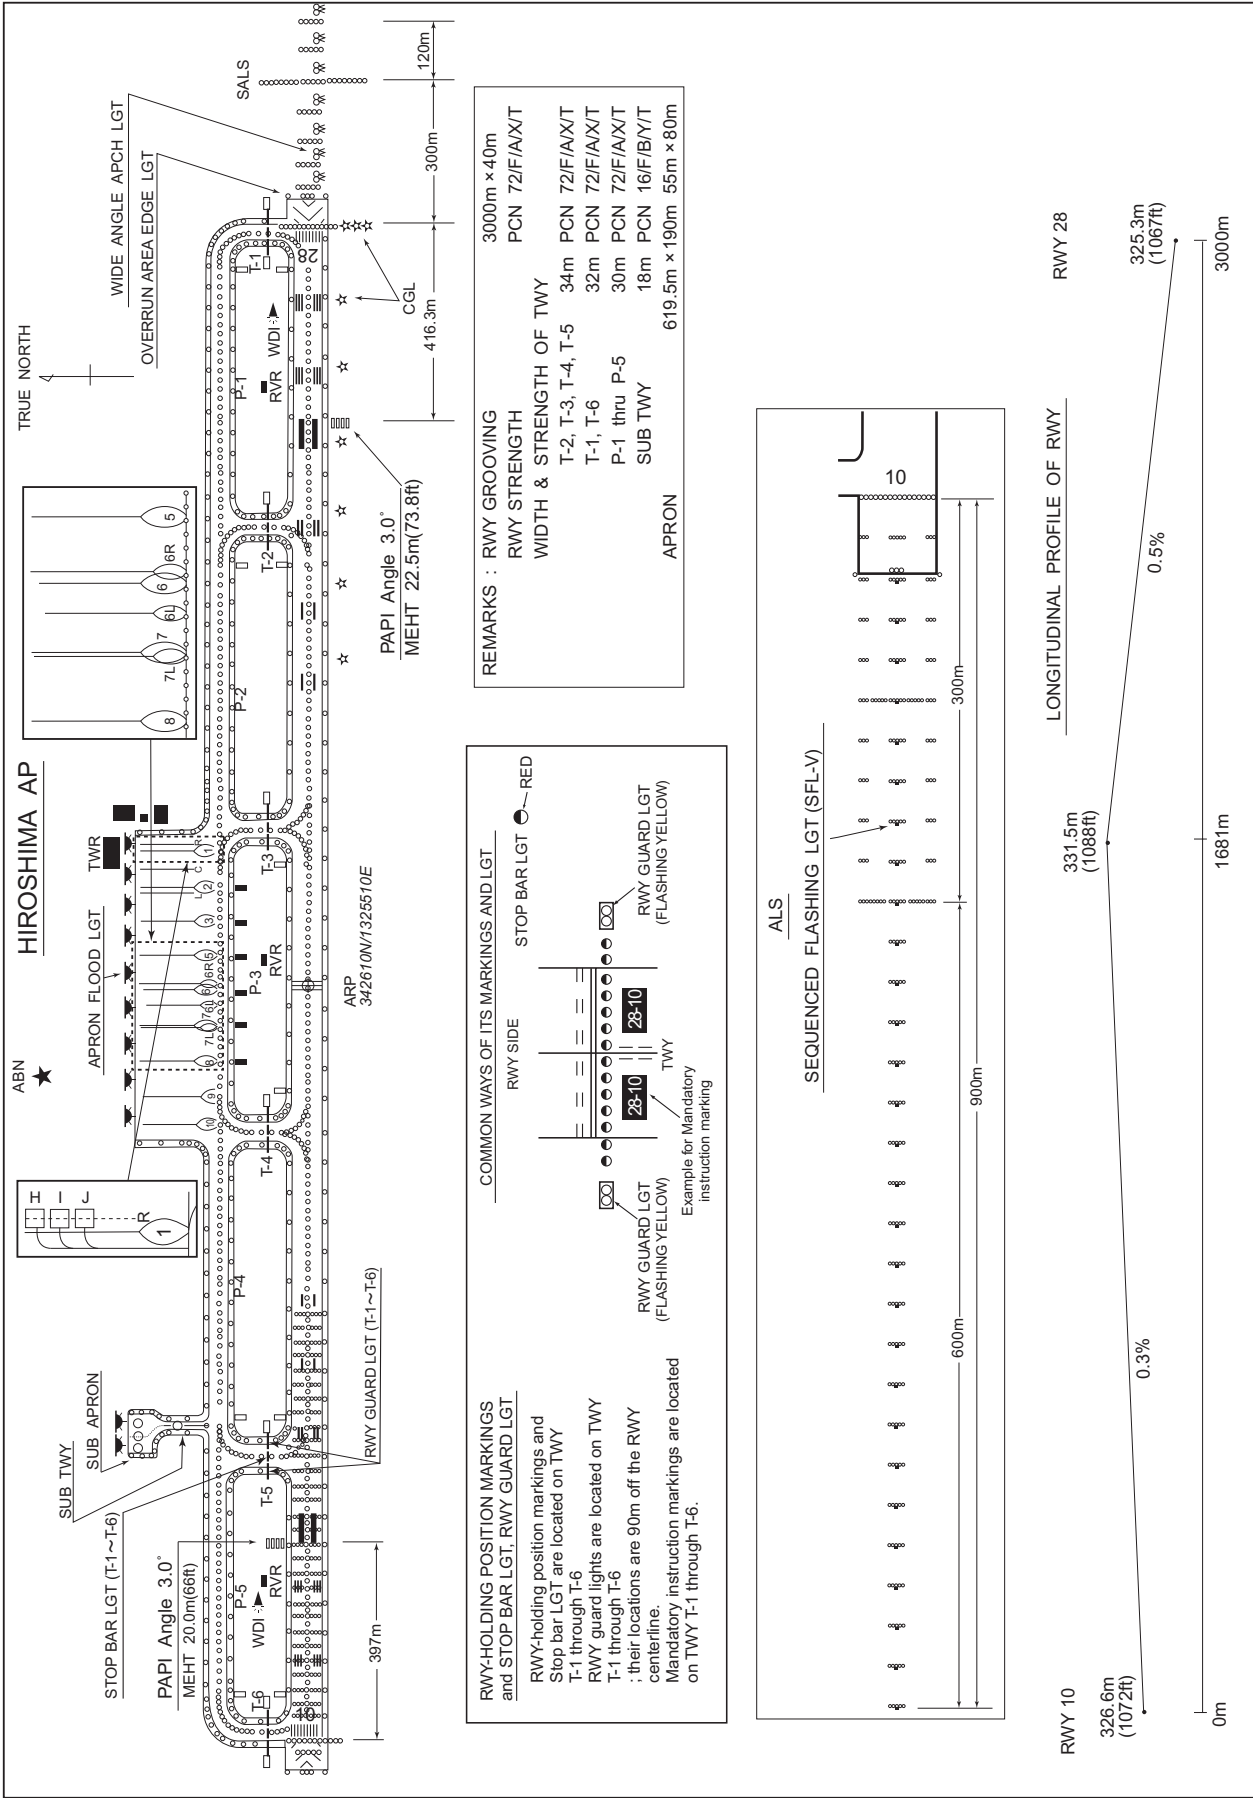


INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



AERODROME OBSTACLE CHART-ICAO
TYPE B (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

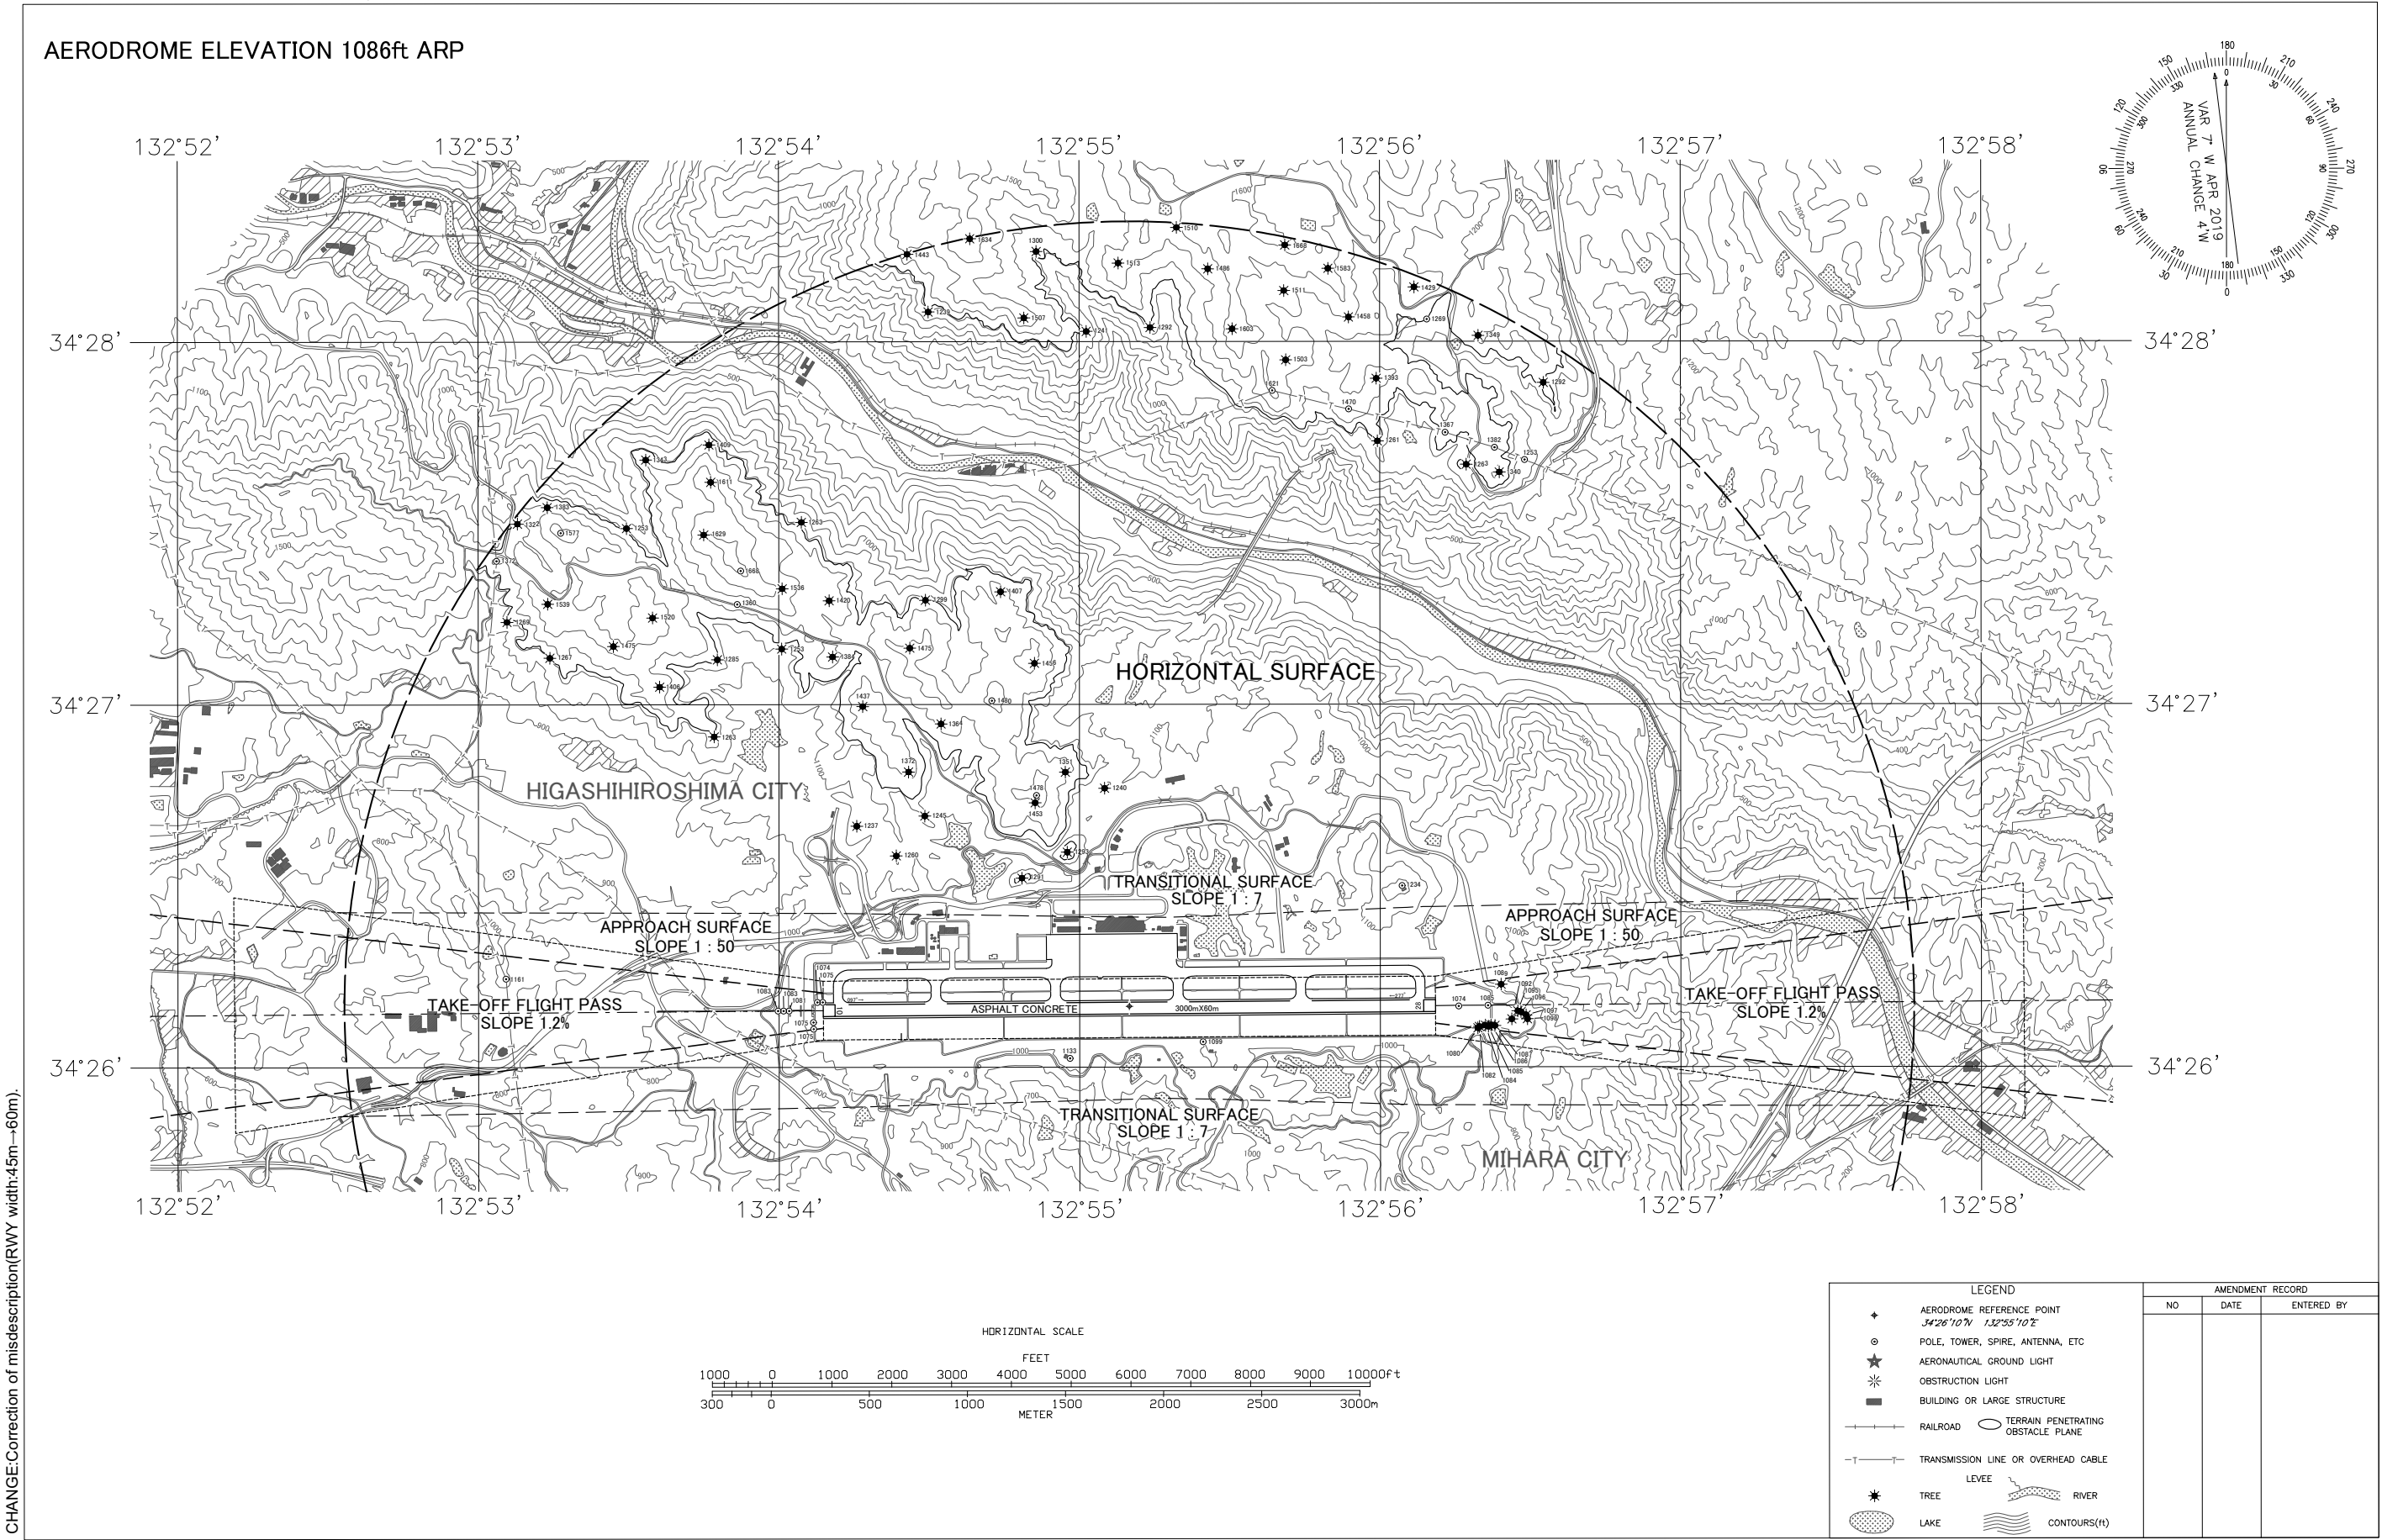

PRECISION APPROACH TERRAIN CHART-ICAO

PRCISION APPROACH TERRAIN CHART



STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

SID and TRANSITION

TOJYO THREE DEPARTURE

RWY 10 : Climb RWY HDG to HGE 2.5DME(1.9NM FM DER), turn left to intercept and proceed via HGE R040 to TOJYO...

RWY 28 : Climb on HDG 270° to HGE 5.0DME(4.0NM FM DER), turn right HDG 085° to intercept and proceed via HGE R-040 to TOJYO...
...Cross TOJYO at or above 12000FT.

Note : RWY10 : 3.5% climb gradient required up to 1900FT.

OBST ALT 1579FT located at 023°/3.31NM FM DER.

RWY28 : 3.4% climb gradient required up to 1600FT.

OBST ALT 2484FT located at 337°/7.77NM FM DER.

MIYAZU TRANSITION

From over TOJYO, proceed via YME R256 to YME VOR/DME.

OPERA THREE DEPARTURE

RWY 10 : Climb RWY HDG to HGE 2.5DME(1.9NM FM DER), turn left HDG 313°....

RWY 28 : Climb on HDG 270° to HGE 5.0DME(4.0NM FM DER), turn right HDG 043°....
....to intercept and proceed via HGE R358 to OPERA, via AKANA.

Cross AKANA at or above 11000FT, cross OPERA at or above FL150.


Note : RWY10 : 3.5% climb gradient required up to 1900FT.

OBST ALT 1579FT located at 023°/3.31NM FM DER.

RWY28 : 3.8% climb gradient required up to 3300FT.

OBST ALT 3025FT located at 329°/11.0NM FM DER.

CHANGE: OTSU TRANSITION abolished. OTSU VOR/DME(CUE) abolished.

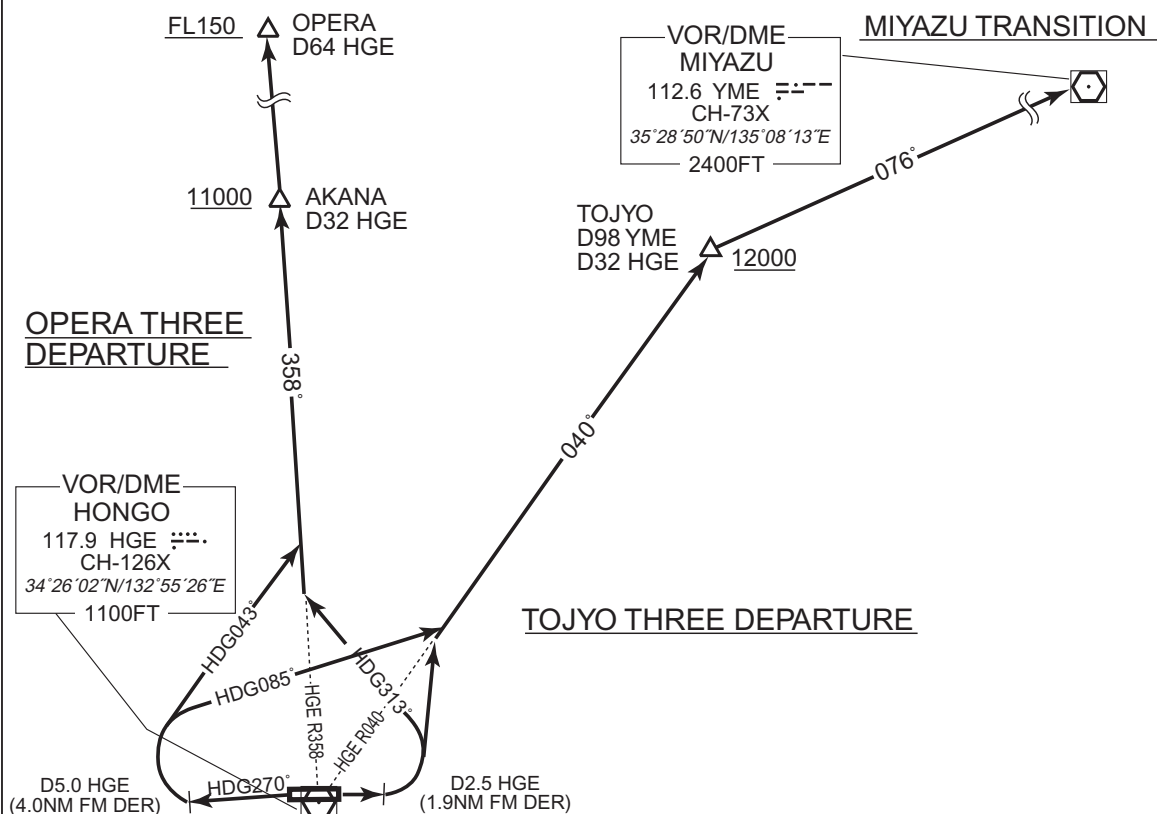

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

SID

BINGO FOUR DEPARTURE

RWY 10 : Climb RWY HDG to HGE 2.5DME(1.9NM FM DER), turn right....

RWY 28 : Climb on HDG 270° to HGE 5.0DME(4.0NM FM DER), turn left HDG 059°
....to intercept and proceed via HGE R104 to BINGO.


Cross BINGO at or above 5000FT.

KINOE FIVE DEPARTURE

RWY 10 : Climb RWY HDG to HGE 2.5DME(1.9NM FM DER), turn right HDG 248°....

RWY 28 : Climb on HDG 270° to HGE 5.0DME(4.0NM FM DER), turn left HDG 158°
....to intercept and proceed via HGE R203 to KINOE.

Cross KINOE at or above 6000FT.

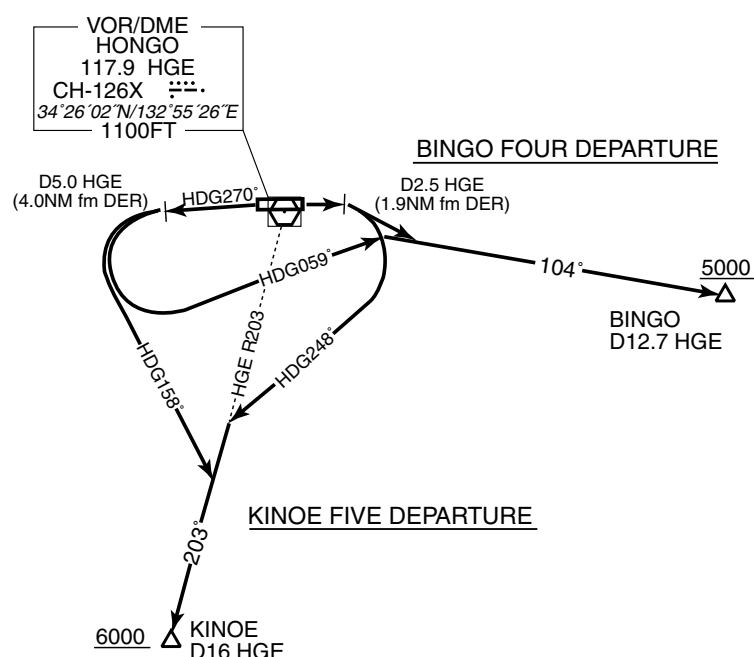

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA


SID and TRANSITION

HONGO REVERSAL THREE DEPARTURE

RWY 10 : Climb RWY HDG to HGE 4.6DME(4.0NM FM DER), turn left....,
RWY 28 : Climb on HDG 270° to HGE 5.0DME(4.0NM FM DER), turn right....,
....direct to HGE VOR/DME. Cross HGE VOR/DME at or above 5000FT.

Note : RWY10 : 3.8% climb gradient required up to 2300FT.
OBST ALT 2002FT located at 093°/5.73NM FM DER.
RWY28 : 3.4% climb gradient required up to 1600FT.
OBST ALT 2484FT located at 337°/7.77NM FM DER.


HONGO REVERSAL THREE DEPARTURE

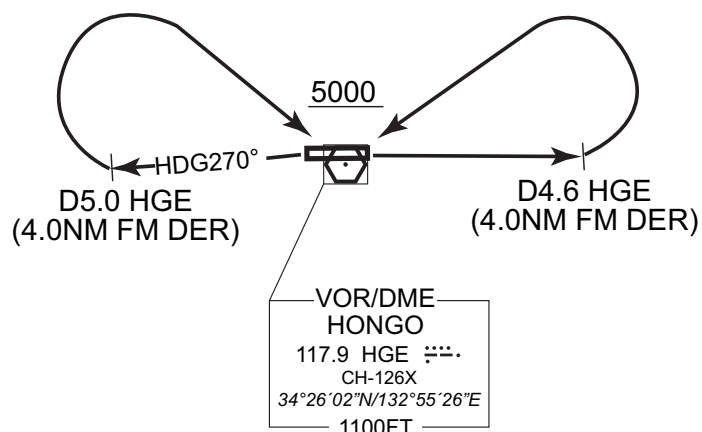

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA


RNAV SID

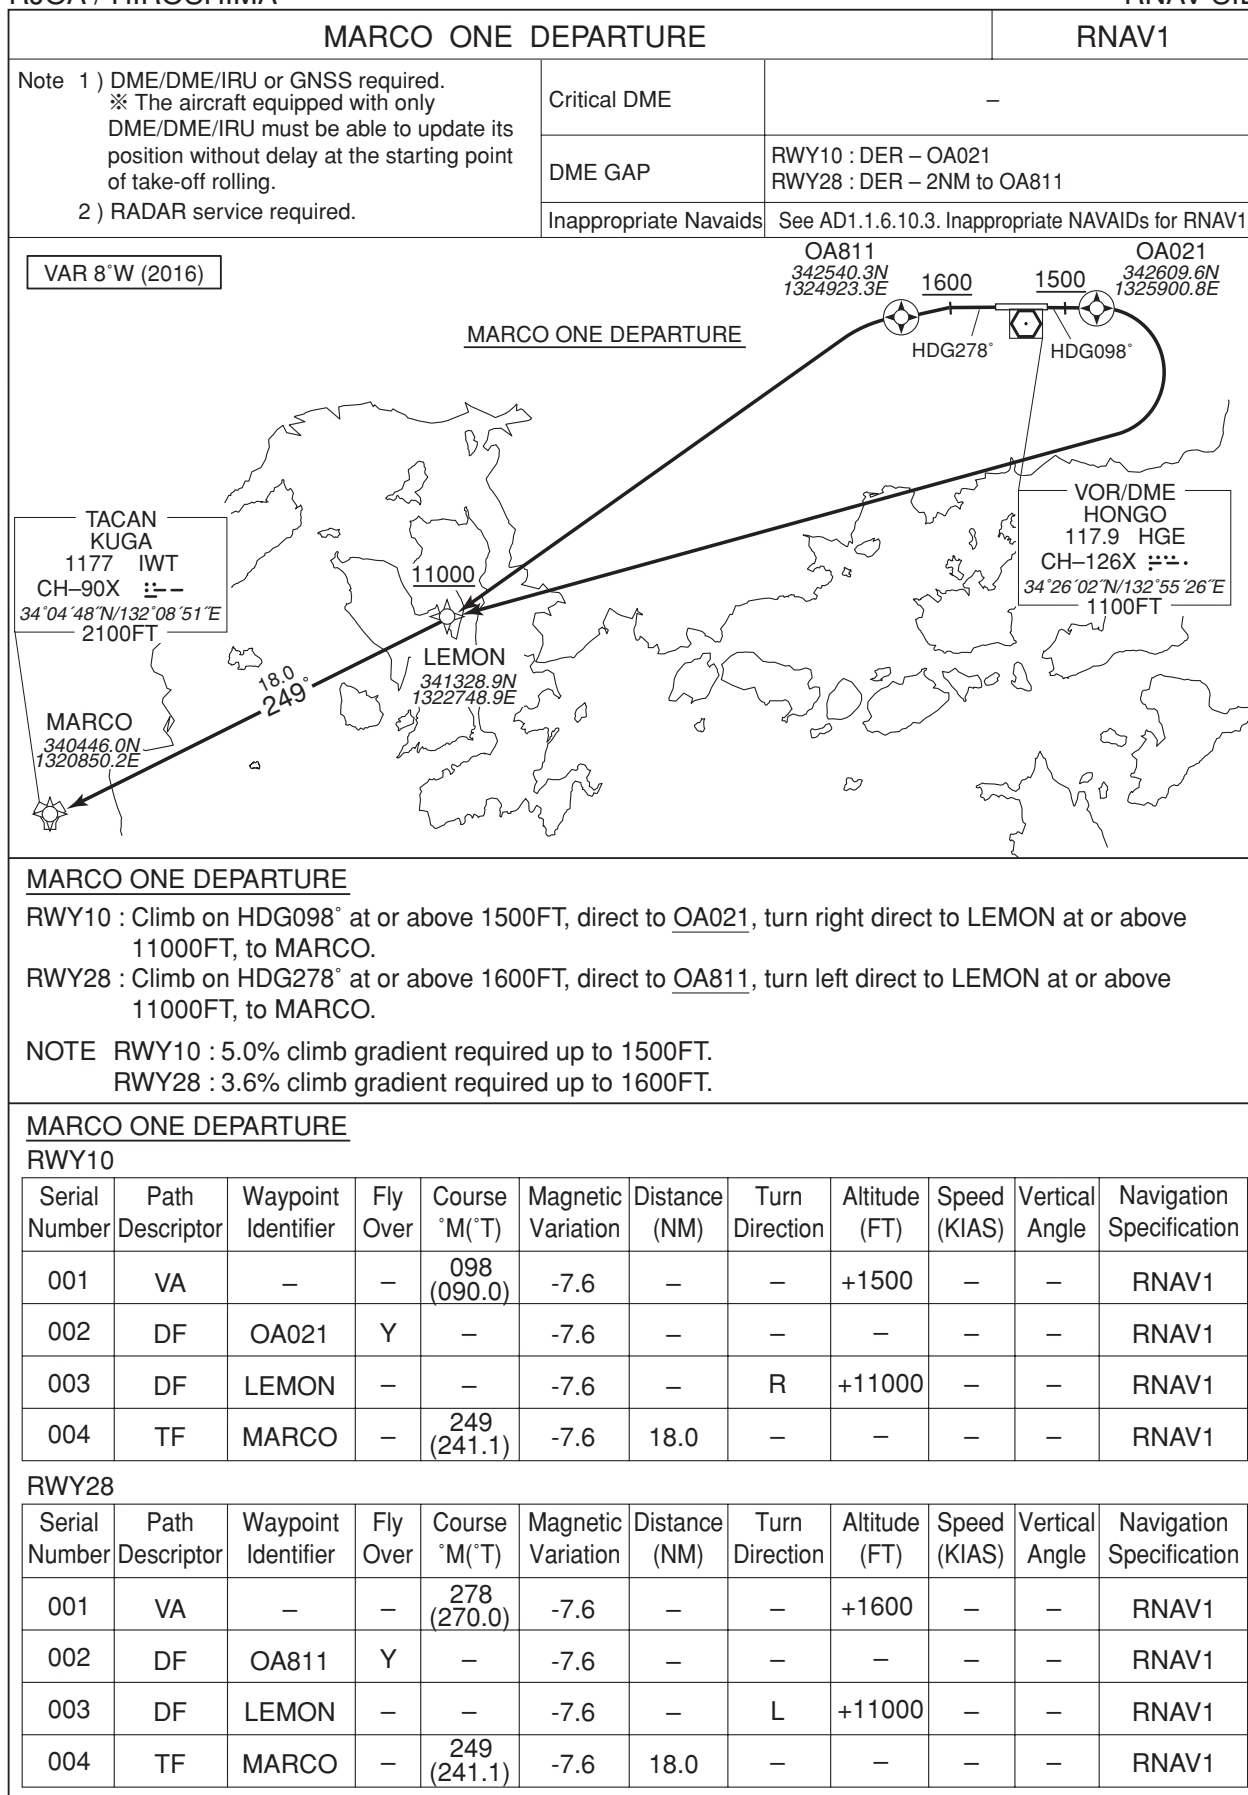

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

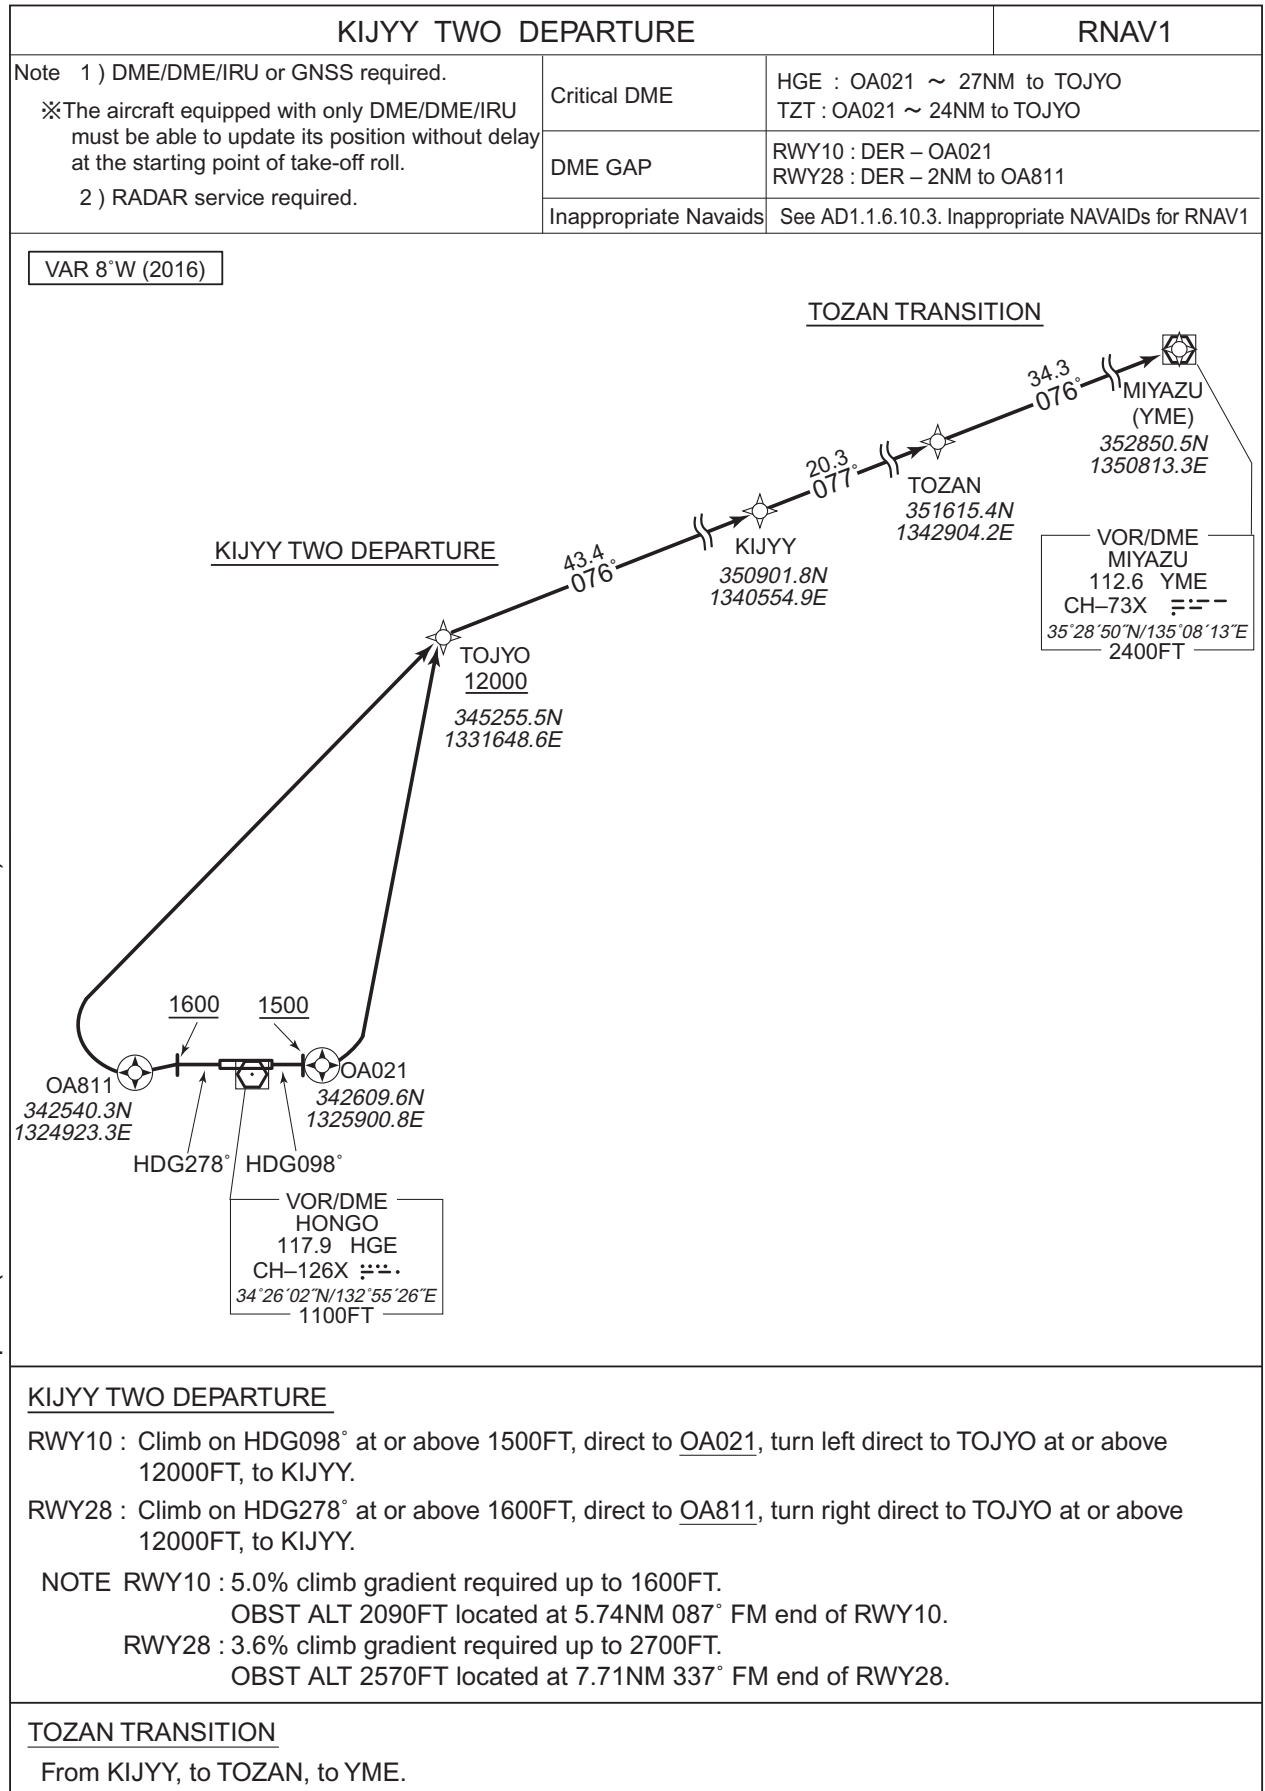

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

KIJYY TWO DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-7.6	—	—	+1500	—	—	RNAV1
002	DF	OA021	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TOJYO	—	—	-7.6	—	L	+12000	—	—	RNAV1
004	TF	KIJYY	—	076 (067.9)	-7.6	43.4	—	—	—	—	RNAV1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-7.6	—	—	+1600	—	—	RNAV1
002	DF	OA811	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	TOJYO	—	—	-7.6	—	R	+12000	—	—	RNAV1
004	TF	KIJYY	—	076 (067.9)	-7.6	43.4	—	—	—	—	RNAV1

TOZAN TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIJYY	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	TOZAN	—	077 (069.0)	-7.6	20.3	—	—	—	—	RNAV1
003	TF	YME	—	076 (068.3)	-7.6	34.3	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART - INSTRUMENT


RJOA / HIROSHIMA

RNAV SID and TRANSITION

MOMOT THREE DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	HGE : OA021 ~ 27NM to TOJYO TZZ : OA021 ~ 24NM to TOJYO OKT : 25NM to IKUNO ~ 19NM to IKUNO
	DME GAP	RWY10 : DER - OA021 RWY28 : DER - 2NM to OA811
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

VAR 8°W (2020)

IKUNO TRANSITION

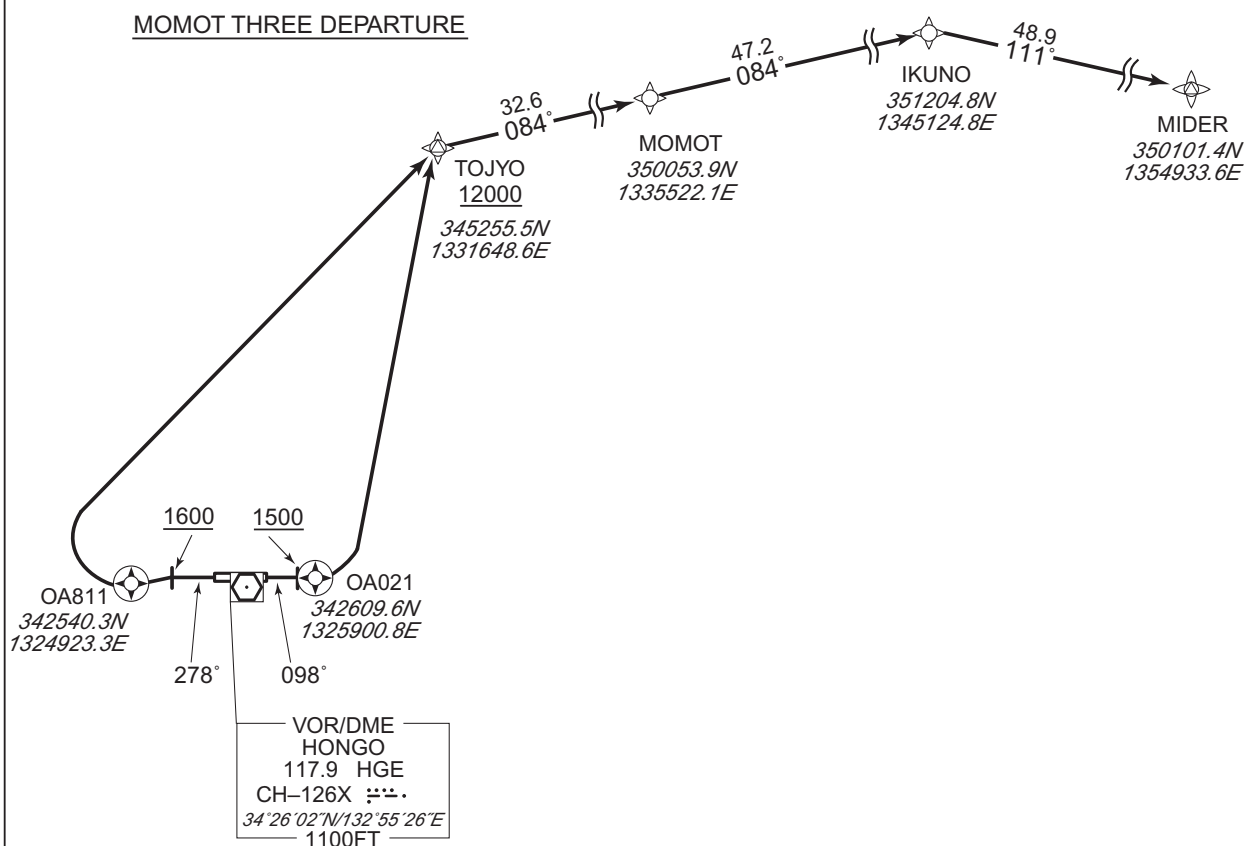MOMOT THREE DEPARTURE

RWY10 : Climb on HDG098° at or above 1500FT, direct to OA021, turn left direct to TOJYO at or above 12000FT, to MOMOT.

RWY28 : Climb on HDG278° at or above 1600FT, direct to OA811, turn right direct to TOJYO at or above 12000FT, to MOMOT.

NOTE RWY10 : 5.0% climb gradient required up to 1600FT.
OBST ALT 2090FT located at 5.74NM 087° FM end of RWY10.
RWY28 : 3.6% climb gradient required up to 2700FT.
OBST ALT 2570FT located at 7.71NM 337° FM end of RWY28.

IKUNO TRANSITION

From MOMOT, to IKUNO, to MIDER.

CHANGE: VAR. PROC course. SID renamed. OTSU VOR/DME(CUE) abolished. MIDER established.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

MOMOT THREE DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-7.9	—	—	+1500	—	—	RNAV1
002	DF	OA021	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TOJYO	—	—	-7.9	—	L	+12000	—	—	RNAV1
004	TF	MOMOT	—	084 (075.7)	-7.9	32.6	—	—	—	—	RNAV1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-7.9	—	—	+1600	—	—	RNAV1
002	DF	OA811	Y	—	-7.9	—	—	—	—	—	RNAV1
003	DF	TOJYO	—	—	-7.9	—	R	+12000	—	—	RNAV1
004	TF	MOMOT	—	084 (075.7)	-7.9	32.6	—	—	—	—	RNAV1

IKUNO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MOMOT	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	IKUNO	—	084 (076.0)	-7.9	47.2	—	—	—	—	RNAV1
003	TF	MIDER	—	111 (102.8)	-7.9	48.9	—	—	—	—	RNAV1


CHANGE: VAR. Course FM TOJYO to MOMOT. CUE abolished. MIDER established.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

SINFO TWO DEPARTURE		RNAV1
Note 1) DME/DME/IRU or GNSS required. ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	Critical DME	MYE : OA021 ~ 31NM to AKANA TRE : SINFO ~ STAGE
	DME GAP	RWY10 : DER – OA021 RWY28 : DER – 2NM to OA811
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

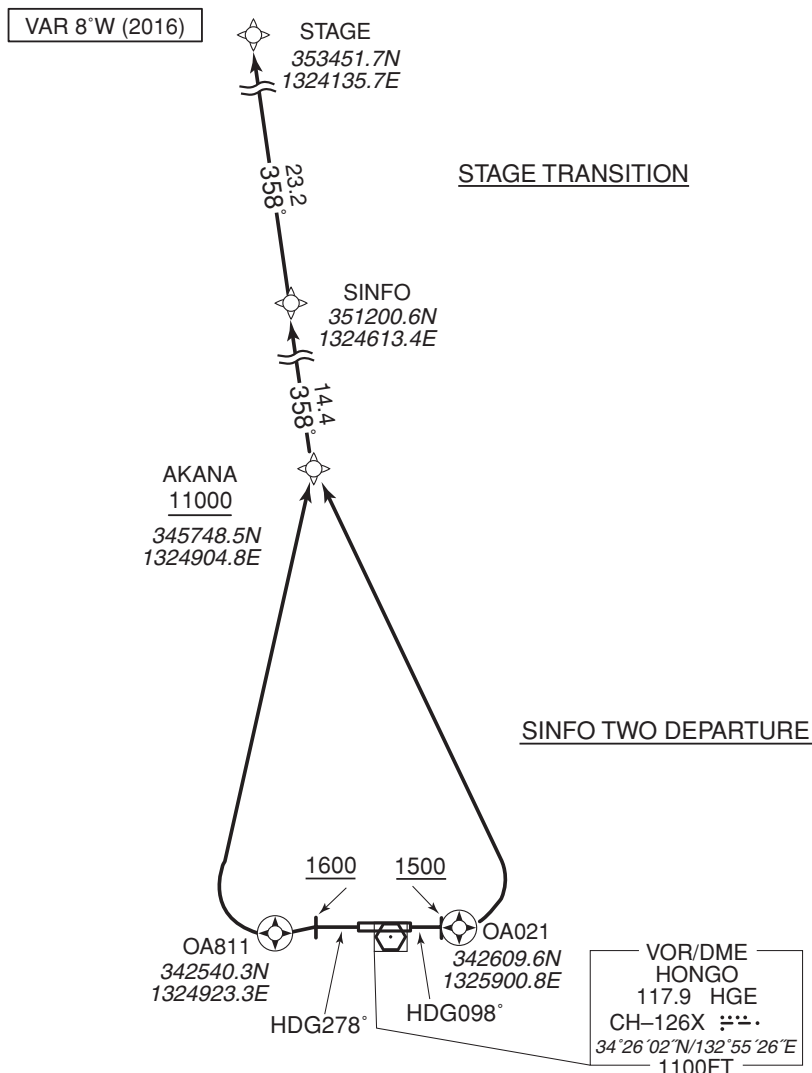SINFO TWO DEPARTURE

RWY10 : Climb on HDG098° at or above 1500FT, direct to OA021, turn left direct to AKANA at or above 11000FT, to SINFO.

RWY28 : Climb on HDG278° at or above 1600FT, direct to OA811, turn right direct to AKANA at or above 11000FT, to SINFO.

NOTE RWY10 : 5.0% climb gradient required up to 1800FT.

OBST ALT 1780FT located at 2.30NM 006° FM end of RWY10.

RWY28 : 3.8% climb gradient required up to 3700FT.

OBST ALT 3150FT located at 11.02NM 322° FM end of RWY28.

STAGE TRANSITION

From SINFO, to STAGE.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV SID and TRANSITION

SINFO TWO DEPARTURE

RWY10

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	098 (090.0)	-7.6	—	—	+1500	—	—	RNAV1
002	DF	OA021	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	AKANA	—	—	-7.6	—	L	+11000	—	—	RNAV1
004	TF	SINFO	—	358 (350.7)	-7.6	14.4	—	—	—	—	RNAV1

RWY28

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	278 (270.0)	-7.6	—	—	+1600	—	—	RNAV1
002	DF	OA811	Y	—	-7.6	—	—	—	—	—	RNAV1
003	DF	AKANA	—	—	-7.6	—	R	+11000	—	—	RNAV1
004	TF	SINFO	—	358 (350.7)	-7.6	14.4	—	—	—	—	RNAV1

STAGE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	SINFO	—	—	-7.6	—	—	—	—	—	RNAV1
002	TF	STAGE	—	358 (350.6)	-7.6	23.2	—	—	—	—	RNAV1

STANDARD ARRIVAL CHART -INSTRUMENT


RJOA / HIROSHIMA

STAR

HONGO ARRIVAL

From over HGE VOR/DME, via HGE R248 to intercept and proceed
via HGE 14.0DME clockwise ARC to MISEN.

Cross MISEN at or above 4100FT.

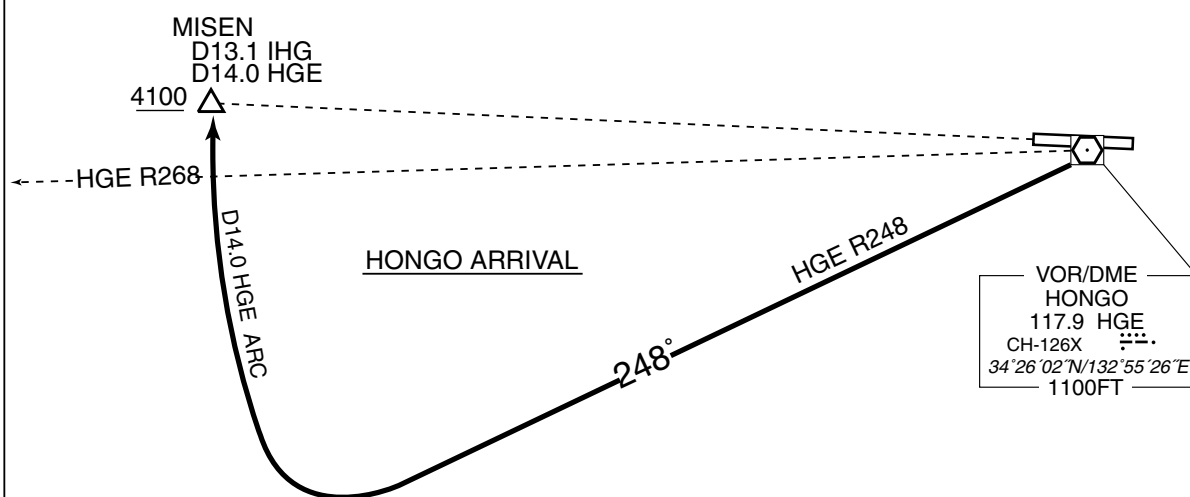

STANDARD ARRIVAL CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

MISEN ARRIVAL


RNAV1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

VAR 8°W (2016)

MISEN ARRIVAL

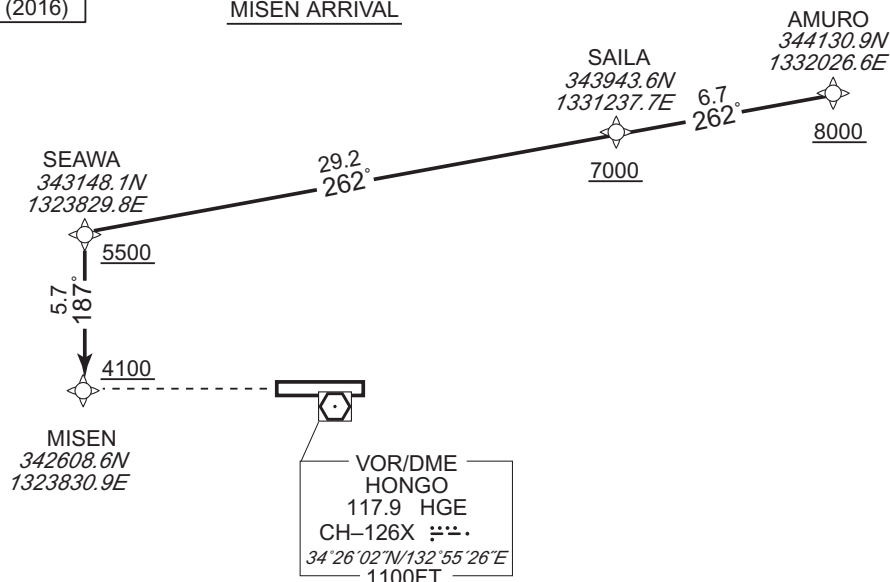

MISEN ARRIVAL

From AMURO at or above 8000FT, to SAILA at or above 7000FT, to SEAWA at or above 5500FT, to MISEN at or above 4100FT.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-7.6	—	—	+8000	—	—	RNAV1
002	TF	SAILA	—	262 (254.5)	-7.6	6.7	—	+7000	—	—	RNAV1
003	TF	SEAWA	—	262 (254.4)	-7.6	29.2	—	+5500	—	—	RNAV1
004	TF	MISEN	—	187 (179.8)	-7.6	5.7	—	+4100	—	—	RNAV1

CHANGE : Critical DME deleted.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY10

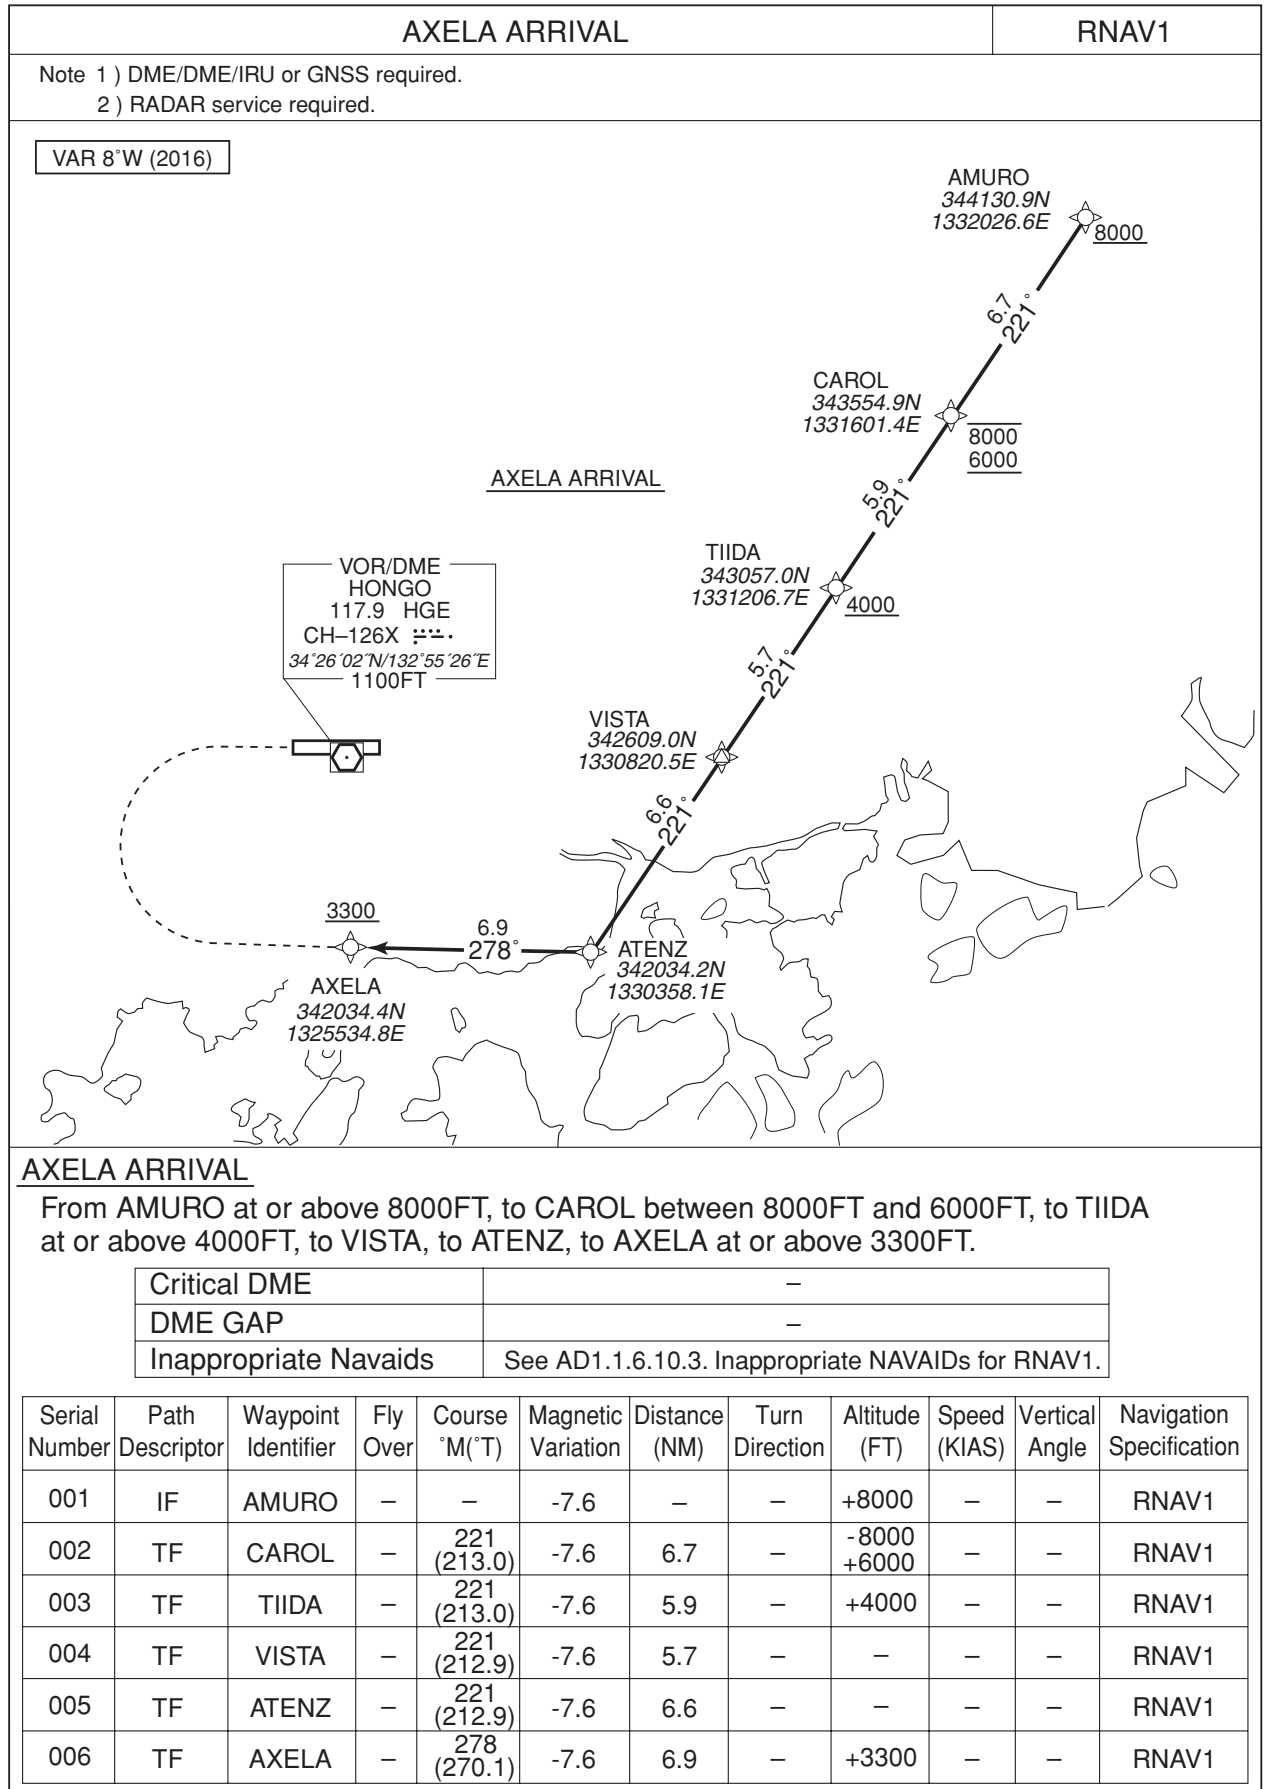

STANDARD ARRIVAL CHART-INSTRUMENT

RJOA / HIROSHIMA


RNAV STAR RWY10

DEMIO ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2016)

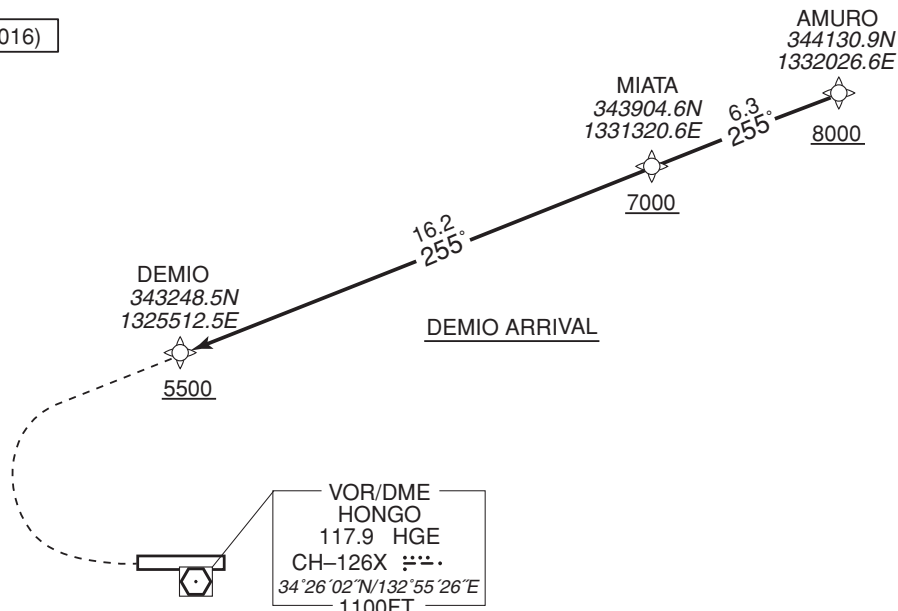

DEMIO ARRIVAL

From AMURO at or above 8000FT, to MIATA at or above 7000FT, to DEMIO at or above 5500FT.

Critical DME	—
DME GAP	—
Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-7.6	—	—	+8000	—	—	RNAV1
002	TF	MIATA	—	255 (247.4)	-7.6	6.3	—	+7000	—	—	RNAV1
003	TF	DEMIO	—	255 (247.3)	-7.6	16.2	—	+5500	—	—	RNAV1

STANDARD ARRIVAL CHART -INSTRUMENT

RJOA / HIROSHIMA

RNAV STAR RWY28


VISTA ARRIVAL	RNAV1
---------------	-------

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

VAR 8°W (2016)

VISTA ARRIVAL

VOR/DME
HONGO
117.9 HGE
CH-126X 34°26'02"N/132°55'26"E
1100FT

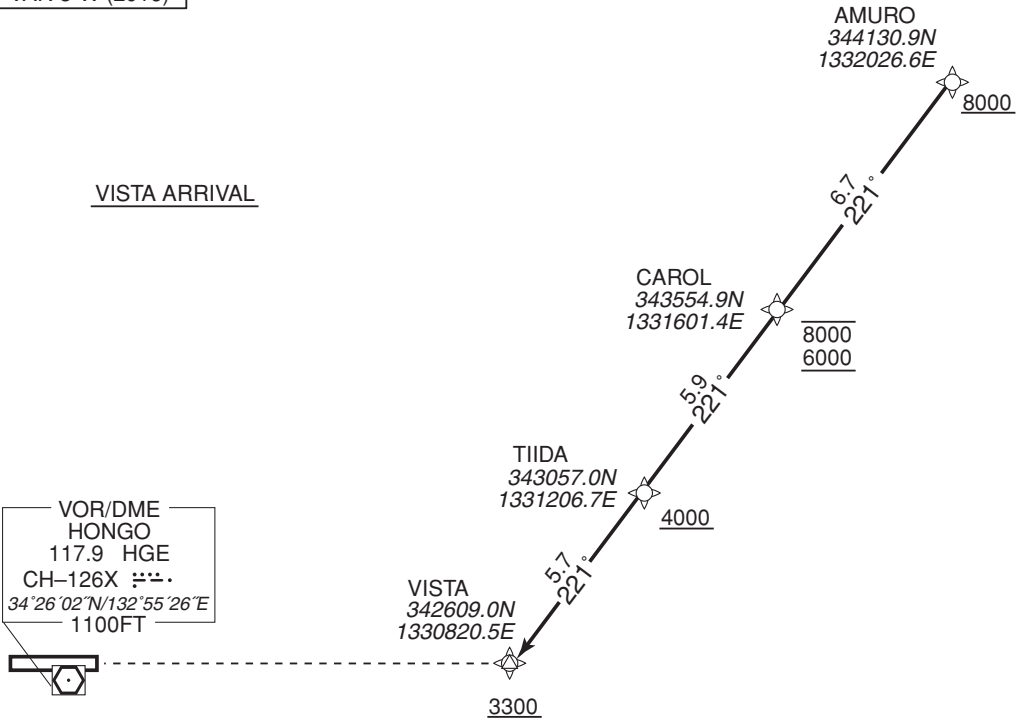

VISTA ARRIVAL

From AMURO at or above 8000FT, to CAROL between 8000FT and 6000FT, to TIIDA at or above 4000FT, to VISTA at or above 3300FT.


Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AMURO	—	—	-7.6	—	—	+8000	—	—	RNAV1
002	TF	CAROL	—	221 (213.0)	-7.6	6.7	—	-8000 +6000	—	—	RNAV1
003	TF	TIIDA	—	221 (213.0)	-7.6	5.9	—	+4000	—	—	RNAV1
004	TF	VISTA	—	221 (212.9)	-7.6	5.7	—	+3300	—	—	RNAV1

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

ILS or LOC RWY10 (CAT III)

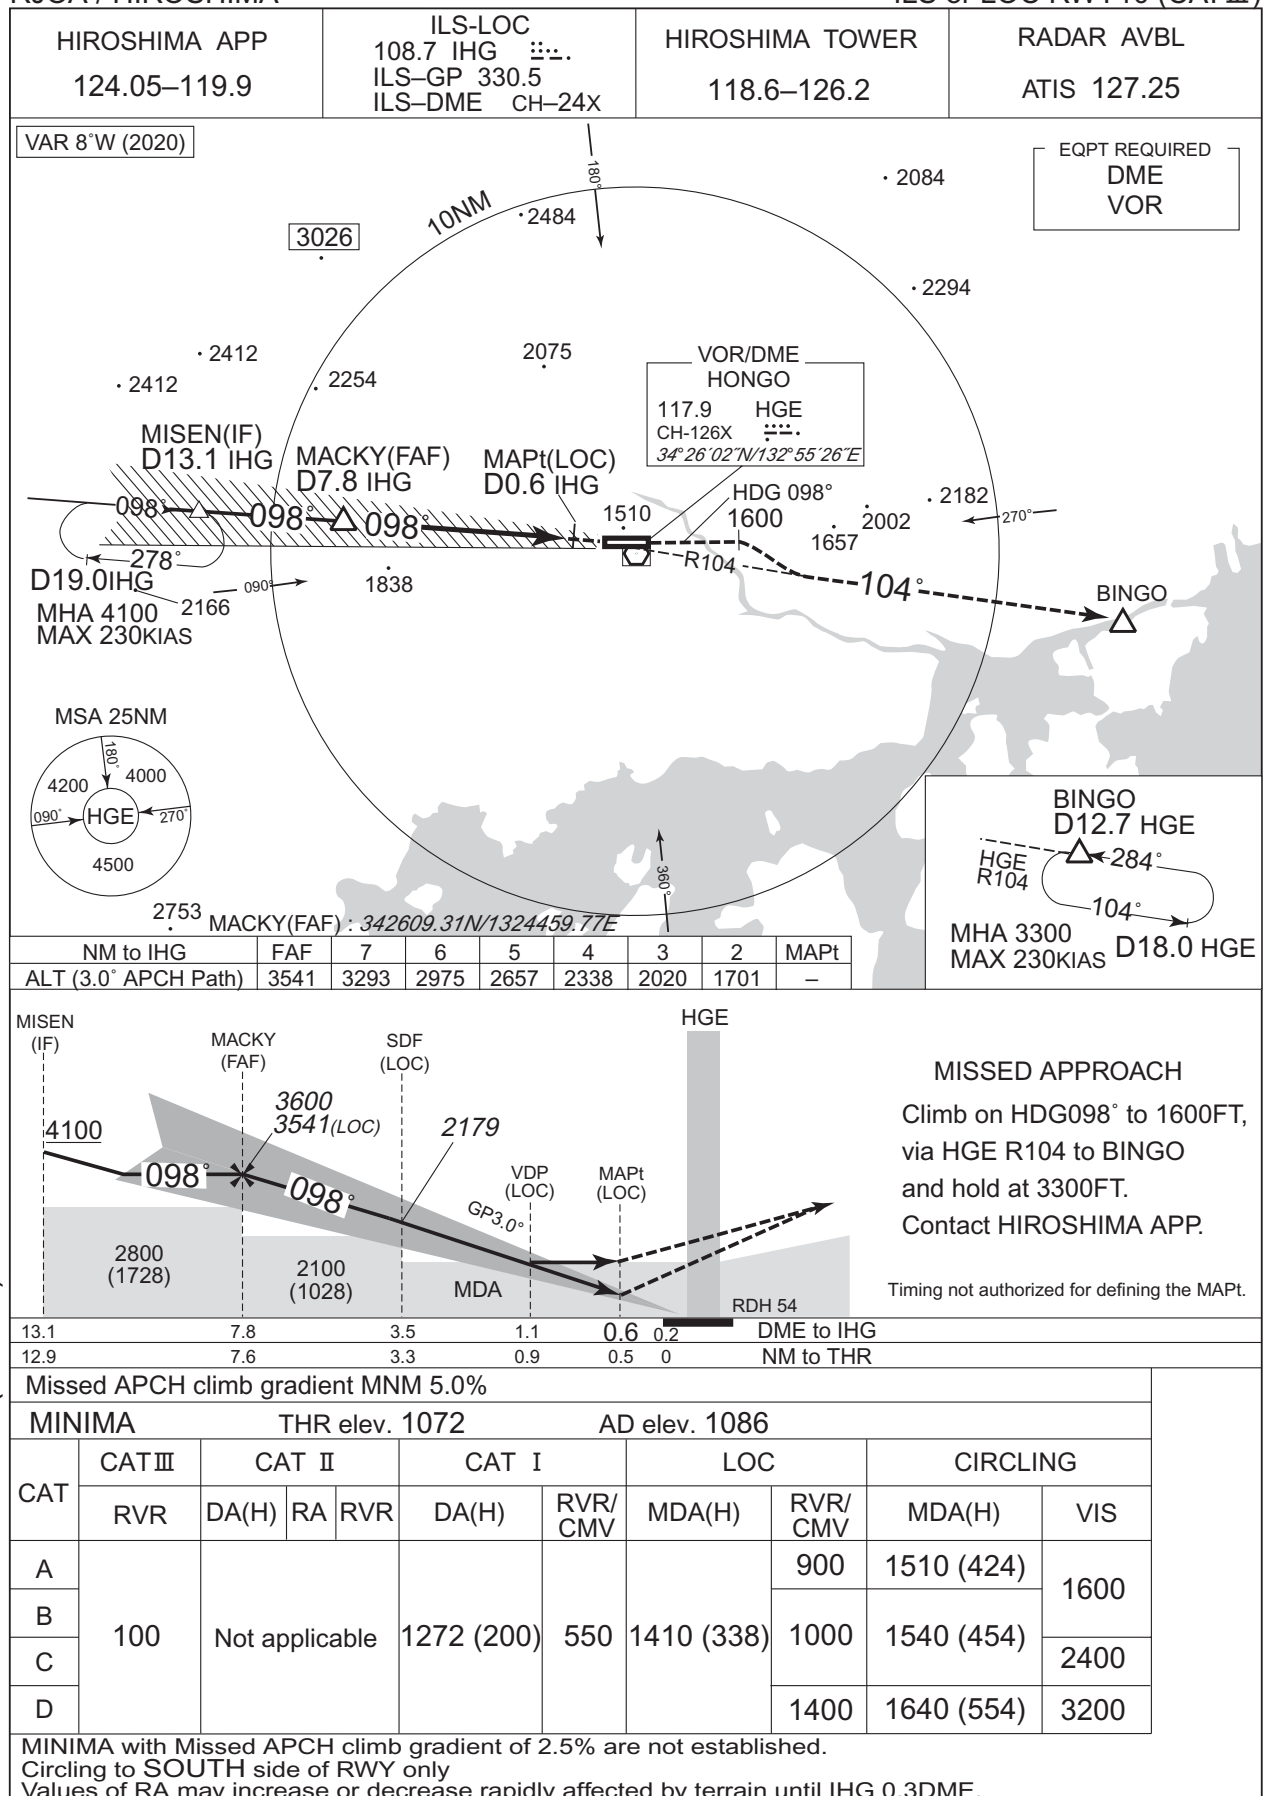


CHANGE: VAR. NM to THR(MISEN).

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA


VOR RWY10

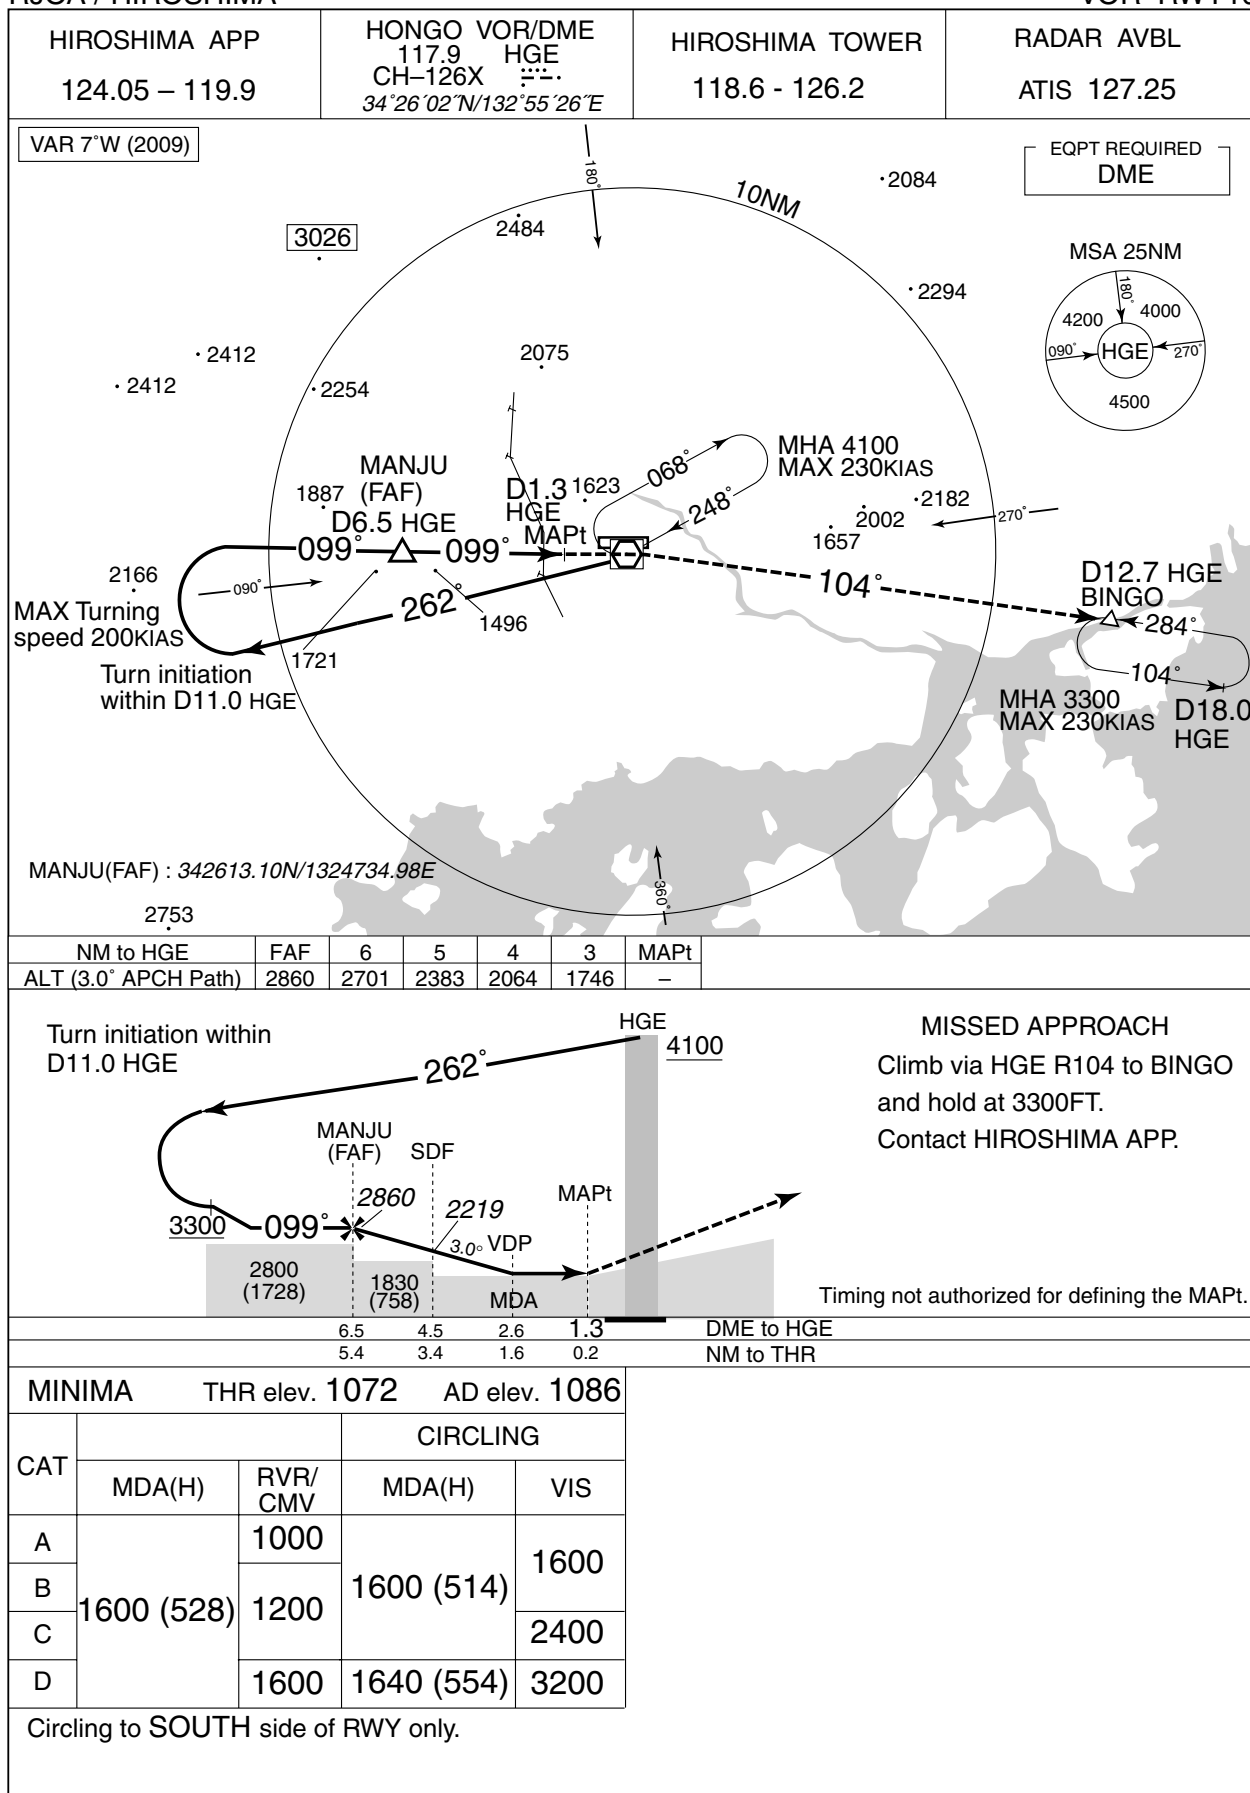

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA


VOR Z RWY28

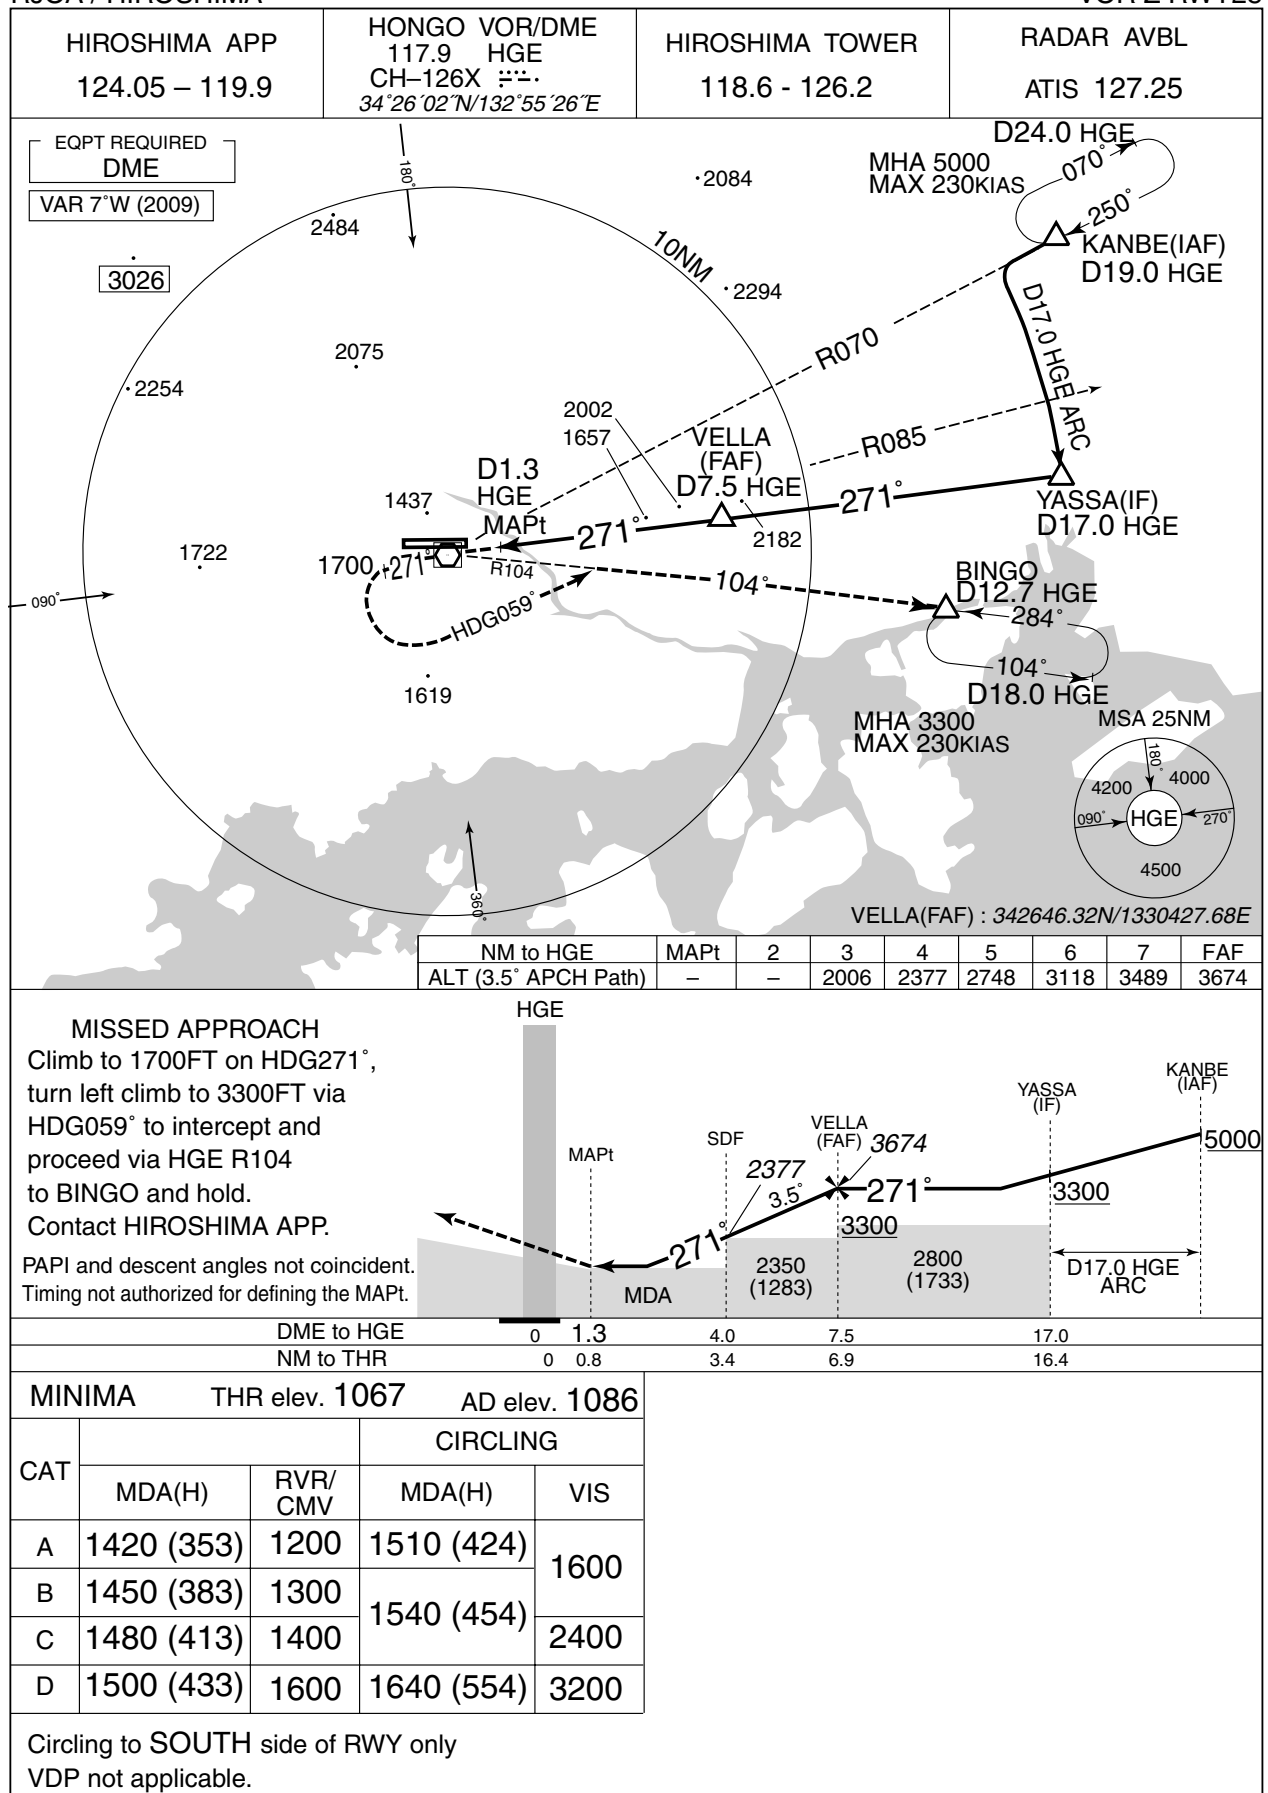

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

VOR Y RWY28

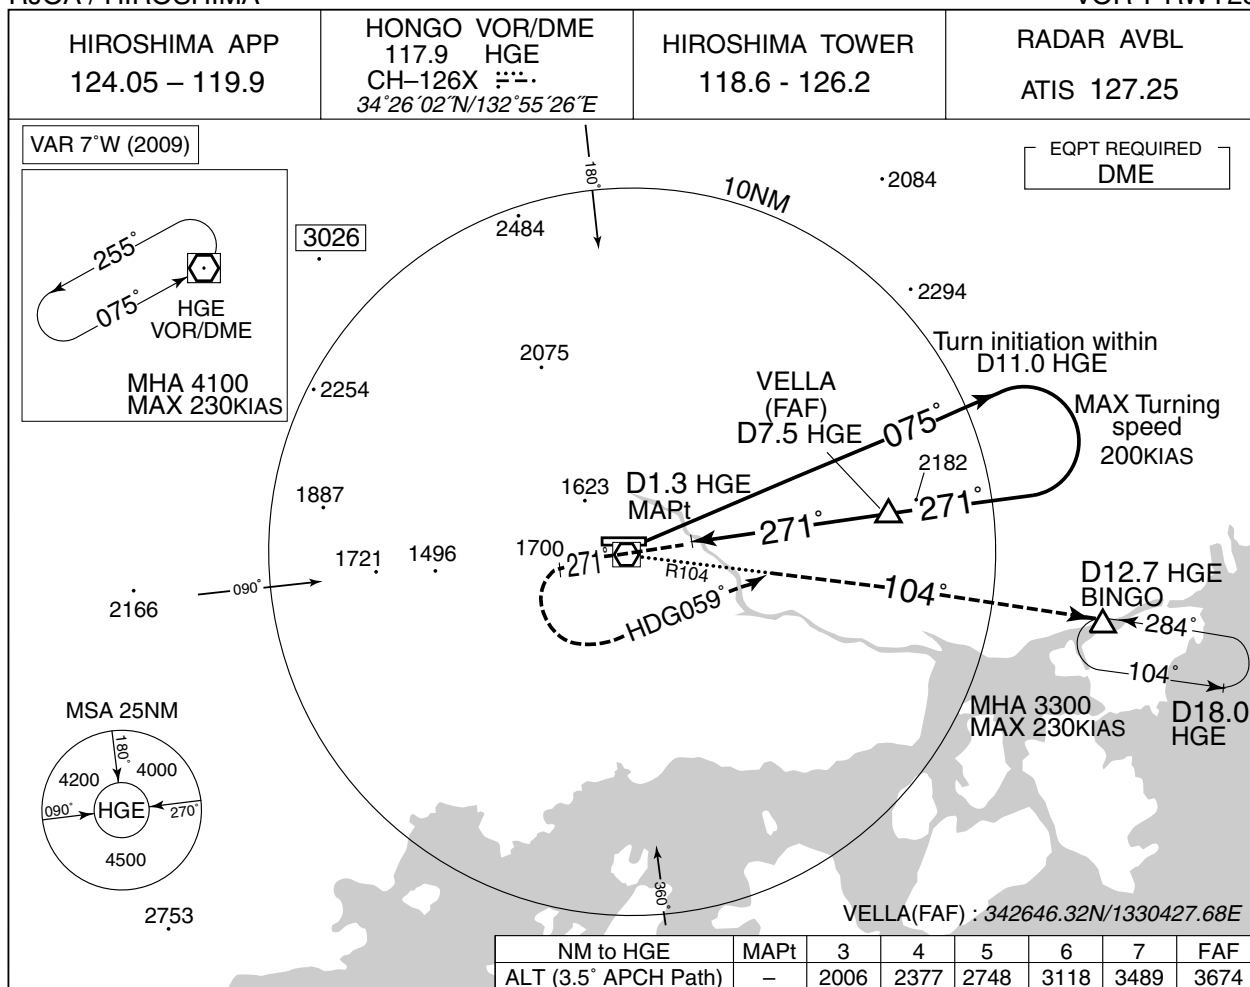


MISSED APPROACH

Climb to 1700FT on HDG271°, turn left climb to 3300FT via HDG059° to intercept and proceed via HGE R104 to BINGO and hold.

Contact HIROSHIMA APP.

PAPI and descent angles not coincident.

Timing not authorized for defining the MAPt.

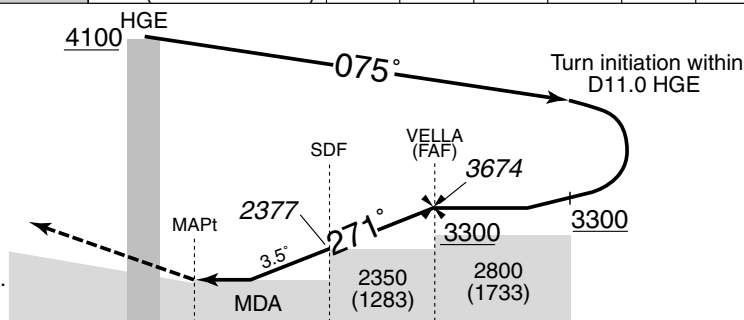

DME to HGE	0	1.3	4.0	7.5
NM to THR	0	0.8	3.4	6.9

MINIMA THR elev. 1067 AD elev. 1086

CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	1420 (353)	1200	1510 (424)	1600
B	1450 (383)	1300	1540 (454)	
C	1480 (413)	1400		2400
D	1500 (433)	1600	1640 (554)	3200


Circling to SOUTH side of RWY only.

VDP not applicable.

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNAV(GNSS) RWY28

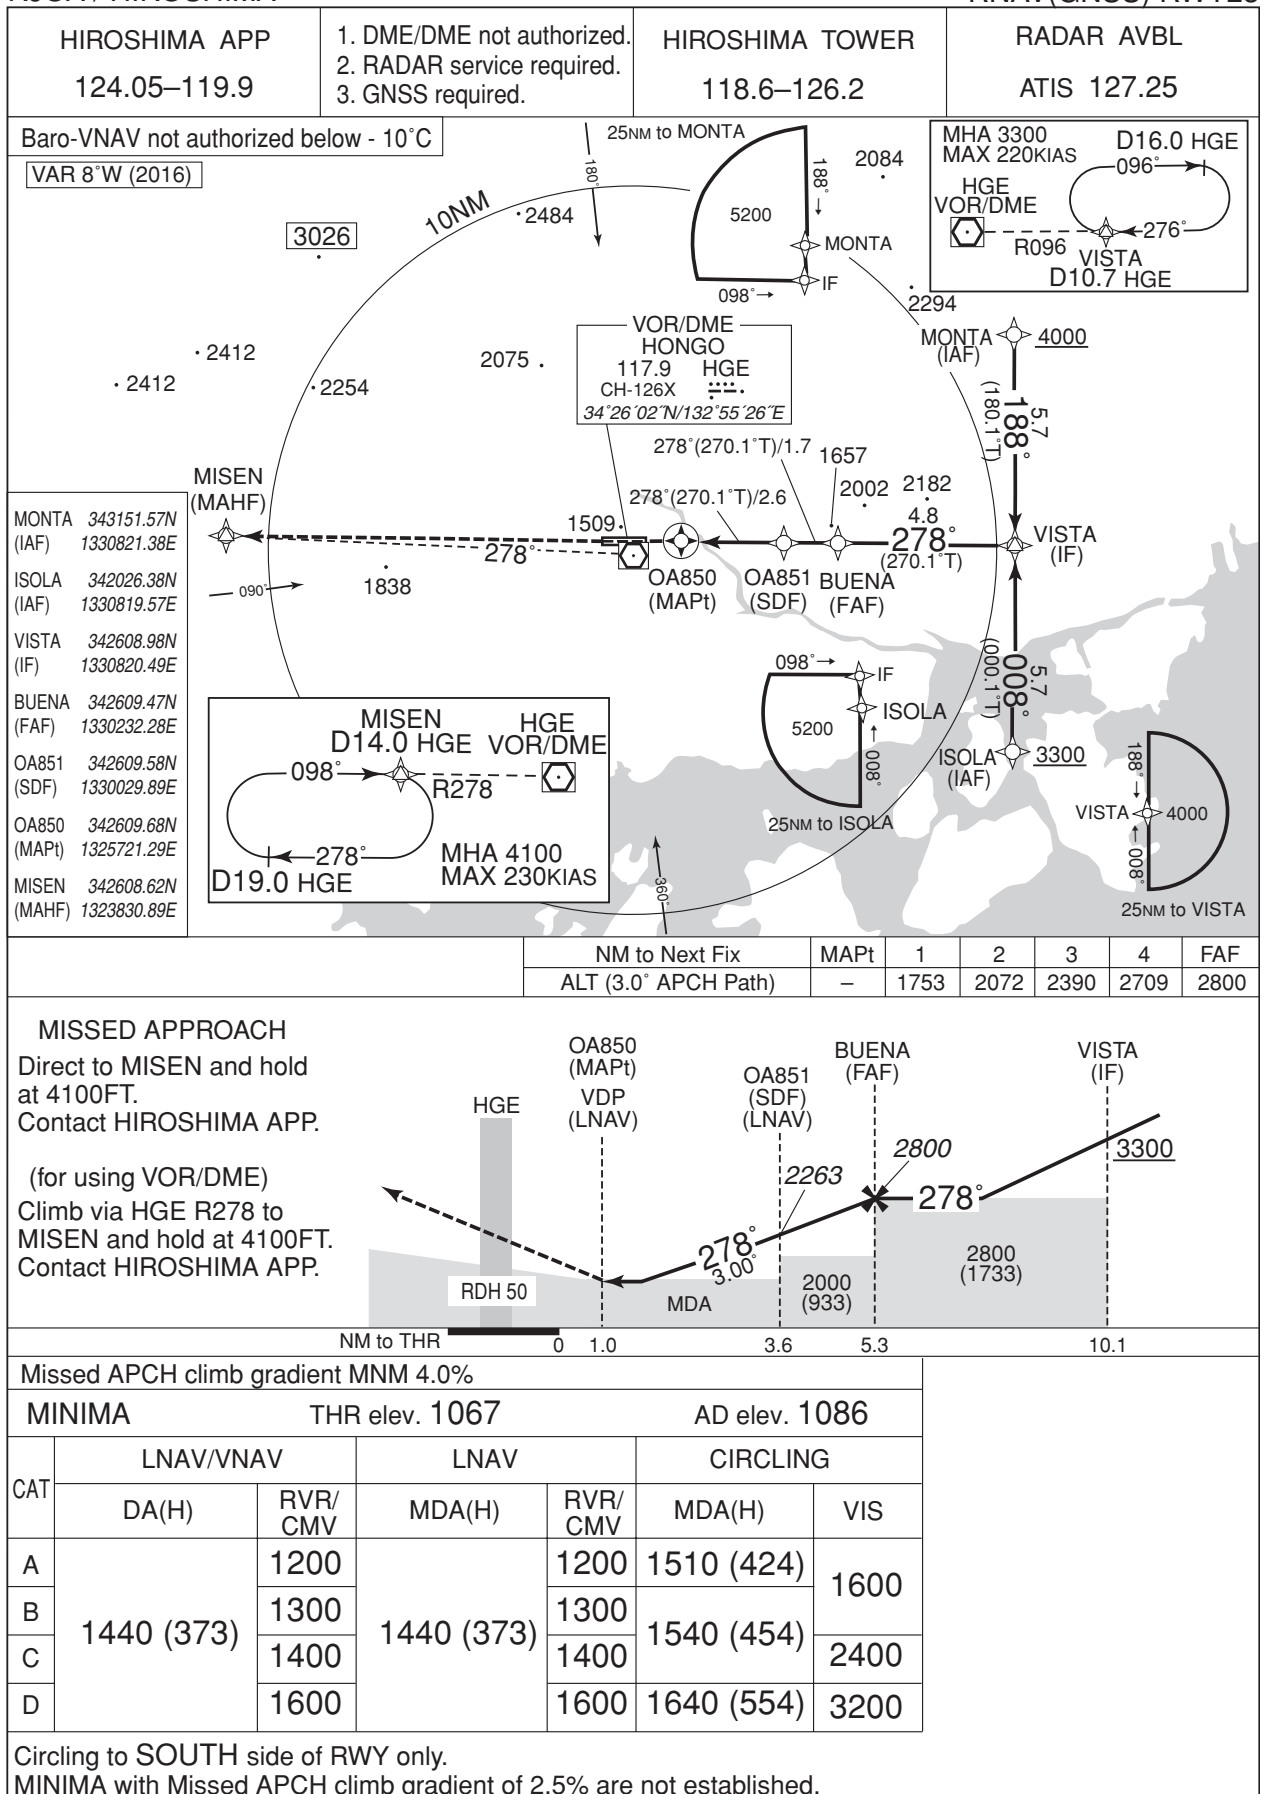



INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNAV(RNP) Z RWY10

HIROSHIMA APP 124.05–119.9	GNSS and RF required.	HIROSHIMA TOWER 118.6–126.2	RADAR AVBL ATIS 127.25
-------------------------------	-----------------------	--------------------------------	---------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

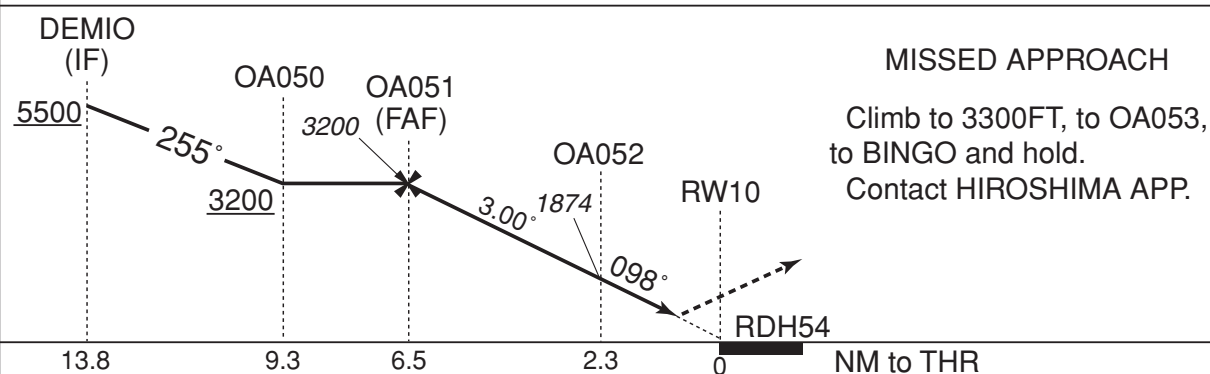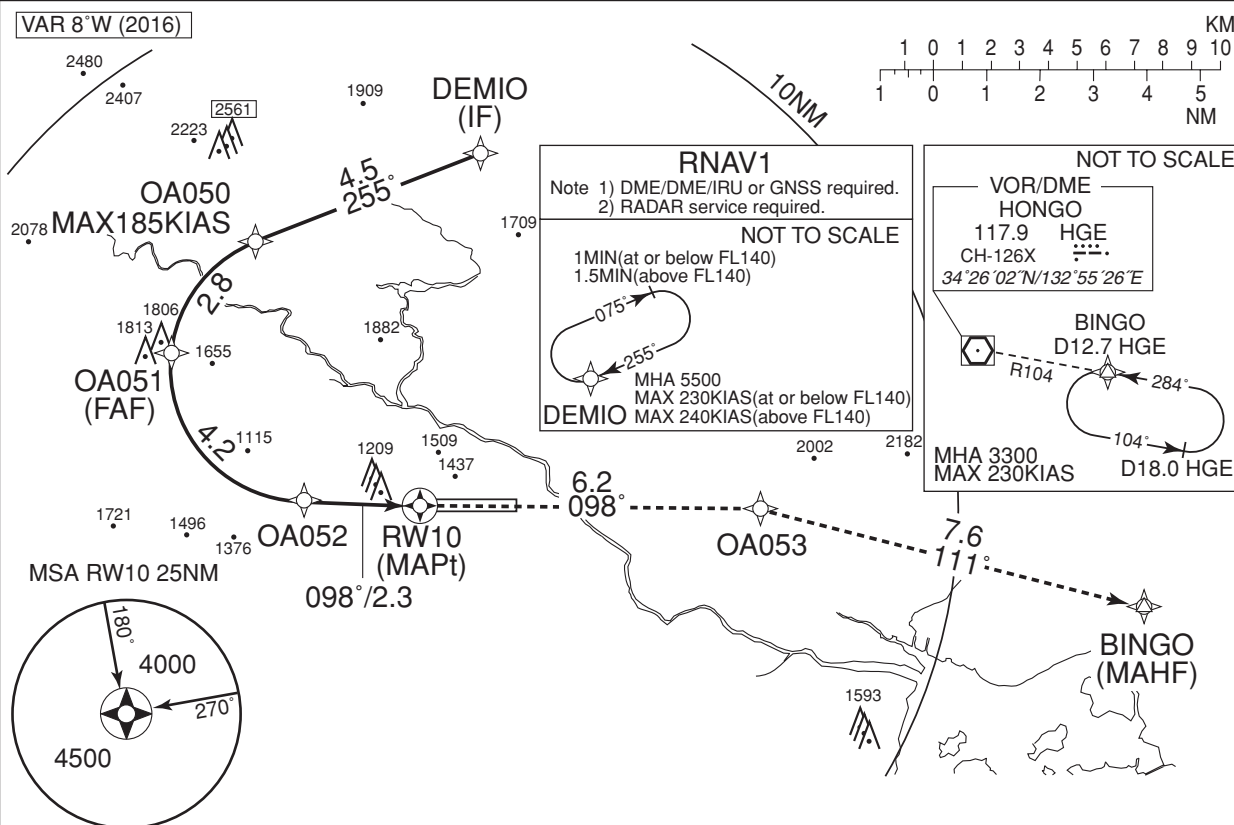

Missed APCH climb gradient MNM 5.0%

CAT	RNP 0.10		RNP 0.30	
	DA(H)	RVR/CMV	DA(H)	RVR/CMV
A	—	—	—	—
B	—	—	—	—
C	1515(443)	1000	1598(526)	1200
D	—	1400	—	1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNAV(RNP) Z RWY10

RNAV(RNP) Z RWY10Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	DEMIO	—	—	-7.6	—	—	+5500	—	—	—
002	TF	OA050	—	255 (247.1)	-7.6	4.5	—	+3200	-185	—	1.0
003	RF Center: OARF1 r=2.54NM	OA051	—	—	-7.6	2.8	L	3200	—	—	1.0
004	RF Center: OARF1 r=2.54NM	OA052	—	—	-7.6	4.2	L	1874	—	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-7.6	2.3	—	1126	—	-3.00/54	0.10 0.30
006	TF	OA053	—	098 (090.0)	-7.6	6.2	—	—	—	—	1.0
007	TF	BINGO	—	111 (103.2)	-7.6	7.6	—	3300	—	—	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	DEMIO	255 (247.1)	-7.6	1.0(-14000) 1.5(+14001)	R	5500	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
DEMIO	343248.47N/1325512.50E	OARF1	342842.28N/1325120.72E
OA050	343102.99N/1325009.23E		
OA051	342852.58N/1324816.81E		
OA052	342609.63N/1325120.84E		
RW10	342609.69N/1325411.25E		
OA053	342609.67N/1330143.51E		
BINGO	342425.72N/1331040.68E		



INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNAV(RNP) Y RWY10

HIROSHIMA APP 124.05–119.9	GNSS and RF required.	HIROSHIMA TOWER 118.6–126.2	RADAR AVBL ATIS 127.25
-------------------------------	-----------------------	--------------------------------	---------------------------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

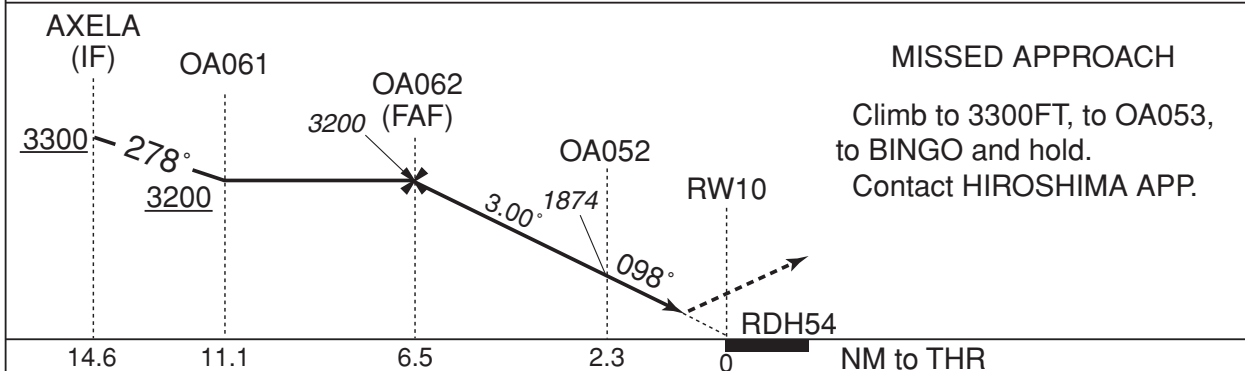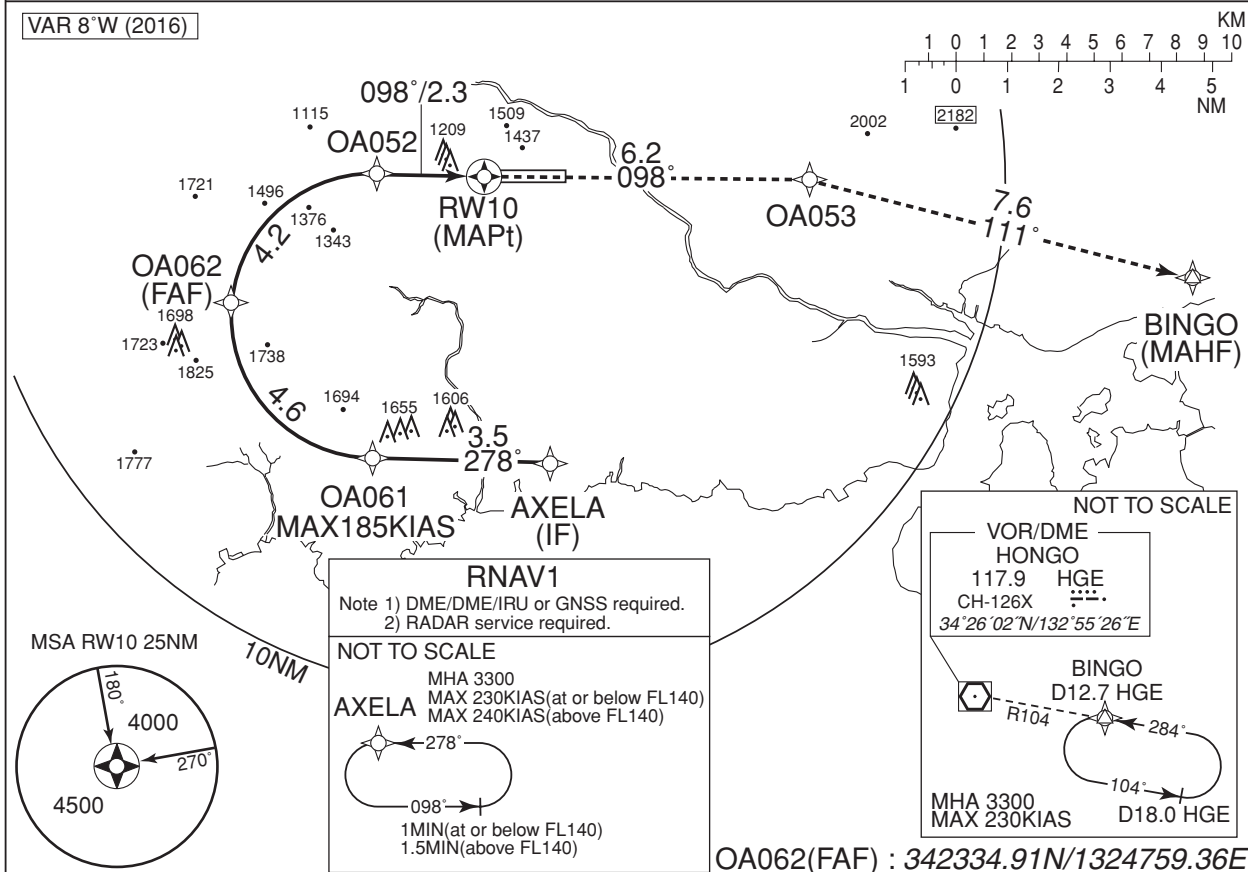

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 1072	AD elev. 1086	
CAT	RNP 0.10		RNP 0.30	
	DA(H)	RVR/CMV	DA(H)	RVR/CMV
A	—	—	—	—
B				
C	1515(443)	1000	1598(526)	1200
D		1400		1600

MINIMA with Missed APCH climb gradient of 2.5% are not established.

RNP AR

Special Authorization Required

INSTRUMENT APPROACH CHART

RJOA / HIROSHIMA

RNAV(RNP) Y RWY10

RNAV(RNP) Y RWY10Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	AXELA	—	—	-7.6	—	—	+3300	—	—	1.0
002	TF	OA061	—	278 (270.0)	-7.6	3.5	—	+3200	-185	—	1.0
003	RF Center: OARF2 r=2.79NM	OA062	—	—	-7.6	4.6	R	3200	—	—	1.0
004	RF Center: OARF2 r=2.79NM	OA052	—	—	-7.6	4.2	R	1874	—	-3.00	0.10 0.30
005	TF	RW10	Y	098 (090.0)	-7.6	2.3	—	1126	—	-3.00/54	0.10 0.30
006	TF	OA053	—	098 (090.0)	-7.6	6.2	—	—	—	—	1.0
007	TF	BINGO	—	111 (103.2)	-7.6	7.6	—	3300	—	—	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AXELA	278 (270.0)	-7.6	1.0(-14000) 1.5(+14001)	L	3300	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
AXELA	342034.40N/1325534.80E	OARF2	342321.96N/1325120.96E
OA061	342034.29N/1325121.21E		
OA062	342334.91N/1324759.36E		
OA052	342609.63N/1325120.84E		
RW10	342609.69N/1325411.25E		
OA053	342609.67N/1330143.51E		
BINGO	342425.72N/1331040.68E		

RJOA / HIROSHIMA


Visual REP



CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
白竜 Hakuryu	345°T / 4.3NM	湖 Lake
小佐木 Kosagi	115°T / 10.1NM	小佐木島 Kosagi - Island
竹原 Takehara	184°T / 5.8NM	竹原駅 Railway Station
三永サウス Minaga South	251°T / 8.4NM	東広島駅 Railway Station
新庄 Shinjo	209°T / 2.9NM	新庄交差点 Shinjo Intersection

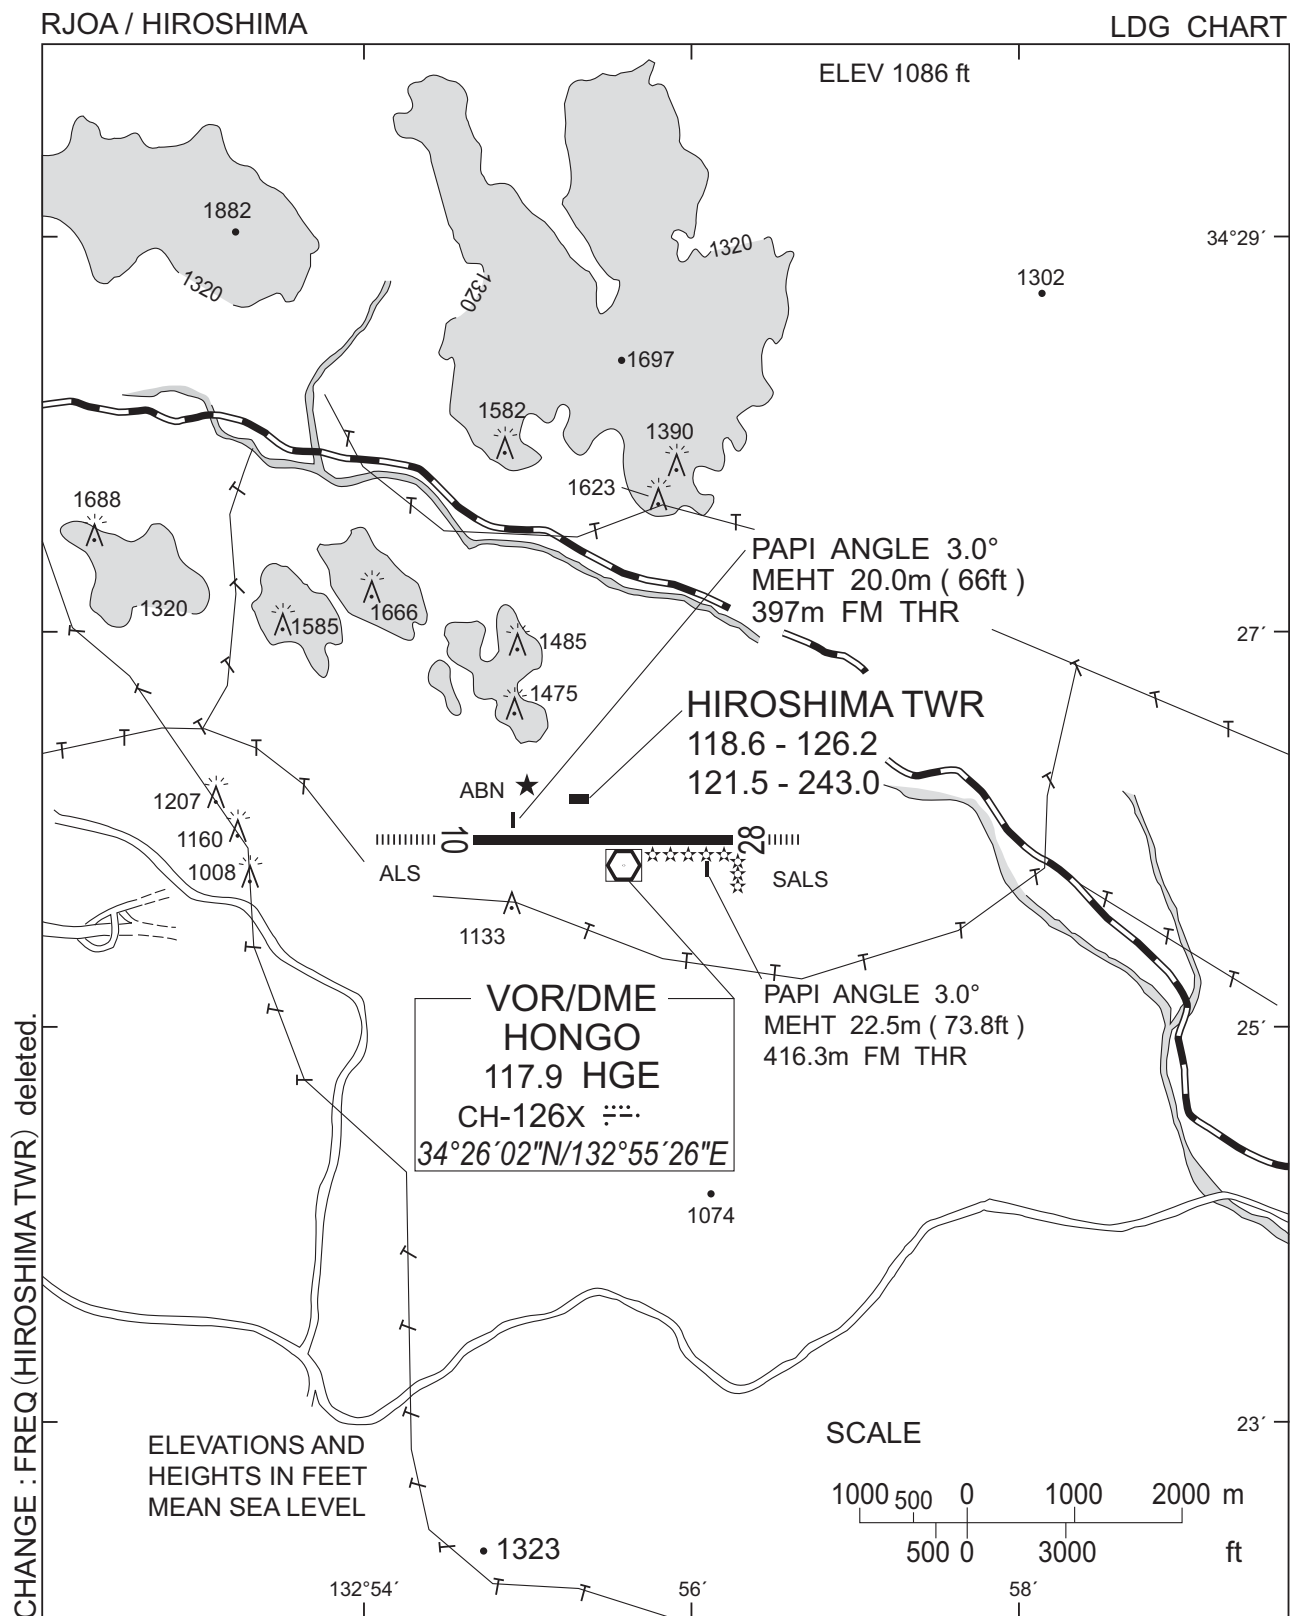

RJOA / HIROSHIMA

Minimum Vectoring Altitude CHART

