

CHANGE : TWY B7 established.



STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

SID

MIHO REVERSAL FIVE DEPARTURE

RWY 07 : Climb RWY HDG to 900FT, ...

RWY 25 : Climb RWY HDG to 500FT, ...


...turn left HDG026° to intercept and proceed via JET R071 to JET 23.0DME,  
turn left direct to JET TACAN.

Cross JET R071/19.0DME at or below 10000FT.

Note RWY25 : 5.0% climb gradient required up to 1200FT.

OBST ALT 1182FT located at 4.33NM 016° FM end of RWY25.

CHANGE : Description of PROC name.

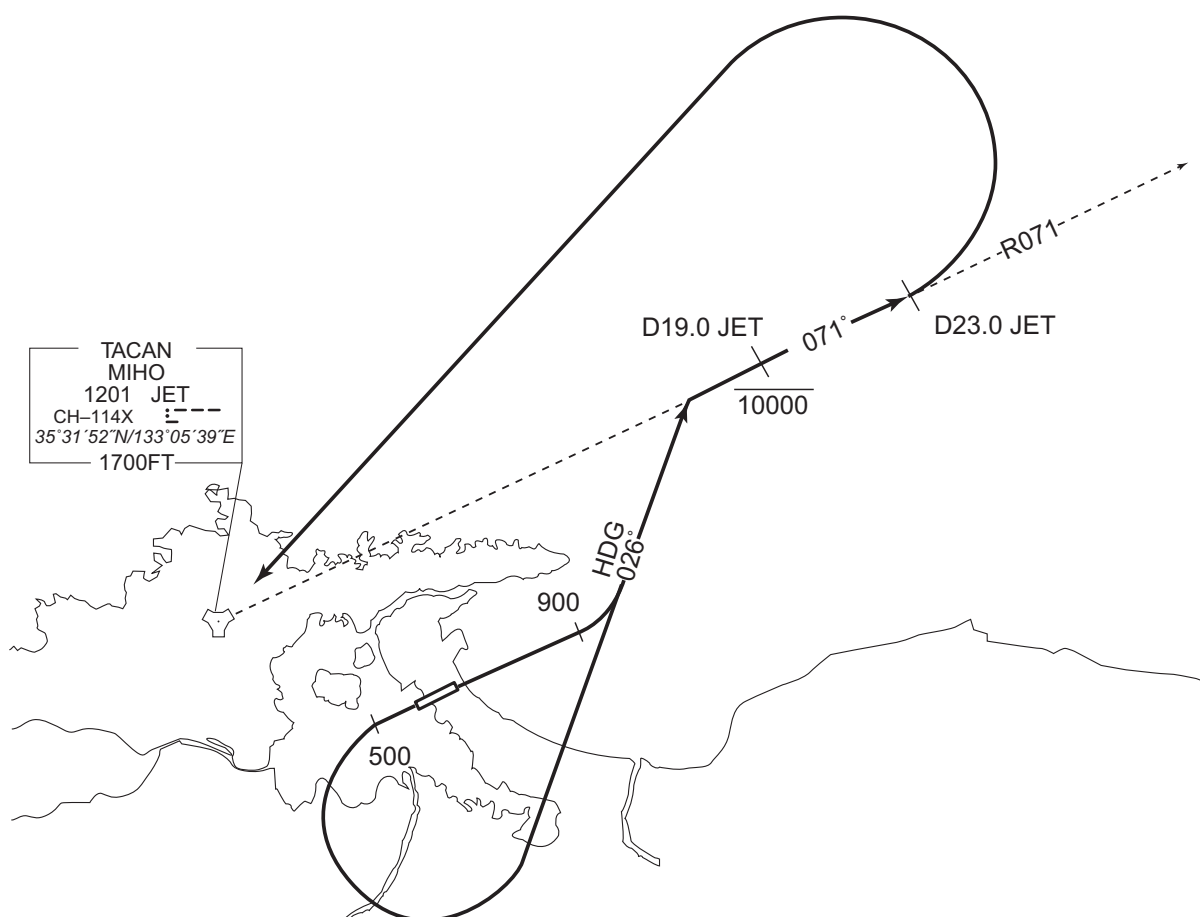

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

SID

YONAGO REVERSAL SEVEN DEPARTURE

RWY 07 : Climb RWY HDG to 900FT, turn left ...

RWY 25 : Climb RWY HDG to 500FT, turn left HDG015° ...

... to intercept and proceed via YGE R060 to YGE 18.0DME, turn left direct to YGE VOR/DME.

Cross YGE R060/18.0DME at or below 10000FT.

Note RWY25 : 5.0% climb gradient required up to 700FT.

OBST ALT 1116FT located at 6.1NM 213° FM end of RWY25.

CHANGE : Description of PROC name.



## STANDARD DEPARTURE CHART -INSTRUMENT

RJOH / MIHO

SID and TRANSITION

INABA FIVE DEPARTURE

RWY07 : Climb RWY HDG to 900FT, turn left ...

RWY25 : Climb RWY HDG to 500FT, turn left HDG015° ...

... to intercept and proceed via YGE R060 to INABA.

Cross YGE R060/18.0DME (TRE R295) at or below 10000FT.

Cross INABA at or above 8000FT.

Note RWY25 : 5.0% climb gradient required up to 700FT.

OBST ALT 1116FT located at 6.1NM 213° FM end of RWY25.

TOZAN TRANSITION

From over INABA, proceed via TRE R322 to TRE VOR/DME, via TRE R142 to TOZAN.

MIYAZU TRANSITION

From over INABA, proceed via YME R296 to YME VOR/DME.

CHANGE : SID. Note RWY25(OBST). YONAGO VOR/DME.



## STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

SID and TRANSITON

SOUTH EIGHT DEPARTURE

RWY07 : Climb RWY HDG to 500FT, turn right HDG220° ...

RWY25 : Climb RWY HDG to 500FT, turn left HDG130° ...

... to intercept and proceed via YGE R175 to NIIMI.

Cross YGE R175/12.5DME at or below 10000FT,

Cross NIIMI at or above 6000FT.

Note RWY25 : 5.0% climb gradient required up to 700FT.

OBST ALT 1116FT located at 6.1NM 213° FM end of RWY25.

MIYOS TRANSITION

From over NIIMI, proceed via YGE 20.4DME clockwise ARC to intercept and proceed via YGE R218 to MIYOS.



CHANGE : SID. Note RWY25(OBST). TRANSITION. YONAGO VOR/DME.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

SID

DOZEN SIX DEPARTURE

RWY 07 : Climb RWY HDG to 1000FT, turn left HDG322°...

RWY 25 : Climb RWY HDG to 500FT, turn left ...

... to intercept and proceed via YGE R007 to DOZEN.

Cross YGE R007/11.0DME between 6000FT and 10000FT.

Note RWY25 : 5.0% climb gradient required up to 1000FT.

OBST ALT 1182FT located at 4.3NM 016° FM end of RWY25.

CHANGE : Description of PROC name.



STANDARD DEPARTURE CHART - INSTRUMENT



CHANGE : Description of VAR and PROC name.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

RNAV SID

STAGE TWO DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	072 (063.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH701	—	—	-8.3	—	—	—	—	—	RNAV1
003	TF	OH703	—	329 (321.1)	-8.3	6.6	—	-10000	—	—	RNAV1
004	TF	STAGE	—	268 (259.6)	-8.3	31.5	—	—	—	—	RNAV1


## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	252 (243.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH501	—	—	-8.3	—	L	—	—	—	RNAV1
003	TF	OH701	—	019 (011.2)	-8.3	8.2	—	—	—	—	RNAV1
004	TF	OH703	—	329 (321.1)	-8.3	6.6	—	-10000	—	—	RNAV1
005	TF	STAGE	—	268 (259.6)	-8.3	31.5	—	—	—	—	RNAV1

CHANGE : VAR. PROC renamed, PROC course.



STANDARD DEPARTURE CHART - INSTRUMENT

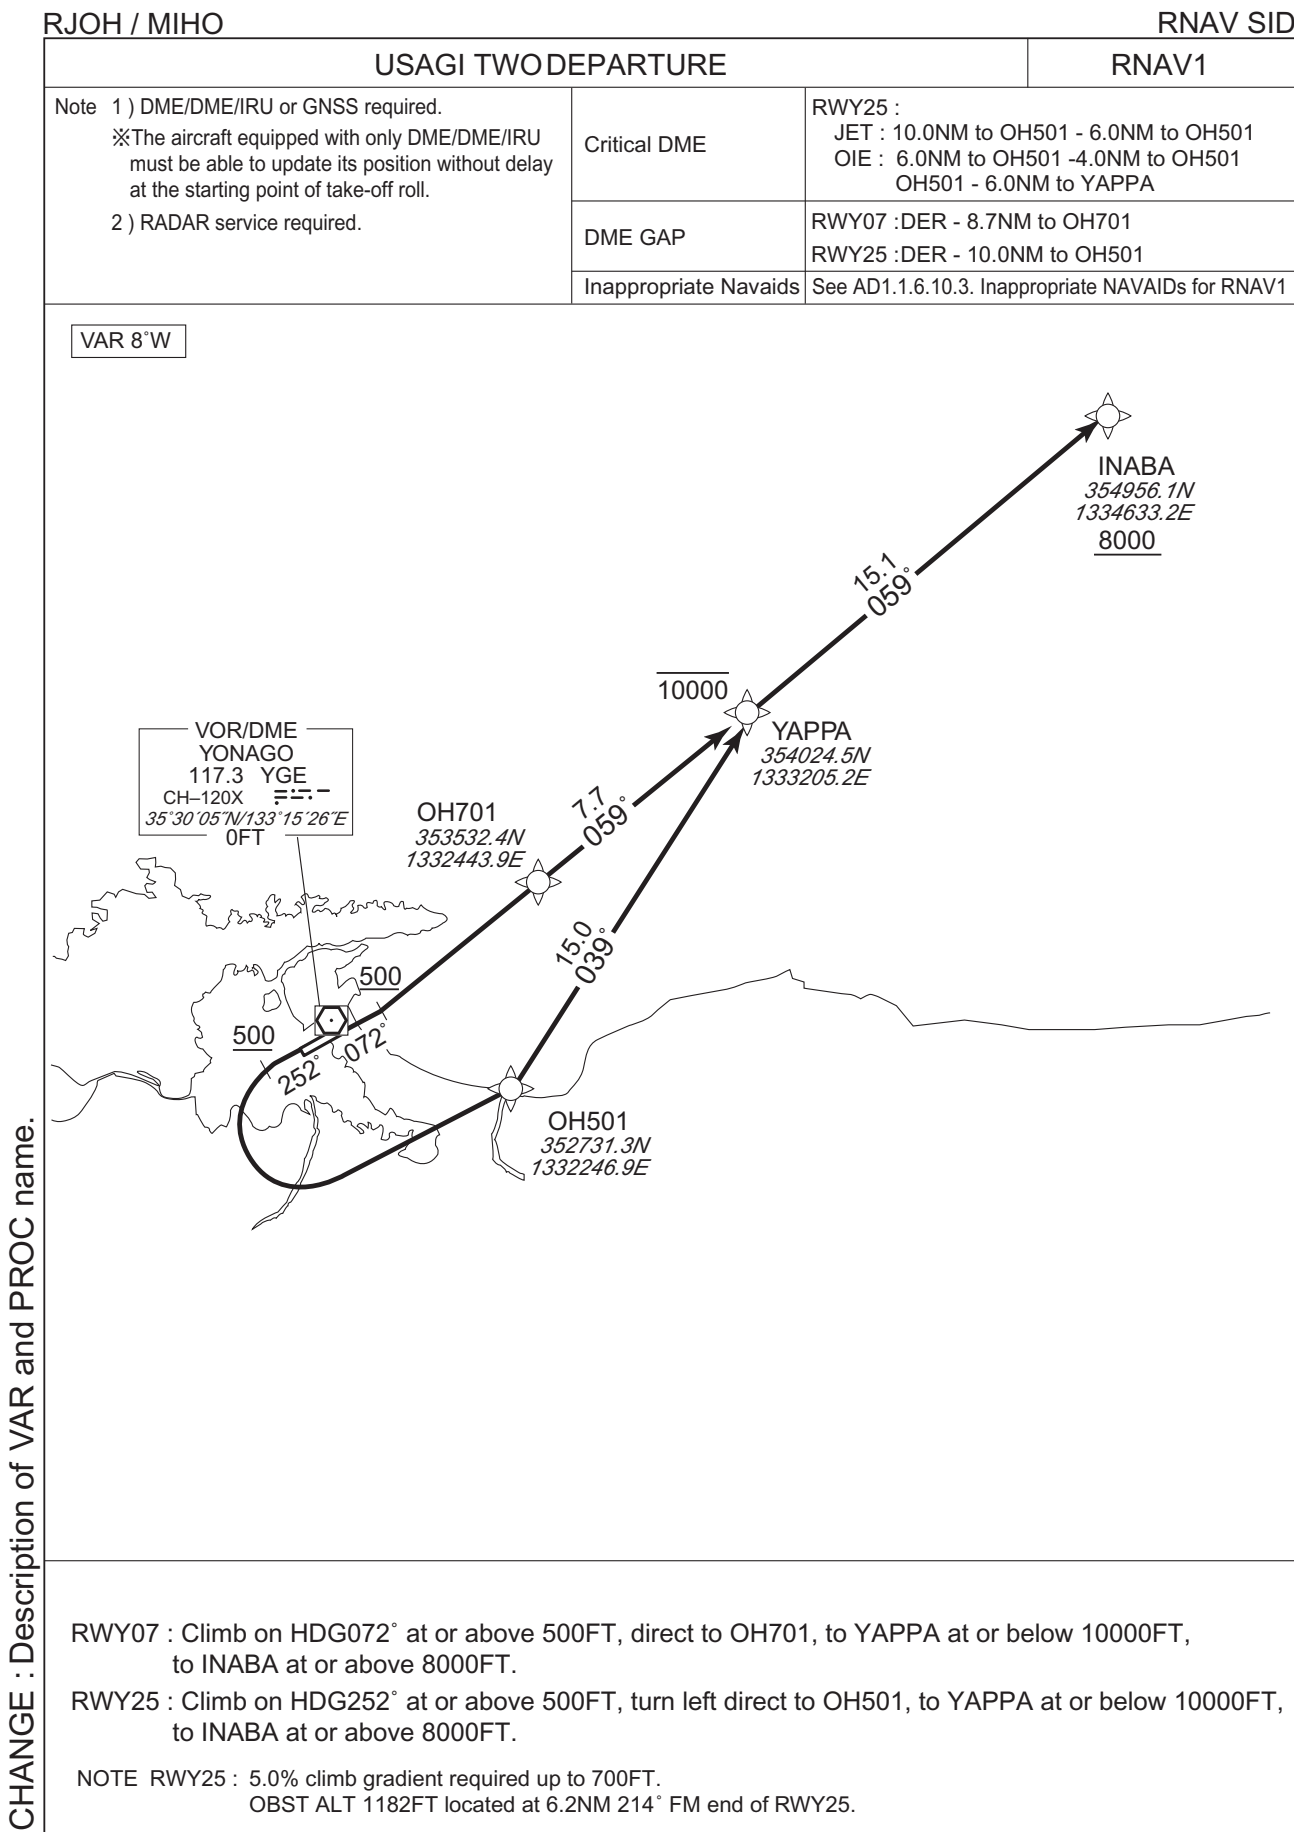

CHANGE : Description of VAR and PROC name.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

RNAV SID

USAGI TWO DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	072 (063.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH701	—	—	-8.3	—	—	—	—	—	RNAV1
003	TF	YAPPA	—	059 (050.8)	-8.3	7.7	—	-10000	—	—	RNAV1
004	TF	INABA	—	059 (050.9)	-8.3	15.1	—	+8000	—	—	RNAV1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	252 (243.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH501	—	—	-8.3	—	L	—	—	—	RNAV1
003	TF	YAPPA	—	039 (030.4)	-8.3	15.0	—	-10000	—	—	RNAV1
004	TF	INABA	—	059 (050.9)	-8.3	15.1	—	+8000	—	—	RNAV1

CHANGE : VAR. PROC renamed.PROC course.

RJOH / MIHO
RNAV TRANSITION

ALBINO TRANSITION								RNAV1			
Note 1 ) DME/DME/IRU or GNSS required. 2 ) RADAR service required.				Critical DME		TRE : 42.0NM to YME - 40.0NM to YME STD : 5.0NM to YME - 1.0NM to YME					
				DME GAP		26.0NM to YME - 25.0NM to YME					
				Inappropriate Nav aids		See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1					

VAR 8°W

From INABA, to YME.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	INABA	—	—	-8.3	—	—	—	—	—	RNAV1
002	TF	YME	—	115 (107.2)	-8.3	69.7	—	—	—	—	RNAV1

CHANGE : Critical DME, DME GAP.

## RJOH / MIHO

## RNAV TRANSITION

## RNAV1

---

---

Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1
-----------------------	---

VAR 8°W

VORTAC  
KOMATSU  
112.0 KMC  
CH-57X  $\equiv \equiv$ .  
36°23'47"N/136°24'15"E

INABA  
354956.1N  
1334633.2E  
8000

KUMIK  
354959.9N  
1340510.3E  
FL160

From INABA at or above 8000FT, to KUMIK at or above FL160, to KMC.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	INABA	—	—	-8.3	—	—	+8000	—	—	RNAV1
002	TF	KUMIK	—	098 (089.7)	-8.3	15.1	—	+FL160	—	—	RNAV1
003	TF	KMC	—	081 (072.6)	-8.3	117.4	—	—	—	—	RNAV1

CHANGE : Critical DME deleted.

STANDARD DEPARTURE CHART - INSTRUMENT



CHANGE : Description of VAR and PROC name.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJOH / MIHO

RNAV SID

KITARO TWO DEPARTURE

## RWY07


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	072 (063.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH701	—	—	-8.3	—	—	—	—	—	RNAV1
003	TF	OH703	—	329 (321.1)	-8.3	6.6	—	-10000	—	—	RNAV1
004	TF	MIHOU	—	241 (232.5)	-8.3	14.4	—	+8000	—	—	RNAV1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	252 (243.9)	-8.3	—	—	+500	—	—	RNAV1
002	DF	OH501	—	—	-8.3	—	L	—	—	—	RNAV1
003	TF	OH701	—	019 (011.2)	-8.3	8.2	—	—	—	—	RNAV1
004	TF	OH703	—	329 (321.1)	-8.3	6.6	—	-10000	—	—	RNAV1
005	TF	MIHOU	—	241 (232.5)	-8.3	14.4	—	+8000	—	—	RNAV1

CHANGE : VAR. PROC renamed. Course FM OH703 to MIHOU.

STANDARD ARRIVAL CHART - INSTRUMENT

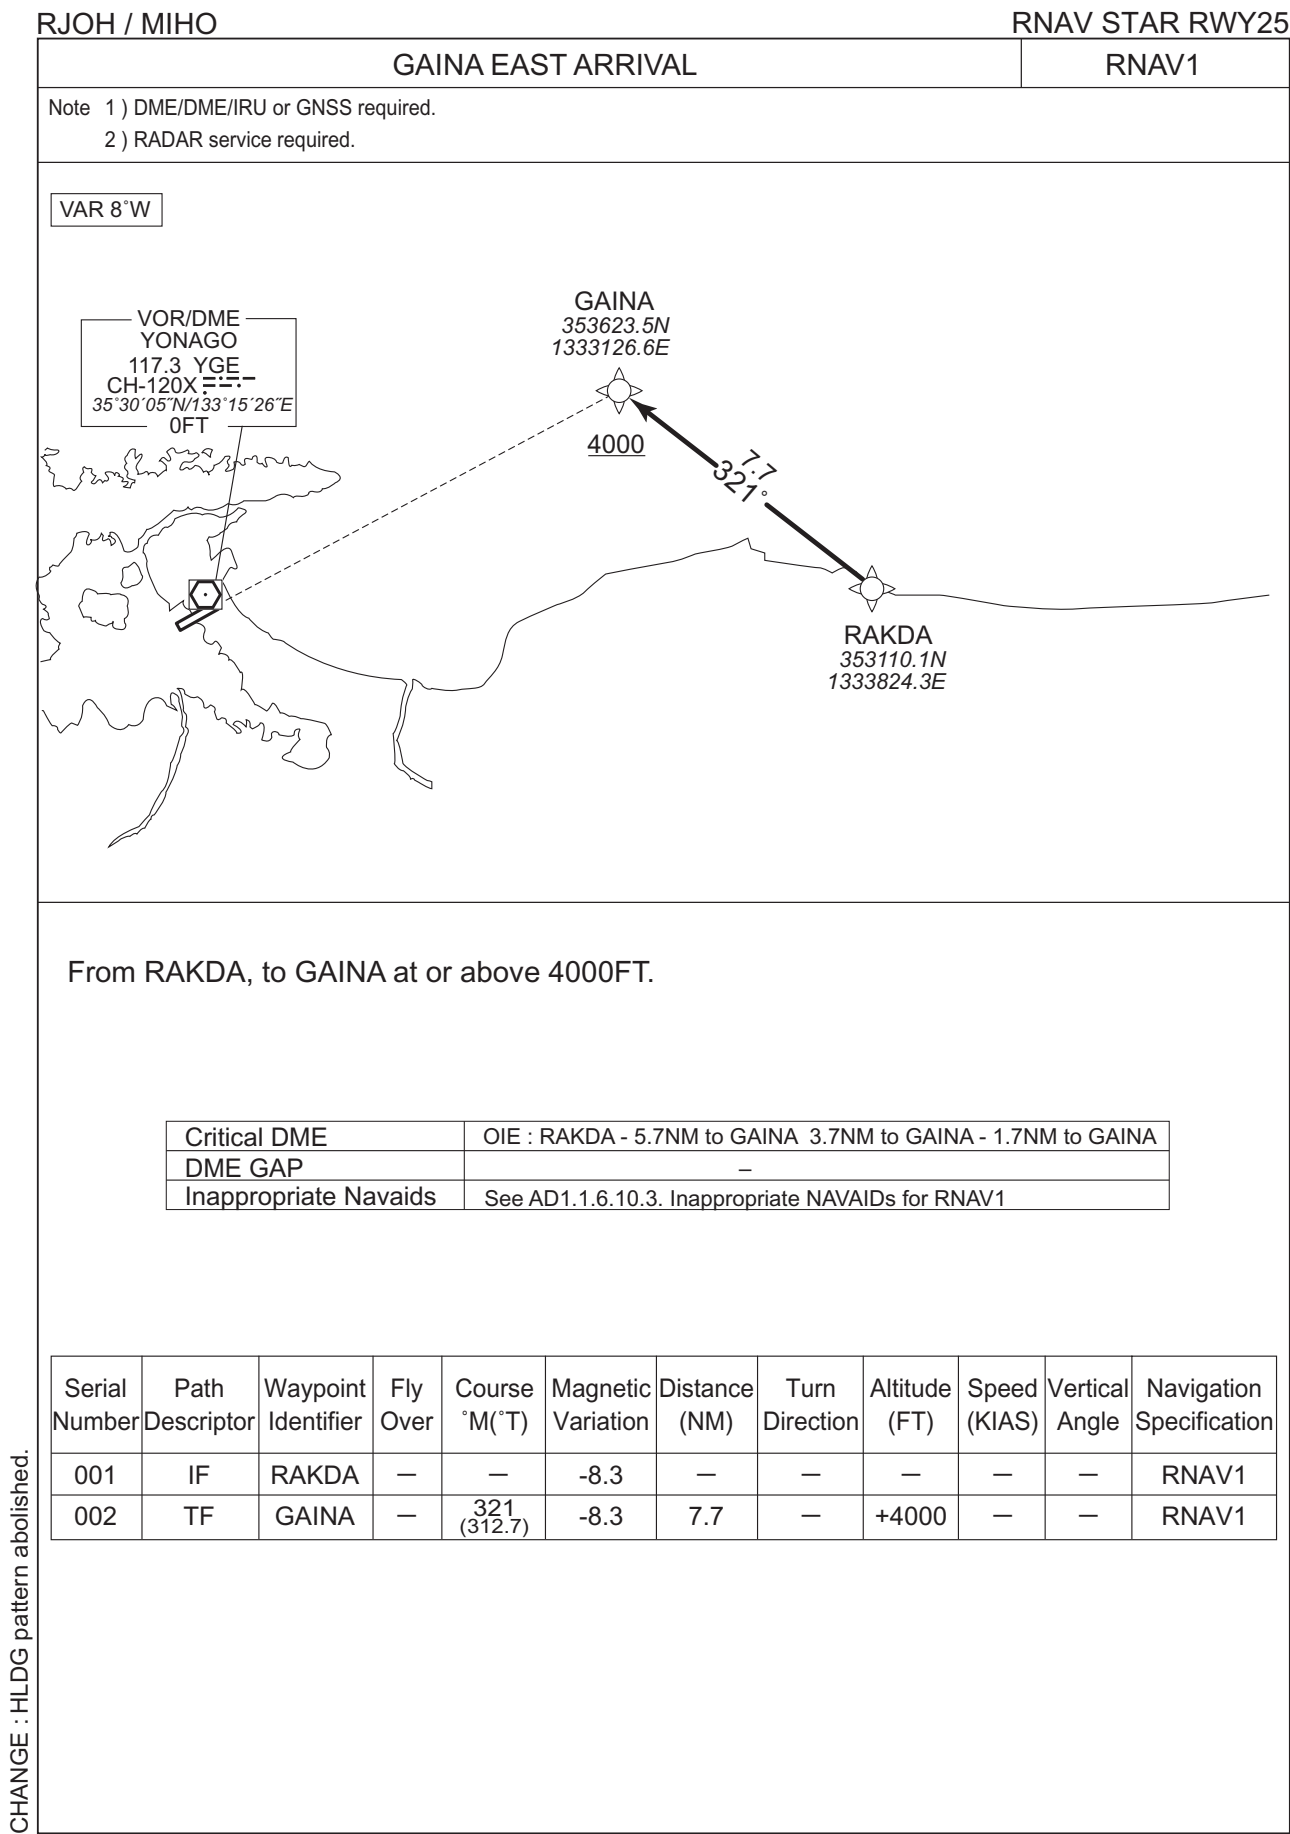

STANDARD ARRIVAL CHART - INSTRUMENT


RJOH / MIHO

RNAV STAR RWY25

GAINA WEST ARRIVAL

RNAV1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

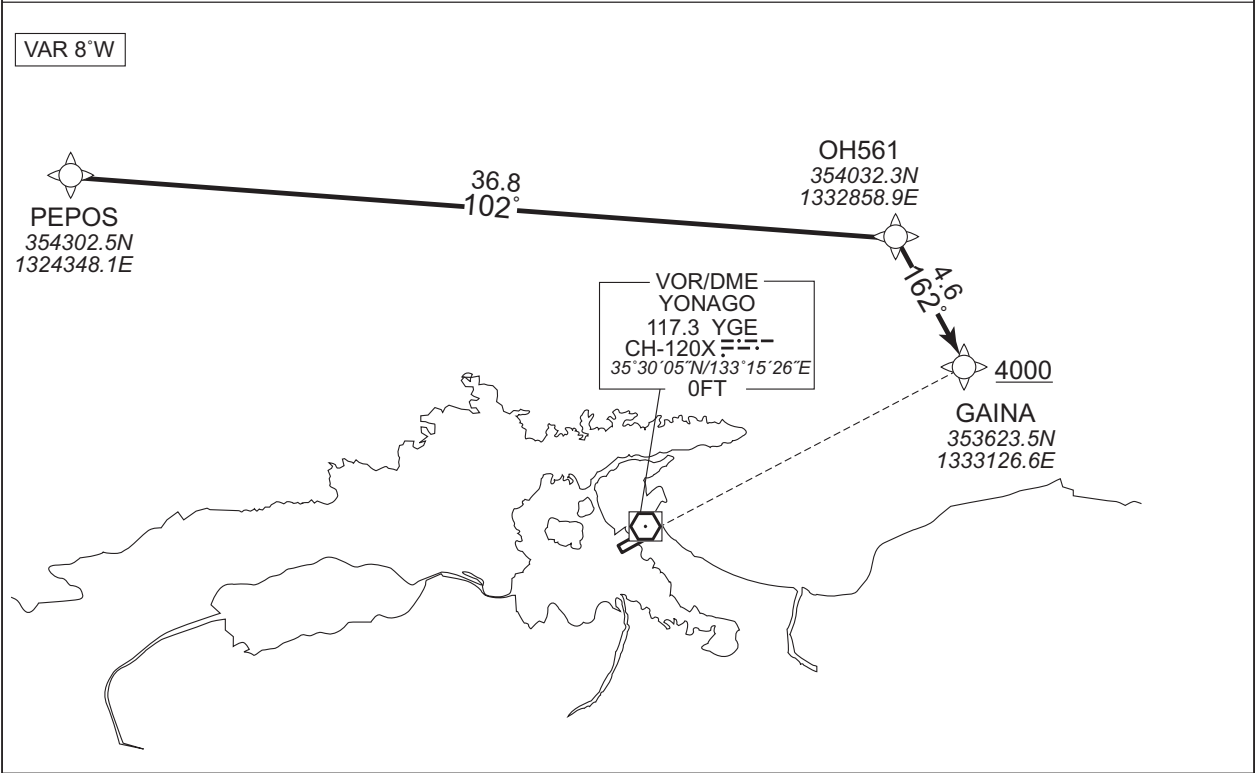

From PEPOS, to OH561, to GAINA at or above 4000FT.

Critical DME	OIE : PEPOS - 32NM to OH561
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PEPOS	—	—	-8.3	—	—	—	—	—	RNAV1
002	TF	OH561	—	102 (093.7)	-8.3	36.8	—	—	—	—	RNAV1
003	TF	GAINA	—	162 (154.2)	-8.3	4.6	—	+4000	—	—	RNAV1

CHANGE : HLDG pattern abolished.




## RJOH / MIHO

RNAV STAR RWY07

KYURI EAST ARRIVAL

RNAV1

VAR 8°W

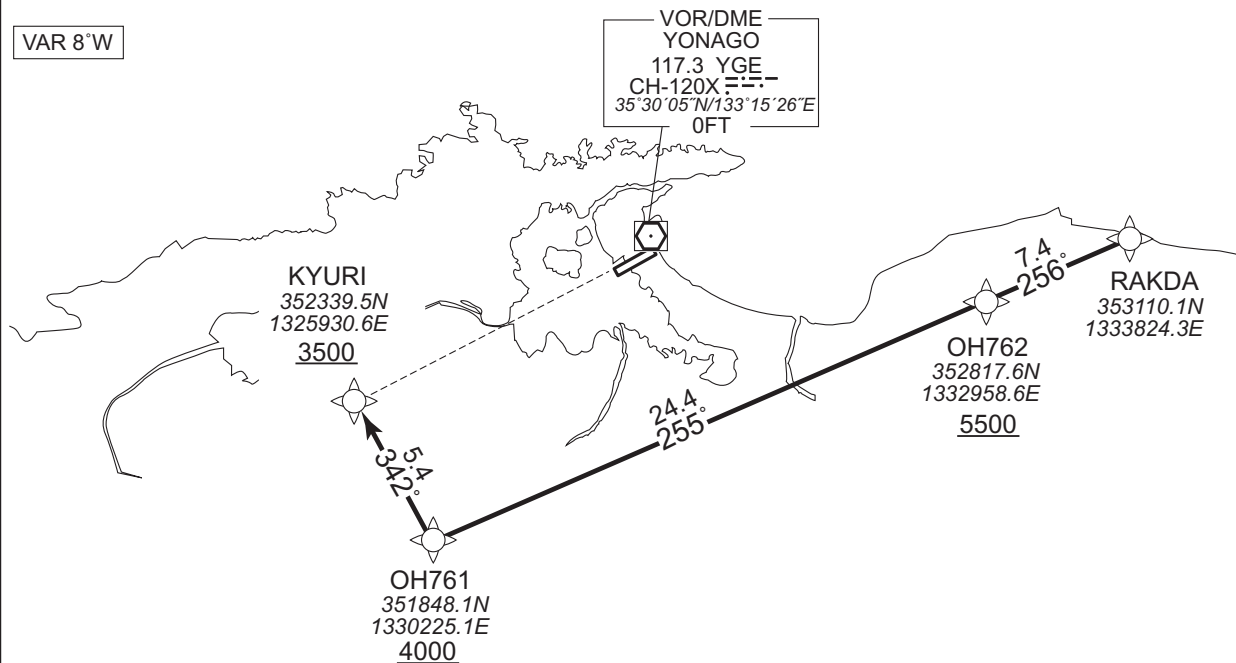

From RAKDA, to OH762 at or above 5500FT, to OH761 at or above 4000FT, to KYURI at or above 3500FT.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	RAKDA	—	—	-8.3	—	—	—	—	—	RNAV1
002	TF	OH762	—	256 (247.3)	-8.3	7.4	—	+5500	—	—	RNAV1
003	TF	OH761	—	255 (247.2)	-8.3	24.4	—	+4000	—	—	RNAV1
004	TF	KYURI	—	342 (334.0)	-8.3	5.4	—	+3500	—	—	RNAV1

CHANGE : HLDG pattern abolished.

STANDARD ARRIVAL CHART - INSTRUMENT

RJOH / MIHO

RNAV STAR RWY07

KYURI WEST ARRIVAL

RNAV1

Note 1 ) DME/DME/IRU or GNSS required.  
2 ) RADAR service required.

VAR 8°W

From PEPOS, to OH763 at or above 4000FT, to KYURI at or above 3500FT.

Critical DME	OIE : 3NM to KYURI - 2NM to KYURI
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PEPOS	—	—	-8.3	—	—	—	—	—	RNAV1
002	TF	OH763	—	155 (146.5)	-8.3	12.6	—	+4000	—	—	RNAV1
003	TF	KYURI	—	155 (146.6)	-8.3	10.6	—	+3500	—	—	RNAV1

CHANGE : HLDG pattern abolished.


## RJOH / MIHO

ILS Z or LOC Z RWY25

	NM to IYV	MAPt	2	3	4	5	FAF
	ALT (3.0" APCH Path)	—	652	970	1289	1607	1962

Climb on HDG251° to 500FT, turn left  
HDG031° to intercept and proceed  
via YGE R076 to 3000FT, turn left,  
direct to YGE VOR/DME within YGE  
10.0DME and hold.  
Contact MIHO APP.

Timing not authorized for defining the MAPt.

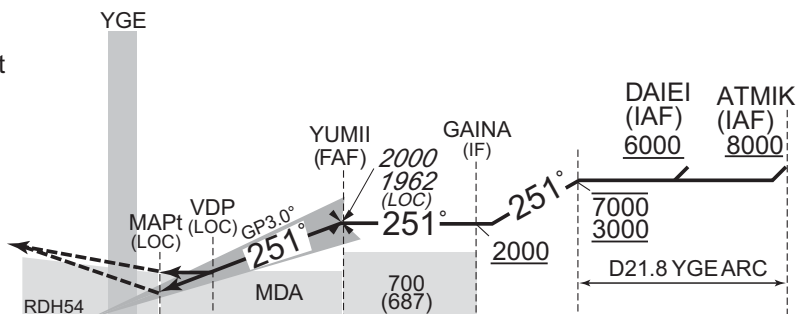

Missed APCH climb gradient MNM 3.0%
-------------------------------------

Missed APCH climb gradient MNM 3.0%

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : OBST HGT(141→161).


INSTRUMENT APPROACH CHART



## INSTRUMENT APPROACH CHART




INSTRUMENT APPROACH CHART

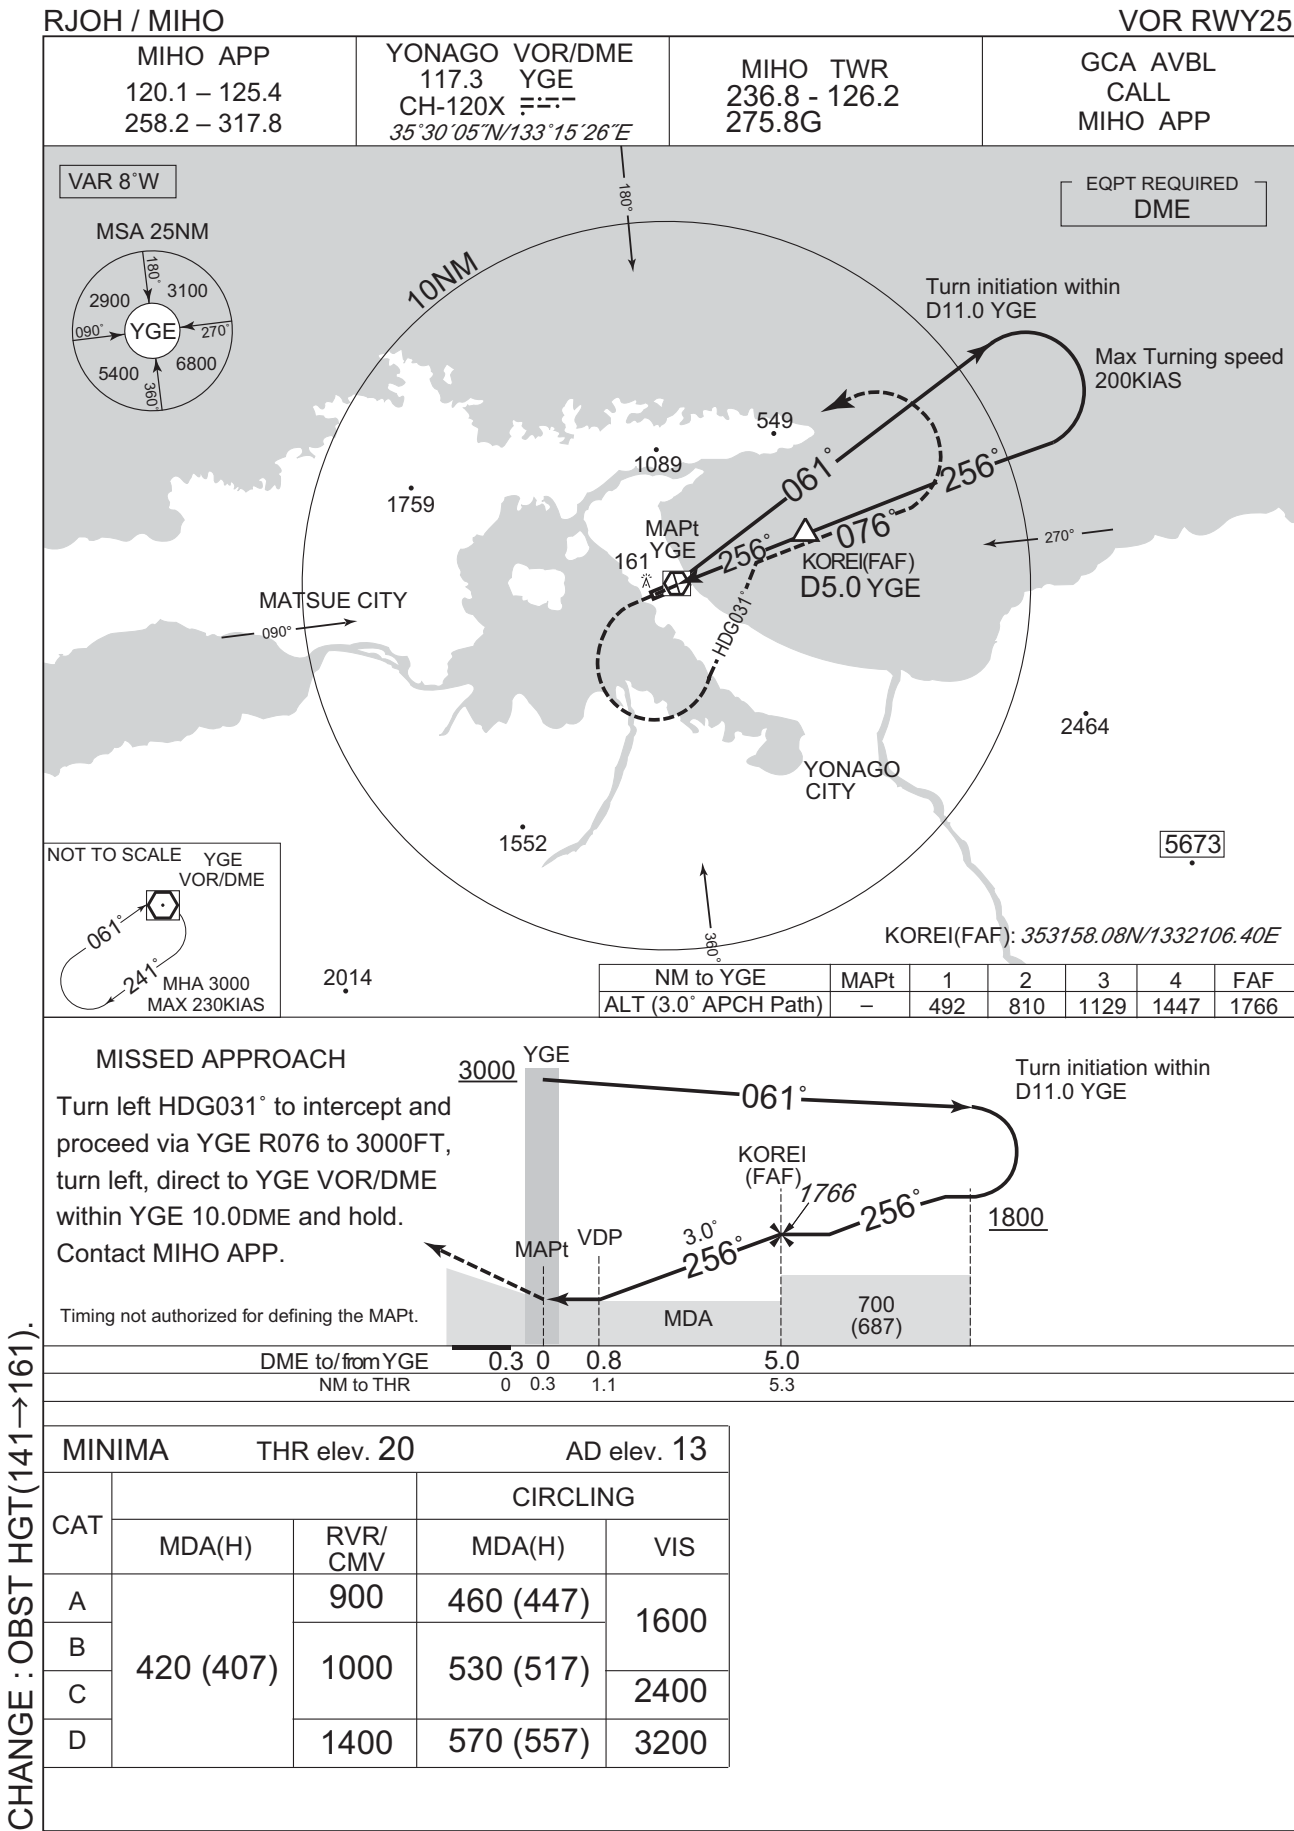


CHANGE : OBST HGT(141→161).

INSTRUMENT APPROACH CHART

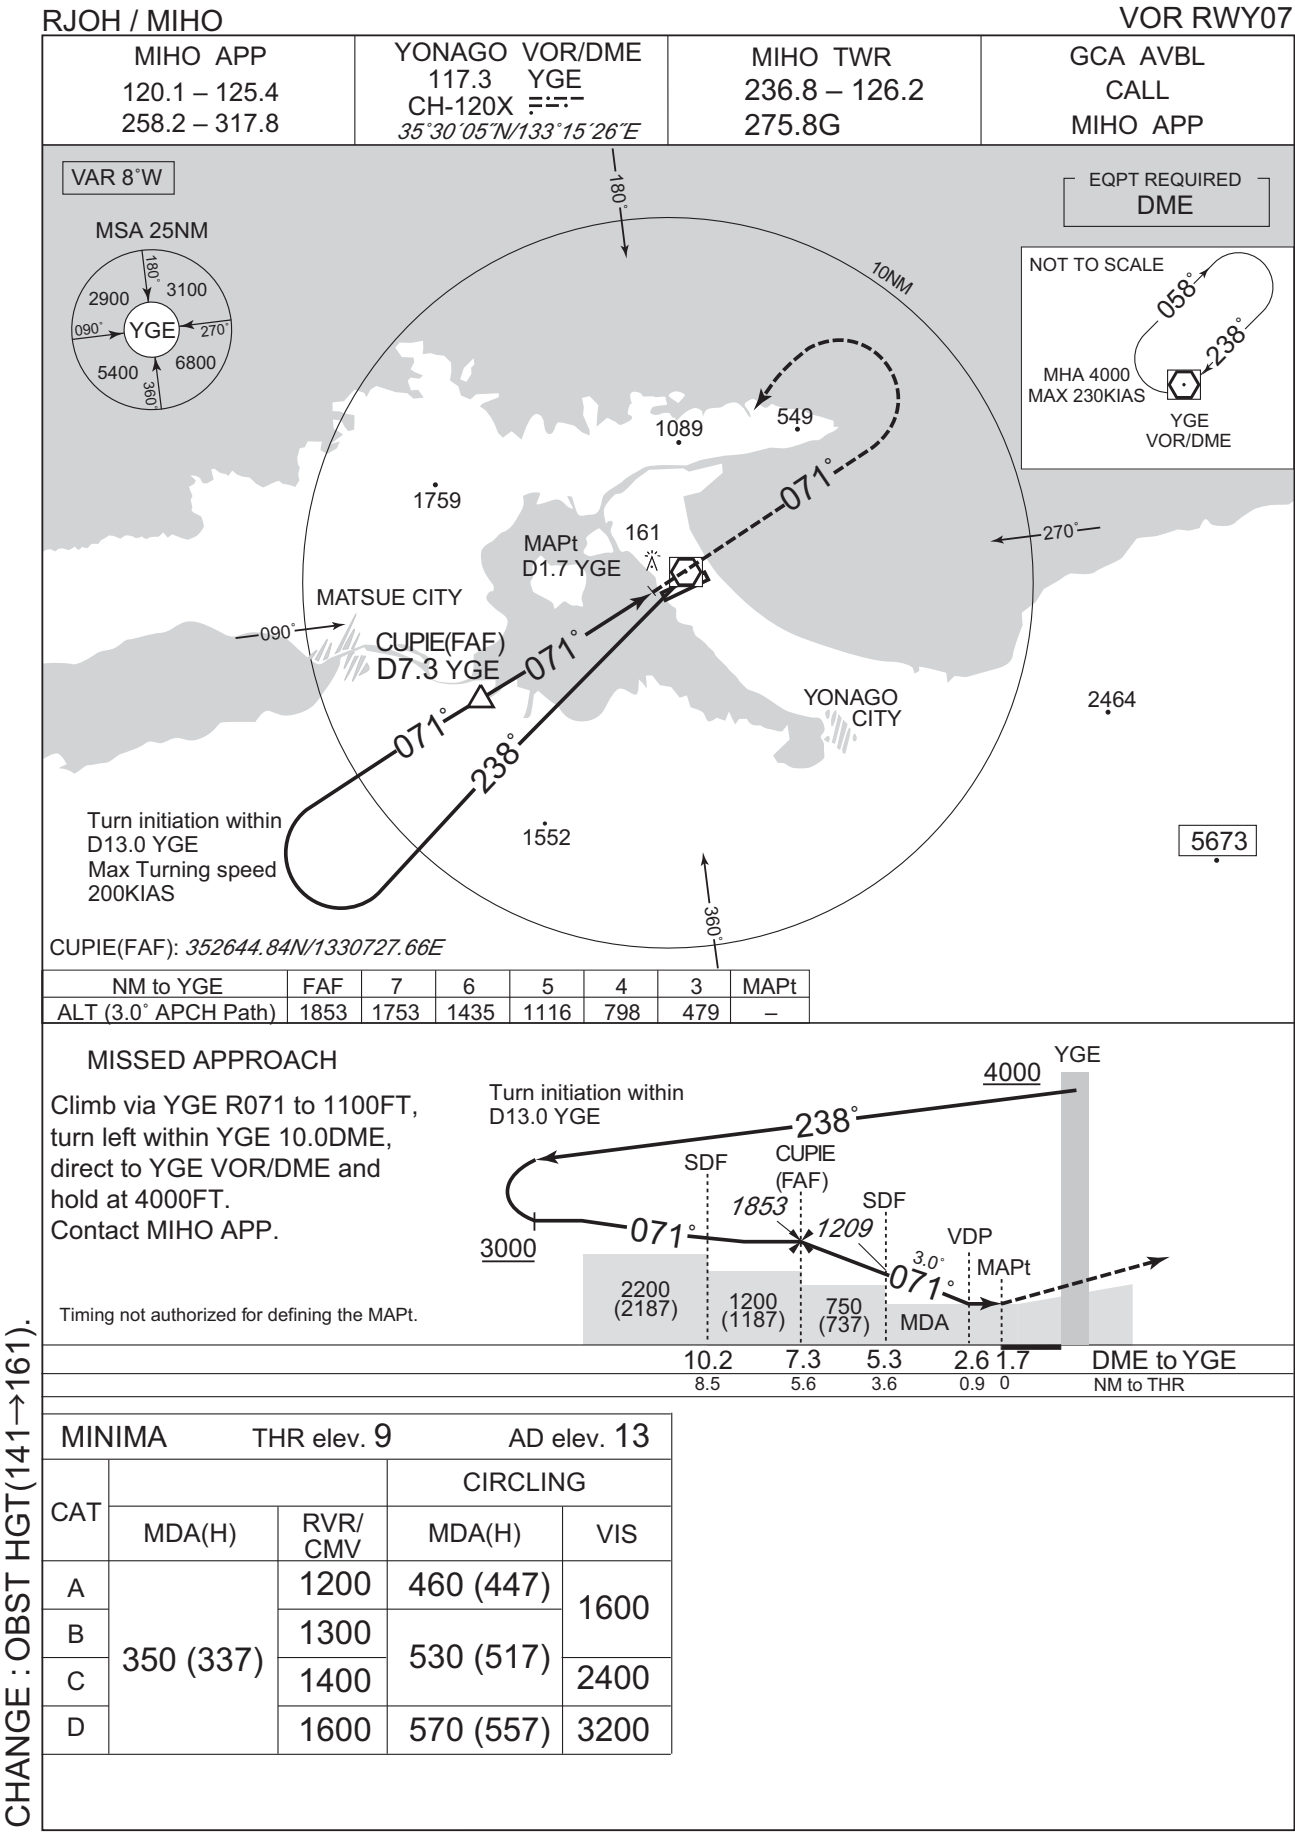

INSTRUMENT APPROACH CHART

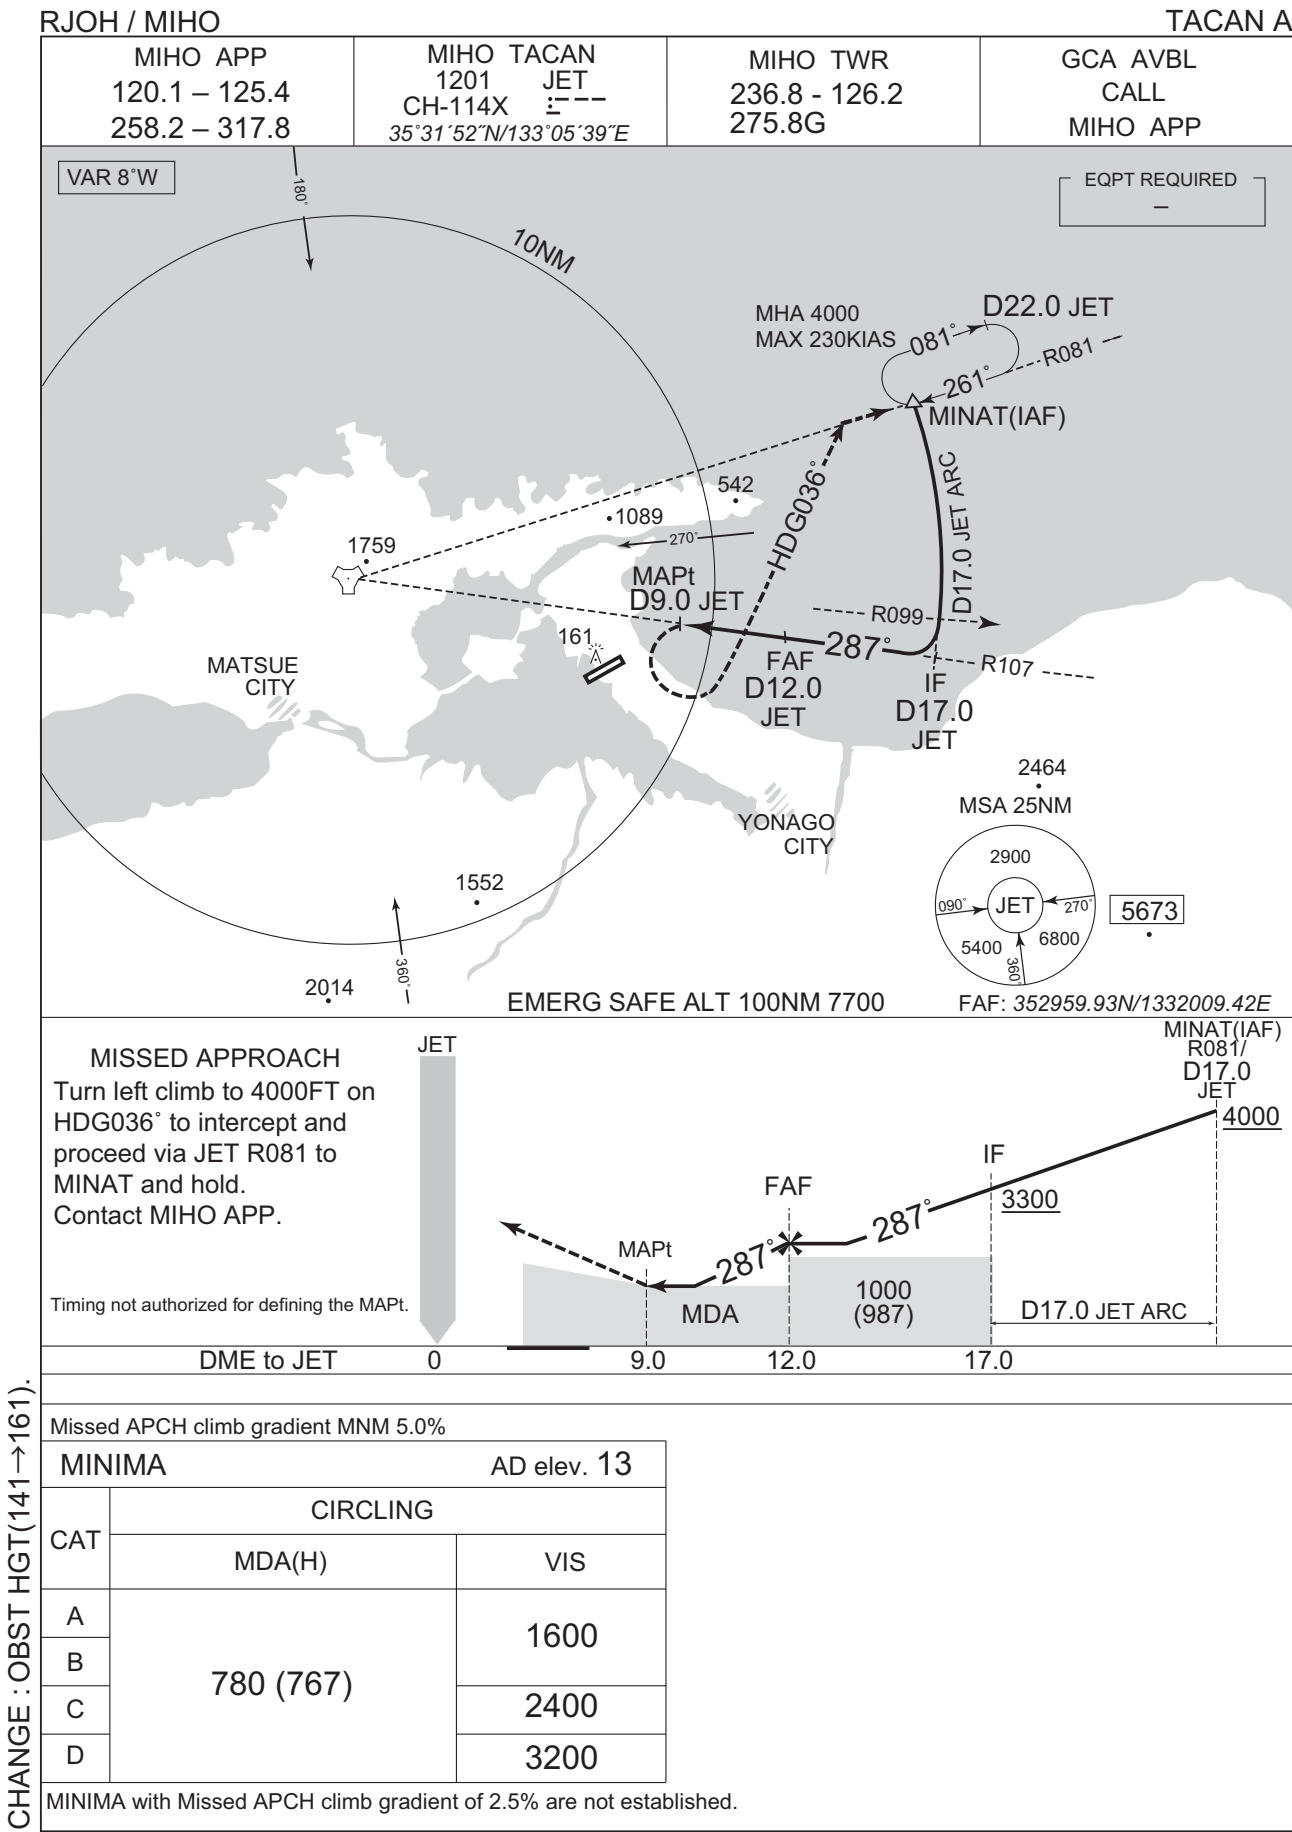

CHANGE : OBST HGT(141→161).




CHANGE : PROC renamed. MNM temperature for Baro-VNAV. Missed APCH for using NAVAID abolished.

RNP Z RWY07


Baro-VNAV not authorized below -10°C

KYURI (IF)	352339.46 <i>N</i> 1325930.61 <i>E</i>
OH751 (FAF)	352620.83 <i>N</i> 1330612.69 <i>E</i>
OH750 (SDF)	352743.38 <i>N</i> 1330938.92 <i>E</i>
RW07 (MAPt)	352918.33 <i>N</i> 1331336.57 <i>E</i>
OH752 (MATF)	353223.66 <i>N</i> 1332121.76 <i>E</i>
YGE (MAHF)	353004.96 <i>N</i> 1331525.94 <i>E</i>

1MIN  
058°  
238°  
YONAGO (YGE)  
MHA 4000  
MAX 230KIAS

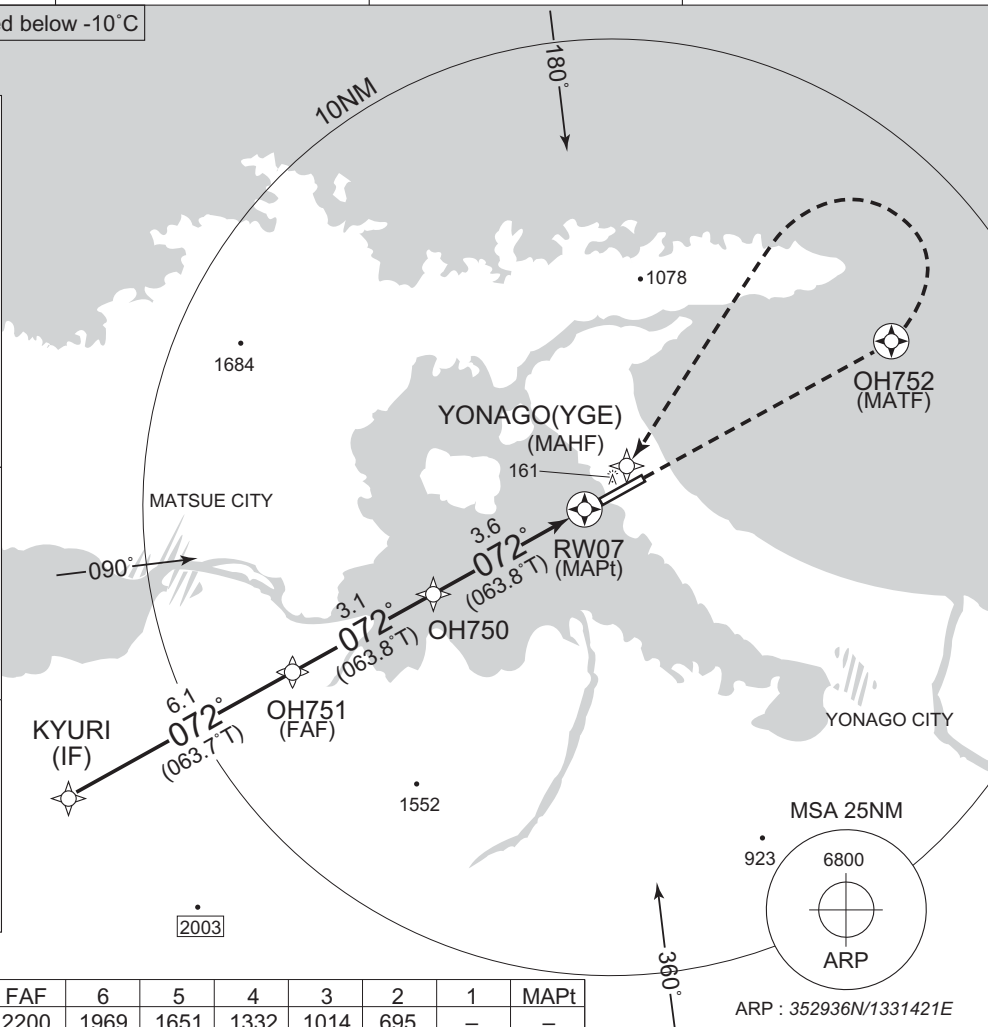

ARP : 352936N/1331421E

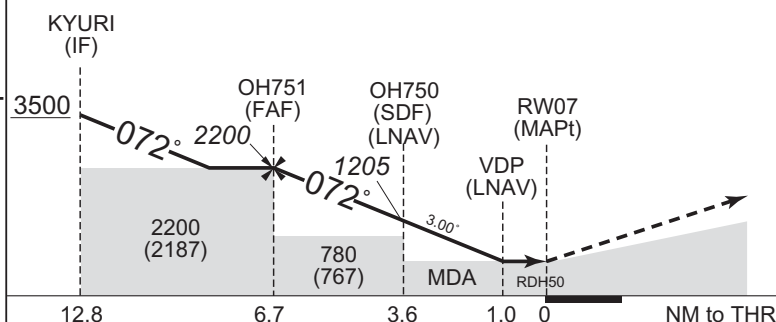

Climb to OH752, turn left, direct to YGE and hold at 4000FT.  
Contact MIHO APP.

MINIMA		THR elev. 9		AD elev. 13		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	380 (371)	1200	380 (367)	1200	460 (447)	1600
B		1300		1300	530 (517)	
C		1400		1400		2400
D		1600		1600	570 (557)	3200

INSTRUMENT APPROACH CHART



## INSTRUMENT APPROACH CHART

RJOH / MIHO

RNP Y RWY07(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	RAKDA	-	-	-8.5	-	-	-	-	-	-
002	TF	UGEPA	-	256 (247.3)	-8.5	18.8	-	+3100	-	-	0.3
003	TF	OH753	-	297 (288.2)	-8.5	2.2	-	2600	-	-	0.3
004	TF	OH754	-	297 (288.1)	-8.5	2.1	-	1941	-155	-3.00	0.3
005	RF Center: OHRF1 r=1.84NM	OH755	-	-	-8.5	4.4	R	554	-	-3.00	0.3
006	TF	RW07	Y	072 (063.9)	-8.5	1.6	-	59	-	-3.00/50	0.3
007	CF	OH752	Y	072 (063.9)	-8.5	7.0	-	-	-	-	1.0
008	DF	YGE	-	-	-8.5	-	L	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	RAKDA	208 (199.9)	-8.5	1.0 (-14000)	R	7000	FL140	-210 (-14000)	1.0
Hold	YGE	238 (229.7)	-8.5	1.0 (-14000)	R	4000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
RAKDA	353110.12N / 1333824.27E	OHRF1	352658.12N / 1331252.91E
UGEPA	352353.68N / 1331709.24E		
OH753	352434.73N / 1331435.50E		
OH754	352513.21N / 1331211.18E		
OH755	352837.26N / 1331153.73E		
RW07	352918.33N / 1331336.57E		
OH752	353223.66N / 1332121.76E		
YGE	353004.96N / 1331525.94E		

CHANGE : New PROC.

RJOH / MIHO

Minimum Vectoring Altitude CHART

VAR 8°W (2023)

CHANGE : VAR. Update(BTN 205°and 210°).

