### **AD 2 AERODROMES**

## **RJSR AD 2.1 AERODROME LOCATION INDICATOR AND NAME**

## **RJSR - ODATE-NOSHIRO**

### RJSR AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	401131N/1402218E 109°/1.0km from RWY11 THR
2	Direction and distance from (city)	8.3NM W FM OODATE City
3	Elevation/ Reference temperature	276ft /31°C (1997-2008)
4	Geoid undulation at AD ELEV PSN	126ft
5	MAG VAR/ Annual change	8°W(2006) / 1'E
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Odate-Noshiro Airport Administration Office (Akita prefectural government) 21-144,Wakigami-aza,karamushi-tai,kita-Akita City,AKITA,018-3454 JAPAN. TEL:0186-63-1001 FAX:0186-63-1009 E-mail:oodatenoshirokuukoujimusho@pref.akita.lg.jp
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Nil

## **RJSR AD 2.3 OPERATIONAL HOURS**

1	AD Administration	2300 - 1030
2	Customs and immigration	On request Customs: 018-845-0735 Immigration: 018-895-5221
3	Health and sanitation	Quarantine(human): On request(018-846-8280) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24(TOKYO)
7	ATS	2300 - 1030 Remarks: AFIS provided by New Chitose Airport Office.
8	Fuelling	2300 - 0930
9	Handling	2240 - 0900
10	Security	2300 - 1030
11	De-icing	Nil
12	Remarks	Nil

## **RJSR AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	AVBL up to B767 passenger plane
2	Fuel/ oil types	JET A1
3	Fuelling facilities/ capacity	Fuel truck /200kl
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

### **RJSR AD 2.5 PASSENGER FACILITIES**

1	Hotels	Nil
2	Restaurants	At Airport
3	Transportation	Bus,Taxi
4	Medical facilities	Nil
5	Bank and Post Office	Nil
6	Tourist Office	Nil
7	Remarks	Nil

### **RJSR AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	CAT 7
2	Rescue equipment	Chemical fire fighting truck x 2 Emergency medical equipments conveyance truck x 1
3	Capability for removal of disabled aircraft	Ask AD administration
4	Remarks	Nil

### **RJSR AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1 Types of clearing equipment			Snow plow x 4, Snow sweeper x 4, rotary x 4, spreader equipment x 1			
Ī	2	Clearance priorities	RWY, TWY, APRON			
Ī	3	Remarks	Nil			

## RJSR AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface: Concrete Strength: PCR 734/R/C/W/T	
2	Taxiway width, surface and strength	Width 30m Surface: asphalt-Concrete Strength: PCR 902/F/C/X/T	
3	ACL and elevation	Not available	
4	VOR checkpoints	Not available	
5	INS checkpoints	(Spot NR)  1  401142.42N ,1402218.33E  2  401142.04N ,1402220.50E  3  401141.71N ,1402223.00E  5  401141.37N ,1402225.50E	
6	Remarks	Nil	

## RJSR AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual dock- ing/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:RWY 11/29 (Marking): RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe, RWY turn pad edge, RWY turn pad CL (LGT): RCLL, REDL, RTHL, RENL, RTZL(RWY11), WBAR, Turning point indicator LGT, RWY DIST marker LGT TWY: (Marking):TWY CL, RWY HLDG PSN, TWY side stripe (LGT):TWY edge LGT, TWY CL LGT, Taxiing guidance sign
3	Stop bars	Nil
4	Remarks	(Marking):Overrun area (LGT):Apron flood LGT

### RJSR / ODATE-NOSHIRO

180° Turn on RWY


## B767 型機用の滑走路 180° 転回実施要領


- 1. 滑走路中心線からターニングパッド中心線標識に従って進行する。
- 2. 転回灯 1 が一直線に見えるように進行し、転回灯 2 が一直線に見えたとき転回 を開始する。転回時は MAX STEERING ANGLE を使用する。

### 180° turn procedure on RWY for B767 aircraft

- Proceed along the RWY Center Line to the starting point of the RWY Turn Pad Center Line Marking; then
- 2. Proceed along the RWY Turn Pad Center Line Marking to see the Turning Point Indicator Light 1 on a straight line, then commence turn at the spot where you (pilot)can see the Turning Point Indicator Light 2 on a straight line at an angle of 9 o'clock. When turning, take MAX STEERING ANGLE.

### ODATE-NOSHIRO AP

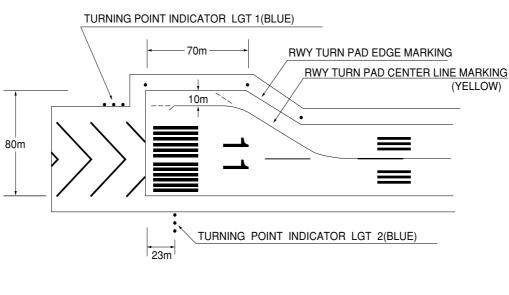

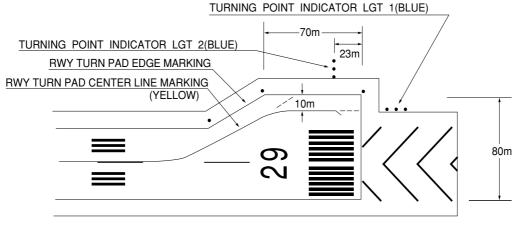

## **RJSR AD 2.10 AERODROME OBSTACLES**

In Area2 See Obstacle data

In Area3 To be developed

service, etc.)

### **RJSR AD 2.11 METEOROLOGICAL INFORMATION PROVIDED**

1	Associated MET Office	токуо
2	Hours of service	H24(TOKYO)
	MET Office outside hours	
3	Office responsible for TAF preparation	Nil
	Periods of validity	
4	Trend forecast	Nil
	Interval of issuance	
5	Briefing/ consultation provided	Briefing is available upon inquiry at TOKYO
6	Flight documentation	С
	Language(s) used	En
7	Charts and other information available	S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>s</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> ,
	for briefing or consultation	P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N
8	Supplementary equipment	Nil
	available for providing information	
9	ATS units provided with information	RADIO
10	Additional information(limitation of	Nil

## **RJSR AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

•			0.5%			
RWY 11 259.18ft					291.99ft	
		LONGIT	TUDINAL PROFILE	OF RUNWAY	RWY 29	
		2120×300	40×(MNM *For detail, ask			
See below figure		2120×300	190×(MNM:149 MAX:297)*		RWY Grooving: 2000×45m	
7		10	11		14	
Slope of RWY		Strip Dimensions(M)	RESA (Overrun) Dimensions (M)		Remarks	
29	280.30°	2000×45	PCR 902/F/C/X/T Asphalt-Concrete	401125.10N 1402258.78E 126FT	THR ELEV:292.0FT	
11	100.30°	2000×45	PCR 902/F/C/X/T Asphalt-Concrete	401136.37N 1402135.51E 125.7FT	THR ELEV:259.2FT TDZ ELEV:269FT	
1	2	3	4	5	6	
Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TD2 of precision APP RWY	

### **RJSR AD 2.13 DECLARED DISTANCES**

	TORA	TODA	ASDA	LDA	
RWY Designator	(m)	(m)	(m)	(m)	Remarks
1	2	3	4	5	6
11	2000	2000	2000	2000	Nil
29	2000	2000	2000	2000	Nil

## **RJSR AD 2.14 APPROACH AND RUNWAY LIGHTING**

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
11	PALS (CAT I) 900m LIH	Green Green	PAPI 3.0°/Left 347.2m 61ft	900m	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
29	SALS (*1) 420m LIH	Green Nil	PAPI 3.0°/Left 414.9m 61ft	Nil	2000m 30m Coded color (White/Red) LIH	2000m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
				Remarks				
_				10				
SALS with APCH LGT beacon(570m and 900m FM RWY 29 THR)(*1)  Overrun area edge LGT(LEN:60m Color:Red) (*2)  CGL for RWY 29 only								

## RJSR AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and	ABN: 401148N/1402216E, White/Green EV4.3sec, HO
	hours of operation	
2	LDI location and LGT  Anemometer location and LGT	LDI:Nil Anemometer: RWY11:305m from RWY11 THR. LGTD RWY29:295m from RWY29 THR. LGTD
3	TWY edge and centerline lighting	TWY edge and center line lights installed, see AD 2.9
4	Secondary power supply/ switch-over time	Within 15sec : ALL LGT
5	Remarks	WDI LGT

### **RJSR AD 2.16 HELICOPTER LANDING AREA**

Nil
-----

## **RJSR AD 2.17 ATS AIRSPACE**


	Designation and lateral limits	Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
	1	2	3	3 4	
Odate Noshiro information zone	Area within a radius of 9km(5NM) of Odate-Noshiro ARP.	3,000 or below	E	Odate Radio En	
Shirakami ACA	See RJSK attached chart	E	Shirakami APP En		

### **RJSR AD 2.18 ATS COMMUNICATION FACILITIES**

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP	Shirakami Approach	119.25MHz 315.3MHz 120.65MHz 121.5MHz (E) 243.0MHz (E)	2200 - 1300	
AFIS	Odate Radio	118.75MHz	2300 - 1030	Operated by New Chitose Airport Office

## **RJSR AD 2.19 RADIO NAVIGATION AND LANDING AIDS**

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (9°W/2015)	ODE	114.75MHz	2300 - 1030	401154.03N/ 1402142.68E		VOR unusable: 010°-020° beyond 35nm BLW 8000ft. 100°-110° beyond 35nm BLW 6000ft. 110°-130° beyond 35nm BLW 9000ft. 150°-160° beyond 30nm BLW 8000ft. 320°-340° beyond 35nm BLW 6000ft. 340°-350° beyond 25nm BLW 6000ft. 350°-360° beyond 35nm BLW 8000ft.
DME	ODE	1055MHz (CH-94Y)	2300 - 1030	401154.03N/ 1402142.68E	308ft	DME unusable: 100°-110° beyond 35nm BLW 6000ft. 110°-130° beyond 35nm BLW 9000ft. 150°-160° beyond 30nm BLW 8000ft. 320°-340° beyond 35nm BLW 6000ft. 340°-350° beyond 35nm BLW 6000ft. 350°-360° beyond 35nm BLW 8000ft.
ILS-LOC 11	IOD	110.15MHz	2300 - 1030	401123.77N/ 1402308.57E		LOC:235m(771ft) away FM RWY 29 THR, BRG(MAG)110°.
ILS-GP 11	-	334.25MHz	2300 - 1030	401130.74N/ 1402146.51E		GP:287m(942ft) inside FM RWY 11 THR. 125m(410ft) S of RCL. HGT of ILS REF datum 16.5m (54ft). GP angle 3.0°.
ILS-DME 11	IOD	1125MHz	2300 - 1030	401130.42N/ 1402146.43E	278ft	DME:287m(942ft) inside FM RWY 11 THR. 135m(443ft) S of RCL.

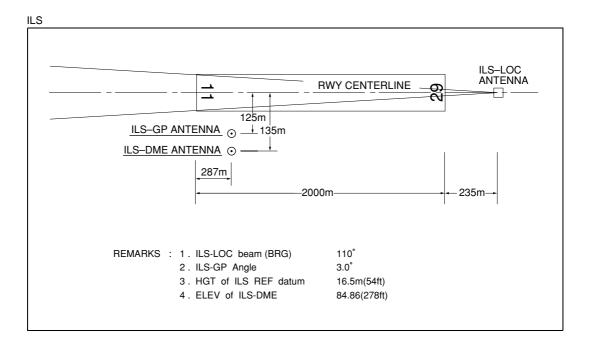

## **RJSR AD 2.20 LOCAL TRAFFIC REGULATIONS**

1. Airp	port regulations
	Nil
2. Tax	siing to and from stands
	Nil
3. Par	rking area for small aircraft(General aviation)
	Nil
4. Par	rking area for helicopters
	Nil
5. Apr	ron - taxiing during winter conditions
	Nil
6. Tax	iing - limitations
	Nil
7. Sch	nool and training flights - technical test flights - use of runways
	Nil
8. Hel	icopter traffic - limitation
	Nil
	moval of disabled aircraft from runways
	Nil
	RJSR AD 2.21 NOISE ABATEMENT PROCEDURES
	Nil

#### **RJSR AD 2.22 FLIGHT PROCEDURES**

#### 1.TAKE OFF MINIMA

	RWY	ACFT CAT	REDL 8	REDL & RCLL		or RCLL Marking	NIL (DAYTIME ONLY)			
		CAI	CEIL-RVR	CEIL-VIS	CEIL-RVR	CEIL-VIS	CEIL-RVR	CEIL-VIS		
Multi-Engine ACFT with	11	A, B, C, D	200′-800m	200′-800m	200′-800m	200′-800m	-	200′-800m		
TKOF ALTN AP FILED	29	A, B, C, D	1	200′-800m	-	200′-800m	1	200′-800m		
OTHER	11	A, B, C, D	AVDL LDC MINIMA							
OTHER	29	A, B, C, D		AVBL LDG MINIMA						

### 2. Lost communication procedures for arrival aircraft under radar navigational guidance

If radio communications with Shirakami Approach are lost for 1 minute, squawk Mode A/3 Code 7600 and;

- 1. Contact Odate Radio.
  - 2. If unable, proceed in accordance with visual flight rules.
  - 3. If unable, proceed to ODATE VOR/DME at last assigned altitude or 4,000 feet whichever is higher, and execute instrument approach.
- (II) Procedures other than above will be issued when situation requires.

#### **RJSR AD 2.23 ADDITIONAL INFORMATION**

Nil
-----

#### **RJSR AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart

Standard Departure Chart - Instrument (ODATE REVERSAL)

Standard Departure Chart - Instrument (LAGOON)

Standard Arrival Chart - Instrument

Instrument Approach Chart (ILS Z or LOC Z RWY11)

Instrument Approach Chart (ILS Y or LOC Y RWY11)

Instrument Approach Chart (VOR A)


Instrument Approach Chart (RNP Z RWY29 (AR))

Instrument Approach Chart (RNP Y RWY29 (AR))

Other Chart (Visual REP)
Other Chart (LDG CHART)

Other Chart (MVA CHART)



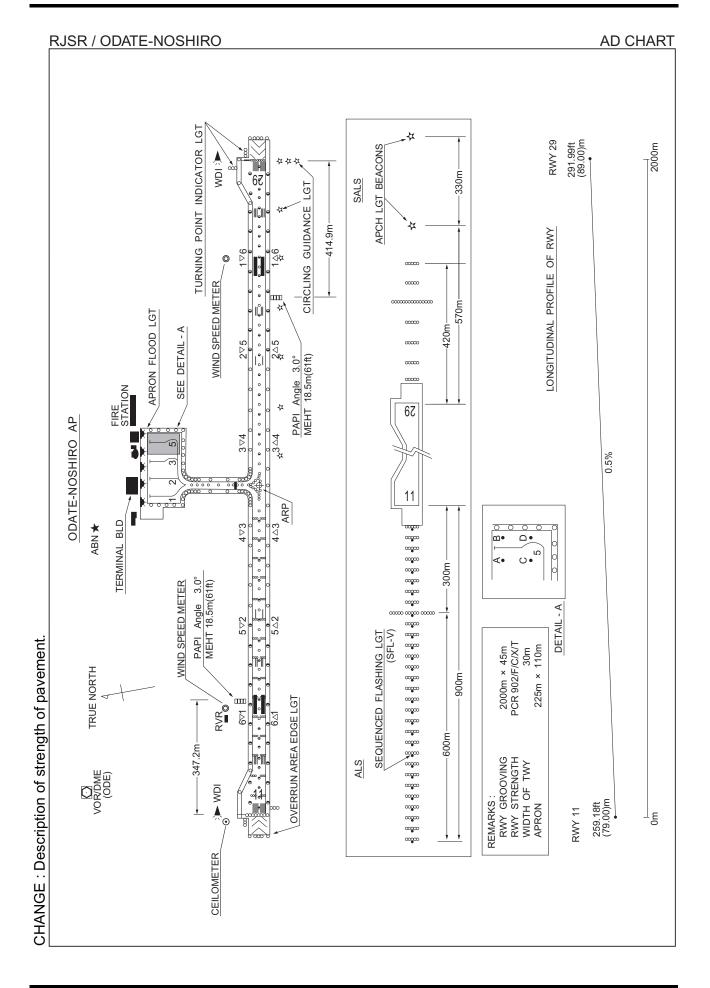

#### STANDARD DEPARTURE CHART -INSTRUMENT

### RJSR / ODATE-NOSHIRO

SID

### ODATE REVERSAL TWO DEPARTURE

RWY11: Climb RWY HDG to 1800FT, turn right HDG332° to intercept and proceed...

RWY29: Climb RWY HDG to ODE 3.0DME,...

...via ODE R287 to 6.0DME, turn left, direct to ODE VOR/DME.


Cross ODE VOR/DME at or above 6000FT.

Note RWY11: 5.0% climb gradient required up to 1800FT.

OBST ALT 1313FT located at 4.3NM 093° FM end of RWY11. OBST ALT 2100FT located at 9.5NM 137° FM end of RWY11.

RWY29: 4.0% climb gradient required up to 700FT.


OBST ALT 656FT located at 2.1NM 276° FM end of RWY29.

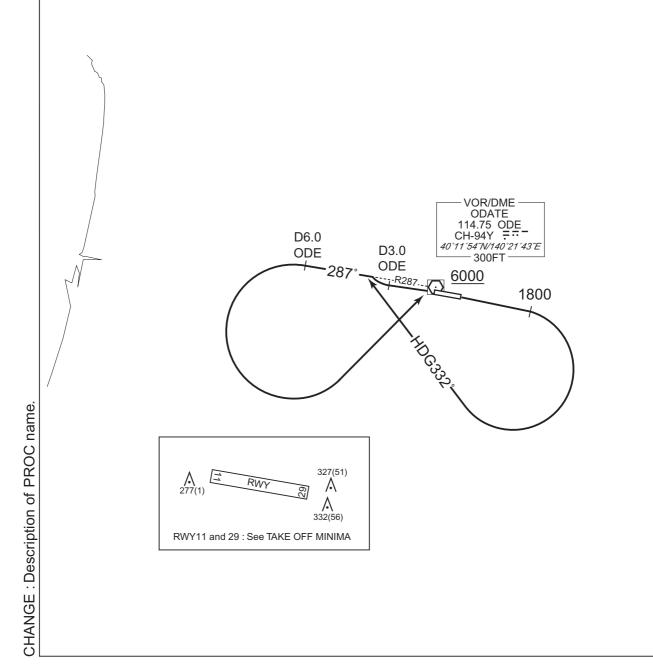

#### STANDARD DEPARTURE CHART -INSTRUMENT

SID RJSR / ODATE-NOSHIRO LAGOON THREE DEPARTURE RWY11: Climb RWY HDG to 1800FT, turn right HDG332° to intercept and proceed... RWY29: Climb RWY HDG to ODE 3.0DME,... ...via ODE R287 to NOSSY, turn left, via UWE R360 to UWE VOR/DME. Cross NOSSY at or above 3000FT. Note RWY11: 5.0% climb gradient required up to 1800FT. OBST ALT 1313FT located at 4.3NM 093° FM end of RWY11. OBST ALT 2100FT located at 9.5NM 137° FM end of RWY11. RWY29: 4.0% climb gradient required up to 700FT. OBST ALT 656FT located at 2.1NM 276° FM end of RWY29. **UWE R360** NOSSY VOR/DME **D9.9 ODE** ODE R287 ODATE 3000 114.75 ODE CH-94Y = ... D3.0 40°11′54″N/140°21′43″E 287° ODE 300FT R287 1800 327(51) RWY ۸ A 332(56) RWY11 and 29: See TAKE OFF MINIMA CHANGE: Description of PROC name. VOR/DME YUWA 110.65 UWE CH-43Y := 39°37′02″N/140°11′13″E 300FT

#### STANDARD ARRIVAL CHART - INSTRUMENT

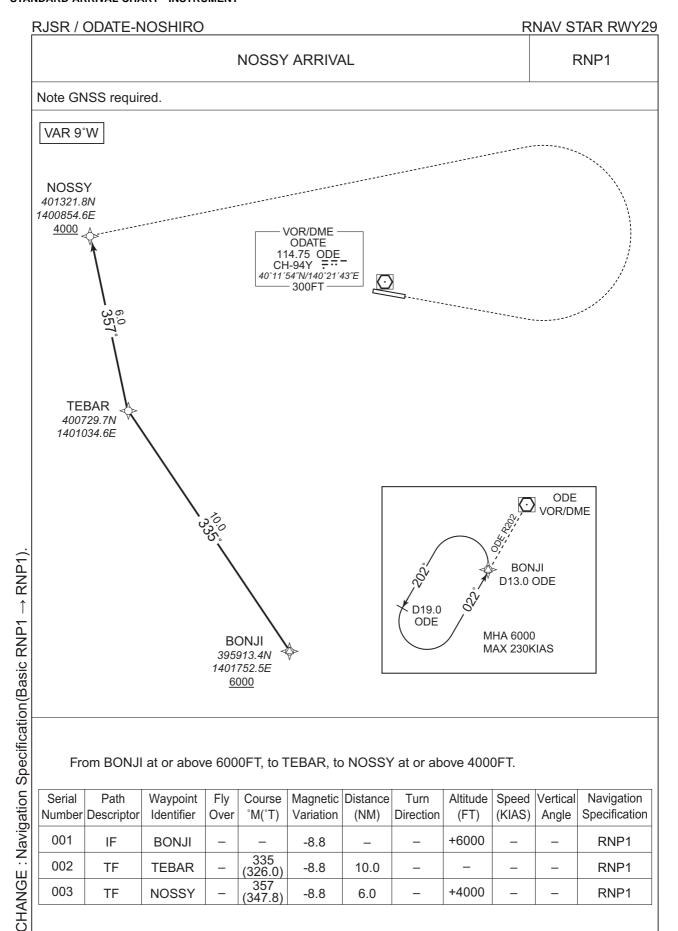

<b>Civil Aviation</b>	Bureau, Japan	(EFF:18 APR	2024

**TEBAR** 

NOSSY

002

003

TF

TF

335 (326.0)

357

(347.8)

-8.8

-8.8


10.0


6.0


+4000


RNP1

RNP1

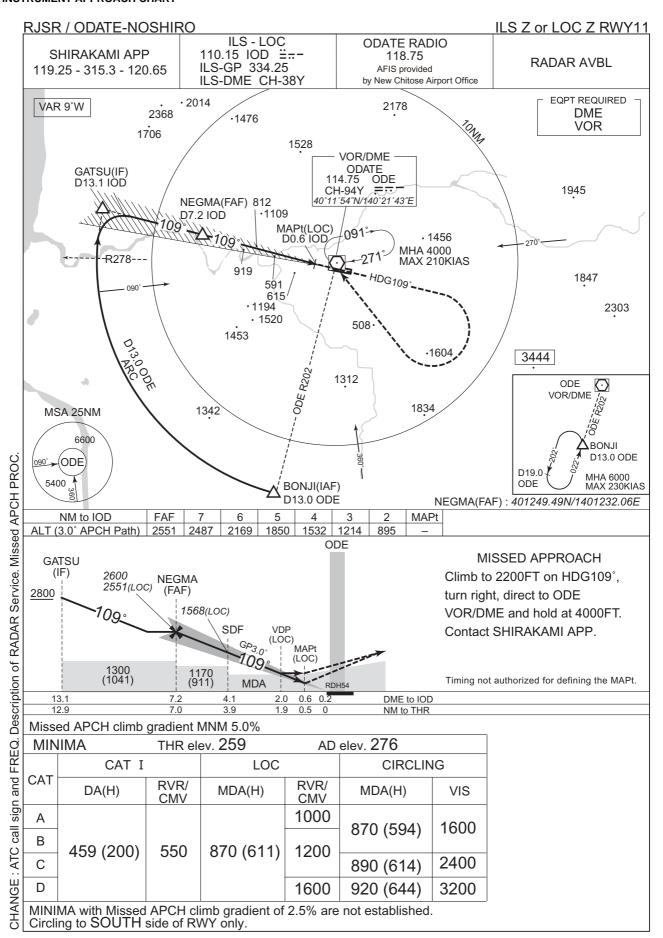

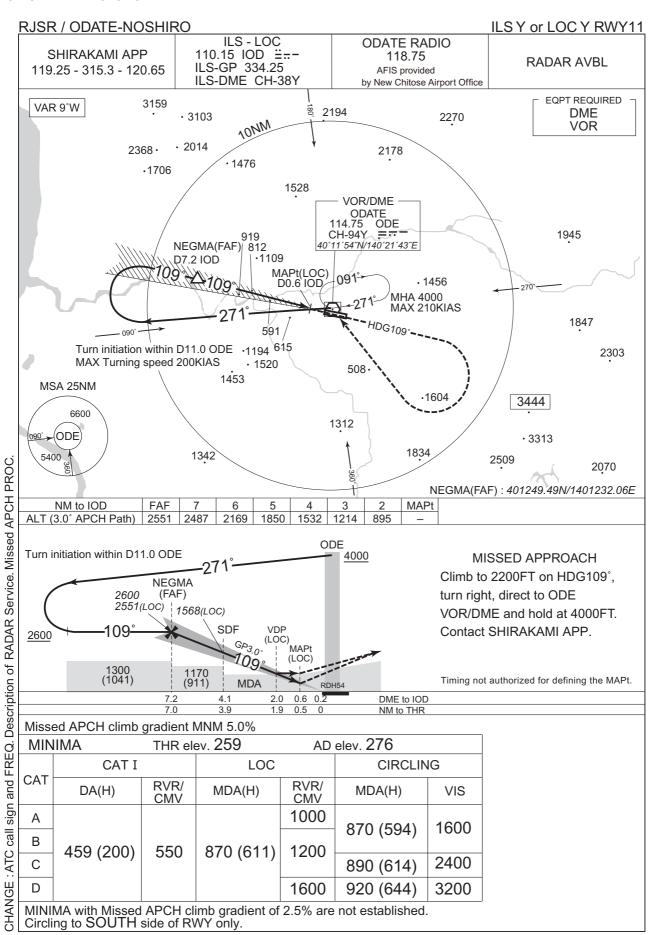

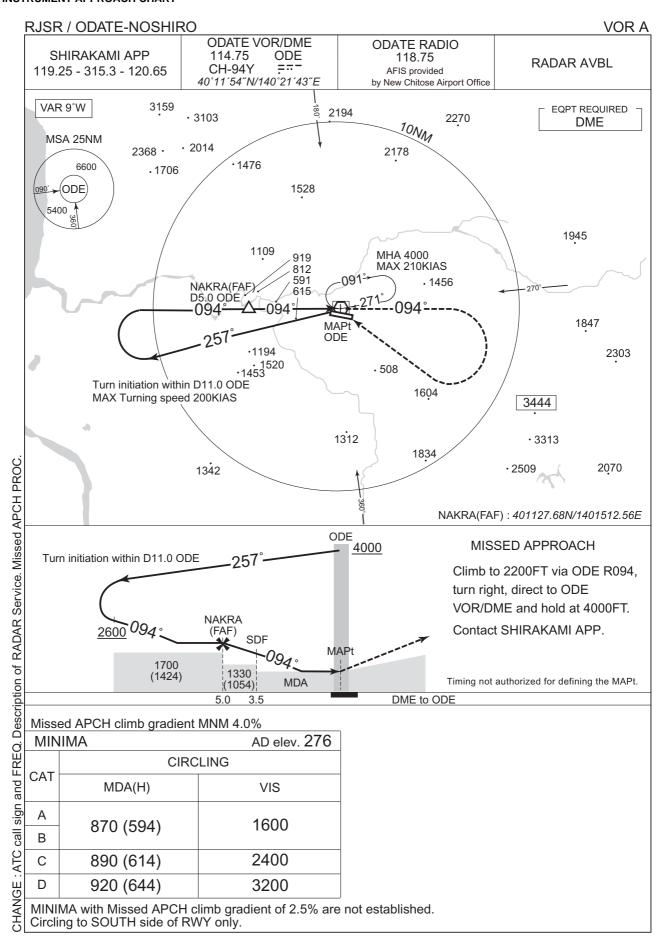

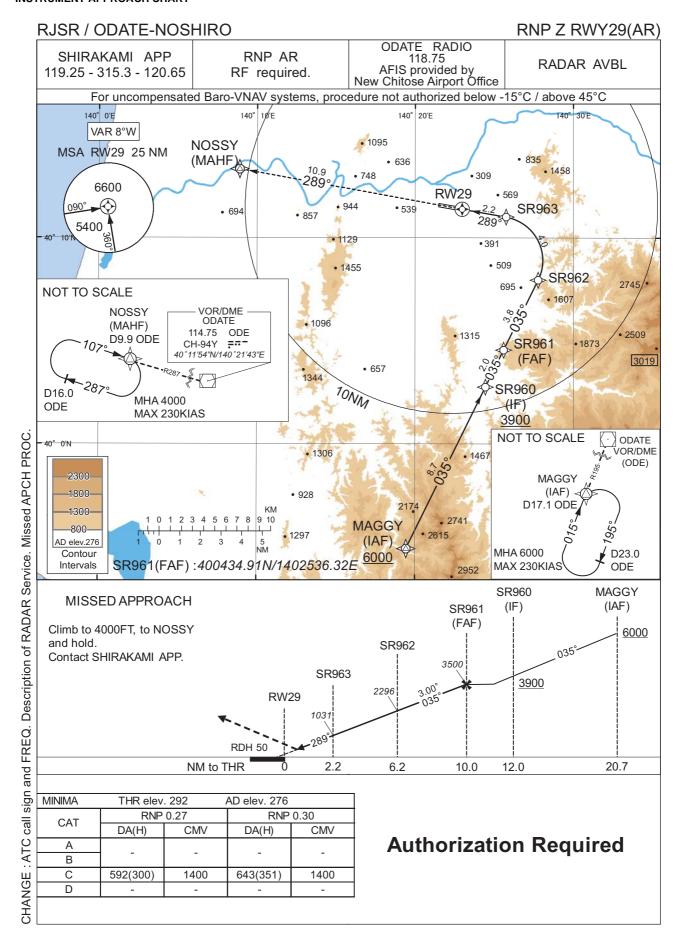

# RJSR / ODATE-NOSHIRO


# RNP Z RWY29(AR)

## Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MAGGY	-	-	-8.5	1	-	+6000	-	-	-
002	TF	SR960	-	035 (026.1)	-8.5	8.7	-	+3900	-	-	1.0
003	TF	SR961	-	035 (026.1)	-8.5	2.0	-	3500	-	-	1.0
004	TF	SR962	-	035 (026.1)	-8.5	3.8	-	2296	-	-3.00	0.27 0.30
005	RF Center: SRRF1 r=2.15NM	SR963	-	-	-8.5	4.0	L	1031	1	-3.00	0.27 0.30
006	TF	RW29	Υ	289 (280.1)	-8.5	2.2	-	342	-	-3.00/50	0.27 0.30
007	TF	NOSSY	-	289 (280.3)	-8.5	10.9	-	4000	-	-	1.0

## **Waypoint Coordinates**

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MAGGY	395456.61N / 1401926.80E	SRRF1	400855.54N / 1402516.24E
SR960	400247.11N / 1402427.29E		
SR961	400434.91N / 1402536.32E		
SR962	400758.60N / 1402746.93E		
SR963	401102.48N / 1402545.54E		
RW29	401125.10N / 1402258.78E		
NOSSY	401321.82N / 1400854.64E		

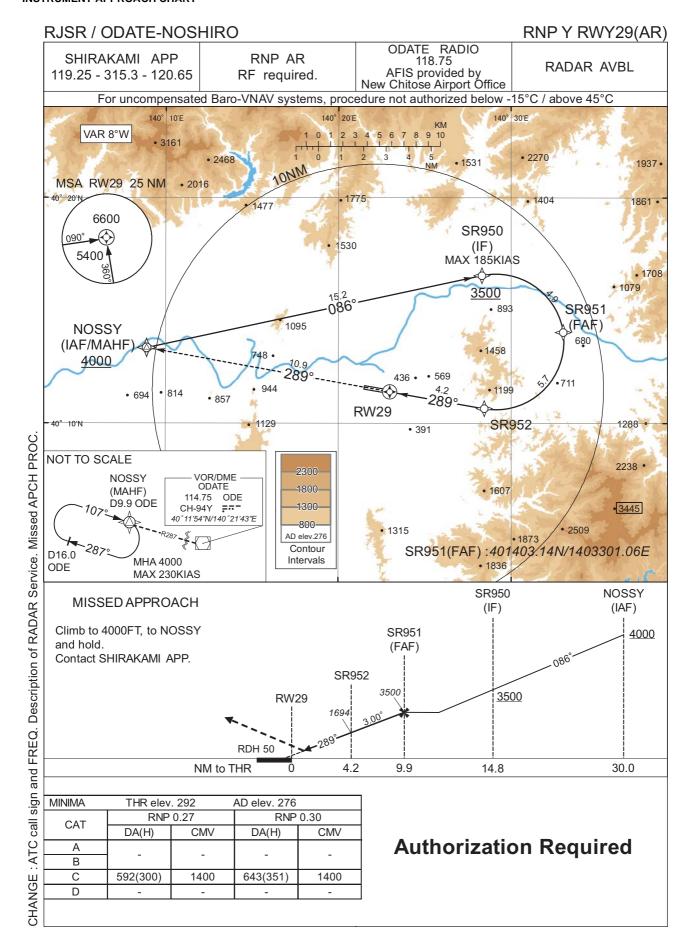

# RJSR / ODATE-NOSHIRO


# RNP Y RWY29(AR)

## Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	NOSSY	1	-	-8.5	-	-	+4000	1	-	-
002	TF	SR950	,	086 (077.7)	-8.5	15.2	1	+3500	-185	-	1.0
003	RF Center: SRRF2 r=3.00NM	SR951	ı	ı	-8.5	4.9	R	3500	1	-	1.0
004	RF Center: SRRF2 r=3.00NM	SR952	1	-	-8.5	5.7	R	1694	1	-3.00	0.27 0.30
005	TF	RW29	Υ	289 (280.1)	-8.5	4.2	-	342	1	-3.00/50	0.27 0.30
006	TF	NOSSY	-	289 (280.3)	-8.5	10.9	-	4000	-	-	1.0

## **Waypoint Coordinates**

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SR950	401634.48N / 1402818.75E	SRRF2	401338.11N / 1402908.01E
SR951	401403.14N / 1403301.06E		
SR952	401040.53N / 1402826.85E		
RW29	401125.10N / 1402258.78E		
NOSSY	401321.82N / 1400854.64E		

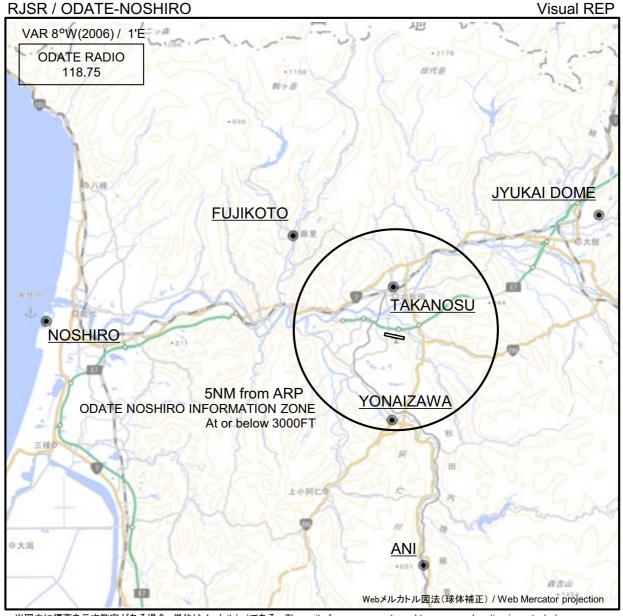

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

010).	Call sign	BRG / DIST from ARP	Remarks
CHANGE : Call sign(REMOTE→RADIO).	樹海ドーム Jyukai Dome	058°T / 11.6NM	大館市白色ドーム White Dome Odate City
	藤琴 Fujikoto	314°T / 7.2NM	粕毛川 ・藤琴川交点 Intersection Kasuge and Fujikoto River
	鷹巣 Takanosu	357°T / 2.5NM	JR駅北側 North of JR Station
	能代 Noshiro	272°T / 17.3NM	能代港 Noshiro Harbor
	米内沢 Yonaizawa	183°T / 4.2NM	内陸線米内沢駅南側米内沢橋 Bridge
	阿仁 Ani	173°T / 11.6NM	内陸線阿仁合駅 Station

