


RJCM / MEMANBETSU

SID

....Proceed to TBE VOR/DME. Cross TBE VOR/DME at or above 4000FT.

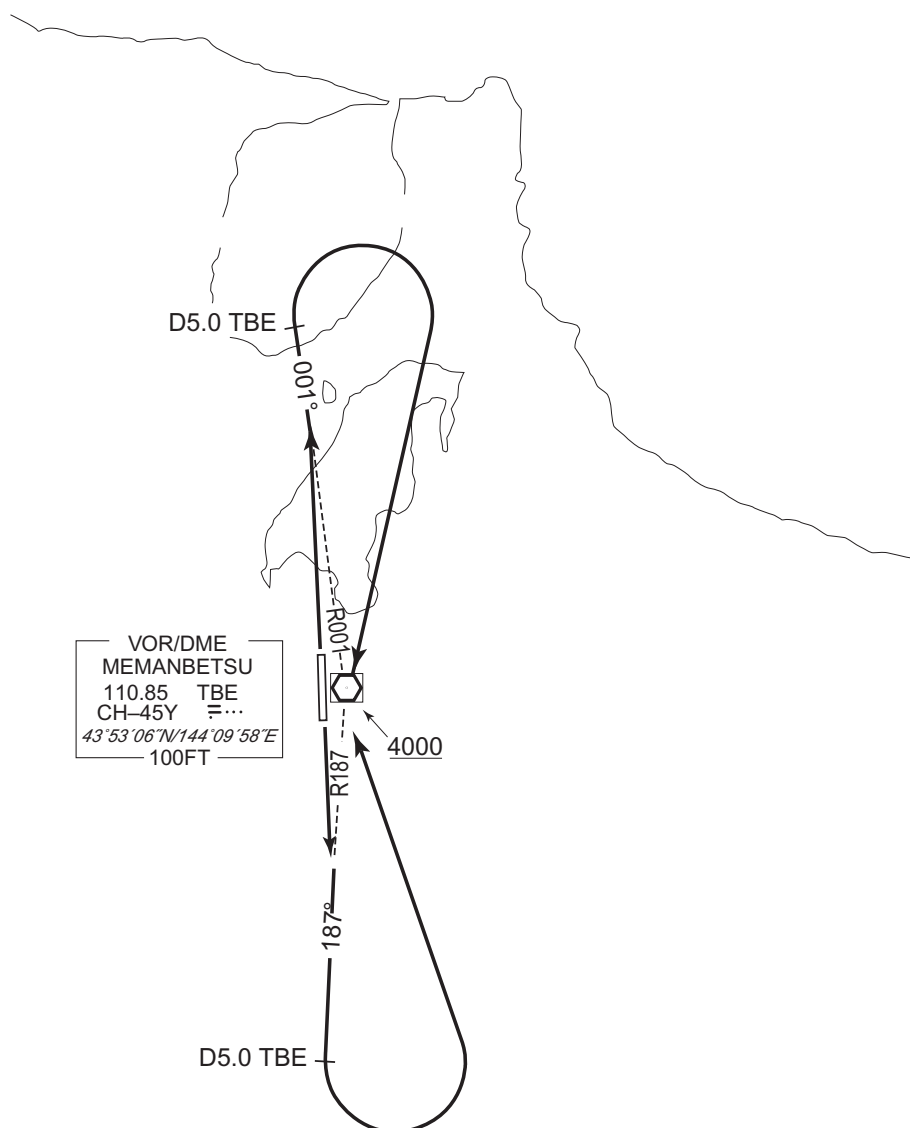


CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

RNAV SID

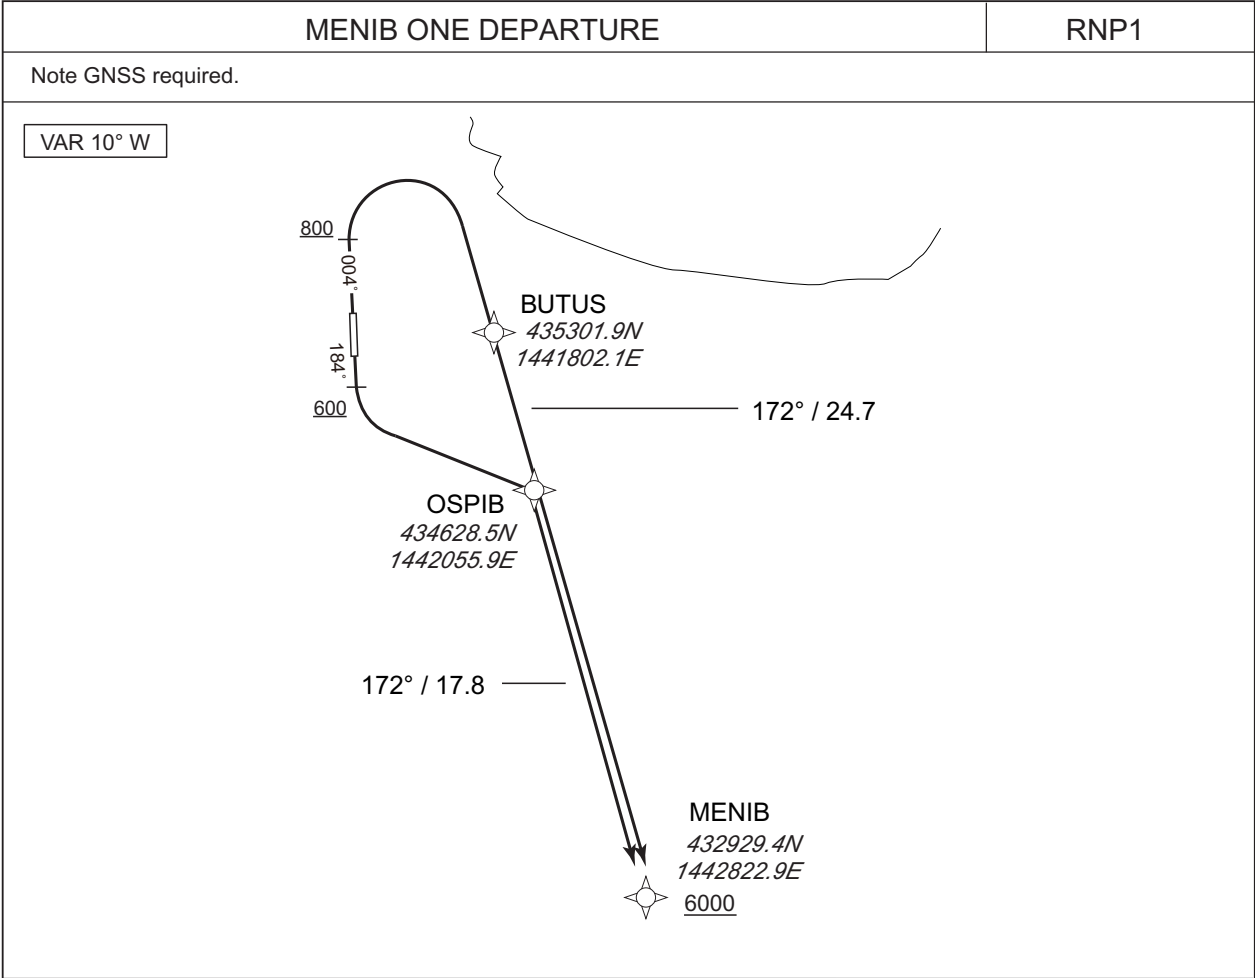

RWY18 : Climb on HDG184° at or above 600FT, turn left direct to OSPIB, to MENIB at or above 6000FT.
RWY36 : Climb on HDG004° at or above 800FT, turn right direct to BUTUS, to MENIB at or above 6000FT.
Note RWY18 : 5.0% climb gradient required up to 2300FT.
OBST ALT 3314FT located at 12.2NM 153° FM end of RWY18.

RWY18


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (174.7)	-9.6	—	—	+600	—	—	RNP1
002	DF	OSPIB	—	—	-9.6	—	L	—	—	—	RNP1
003	TF	MENIB	—	172 (162.3)	-9.6	17.8	—	+6000	—	—	RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (354.7)	-9.6	—	—	+800	—	—	RNP1
002	DF	BUTUS	—	—	-9.6	—	R	—	—	—	RNP1
003	TF	MENIB	—	172 (162.3)	-9.6	24.7	—	+6000	—	—	RNP1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

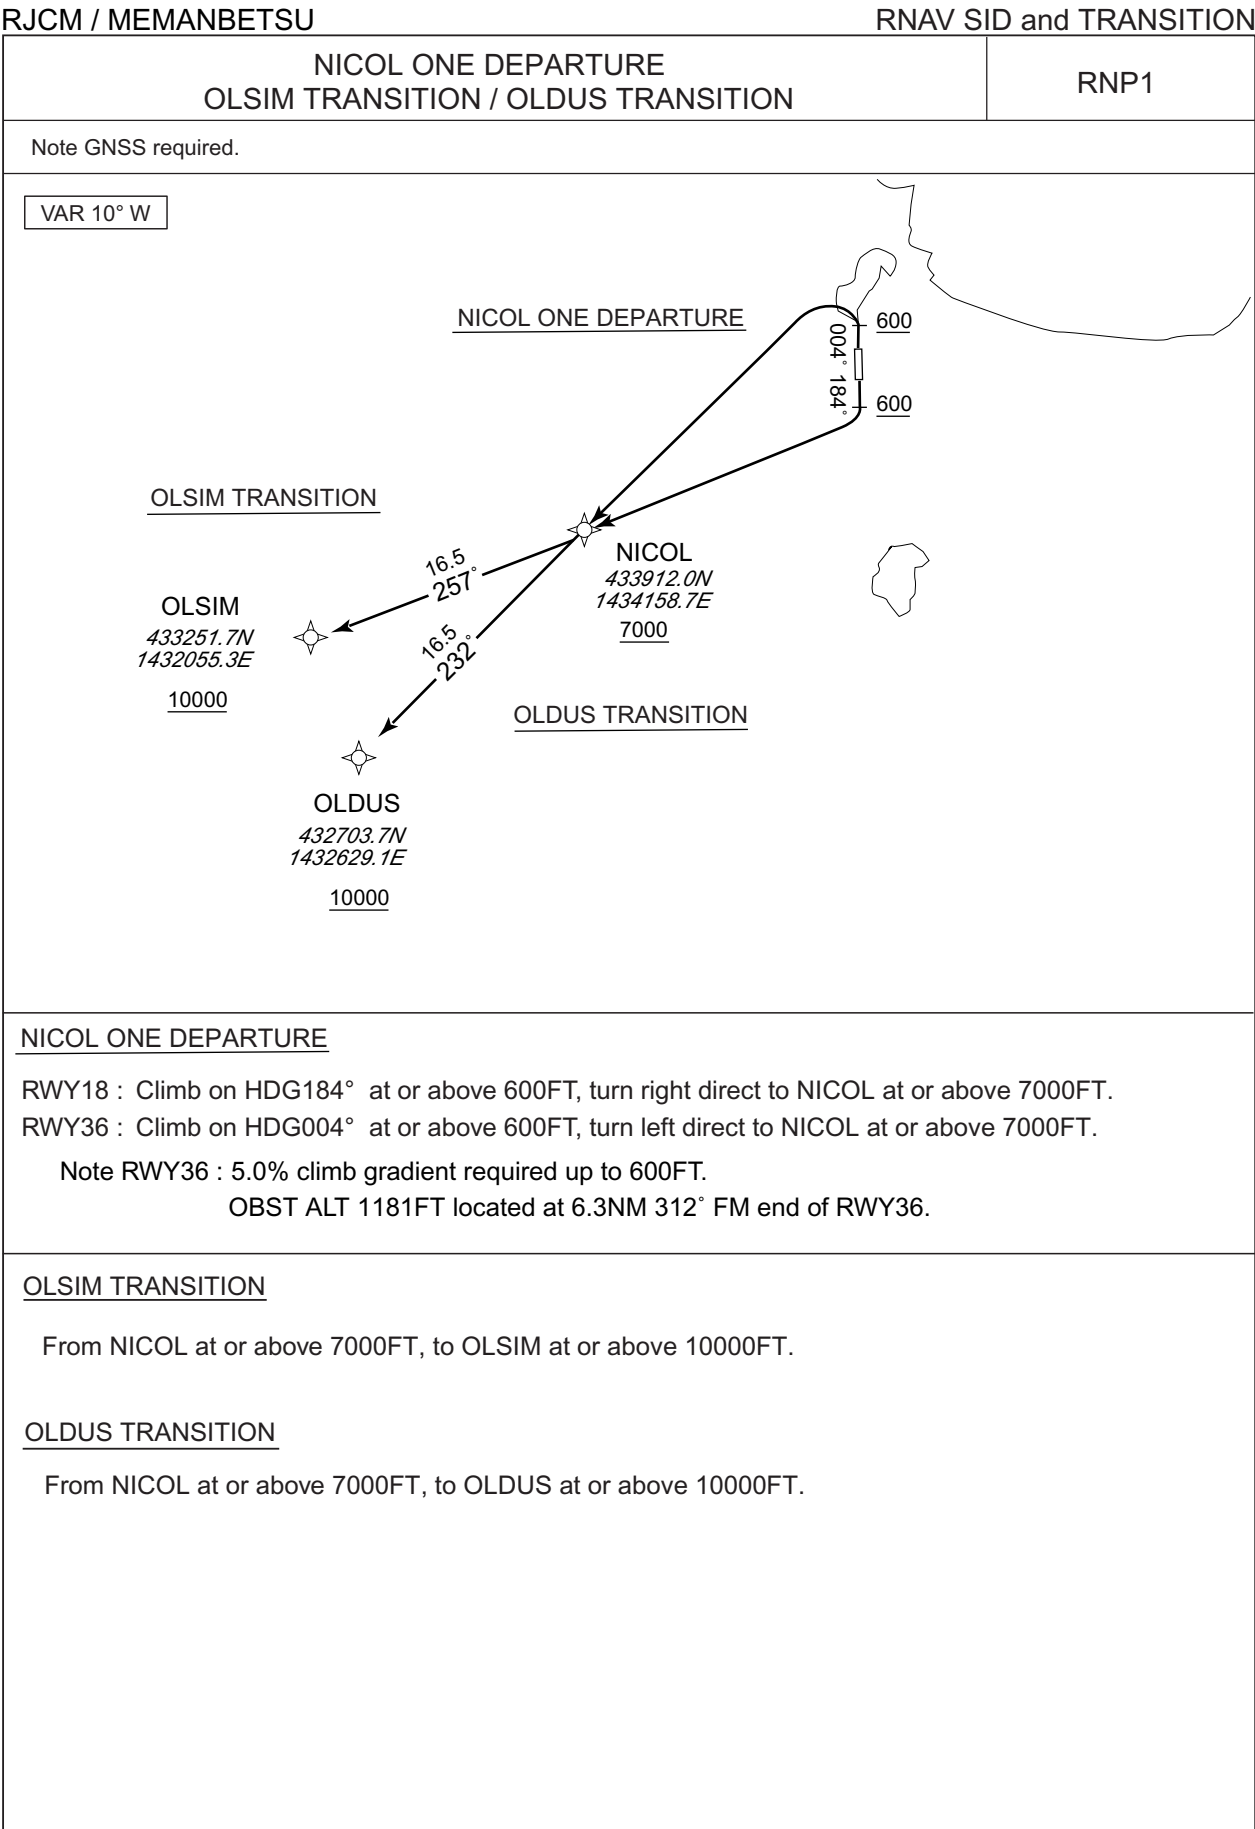

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU

RNAV SID and TRANSITION

NICOL ONE DEPARTURE											
RWY18											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	184 (174.7)	-9.6	-	-	+600	-	-	RNP1
002	DF	NICOL	-	-	-9.6	-	R	+7000	-	-	RNP1
RWY36											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	004 (354.7)	-9.6	-	-	+600	-	-	RNP1
002	DF	NICOL	-	-	-9.6	-	L	+7000	-	-	RNP1
OLSIM TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NICOL	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	OLSIM	-	257 (247.6)	-9.6	16.5	-	+10000	-	-	RNP1
OLDUS TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	NICOL	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	OLDUS	-	232 (222.9)	-9.6	16.5	-	+10000	-	-	RNP1

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCM / MEMANBETSU


RNAV SID

NULKI ONE DEPARTURE

RNP1

Note GNSS required.

VAR 10° W

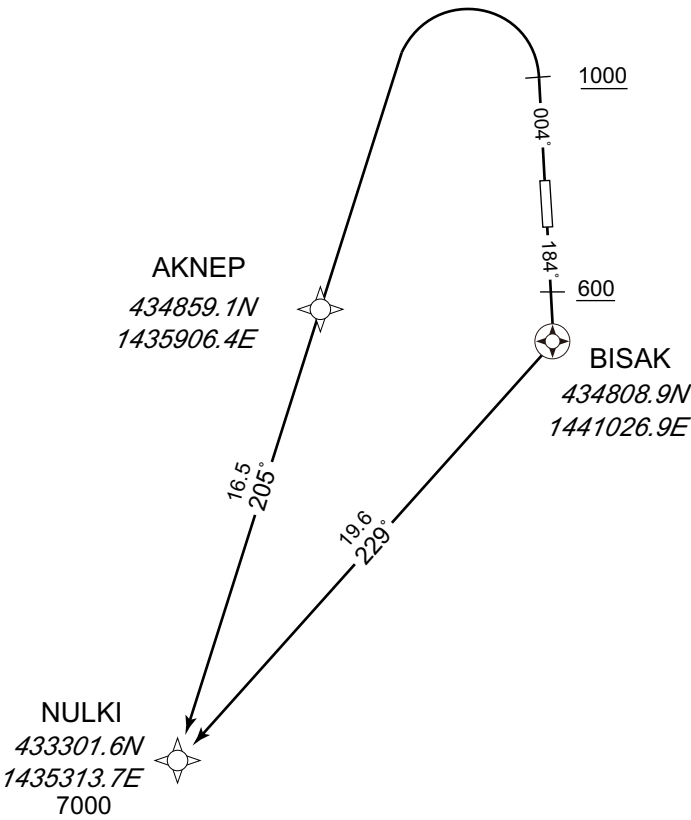

RWY18 : Climb on HDG184° at or above 600FT, direct to BISAQ, to NULKI at or above 7000FT.

RWY36 : Climb on HDG004° at or above 1000FT, turn left direct to AKNEP, to NULKI at or above 7000FT.

Note RWY36 : 3.9% climb gradient required up to 1500FT.

OBST ALT 1673FT located at 8.2NM 320° FM end of RWY36.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (174.7)	-9.6	—	—	+600	—	—	RNP1
002	DF	BISAQ	Y	—	-9.6	—	—	—	—	—	RNP1
003	TF	NULKI	—	229 (219.6)	-9.6	19.6	—	+7000	—	—	RNP1


RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (354.7)	-9.6	—	—	+1000	—	—	RNP1
002	DF	AKNEP	—	—	-9.6	—	L	—	—	—	RNP1
003	TF	NULKI	—	205 (194.9)	-9.6	16.5	—	+7000	—	—	RNP1

CHANGE : New PROC.

INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART



CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



RJCM / MEMANBETSU

HIDAKA APP 128.325 - 246.1 - 134.55	ILS - LOC 110.1 ITB ... ILS-GP 334.4 ILS - DME CH-38X	MEMANBETSU TOWER 118.85 - 126.2	ILS X RWY18
--	--	------------------------------------	-------------

RADAR AVBL

VAR 9°W

MSA 25NM
6200
ARP
ARP : 435250N/1440951E
• 2290

RNAV HLDG NOT TO SCALE

GINGA
040° → 220°
1MIN
MHA 5400
MAX 230KIAS

RNAV HLDG NOT TO SCALE

KIMUA
002° → 009°
7.6
002°
17.2
021°
18.9
351°
360°
OZORA(IAF)
7000

TEBES(FAF) : 435816.30N / 1440908.38E

EQPT REQUIRED
DME
RNP1
RF required.

RNAV HLDG NOT TO SCALE

RAUSU
047° → 221°
1MIN
MHA 3100
MAX 230KIAS

RNAV HLDG NOT TO SCALE

OZORA
090° → 186°
1MIN
MHA 7000
MAX 230KIAS

MISSED APPROACH

Climb on course 184°, at or above 700FT turn left, direct to RAUSU and hold at 3100FT. Contact HIDAKA APP.

MINIMA		THR elev. 102	AD elev. 109	
CAT	CAT I		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	VIS
A	302 (200)	550	640 (531)	1600
B			750 (641)	2400
C			760 (651)	3200
D				

CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC. Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

ILS X RWY18

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GINGA	-	-	-9.6	-	-	+5000	-	-	RNP1
002	TF	KILOX	-	021 (011.9)	-9.6	17.2	-	-	-	-	RNP1
003	TF	CM853	-	009 (359.2)	-9.6	5.0	-	+2700	-200	-	RNP1
001	IF	OZORA	-	-	-9.6	-	-	+7000	-	-	RNP1
002	TF	KIMUA	-	351 (341.4)	-9.6	18.9	-	+4200	-	-	RNP1
003	TF	KILOX	-	002 (352.2)	-9.6	7.6	-	-	-	-	RNP1
004	TF	CM853	-	009 (359.2)	-9.6	5.0	-	+2700	-200	-	RNP1
001	IF	CM853	-	-	-9.6	-	-	+2700	-200	-	RNP1
002	RF Center: CMRF2 r=2.51NM	CM854	-	-	-9.6	3.8	R	+2200	-	-	RNP1
003	RF Center: CMRF2 r=2.51NM	CM855	-	-	-9.6	3.8	R	1700	-	-	RNP1
001	CA	-	-	184 (174.7)	-9.6	-	-	+700	-	-	RNP1
002	DF	RAUSU	-	-	-9.6	-	L	3100	-	-	RNP1
Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification		
Hold	GINGA	040 (030.8)	-9.5	1.0 (-14000)	R	5400	FL140	-230 (-14000)	RNP1		
Hold	OZORA	006 (356.7)	-9.5	1.0 (-14000)	R	7000	FL140	-230 (-14000)	RNP1		
Hold	RAUSU	227 (217.0)	-9.5	1.0 (-14000)	L	3100	FL140	-230 (-14000)	RNP1		

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
GINGA	433738.73N / 1435710.93E	CMRF2	435931.80N / 1440529.11E
OZORA	432908.24N / 1441153.19E		
KIMUA	434701.35N / 1440331.41E		
KILOX	435429.92N / 1440206.12E		
CM853	435929.83N / 1440200.57E		
CM854	440202.15N / 1440517.96E		
CM855	435945.90N / 1440856.76E		
RAUSU	440327.56N / 1442052.43E		

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

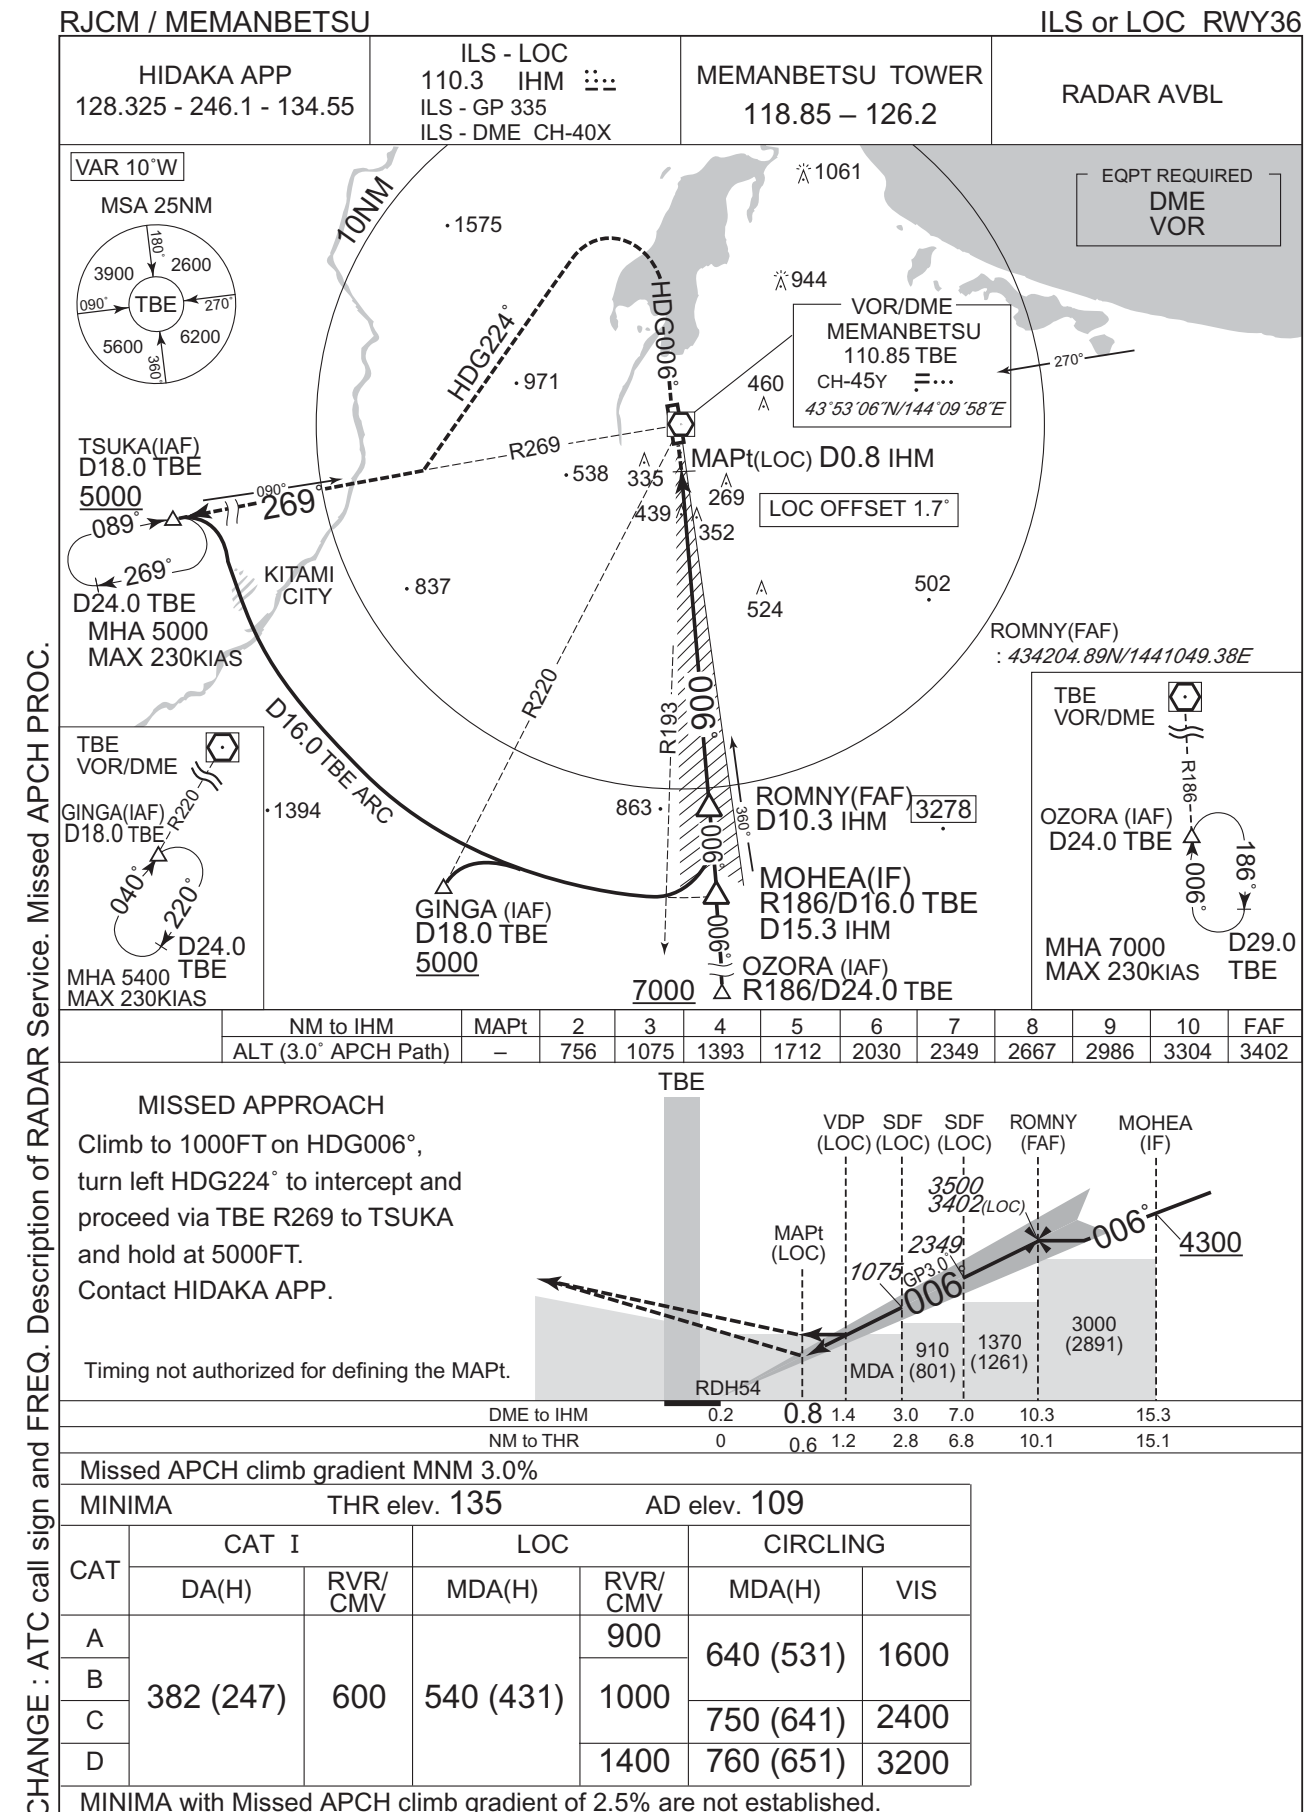

CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



CHANGE : ATC call sign and FREQ. Description of RADAR Service. Missed APCH PROC.



RJCM / MEMANBETSU

HIDAKA APP 128.325 - 246.1 - 134.55	RNP APCH MSAS CH83687 M18A	MEMANBETSU TOWER 118.85 – 126.2	RADAR AVBL
---	---	---	-------------------

Baro-VNAV not authorized below -25°C

VAR 10°W

MSA 25NM

ARP: 435250N/1440951E

NOT TO SCALE

GINGA

MHA 5400
MAX 230KIAS

NOT TO SCALE

OZORA

MHA 7000
MAX 230KIAS

	RAUSU (IAF/MAHF)	OZORA (IAF)	KIMUA (IAF)	NEPPU (IAF)	GINGA (IAF)	PONTO (IF)	YOBIT (FAF)	RW18 (MAPt)	CM852 (MATF)
Elev.	440327.56N	432908.24N	434701.35N	440209.51N	433738.73N	440238.29N	435820.17N	435330.51N	435031.32N
Coord.	1442052.43E	1441153.19E	1440331.41E	1440132.13E	1435710.93E	1440834.36E	1440907.90E	1440945.38E	1441008.52E

NOT TO SCALE

RAUSU

MHA 3100
MAX 230KIAS

NM to Next Fix	FAF	4	3	2	1	MAPt
ALT (3.0° APCH Path)	1700	1430	1111	793	475	-

MISSSED APPROACH

Direct to CM852, turn left direct to RAUSU and hold at 3100FT.
Contact HIDAKA APP.

CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	352(250)	800	440(338)	900	440(331)	900	640(531)	1600
B	360(258)			1000		1000		
C	369(267)			1400		1400		
D	379(277)	1200				1400	760(651)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP Z RWY18

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00618
SBAS service provider identifier	2	FPAP latitude	435209.8350N
Airport identifier	RJCM	FPAP longitude	1440955.7670E
Runway	18	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator	Z	Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M18A	∠ length offset	0000
LTP/FTP latitude	435330.4920N	HAL	40.0
LTP/FTP longitude	1440945.3395E	VAL	50.0
CRC remainder	257C1F8B		

Required additional data

LTP/FTP orthometric height	31.0
----------------------------	------


RJCM / MEMANBETSU

RNP Y RWY18(AR)

For uncompensated Baro-VNAV systems, procedure not authorized below -25°C / above 45°C



From RW18 on track 184°, at or above 600FT turn left, direct to RAUSU and hold at 3100FT.
Contact HIDAKA APP.

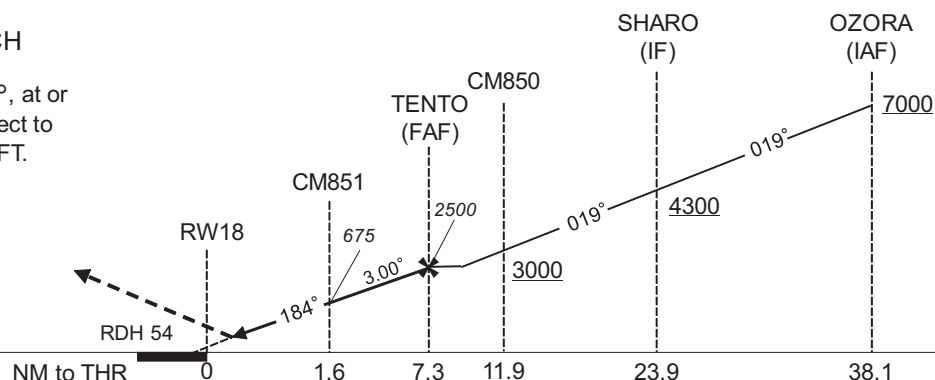

Missed APCH climb gradient MNM 3.0%	NM to NMK
-------------------------------------	-----------

MINIMA	THR elev. 102	AD elev. 109
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B		
C	402(300)	1000
D		1400

MINIMA with Missed APCH climb gradient of 2.5% are not established.

Authorization Required

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP Y RWY18(AR)

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	OZORA	-	-	-9.5	-	-	+7000	-	-	-
002	TF	SHARO	-	019 (009.5)	-9.5	14.1	-	+4300	-	-	1.0
003	TF	CM850	-	019 (009.6)	-9.5	12.0	-	+3000	-185	-	1.0
004	RF Center: CMRF1 r=3.04NM	TENTO	-	-	-9.5	4.6	L	2500	-165	-	1.0
005	RF Center: CMRF1 r=3.04NM	CM851	-	-	-9.5	5.7	L	675	-	-3.00	0.3
006	TF	RW18	Y	184 (174.7)	-9.5	1.6	-	156	-	-3.00/54	0.3
007	FA	-	-	184 (174.7)	-9.5	-	-	+600	-	-	1.0
008	DF	RAUSU	-	-	-9.5	-	L	3100	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OZORA	006 (356.7)	-9.5	1.0 (-14000)	R	7000	FL140	-230 (-14000)	1.0
Hold	RAUSU	227 (217.0)	-9.5	1.0 (-14000)	L	3100	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OZORA	432908.24N / 1441153.19E	CMRF1	435524.66N / 1441344.15E
SHARO	434301.91N / 1441506.66E		
CM850	435454.27N / 1441753.05E		
TENTO	435822.66N / 1441439.66E		
CM851	435507.75N / 1440932.81E		
RW18	435330.51N / 1440945.38E		
RAUSU	440327.56N / 1442052.43E		

INSTRUMENT APPROACH CHART

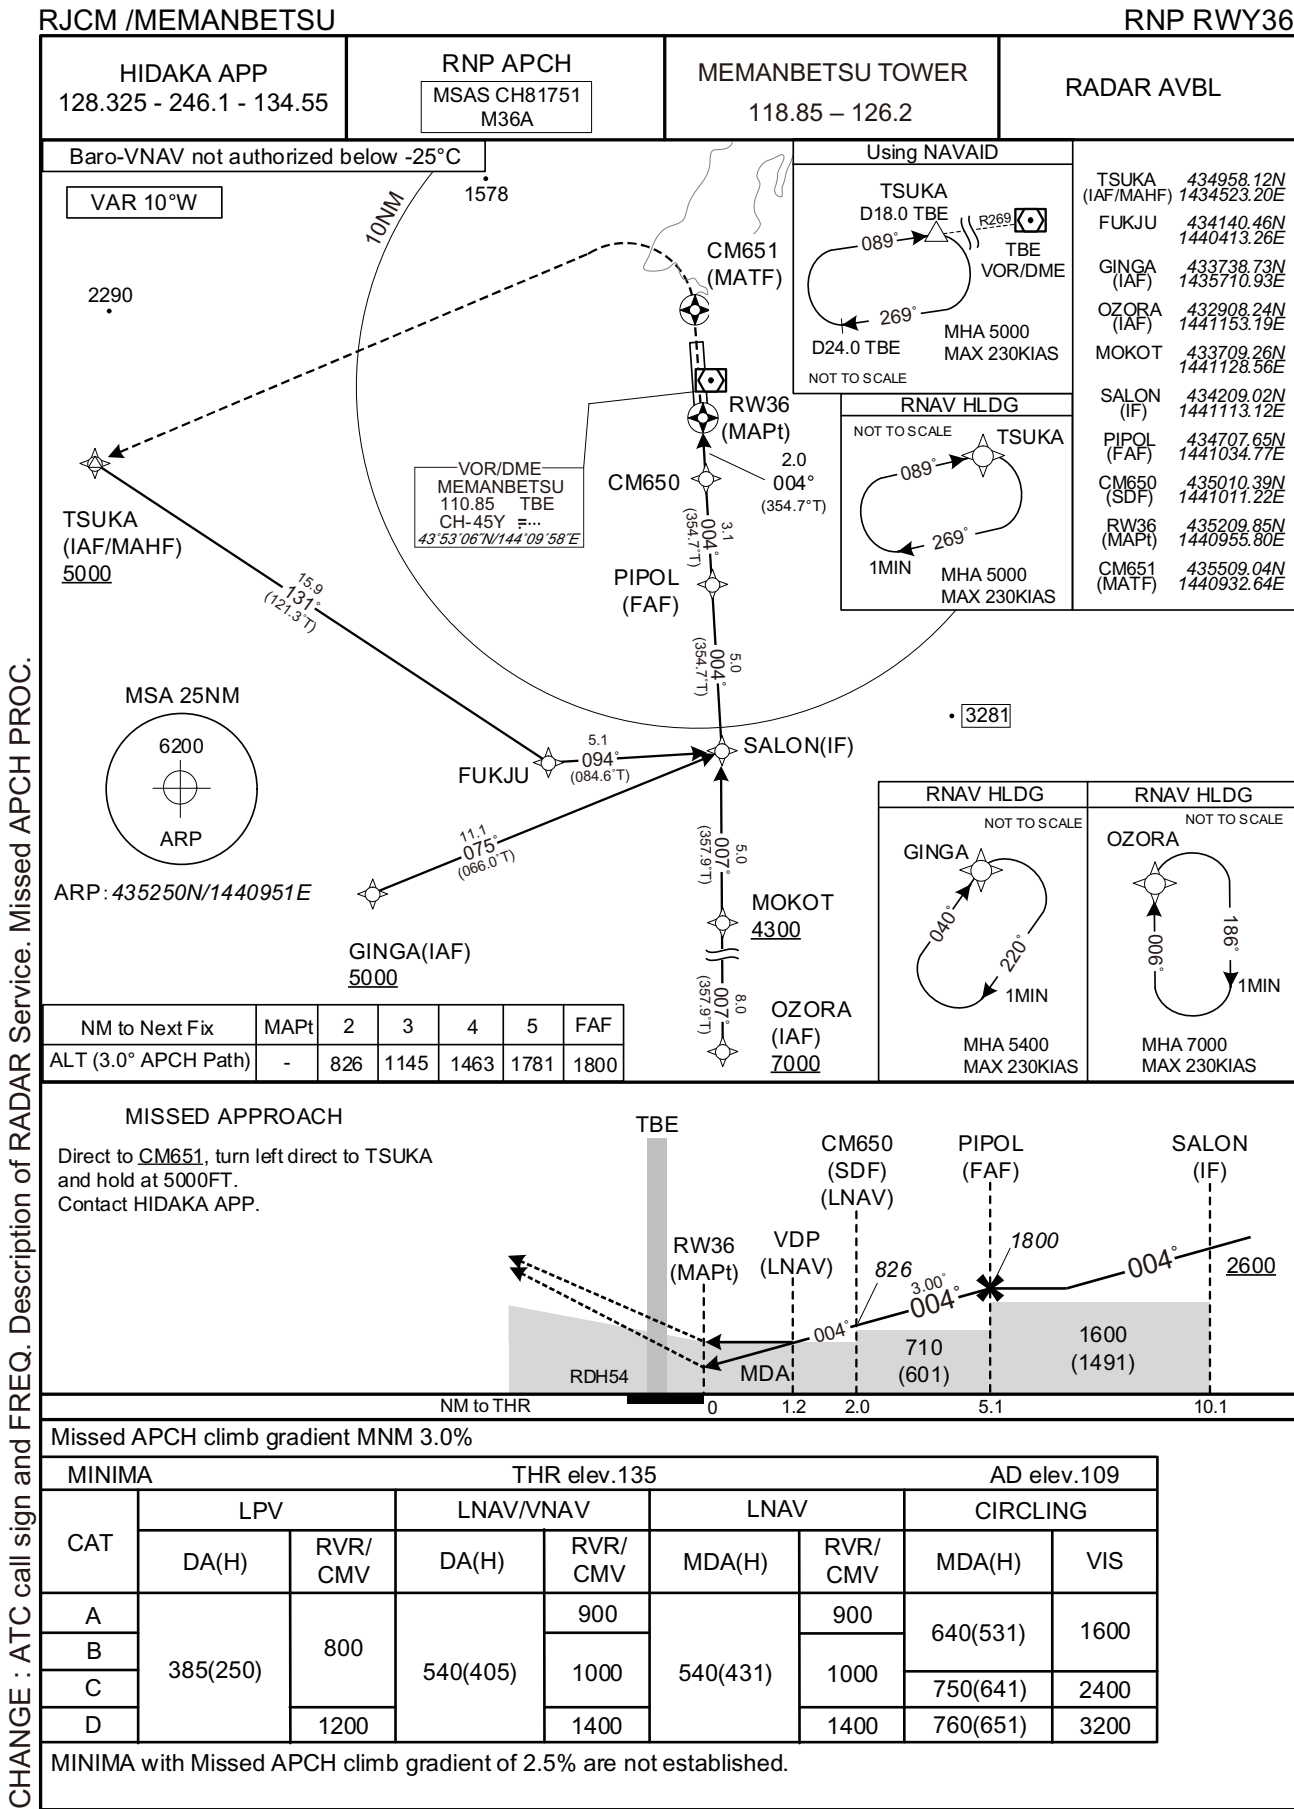

INSTRUMENT APPROACH CHART

RJCM / MEMANBETSU

RNP RWY36

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00719
SBAS service provider identifier	2	FPAP latitude	435330.4920N
Airport identifier	RJCM	FPAP longitude	1440945.3395E
Runway	36	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M36A	∠ length offset	0000
LTP/FTP latitude	435209.8350N	HAL	40.0
LTP/FTP longitude	1440955.7670E	VAL	50.0
CRC remainder	28C6AB24		

Required additional data

LTP/FTP orthometric height	41.1
----------------------------	------

RJCM / MEMANBETSU


Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
網走 Abashiri	025°T / 9.2NM	JR駅 Station
湧沸湖 Tofutsuko	074°T / 10.5NM	湖 Lake
小清水 Koshimizu	097°T / 13.3NM	学校 School
東藻琴 Higashimokoto	110°T / 6.1NM	市街地 Town
美幌峠 Bihoro Toge	165°T / 14.4NM	峠 Pass
津別 Tsubetsu	210°T / 12.2NM	市街地 Town
美幌ステーション Bihoro Station	223°T / 3.7NM	JR駅 Station
北見 Kitami	248°T / 12.4NM	JR駅 Station
浜佐呂間 Hamasaroma	321°T / 15.5NM	佐呂間大橋 Bridge

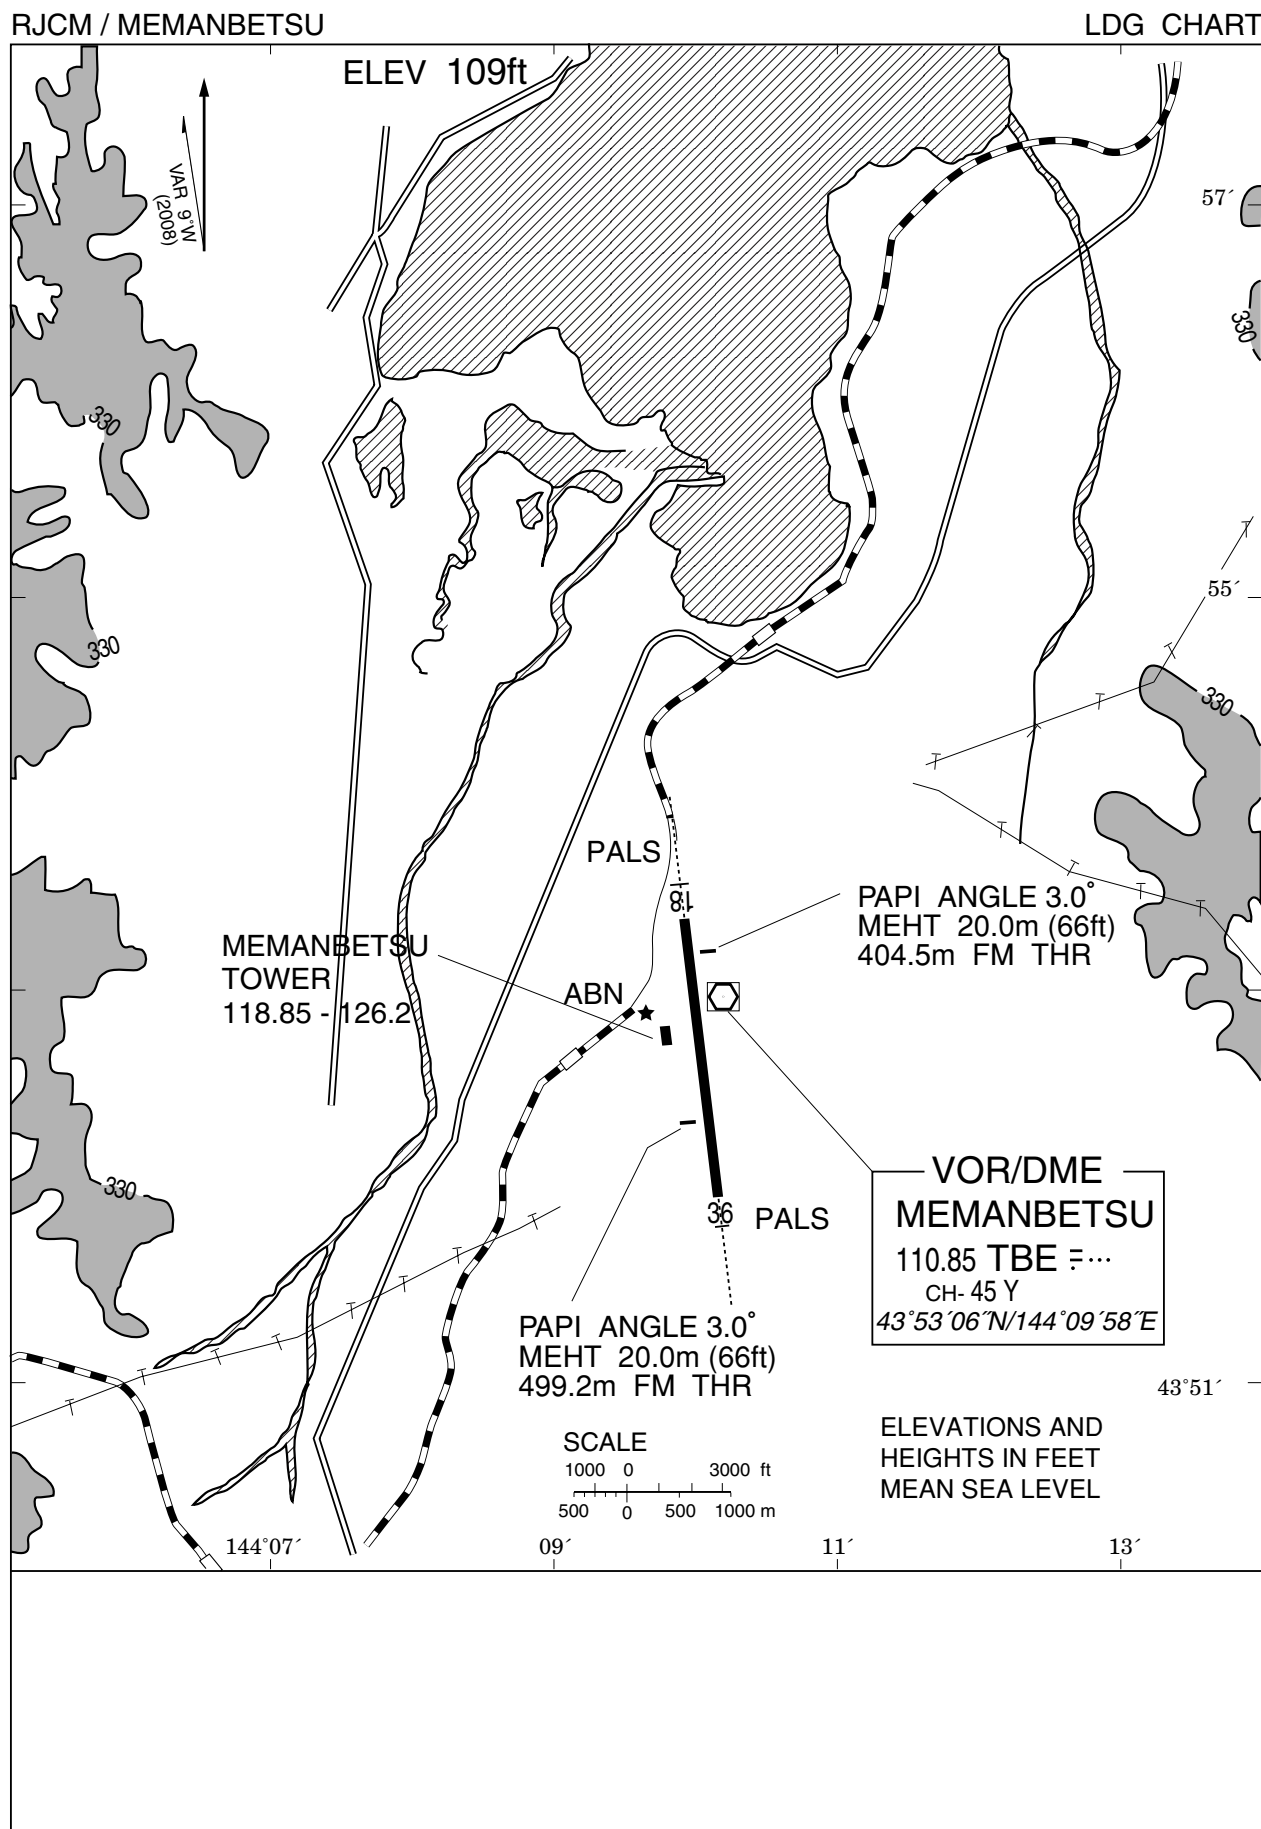

RJCM / MEMANBETSU

Minimum Vectoring Altitude CHART

