



AERODROME CHART

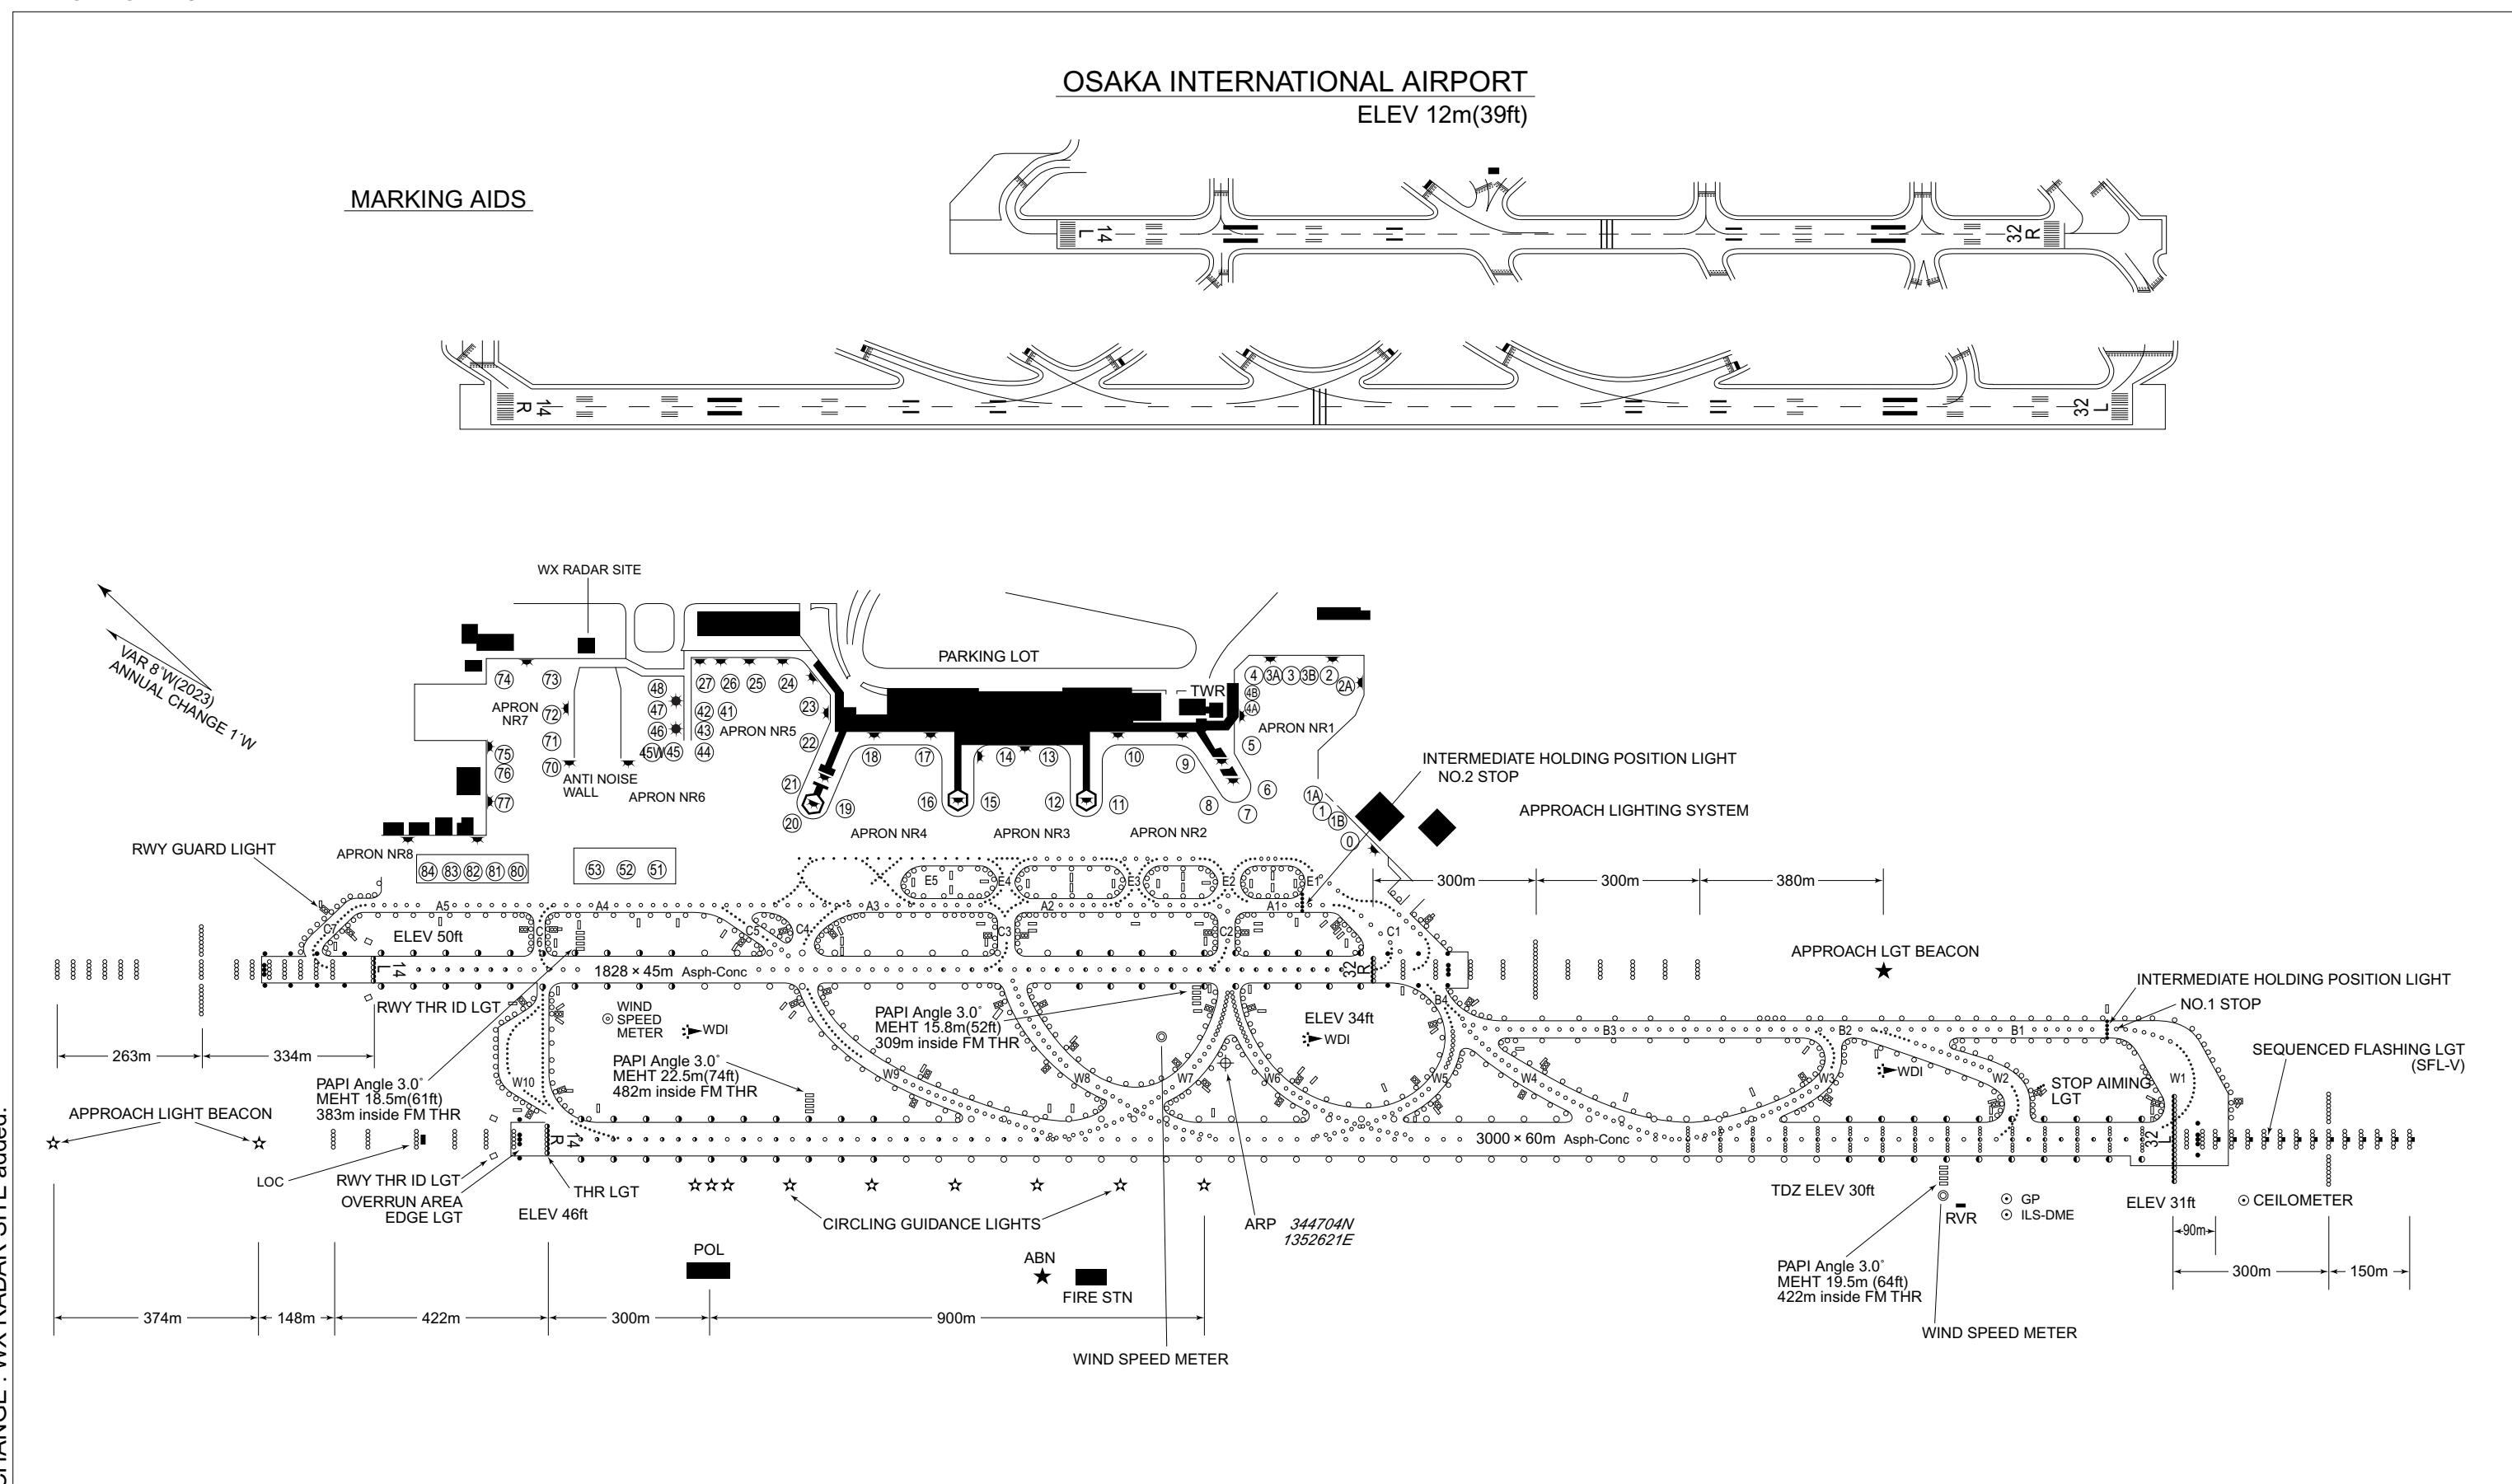

RJOO / OSAKA INTL

AD CHART

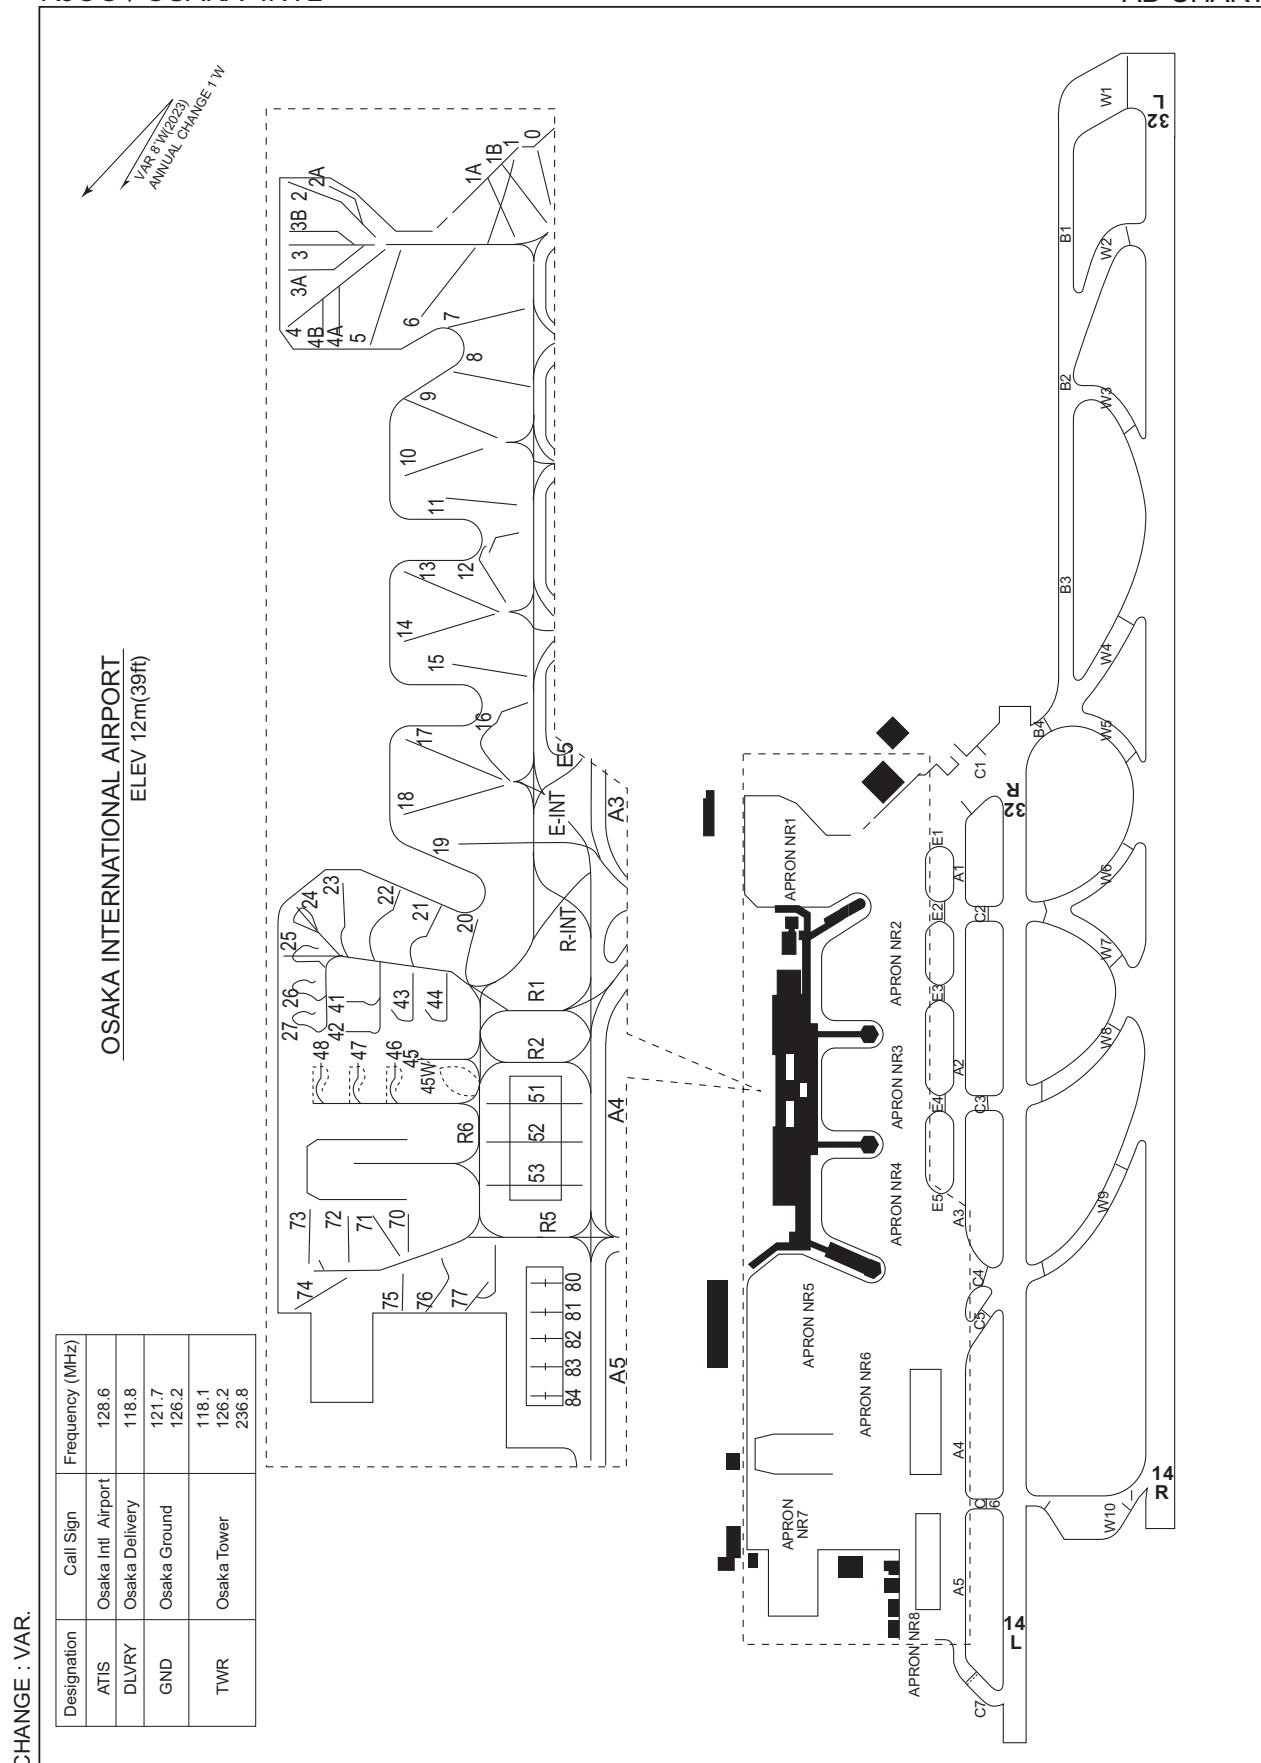


INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-FEB 2022

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

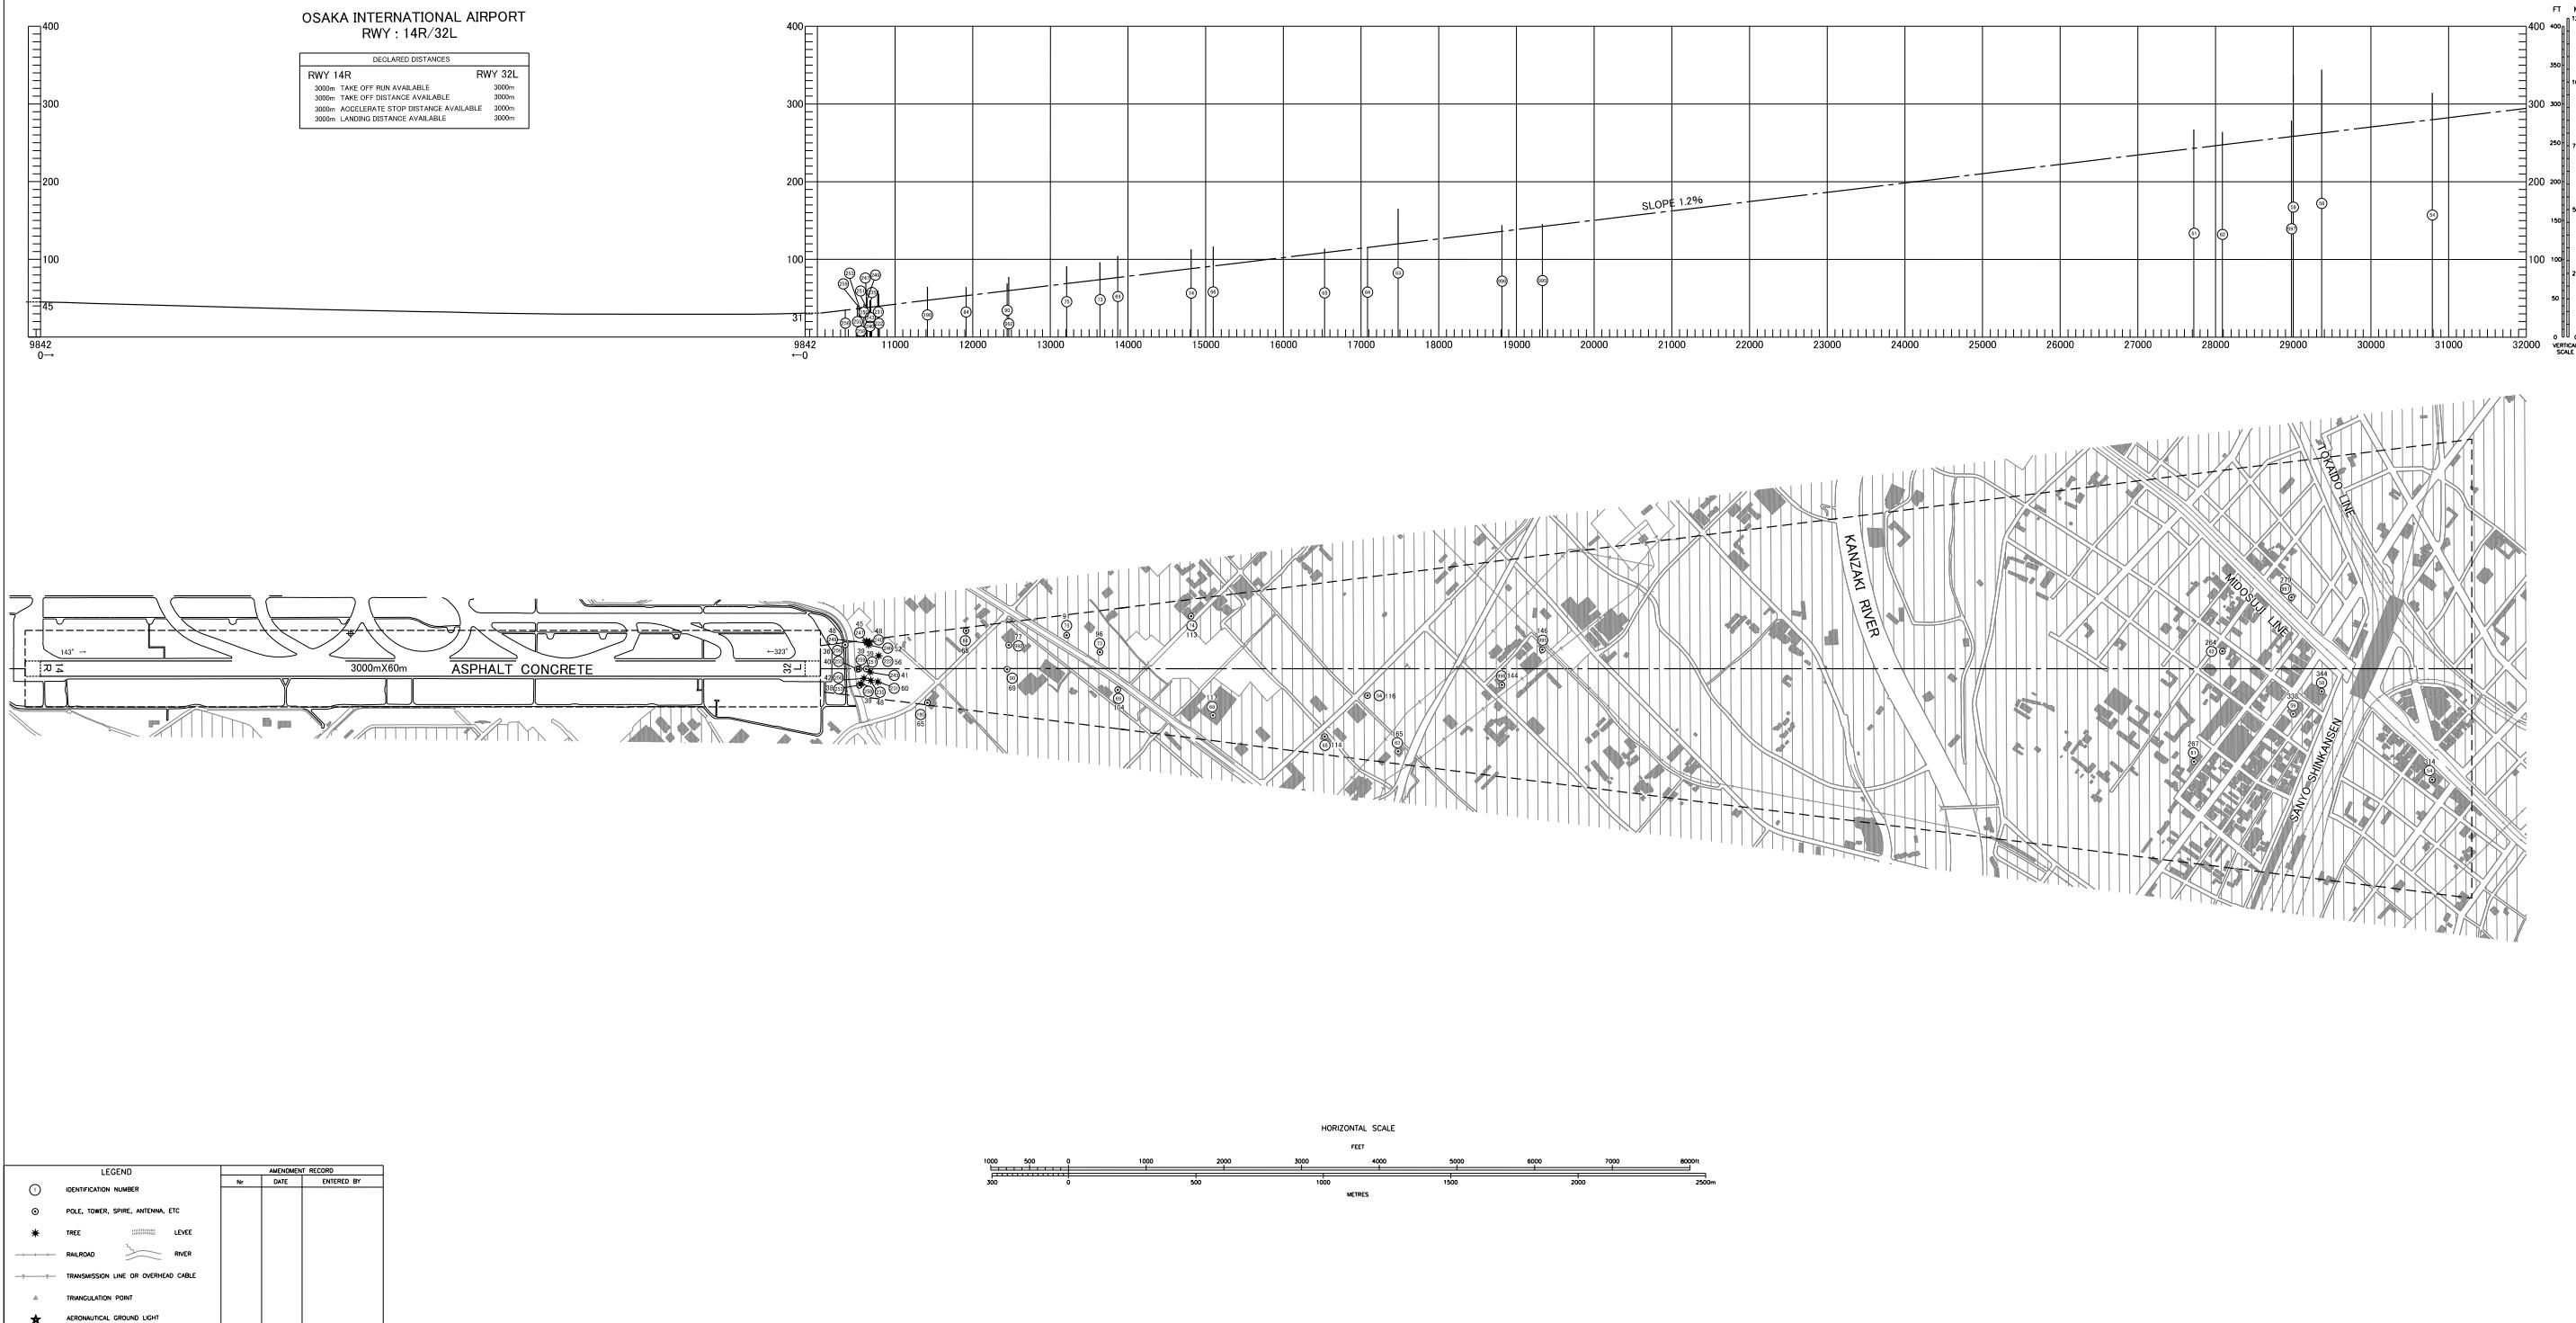

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W-FEB 2022



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

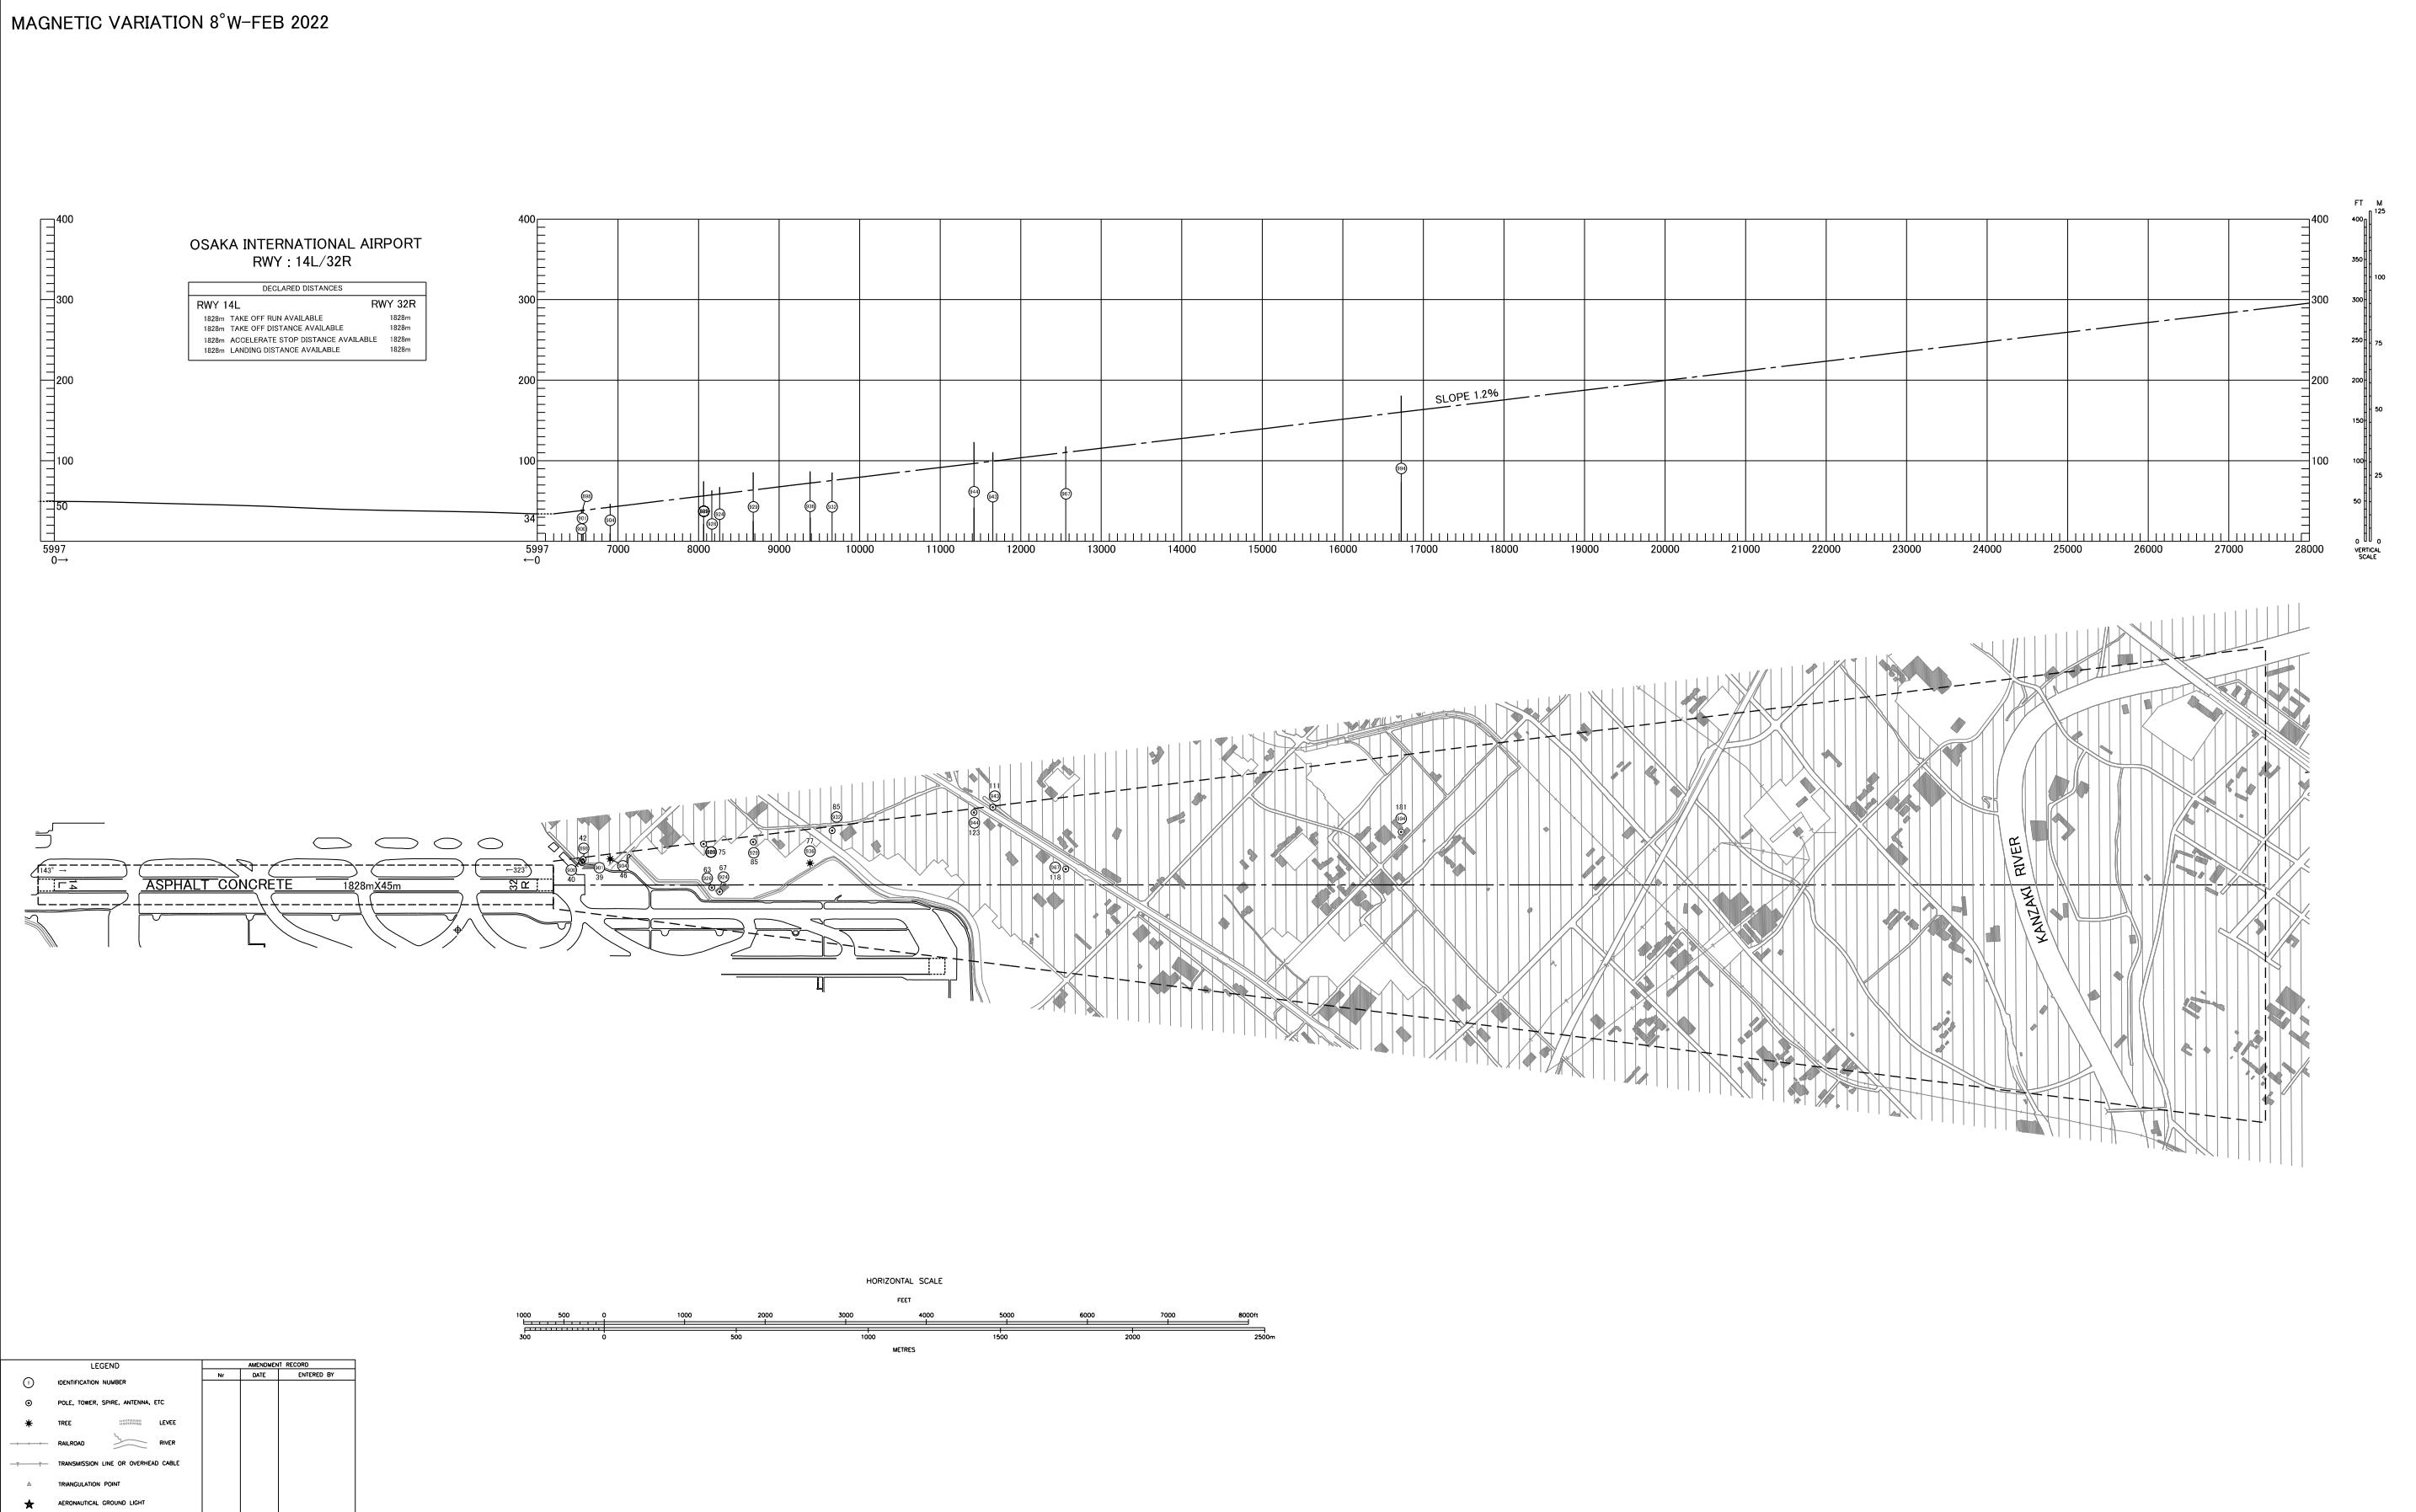

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-FEB 2022

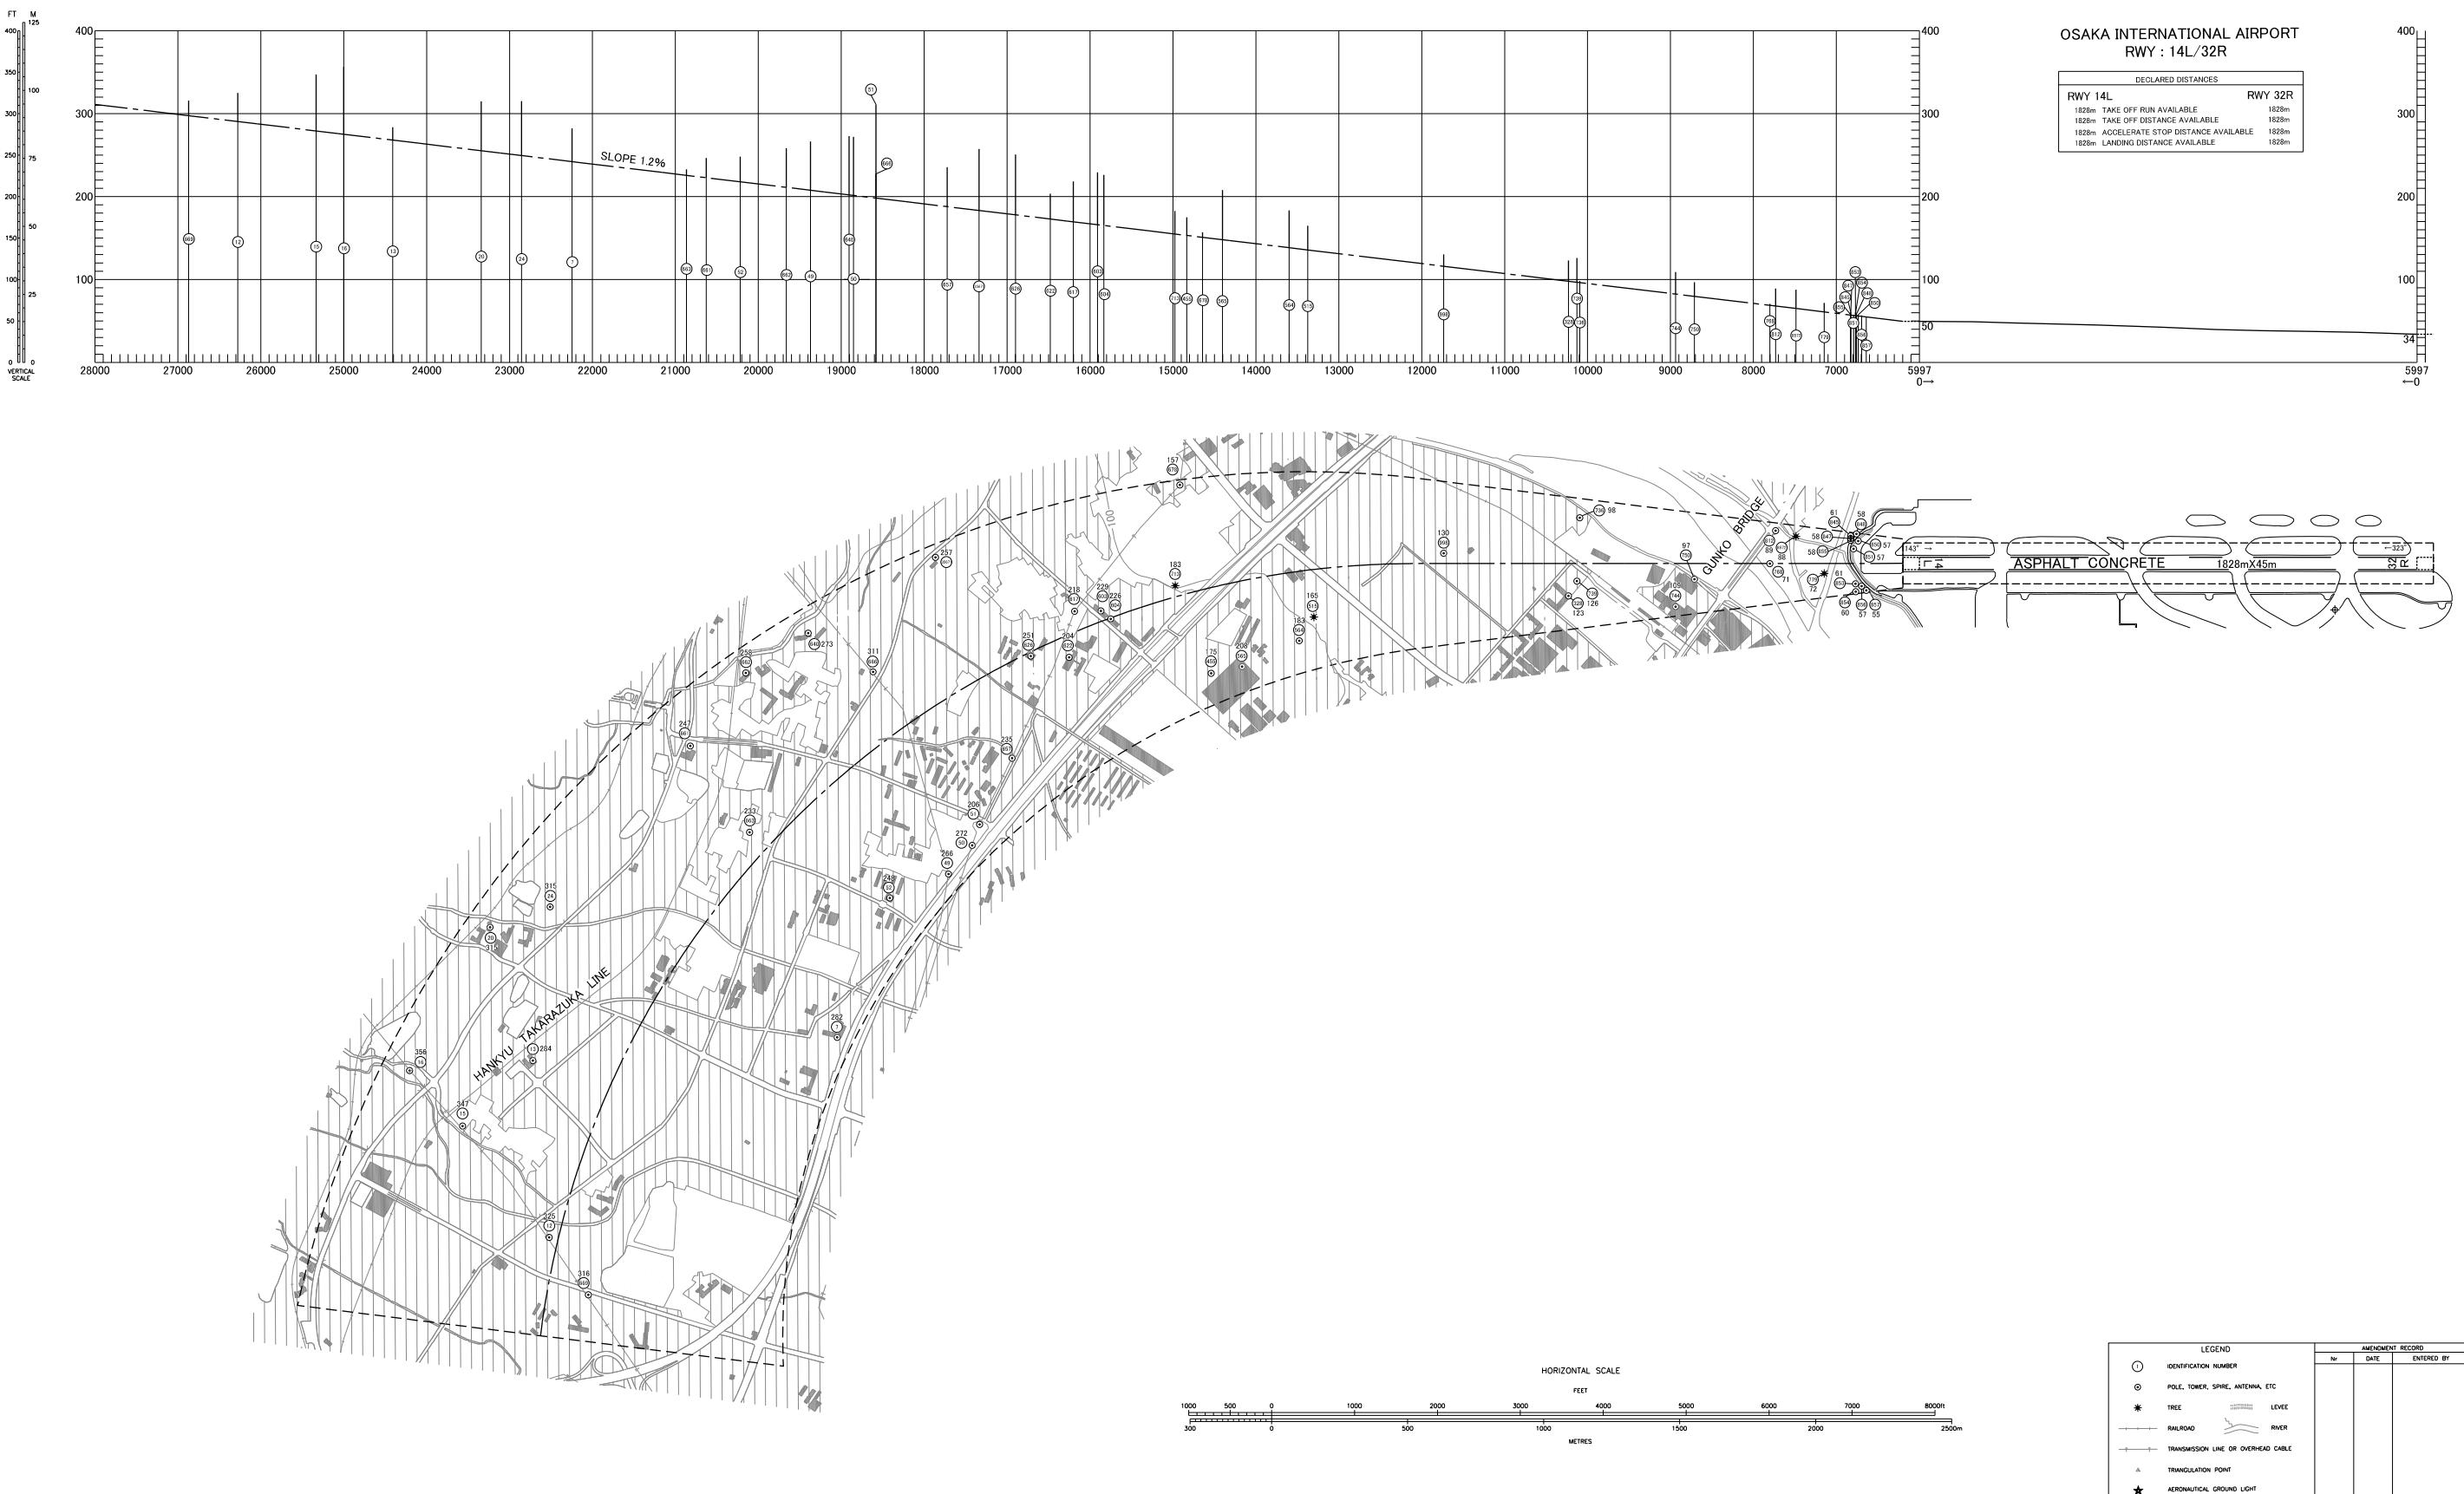

CHANGE : Update

AERODROME OBSTACLE CHART-ICAO TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



CHANGE : Update

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

ASUKA FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to ASUKA.

Cross ASUKA at or above 5000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

PANAS ONE DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to PANAS.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE: New PROC(PANAS ONE DEPARTURE).



STANDARD DEPARTURE CHART -INSTRUMENT



CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PANAS	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	BYODO	-	027 (018.6)	-8.0	9.0	-	+6000	-	-	RNAV1
003	TF	REVOL	-	027 (018.6)	-8.0	33.6	-	+11000	-	-	RNAV1
004	TF	KMC	-	027 (018.7)	-8.0	59.5	-	-	-	-	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

IZUMI ONE DEPARTURE


RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 to YODOH,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° to intercept and proceed via ITE R201 to YODOH,...
...turn left, via YOE R295 to intercept and proceed via ITE R184 to IZUMI.
Cross IZUMI at or above 6000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

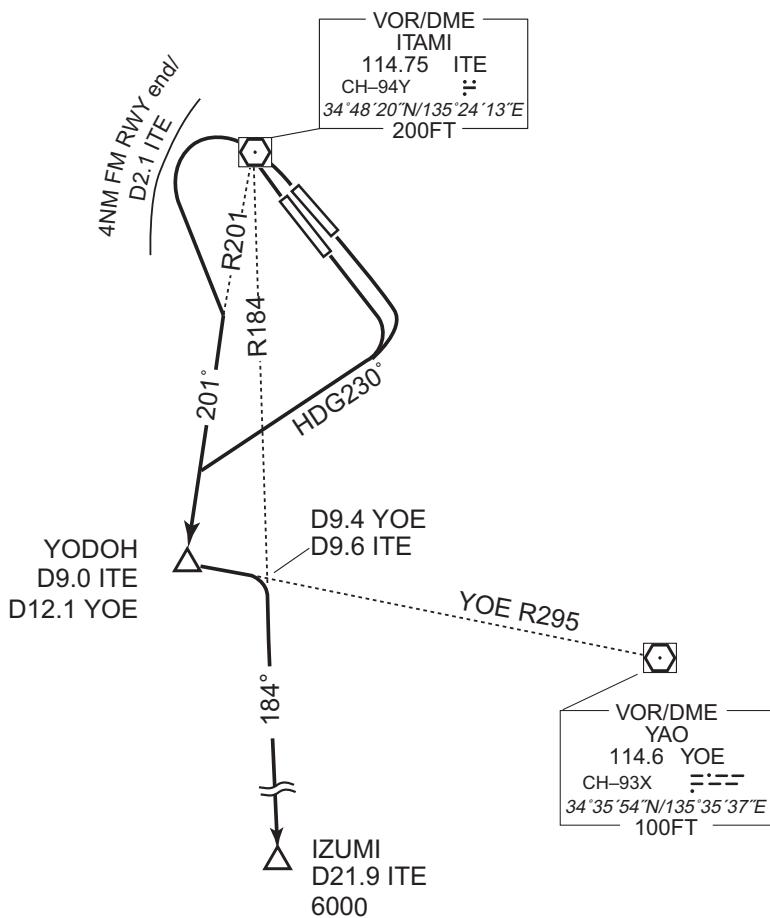

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

EAST REVERSAL FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to 3000FT or above, turn left direct to ITE VOR/DME within ITE 14.0DME.

Cross ITE VOR/DME at assigned altitude.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.



STANDARD DEPARTURE CHART -INSTRUMENT

AIP JAPAN
RJOO / OSAKA INTL

SID

TIGER TWO DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 until crossing YOE R301...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° until crossing YOE R301...


...turn right to intercept and proceed via YOE R291 to TIGER.

Cross TIGER at or above 6000FT.

Note : Following climb gradient should be maintained until 2500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

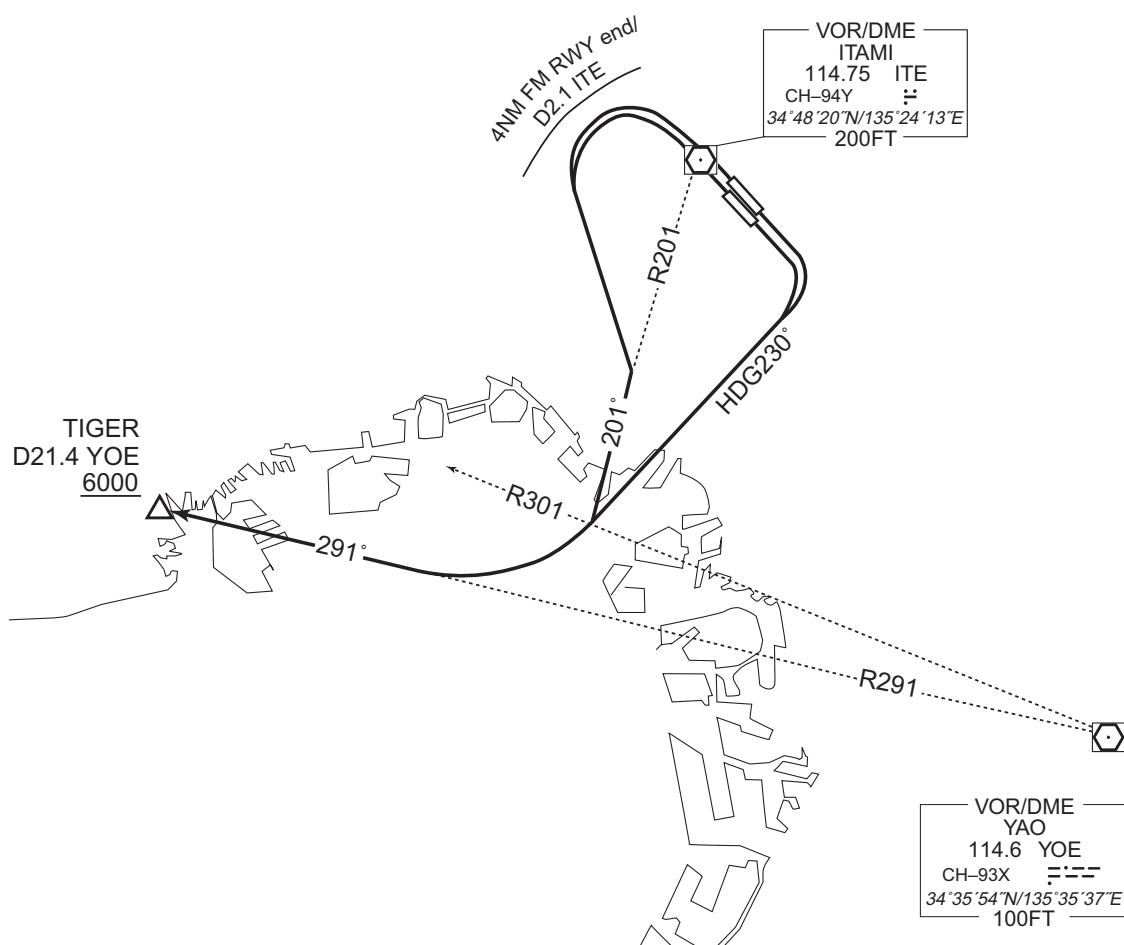

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

TRANSITION

KAGAWA TRANSITION

From over TIGER, via YOE R291 to SUMAR, via ITE R260 to intercept and proceed via KTE R057 to KTE VOR/DME.

Cross SUMAR at or above 9000FT, cross ITE R260/43.1DME at or above FL180.



CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

TRANSITION

ASAGI TRANSITION

From over TIGER, via KCE R324 to ASAGI.
Cross KCE R324/22.4DME at or above 7000FT.

TOZAN TRANSITION

From over TIGER, via KCE R324 to TOZAN, via ASAGI.
Cross KCE R324/22.4DME at or above 7000FT, cross KCE R324/47.0DME at or above 10000FT.

BUMER TRANSITION

From over TIGER, via YOE R291 to intercept and proceed via KCE R311 to BUMER.

CHANGE : TOZAN TRANSITION. Radial FM KCE.



STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

SID and TRANSITION

MINAC FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to intercept and proceed via KCE R077 to MINAC.

Note: When take off RWY14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

NAGOYA TRANSITION

From over MINAC, via KCE R077 to YOKKA, via KCC R243 to KCC VORTAC.

CHANGE : PROC renamed. Radial FM KCE.




STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

GUJYO TRANSITION / SHTLE TRANSITION		RNAV1
NOTE 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	-
	DME GAP	-
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVADs for RNAV1

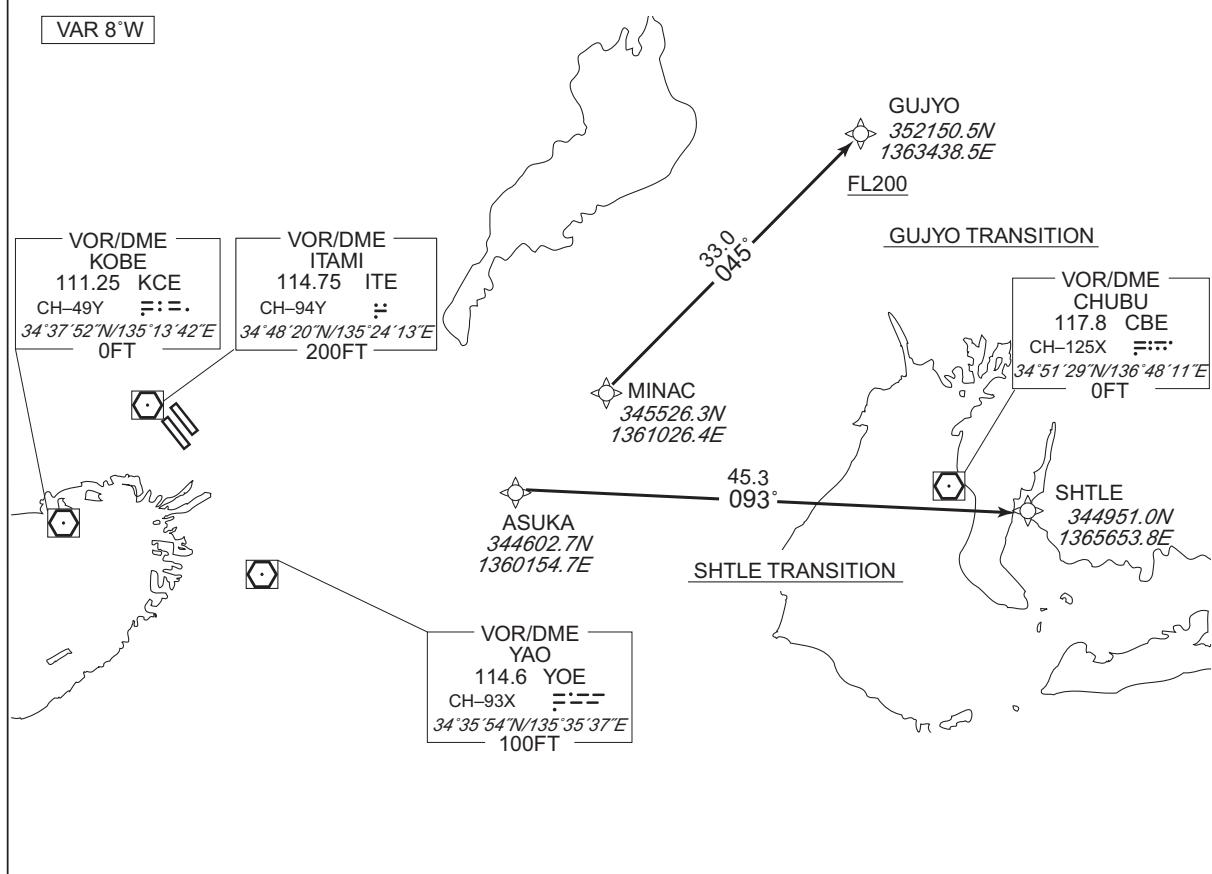

GUJYO TRANSITION

From MINAC, to GUJYO at or above FL200.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MINAC	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	GUJYO	—	045 (036.7)	-8.0	33.0	—	+FL200	—	—	RNAV1

CHANGE : Description of VAR.

SHTLE TRANSITION


From ASUKA, to SHTLE.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ASUKA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	SHTLE	—	093 (084.9)	-8.0	45.3	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

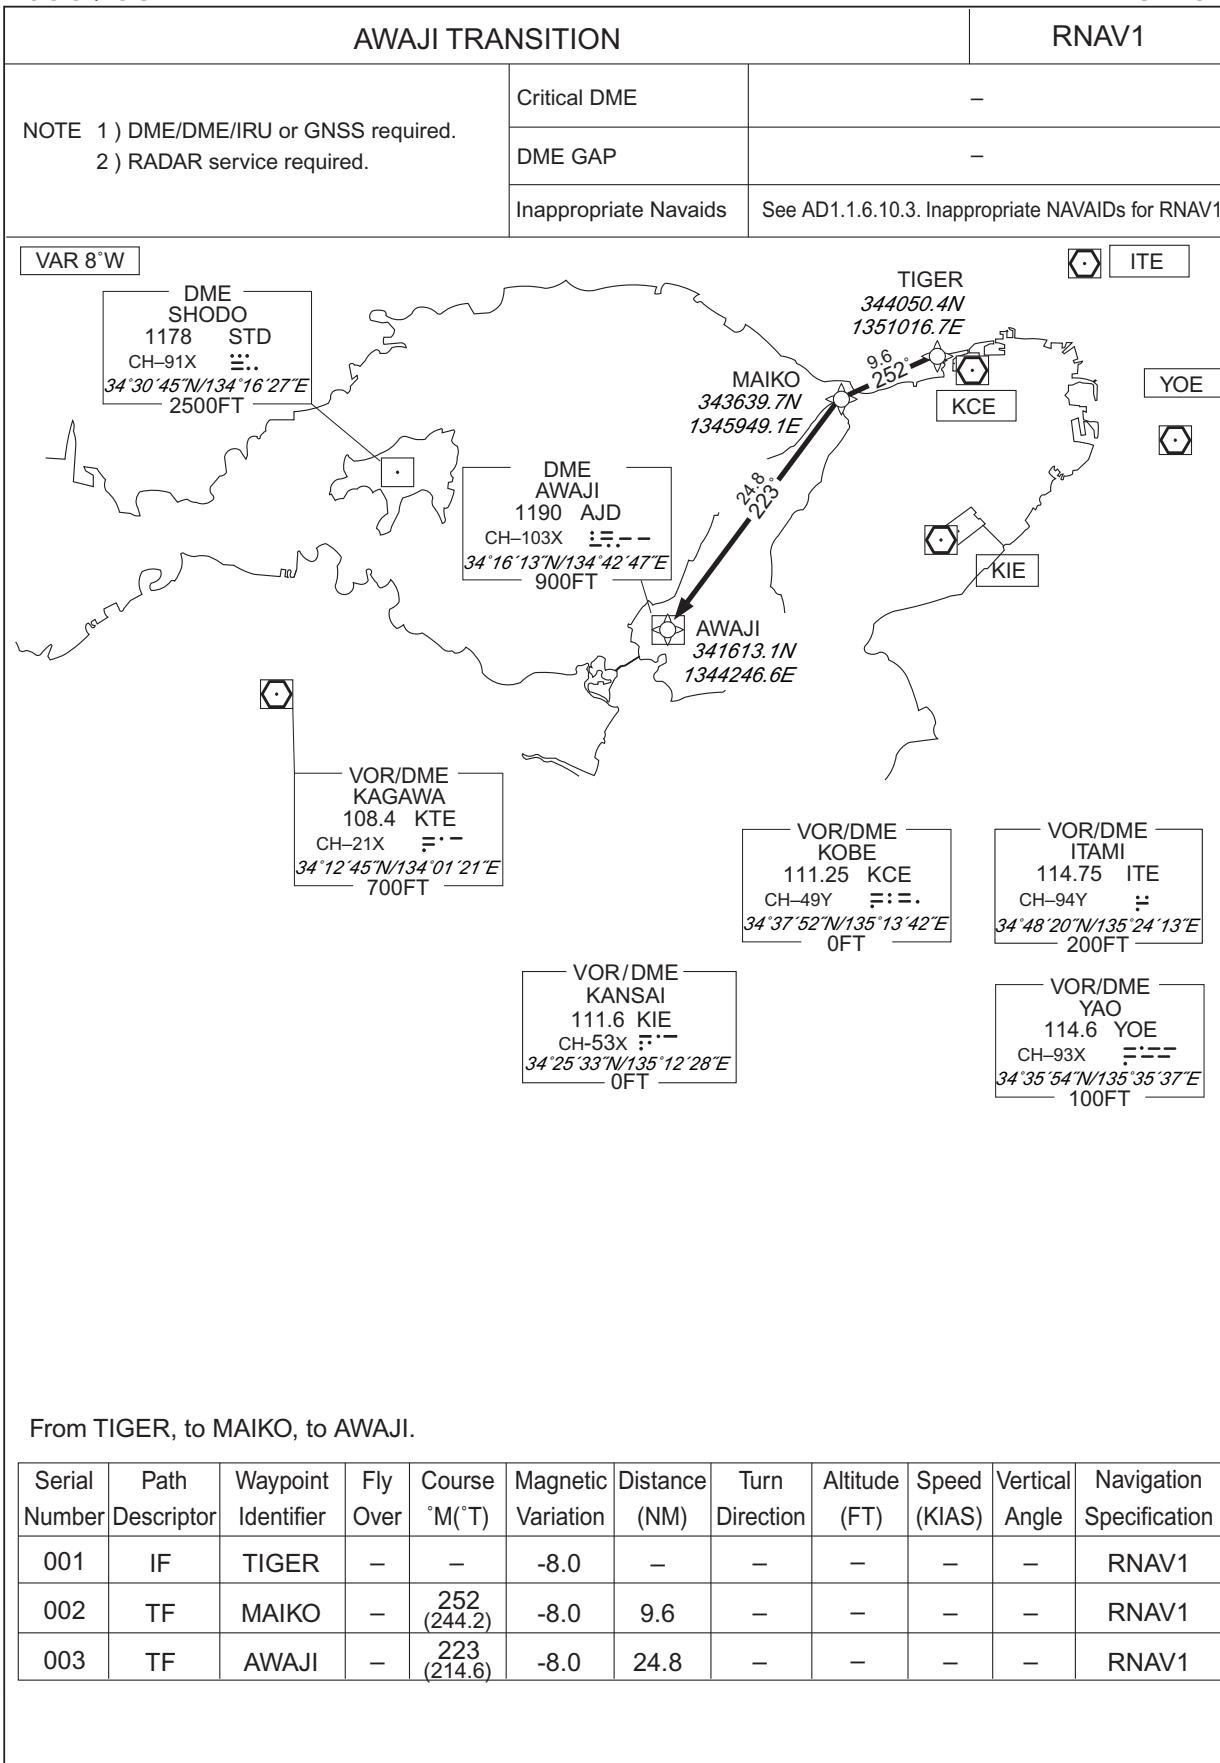


CHANGE : TAKAMATSU TACAN abolished.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

AYAME TRANSITION / SOUJA TRANSITION / WASYU TRANSITION		RNAV1
NOTE 1) DME/DME/IRU or GNSS required.	Critical DME	—
2) RADAR service required.	DME GAP	—
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

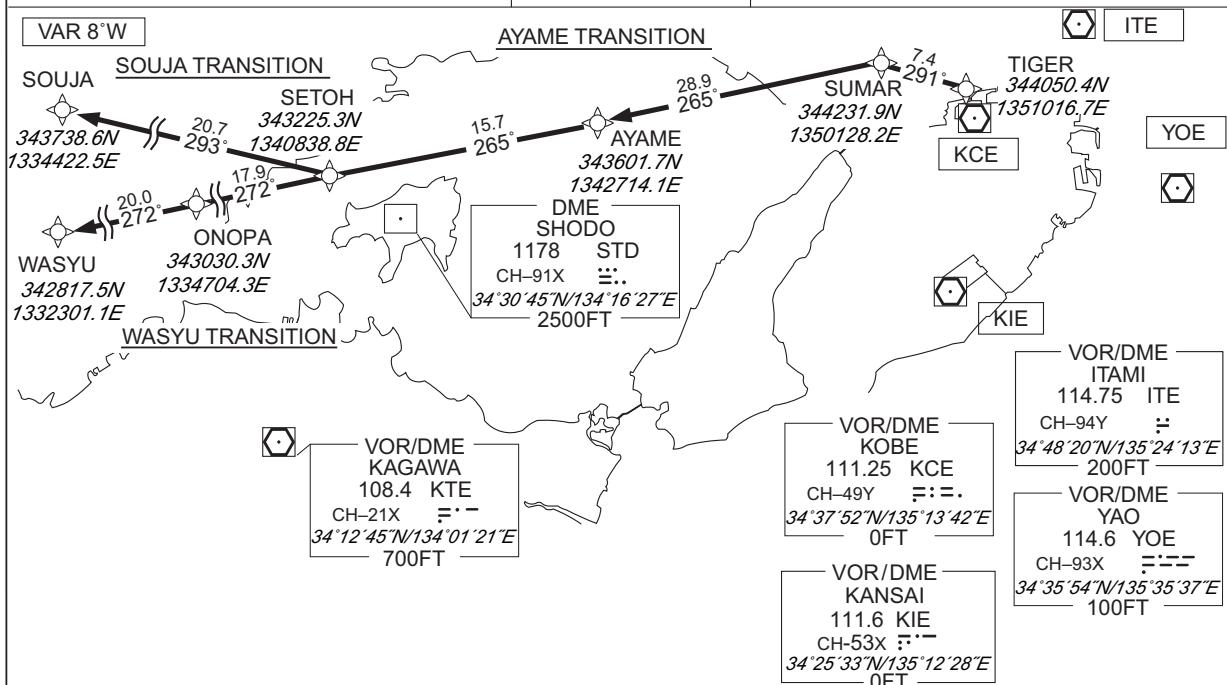

AYAME TRANSITION

From TIGER, to SUMAR, to AYAME.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1

CHANGE : TAKAMATSU TACAN abolished.

SOUJA TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to SOUJA,

Flight Trajectory Overview												
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification	
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1	
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1	
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1	
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1	
005	TF	SOUJA	—	293 (284.8)	-8.1	20.7	—	—	—	—	RNAV1	

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

WASYU TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to ONOPA, to WASYU.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1
005	TF	ONOPA	—	272 (263.9)	-8.1	17.9	—	—	—	—	RNAV1
006	TF	WASYU	—	272 (263.7)	-8.1	20.0	—	—	—	—	RNAV1

CHANGE : VAR. PROC course. ONOPA established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

STAR

IZUMI ARRIVAL

From over IZUMI, via ITE 21.9DME counter-clockwise ARC to intercept and proceed via ITE R141 to IKOMA.

Cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

AGPUK ARRIVAL

From over AGPUK, via YOE R113 to intercept and proceed via ITE R141 to IKOMA.

Cross AGPUK at or above 9000FT, cross YOE R113/21.0DME at or above 4700FT, cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

CHANGE : AGPUK ARRIVAL established.



STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL / IKOMA NORTH ARRIVAL

RNAV1

- Note 1) DME/DME/IRU or GNSS required
 2) RADAR service required

VAR 8°W

ROKKO
350700.6N
1351800.9E
7000

VOR/DME
ITAMI
114.75 ITE
CH-94Y
34°48'20"N/135°24'13"E
200FT

VOR/DME
KOB
111.25 KCE
CH-49Y
34°37'52"N/135°13'42"E
0FT

MAX 210KIAS for
IKOMA NORTH
ARRIVAL

IKOMA
343616.7N
1353914.8E
3500

VOR/DME
KANSAI
111.6 KIE
CH-53X
34°25'33"N/135°12'28"E
0FT

IKOMA NORTH ARRIVAL22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°22.8
148°

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL

From AGPUK, to MIRAI at or above 6000FT, to ABENO, to IKOMA at or above 3500FT.

Critical DME	KCC : AGPUK – MIRAI
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AGPUK	–	–	-8.0	–	–	–	–	–	RNAV1
002	TF	MIRAI	–	297 (288.7)	-8.0	9.5	–	+6000	–	–	RNAV1
003	TF	ABENO	–	297 (288.6)	-8.0	10.5	–	–	–	–	RNAV1
004	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	–	–	RNAV1

IKOMA NORTH ARRIVAL

From ROKKO at or above 7000FT, to KAMEO at or above 7000FT, to OTABE, to ABENO, to IKOMA at or above 3500FT.

Critical DME	ITE : 9.9NM to KAMEO – KAMEO YME : 19.7NM to OTABE – 13.7NM to OTABE
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROKKO	–	–	-8.0	–	–	+7000	–	–	RNAV1
002	TF	KAMEO	–	148 (140.4)	-8.0	12.9	–	+7000	–	–	RNAV1
003	TF	OTABE	–	148 (140.5)	-8.0	22.8	–	–	–	–	RNAV1
004	TF	ABENO	–	226 (218.0)	-8.0	5.0	–	–	-210	–	RNAV1
005	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	-210	–	RNAV1

CHANGE : VAR. KODAI abolished. AGPUK established. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

HABIK ARRIVAL

RNAV1

- Note 1) DME/DME/IRU or GNSS required
 2) RADAR service required

VAR 8°W

VOR/DME
ITAMI
114.75 ITE
CH-94Y
 $34^{\circ}48'20''N/135^{\circ}24'13''E$
200FT



VOR/DME
KOB
111.25 KCE
CH-49Y
 $34^{\circ}37'52''N/135^{\circ}13'42''E$
0FT

VOR/DME
YAO
114.6 YOE
CH-93X
 $34^{\circ}35'54''N/135^{\circ}35'37''E$
100FT

IKOMA
 $34^{\circ}36'16.7''N$
 $135^{\circ}39'14.8''E$
3500

VOR/DME
KANSAI
111.6 KIE
CH-53X
 $34^{\circ}25'33''N/135^{\circ}12'28''E$
0FT

IZUMI
 $34^{\circ}26'28.5''N$
 $135^{\circ}23'1.3''E$

HABIK
 $34^{\circ}32'46.8''N$
 $135^{\circ}39'14.2''E$

Using NAVAID

IZUMI D12.6 YOE R229°
YAO VOR/DME (YOE)
D19.0 YOE
MHA 4200 MAX 230KIAS

Using NAVAID

ITAMI VOR/DME (ITE) R141°
IKOMA D17.3 ITE 141°
D22.0 ITE 327°


From IZUMI, to HABIK, to IKOMA at or above 3500FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1


CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IZUMI	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	HABIK	-	(069) (060.8)	-8.0	13.0	-	-	-	-	RNAV1
003	TF	IKOMA	-	(008) (000.1)	-8.0	3.5	-	+3500	-	-	RNAV1


INSTRUMENT APPROACH CHART

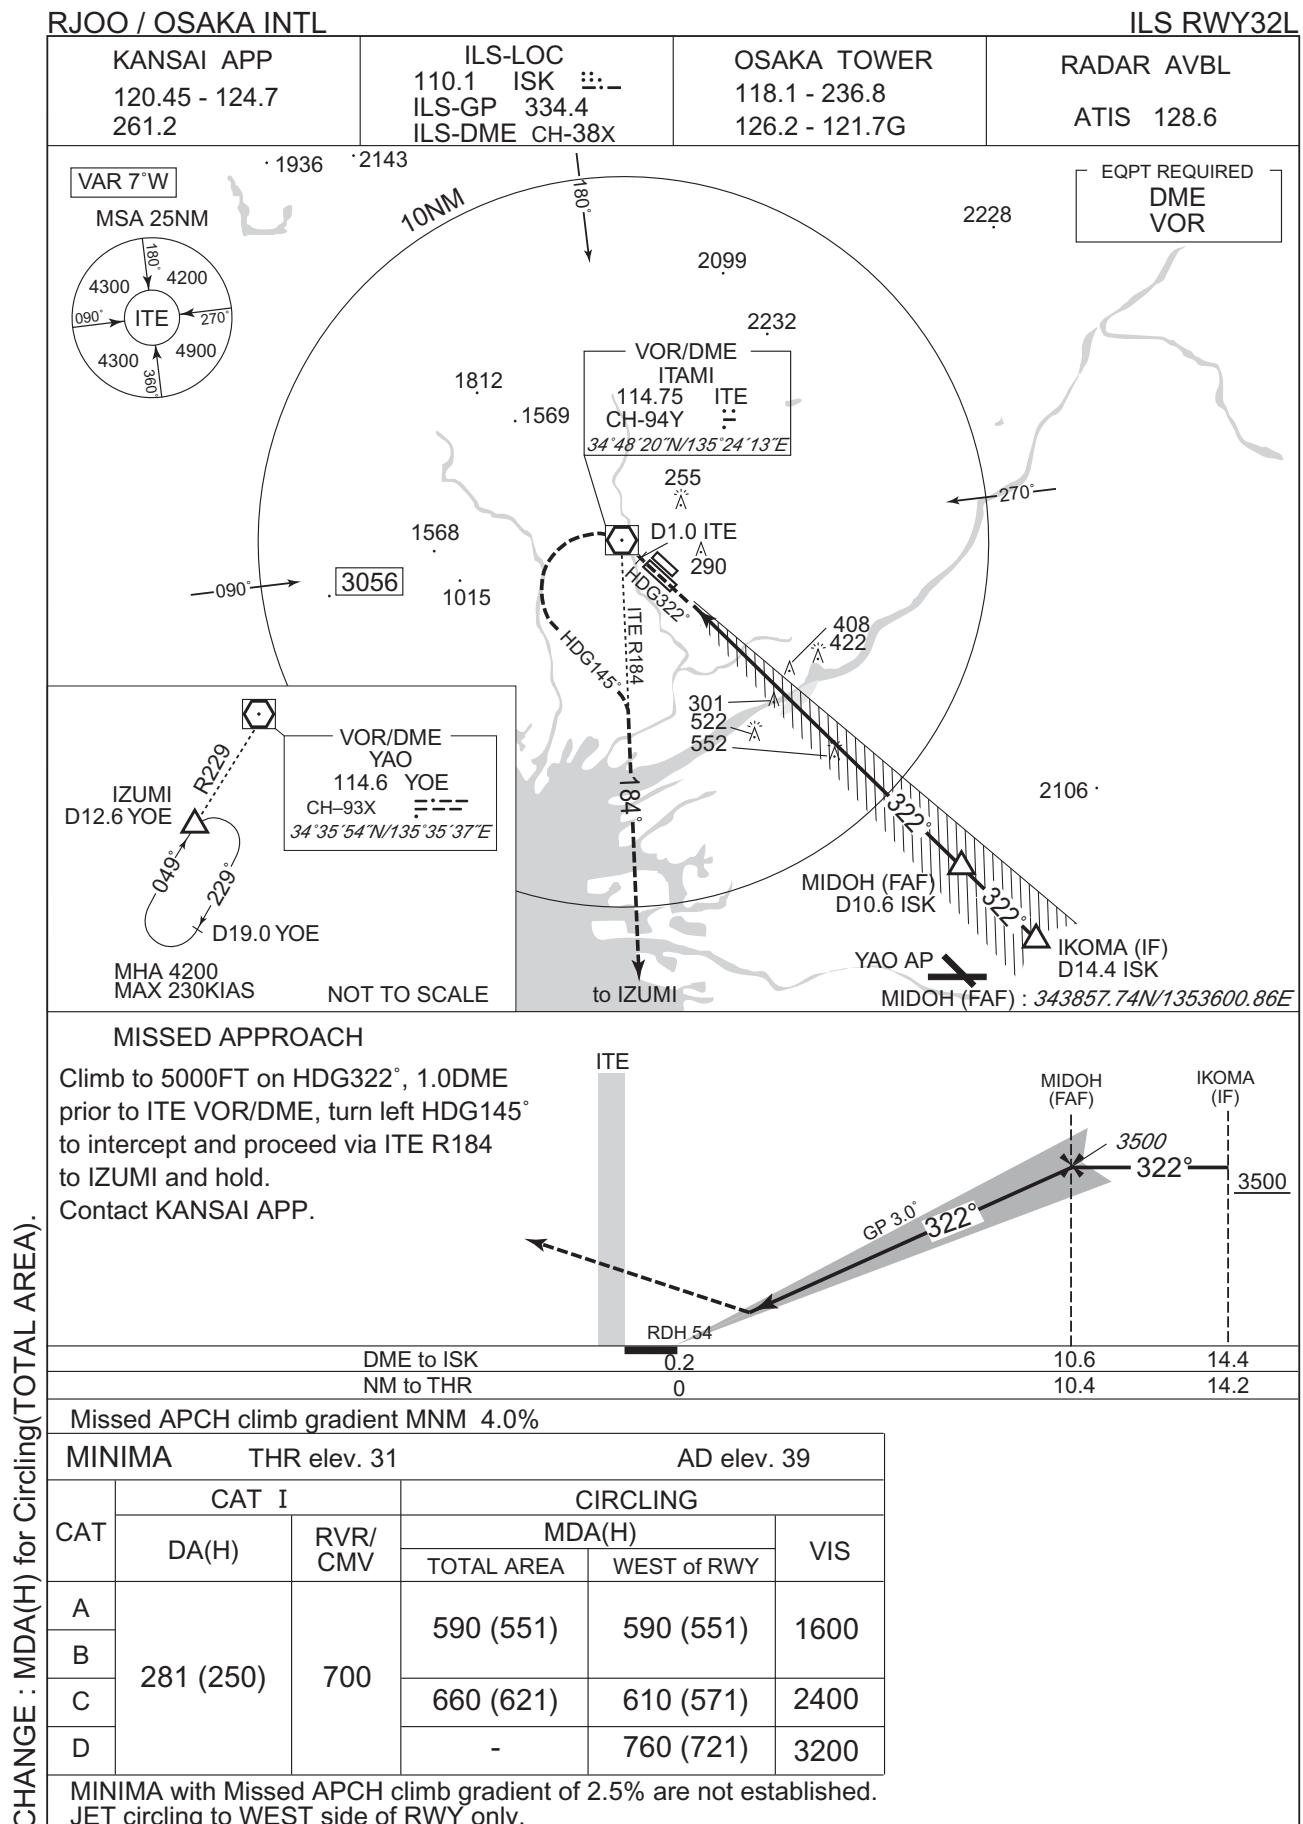

INSTRUMENT APPROACH CHART

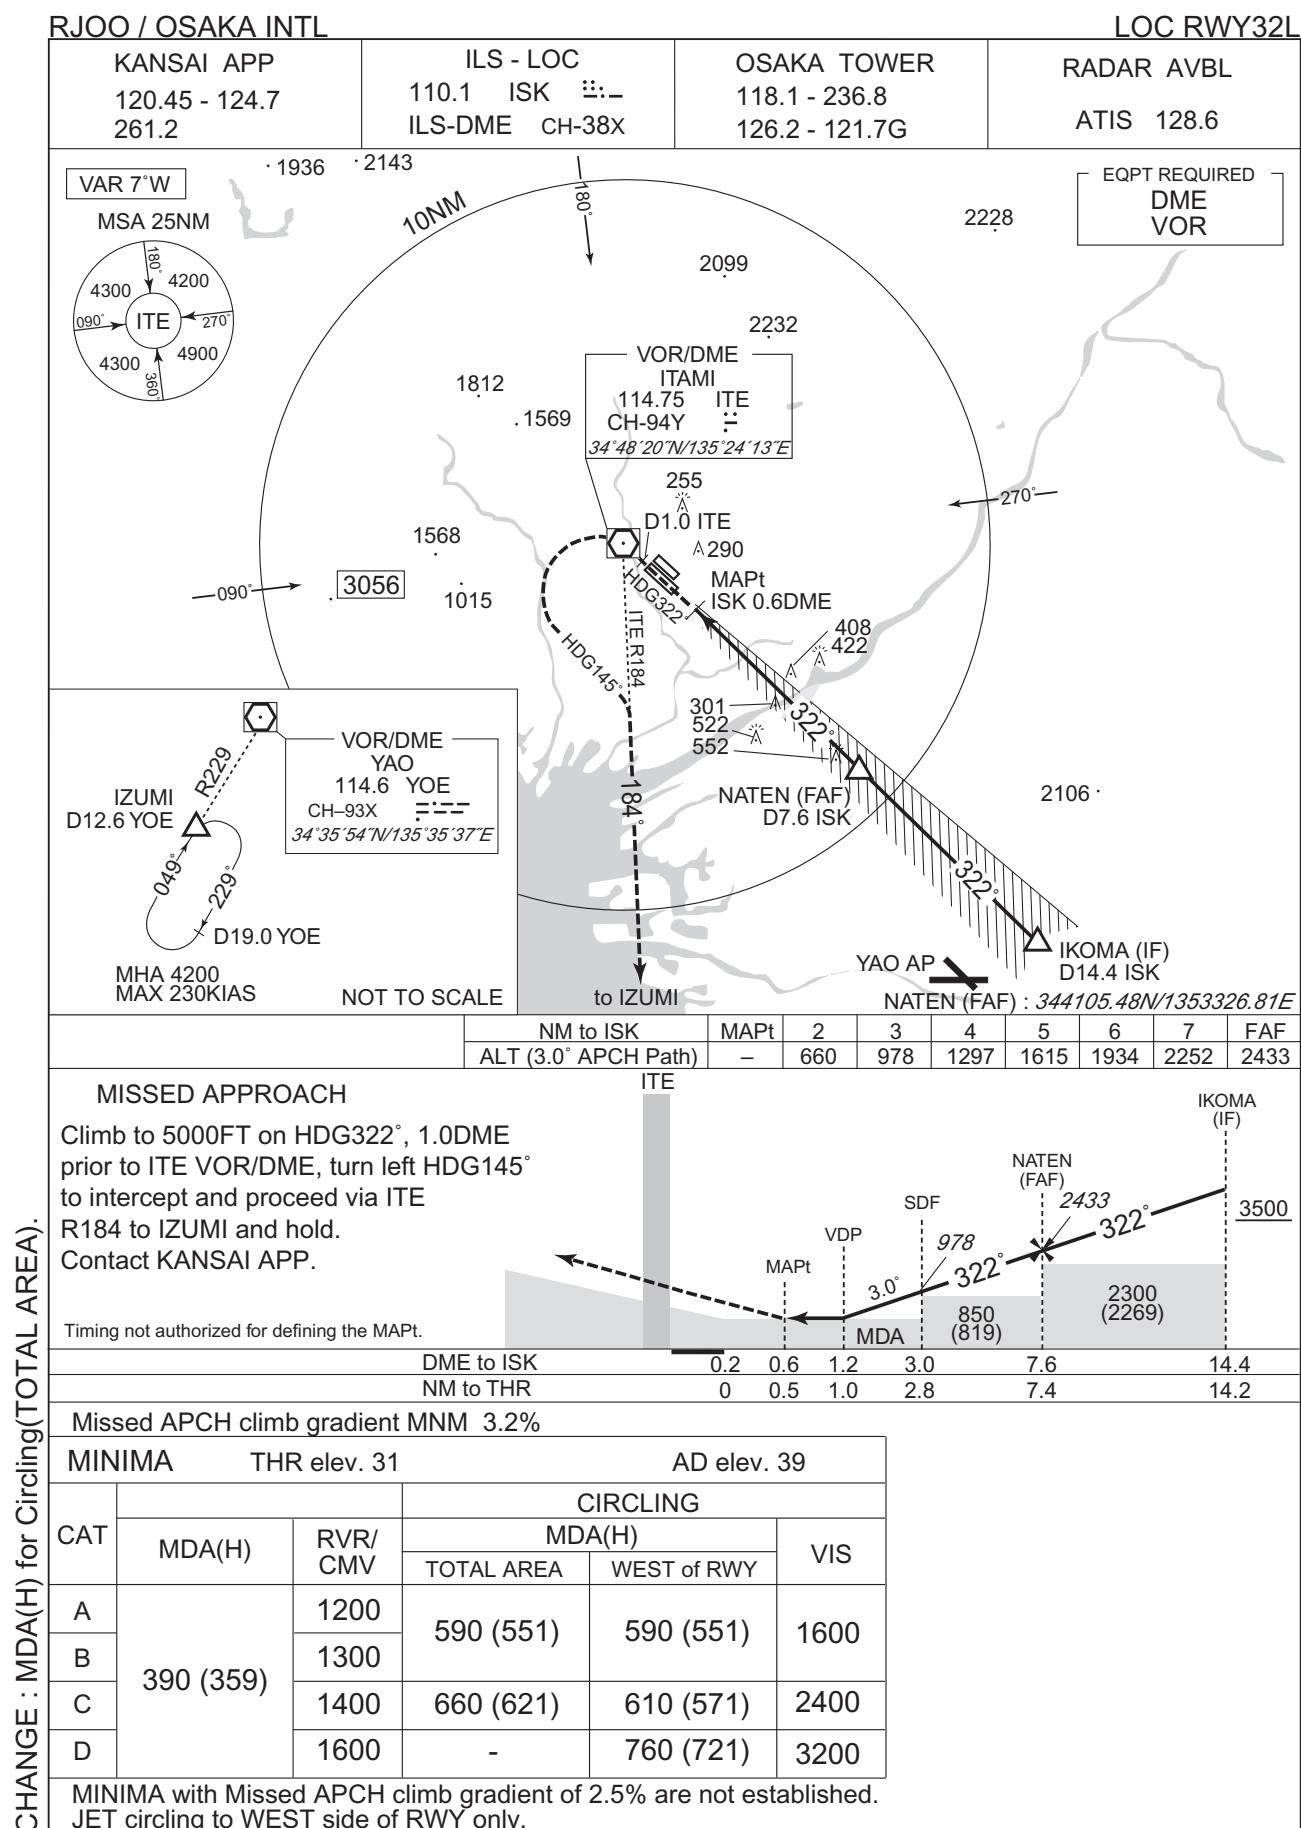

INSTRUMENT APPROACH CHART

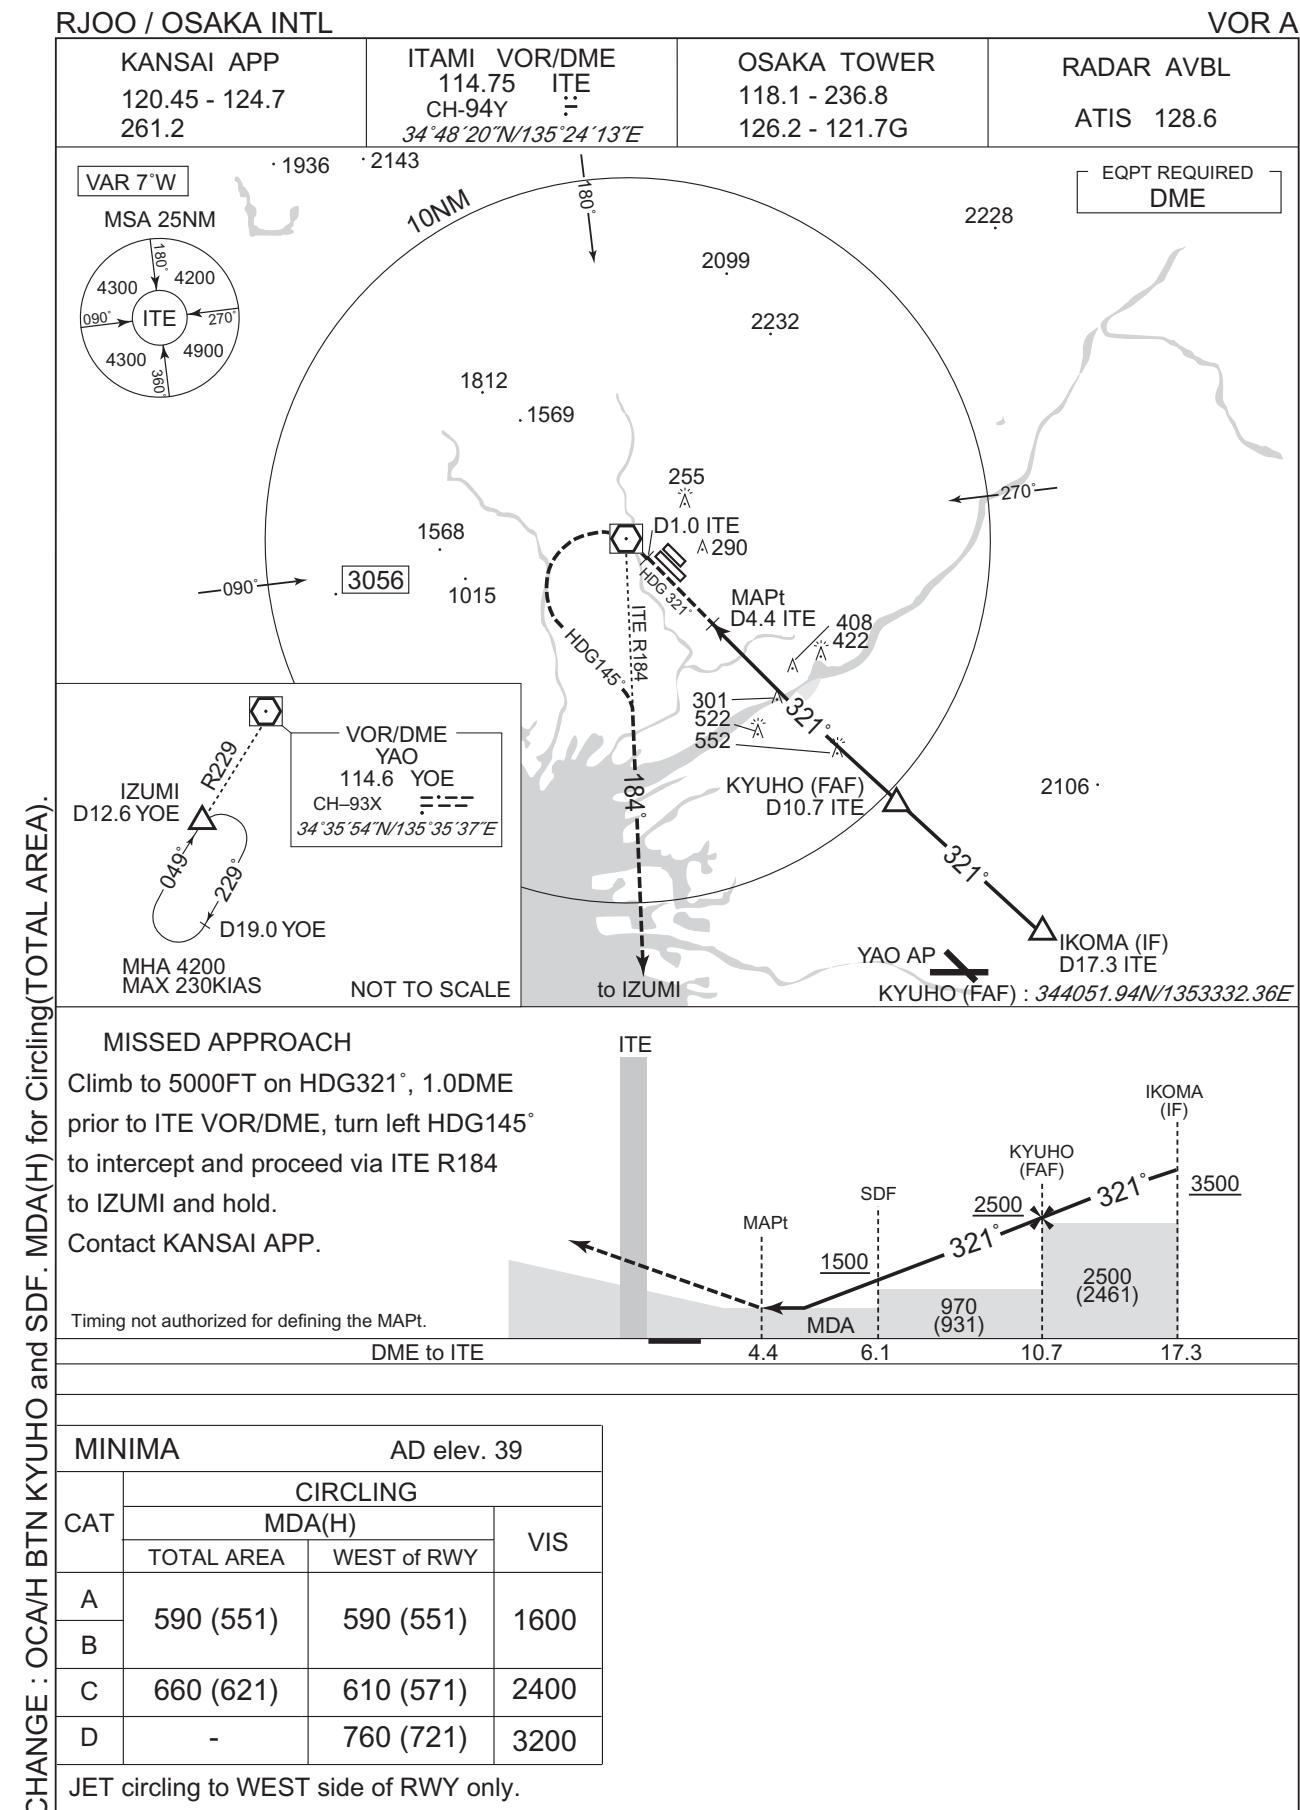

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32L

KANSAI APP
120.45 - 124.7
261.2

RNP APCH
MSAS CH68881
M32A

OSAKA TOWER
118.1 - 236.8
126.2 - 121.7G

RADAR AVBL
ATIS 128.6

VAR 8°W

MSA 25NM
4900
ARP

Baro-VNAV not authorized below -10°C

GAMBA (IAF)
344253.77N
1354007.31E

CEREZ (IAF)
343542.15N
1353123.25E

IKOMA (IAF)
343616.68N
1353914.81E

KOSAK (IF)
343914.59N
1353540.54E

UMEDA (FAF)
344247.16N
1353124.04E

O2L53
344412.28N
1352941.17E

RW32L (MAPt)
344619.92N
1352706.76E

O2L50
344918.47N
1352330.31E

O2L51
344636.88N
1352014.66E

O2L52
343415.50N
1352503.53E

IZUMI (MAHF)
342628.54N
1352531.28E

3056

1015

1569

1812

3006

1090

1800

1850

1900

1950

2000

2050

2107

2150

2200

2250

2300

2350

2400

2450

2500

2550

2600

2650

2700

2750

2800

2850

2900

2950

3000

3050

3100

3150

3200

3250

3300

3350

3400

3450

3500

3550

3600

3650

3700

3750

3800

3850

3900

3950

4000

4050

4100

4150

4200

4250

4300

4350

4400

4450

4500

4550

4600

4650

4700

4750

4800

4850

4900

4950

5000

5050

5100

5150

5200

5250

5300

5350

5400

5450

5500

5550

5600

5650

5700

5750

5800

5850

5900

5950

6000

6050

6100

6150

6200

6250

6300

6350

6400

6450

6500

6550

6600

6650

6700

6750

6800

6850

6900

6950

7000

7050

7100

7150

7200

7250

7300

7350

7400

7450

7500

7550

7600

7650

7700

7750

7800

7850

7900

7950

8000

8050

8100

8150

8200

8250

8300

8350

8400

8450

8500

8550

8600

8650

8700

8750

8800

8850

8900

8950

9000

9050

9100

9150

9200

9250

9300

9350

9400

9450

9500

9550

9600

9650

9700

9750

9800

9850

9900

9950

10000

10050

10100

10150

10200

10250

10300

10350

10400

10450

10500

10550

10600

10650

10700

10750

10800

10850

10900

10950

11000

11050

11100

11150

11200

11250

11300

11350

11400

11450

11500

11550

11600

11650

11700

11750

11800

11850

11900

11950

12000

12050

12100

12150

12200

12250

12300

12350

12400

12450

12500

12550

12600

12650

12700

12750

12800

12850

12900

12950

13000

13050

13100

13150

13200

13250

13300

13350

13400

13450

13500

13550

13600

13650

13700

13750

13800

13850

13900

13950

14000

14050

14100

14150

14200

14250

14300

14350

14400

14450

14500

14550

14600

14650

14700

14750

14800

14850

14900

14950

15000

15050

15100

15150

15200

15250

15300

15350

15400

15450

15500

15550

15600

15650

15700

15750

15800

15850

15900

15950

16000

16050

16100

16150

16200

16250

16300

16350

16400

16450

16500

16550

16600

16650

16700

16750

16800

16850

16900

16950

17000

17050

17100

17150

17200

17250

17300

17350

17400

17450

17500

17550

17600

17650

17700

17750

17800

17850

17900

17950

18000

18050

18100

18150

18200

18250

18300

18350

18400

18450

18500

18550

18600

18650

18700

18750

18800

18850

18900

18950

19000

19050

19100

19150

19200

19250

19300

19350

19400

19450

19500

19550

19600

19650

19700

19750

19800

19850

19900

19950

20000

20050

20100

20150

20200

20250

20300

20350

20400

20450

20500

20550

20600

20650

20700

20750

20800

20850

20900

20950

21000

21050

21100

21150

21200

21250

21300

21350

21400

21450

21500

21550

21600

21650

21700

21750

21800

21850

21900

21950

22000

22050

22100

22150

22200

22250

22300

22350

22400

22450

22500

22550

22600

22650

22700

22750

22800

22850

22900

22950

23000

23050

23100

23150

23200

23250

23300

23350

23400

23450

23500

23550

23600

23650

23700

23750

23800

23850

23900

23950

24000

24050

24100

24150

24200

24250

24300

24350

24400

24450

24500

24550

24600

24650

24700

24750

24800

24850

24900

24950

25000

25050

25100

25150

25200

25250

25300

25350

25400

25450

25500

25550

25600

25650

25700

25750

25800

25850

25900

25950

26000

26050

26100

26150

26200

26250

26300

26350

26400

26450

26500

26550

26600

26650

26700

26750

26800

26850

26900

26950

27000

27050

27100

27150

27200

27250

27300

27350

27400

27450

27500

27550

27600

27650

27700

27750

27800

27850

27900

27950

28000

28050

28100

28150

28200

28250

28300

28350

28400

28450

28500

28550

28600

28650

28700

28750

28800

28850

28900

28950

29000

29050

29100

29150

29200

29250

29300

29350

29400

29450

29500

29550

29600

29650

29700

29750

29800

29850

29900

29950

30000

30050

30100

30150

30200

30250

30300

30350

30400

30450

30500

30550

30600

30650

30700

30750

30800

30850

30900

30950

31000

31050

31100

31150

31200

31250

31300

31350

31400

31450

31500

31550

31600

31650

31700

31750

31800

31850

31900

31950

32000

32050

32100

32150

32200

32250

32300

32350

32400

32450

32500

32550

32600

32650

32700

32750

32800

32850

32900

32950

33000

33050

33100

33150

33200

33250

33300

33350

33400

33450

33500

33550

33600

33650

33700

33750

33800

33850

33900

33950

34000

34050

34100

34150

34200

34250

34300

34350

34400

34450

34500

34550

34600

34650

34700

34750

34800

34850

34900

34950

35000

35050

35100

35150

35200

35250

35300

35350

35400

35450

35500

35550

35600

35650

35700

35750

35800

35850

35900

35950

36000

36050

36100

36150

36200

36250

36300

36350

36400

36450

36500

36550

36600

36650

36700

36750

36800

36850

36900

36950

37000

37050

37100

37150

37200

37250

37300

37350

37400

37450

37500

37550

37600

37650

37700

37750

37800

37850

37900

37950

38000

38050

38100

38150

38200

38250

38300

38350

38400

38450

38500

38550

38600

38650

38700

38750

38800

38850

38900

38950

39000

39050

39100

39150

39200

39250

39300

39350

39400

39450

39500

39550

39600

39650

39700

39750

39800

39850

39900

39950

40000

40050

40100

40150

40200

40250

40300

40350

40400

40450

40500

40550

40600

40650

40700

40750

40800

40850

40900

40950

41000

41050

41100

41150

41200

41250

41300

41350

41400

41450

41500

41550

41600

41650

41700

41750

41800

41850

41900

41950

42000

42050

42100

42150

42200

42250

42300

42350

42400

42450

42500

42550

42600

42650

42700

42750

42800

42850

42900

42950

43000

43050

43100

43150

43200</

CHANGE : 02L53 established. MSAS CH added. Minimum TEMP for Baro-VNAV, HLDG Pattern, PROC ALT at FAF. Missed APCH for Using VOR/DME abolished. OCA/H BTN KOSAK and UMEDA, LPV established. MINIMA, NM to THR at VDP.

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32L

FAS DATA BLOCK


Operation type	0	LTP/FTP ellipsoidal height	+00469
SBAS service provider identifier	2	FPAP latitude	344728.7535N
Airport identifier	RJOO	FPAP longitude	1352543.3300E
Runway	323	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32A	△ length offset	0000
LTP/FTP latitude	344619.8985N	HAL	40.0
LTP/FTP longitude	1352706.7455E	VAL	50.0
CRC remainder	D799CA35		

Required additional data

LTP/FTP orthometric height	9.6
----------------------------	-----

CHANGE : FAS DATA BLOCK, Required additional data established.

INSTRUMENT APPROACH CHART

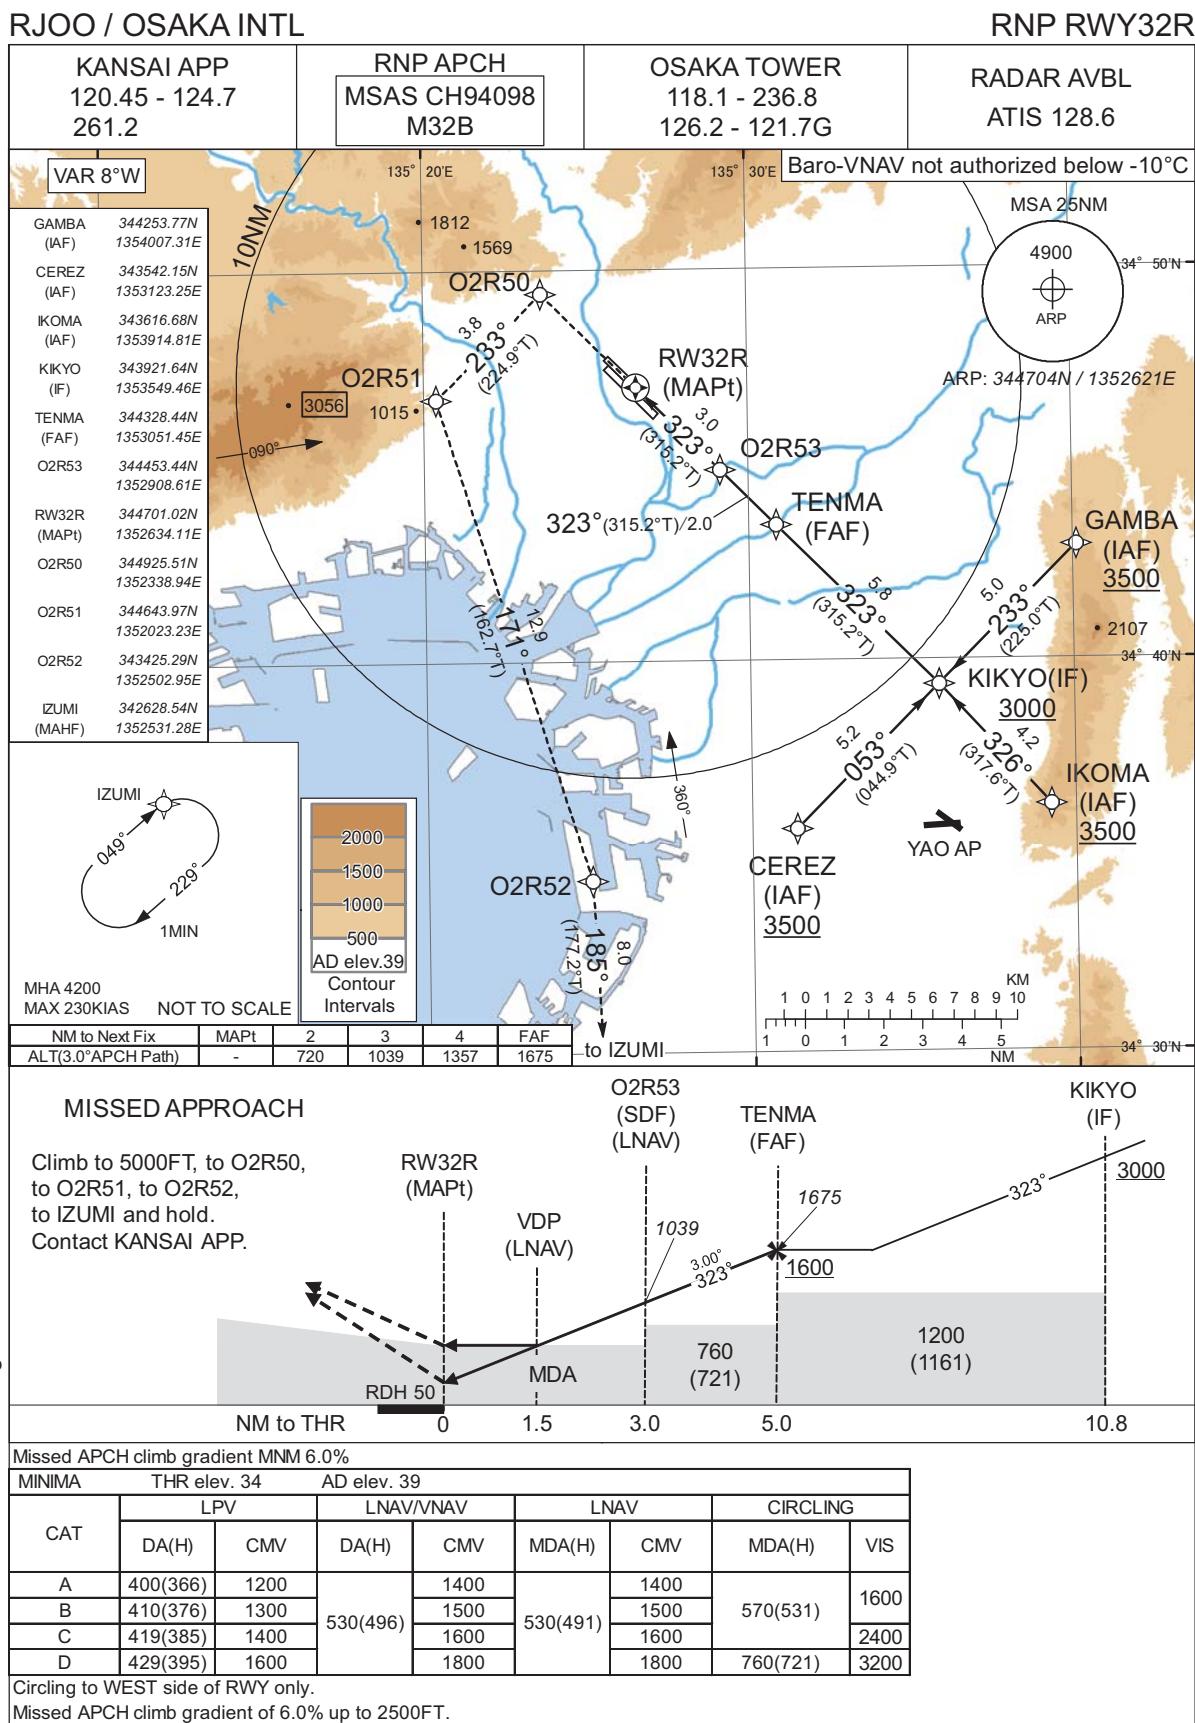

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32R

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00478
SBAS service provider identifier	2	FPAP latitude	344742.9515N
Airport identifier	RJOO	FPAP longitude	1352543.2590E
Runway	321	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32B	△ length offset	0000
LTP/FTP latitude	344700.9970N	HAL	40.0
LTP/FTP longitude	1352634.0960E	VAL	50.0
CRC remainder	49D4256C		


Required additional data

LTP/FTP orthometric height	10.6
----------------------------	------

CHANGE : FAS DATA BLOCK, Required additional data established.


RJOO / OSAKA INTL

HLDG PATTERN

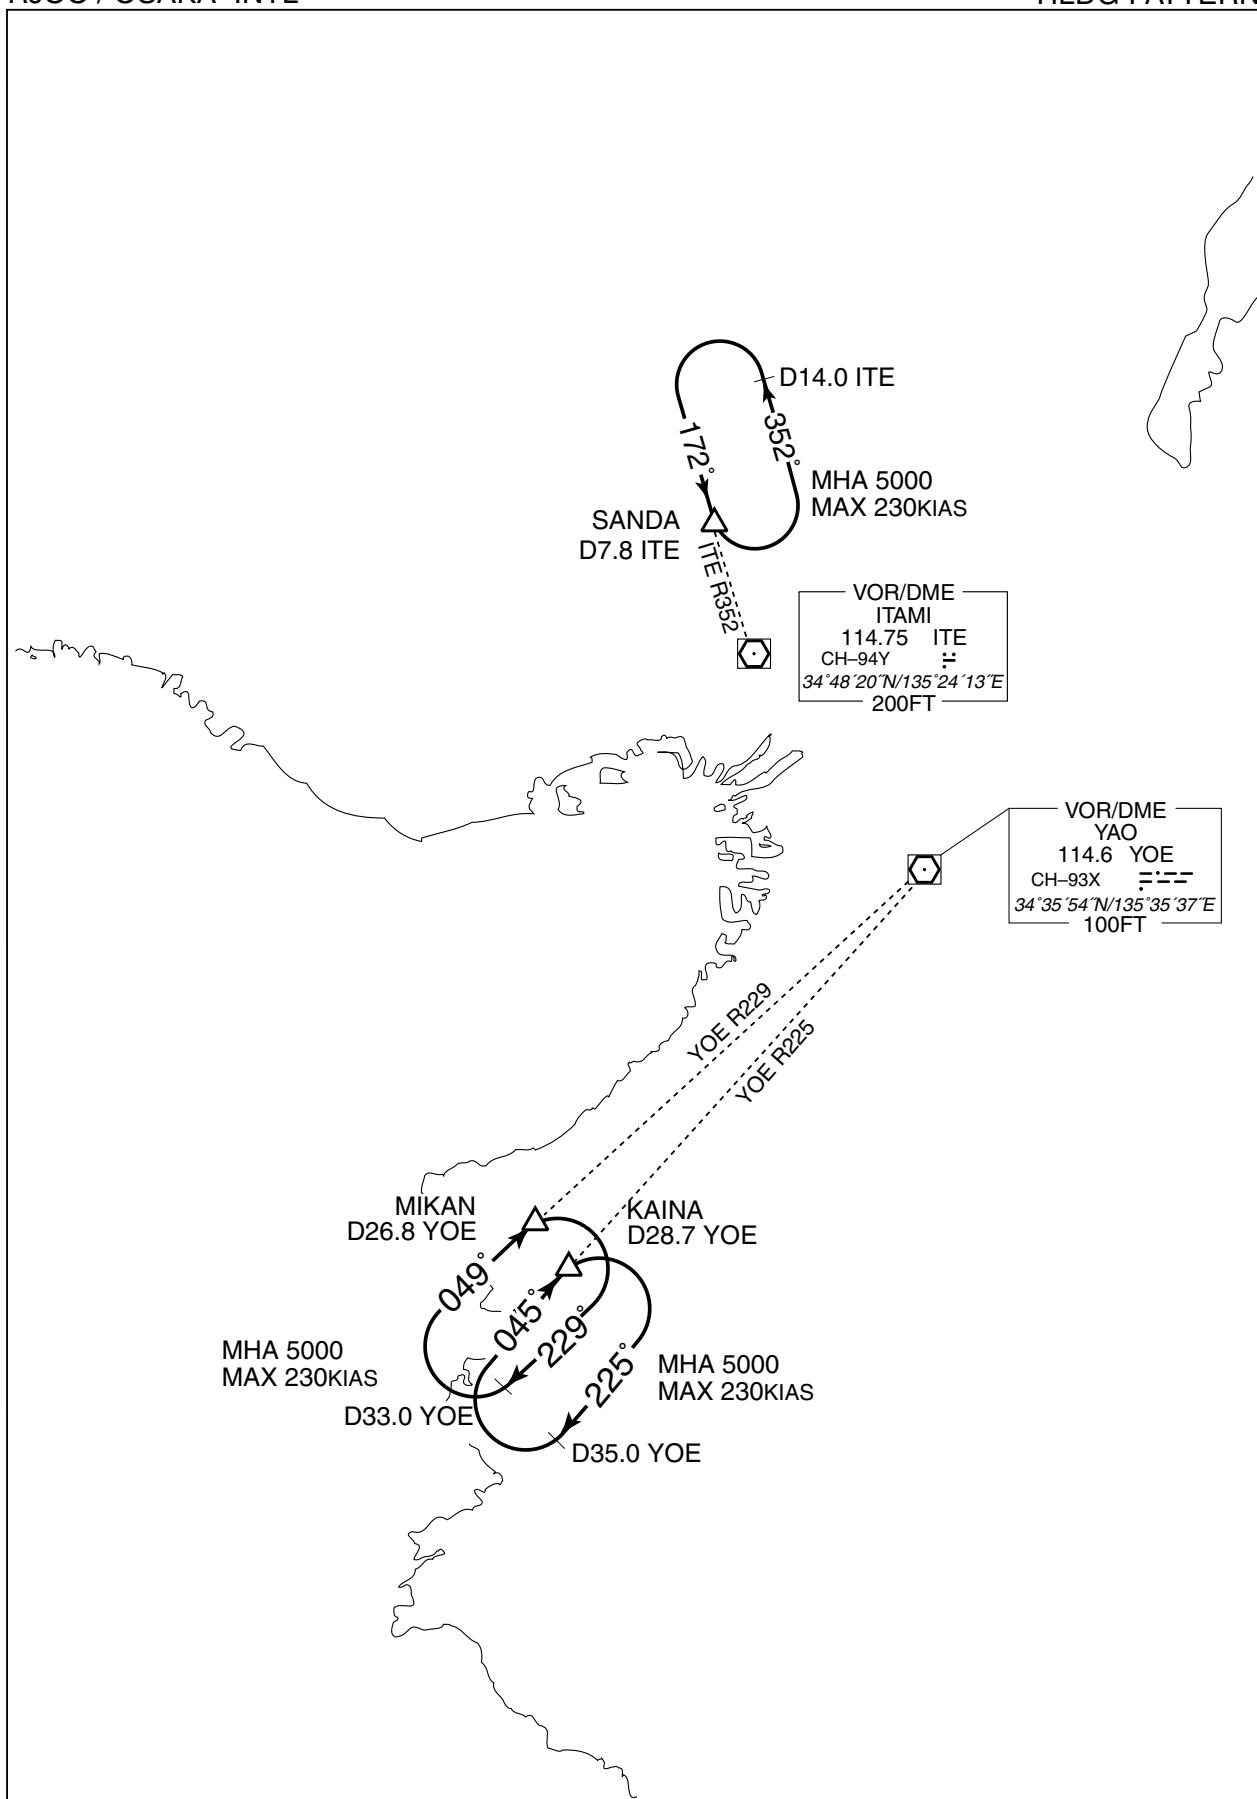

RJOO / OSAKA INTL

Visual REP

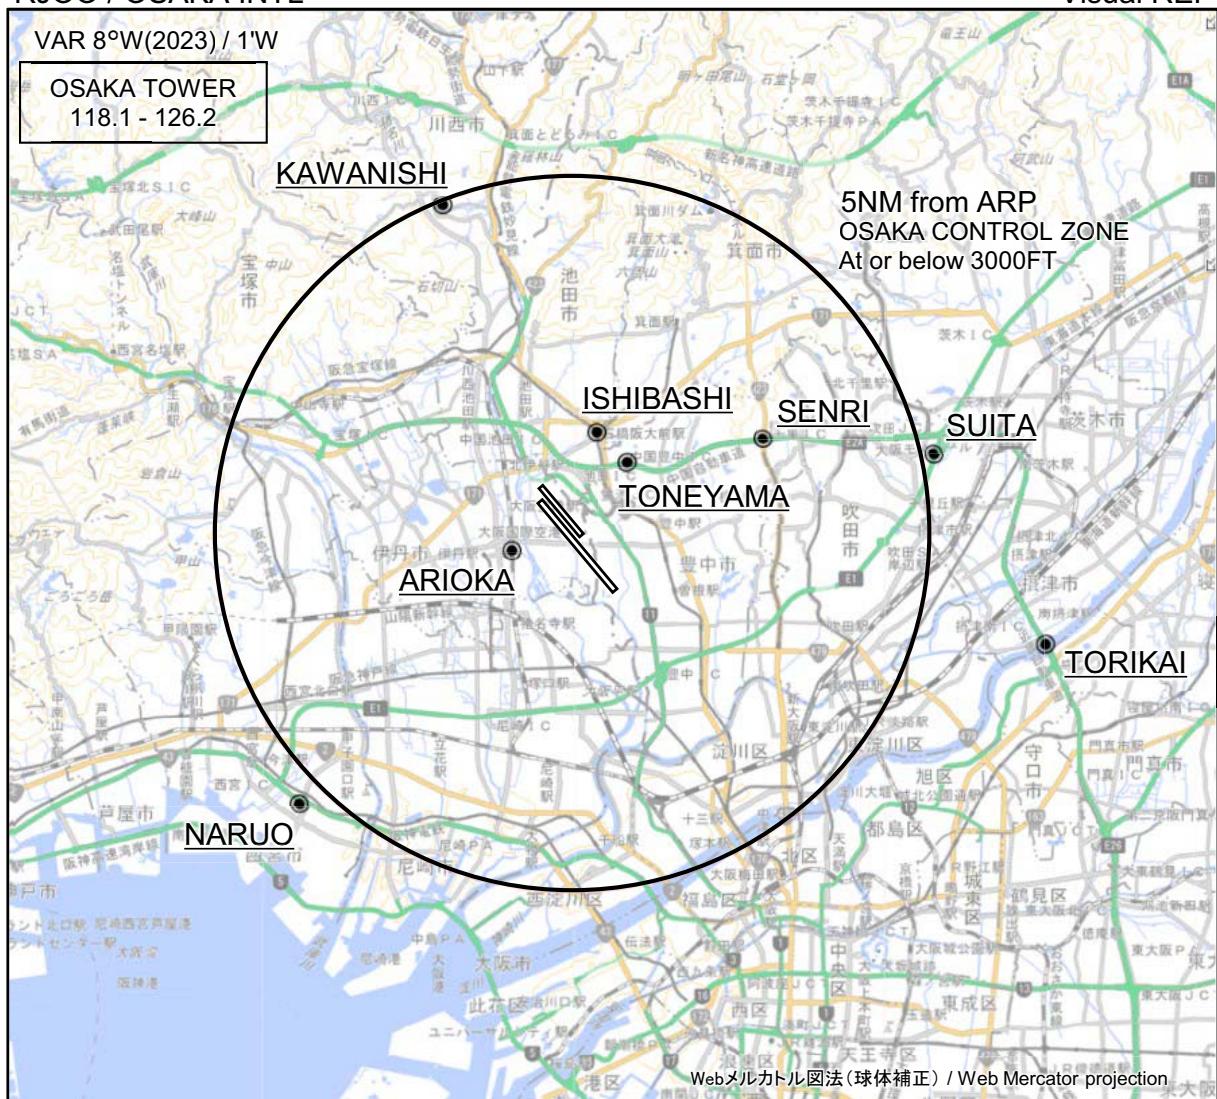

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
川西 Kawanishi	339°T / 4.9NM	多田神社 Shrine
石橋 Ishibashi	013°T / 1.5NM	阪急石橋阪大前駅 Station
千里 Senri	063°T / 3.0NM	千里インターチェンジ Interchange
吹田 Suita	077°T / 5.2NM	吹田ジャンクション Junction
刀根山 Toneyama	037°T / 1.2NM	中国豊中インターチェンジ Interchange
有岡 Arioka	255°T / 0.9NM	JR伊丹駅 Station
鳥飼 Torikai	103°T / 6.8NM	鳥飼大橋 Bridge
鳴尾 Naruo	225°T / 5.4NM	甲子園球場 Baseball ground


CHANGE: VAR.



RJOO / OSAKA INTL

Minimum Vectoring Altitude CHART

VAR 8°W (2023)

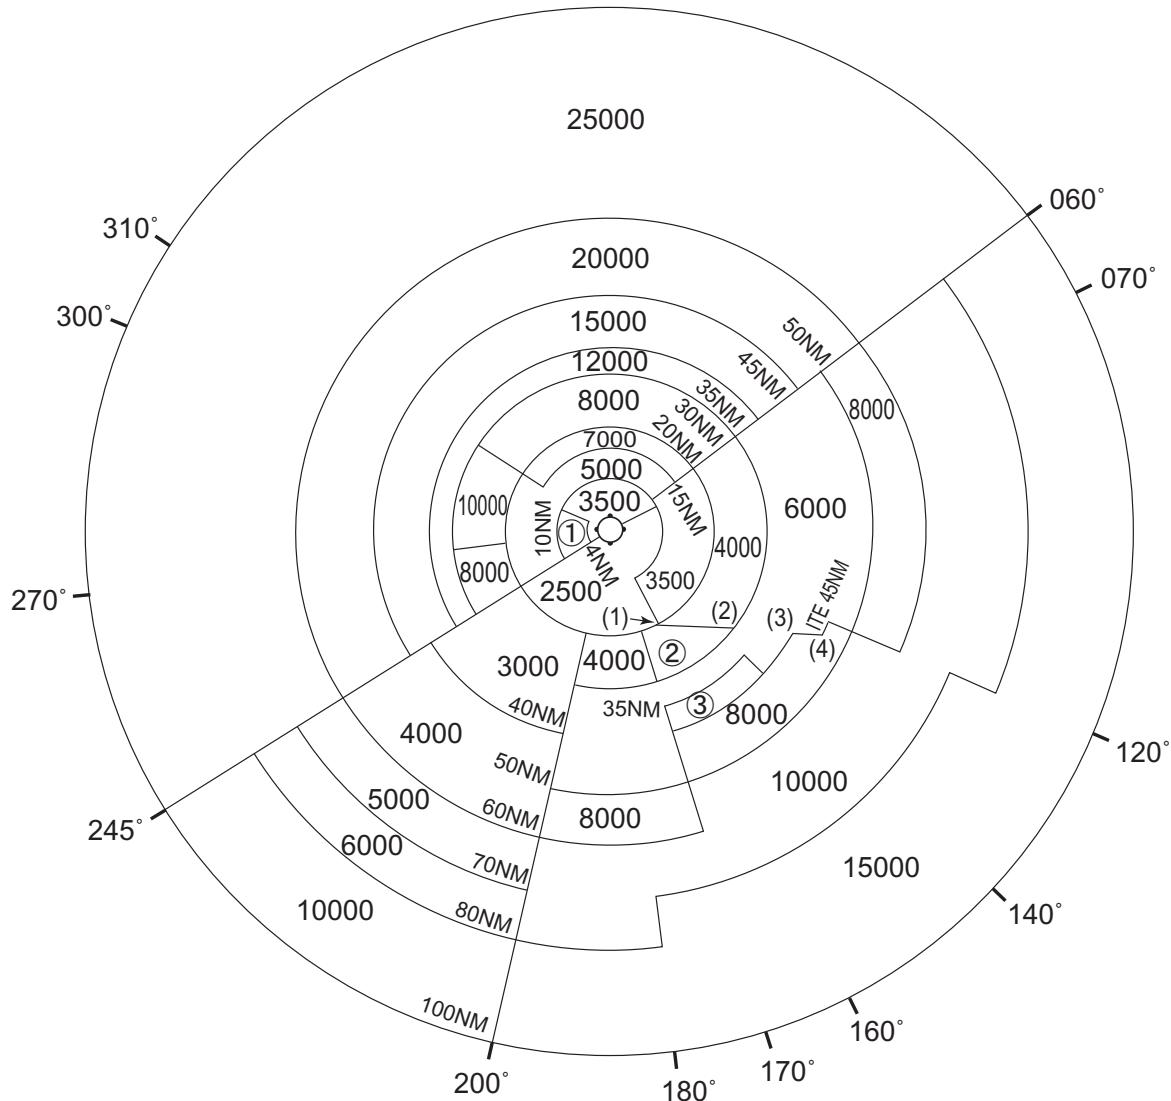

- ① 4500
- ② 5000
- ③ 7000

- (1) 342930N/1353527E
- (2) 342925N/1355432E
- (3) 342918N/1360849E
- (4) 342924N/1361335E

CENTER: 344752N/1352550E (No.1 RADAR SITE)
 CENTER: 344659N/1352600E (No.2 RADAR SITE)

CHANGE : VAR.