


RJOB / OKAYAMA

AD CHART

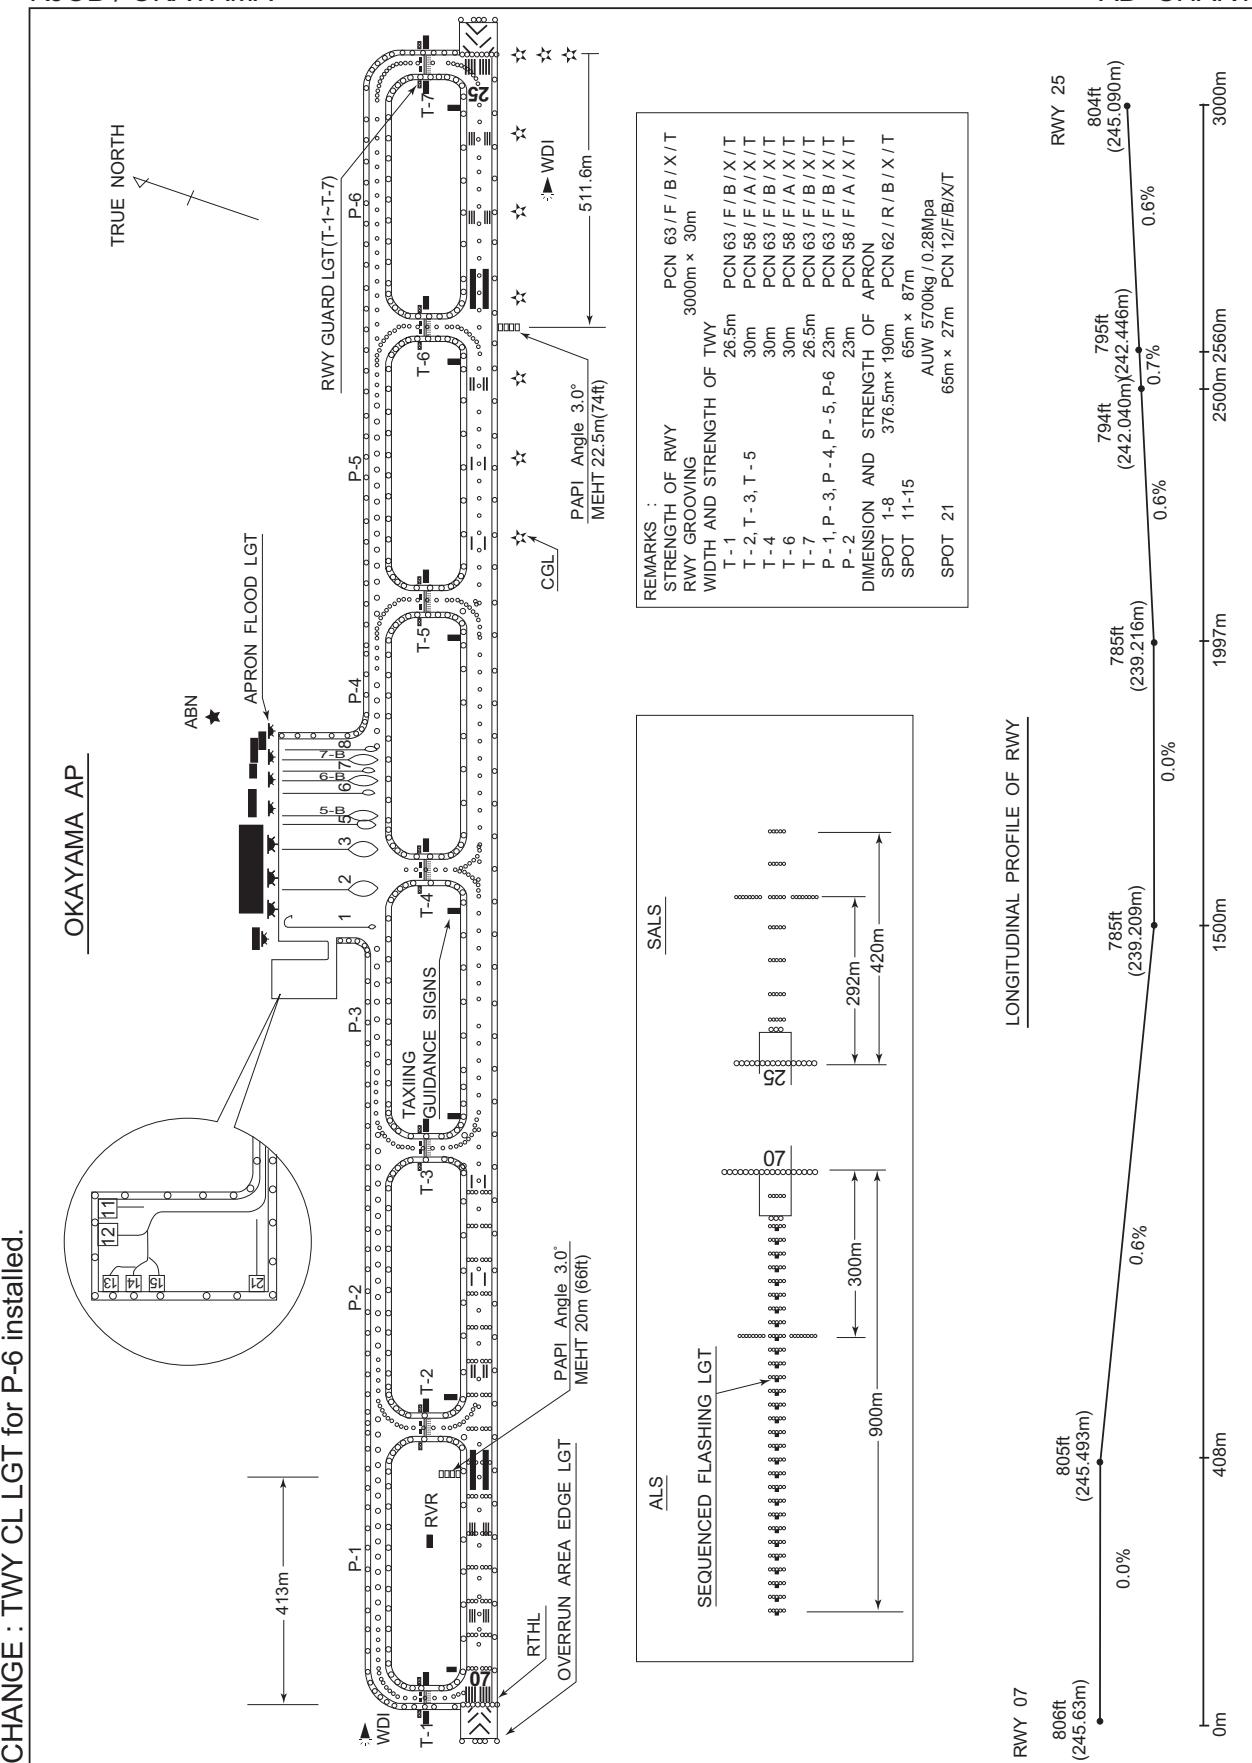

INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-MAR 2017



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO TYPE B

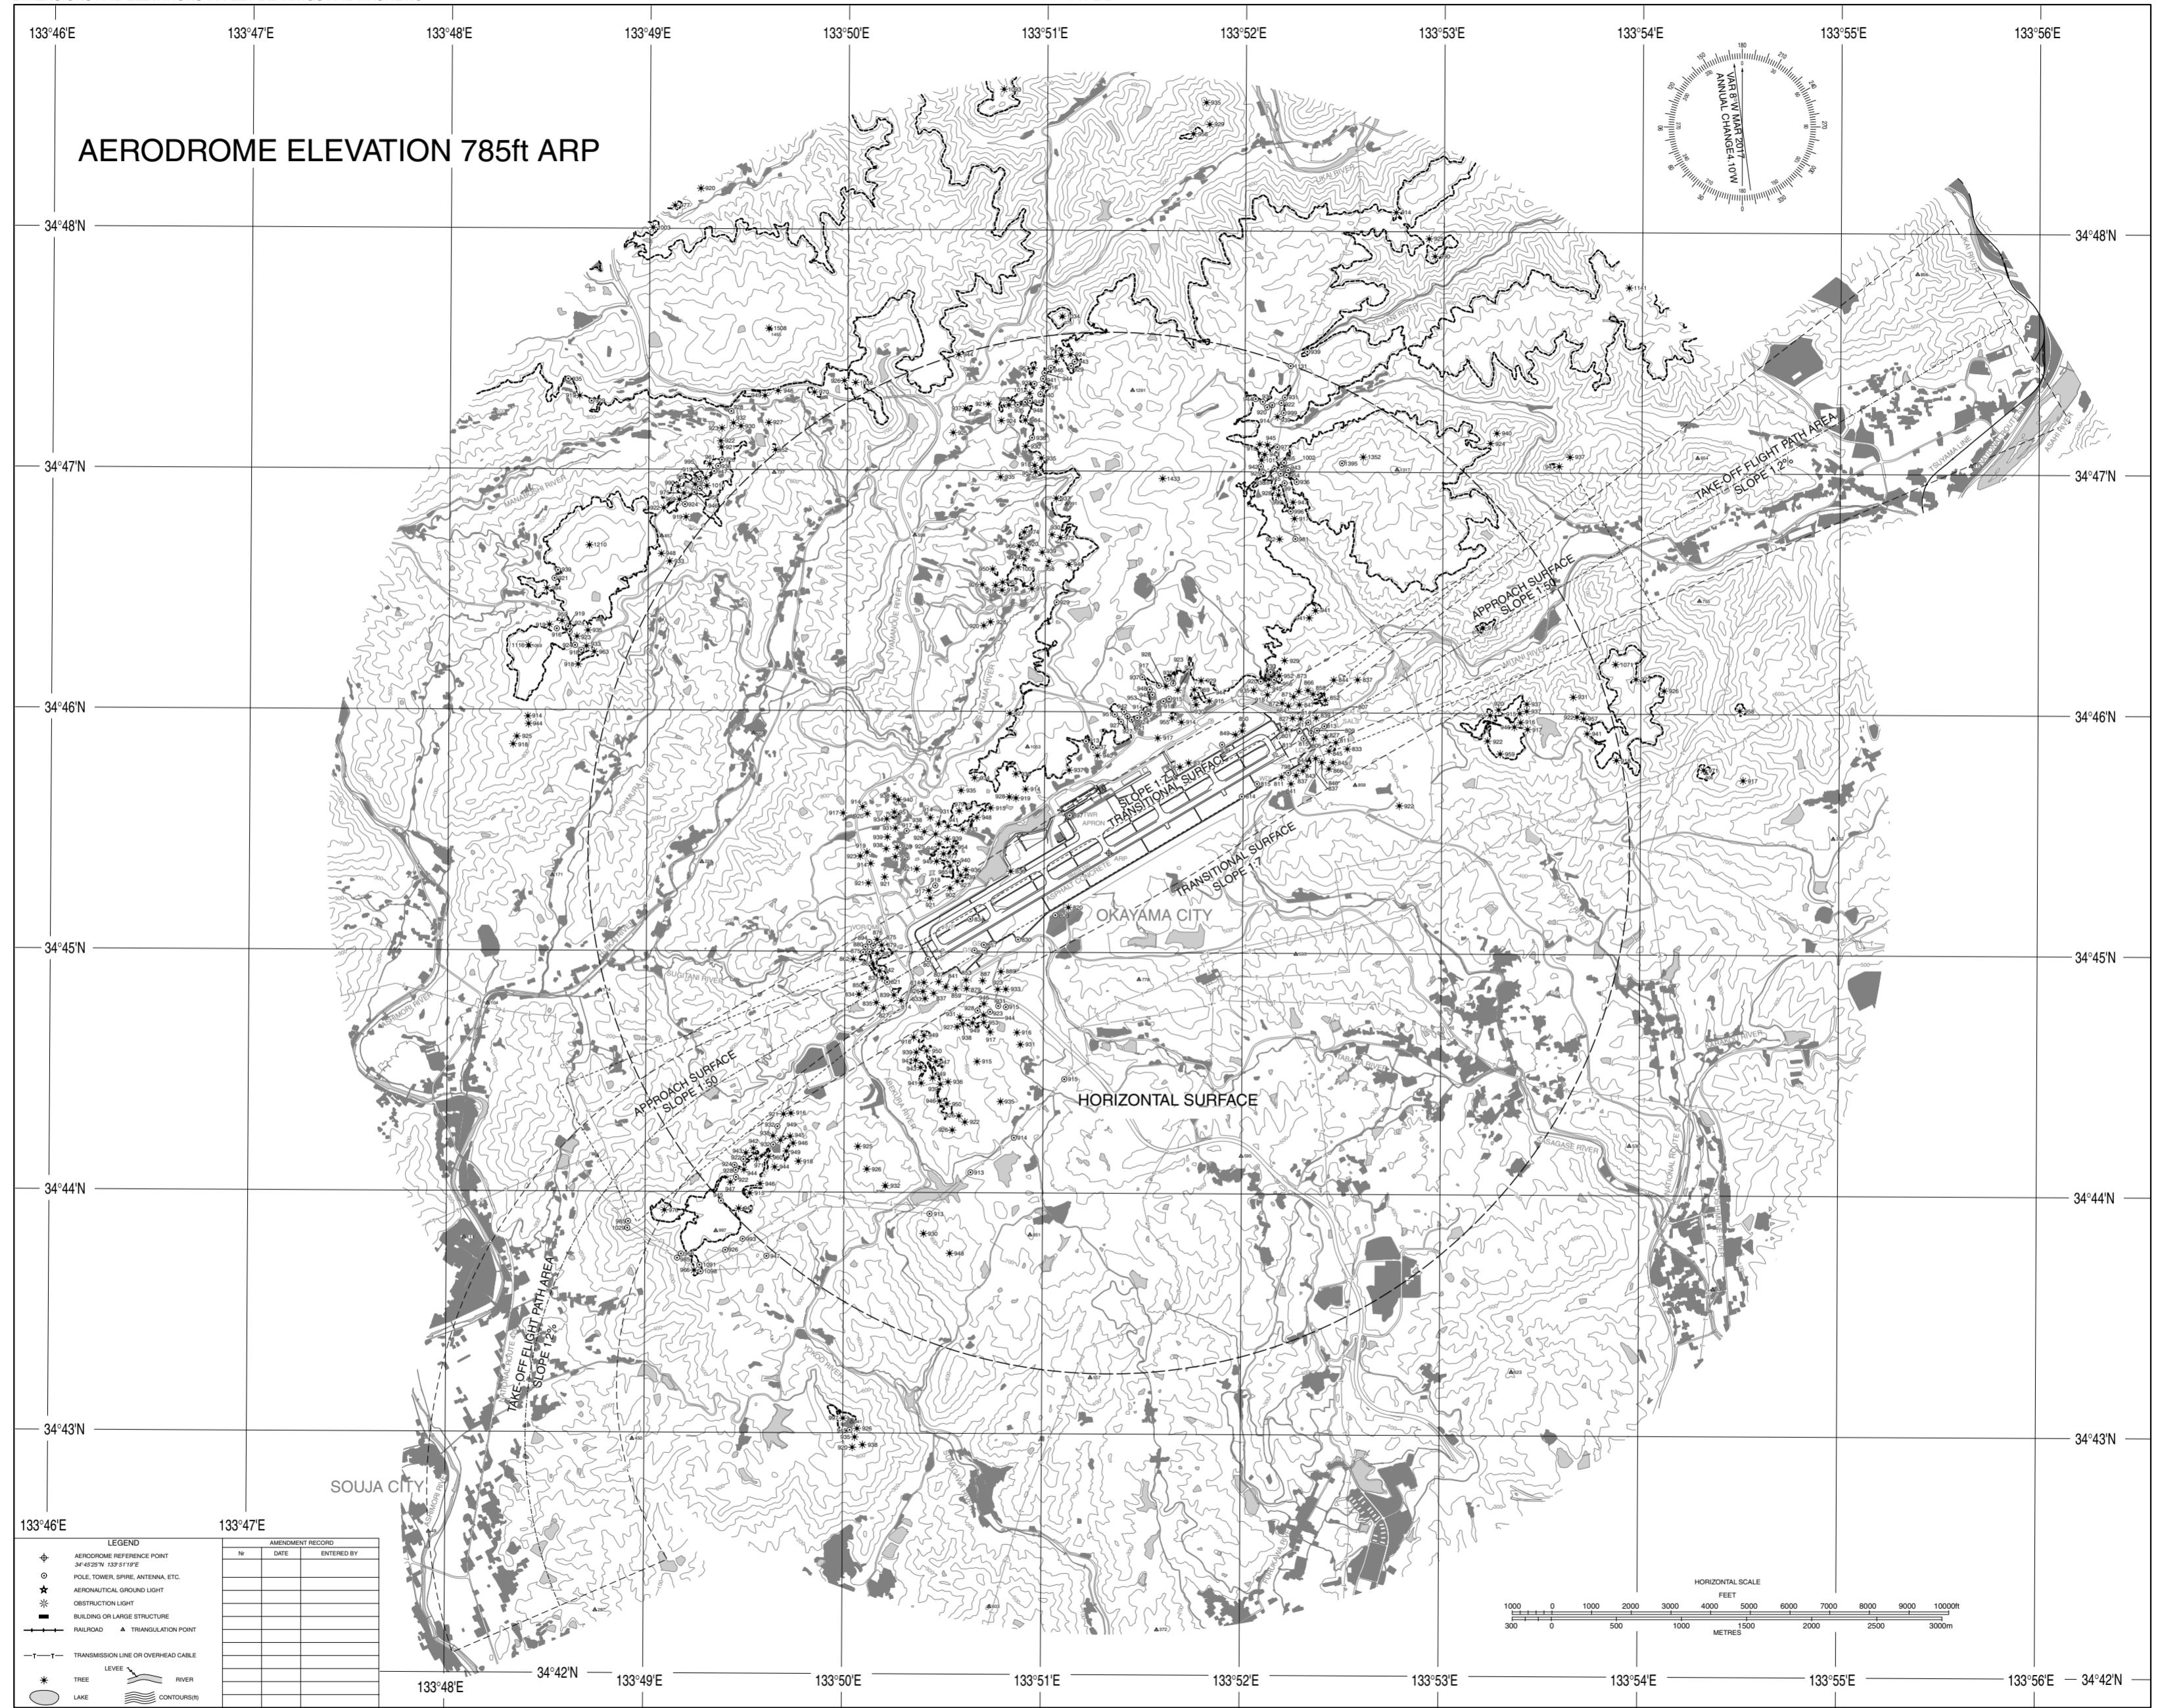

STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA

SID

KIBI REVERSAL SIX DEPARTURE

RWY 07 : Climb RWY HDG to 1400FT, via OYE R071 to 9.0DME, turn right,...

RWY 25 : Climb RWY HDG to 1400FT, turn left, via OYE R226 to 6.0DME, turn left,...
...direct to OYE VOR/DME.

Cross OYE VOR/DME at or above 5000FT.

Note RWY07 : 5.3% climb gradient required up to 1400FT.

OBST ALT 1083FT located at 1.0NM 047° FM end of RWY07.

RWY25 : 4.0% climb gradient required up to 1400FT.

OBST ALT 1017FT located at 1.1NM 228° FM end of RWY25.

KIBI REVERSAL SIX DEPARTURE



STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA

SID

CHIZU TWO DEPARTURE

RWY 07 : Climb RWY HDG to 1400FT, via OYE R071 to CHIZU.
 Cross OYE R071/20.0DME at or above 11000FT.

RWY 25 : Climb RWY HDG to 1400FT, turn left, via OYE R226 to 6.0DME, turn left,
 direct to OYE VOR/DME, via OYE R071 to CHIZU.
 Cross OYE VOR/DME at or above 5000FT.
 Cross OYE R071/20.0DME at or above 11000FT.

Note RWY07 : 5.3% climb gradient required up to 1400FT.

OBST ALT 1083FT located at 1.0NM 047° FM end of RWY07.

RWY25 : 4.0% climb gradient required up to 1400FT.
 OBST ALT 1017FT located at 1.1NM 228° FM end of RWY25.



STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA


TRANSITION

MIYAZU TRANSITION

From over CHIZU, via YME R236 to YME VOR/DME.
Cross YME R236/10.0DME at assigned altitude.

OTSU TRANSITION

From over CHIZU, via CUE R278 to CUE VOR/DME.
Cross CUE R278/35.0DME (YME R190) at assigned altitude.

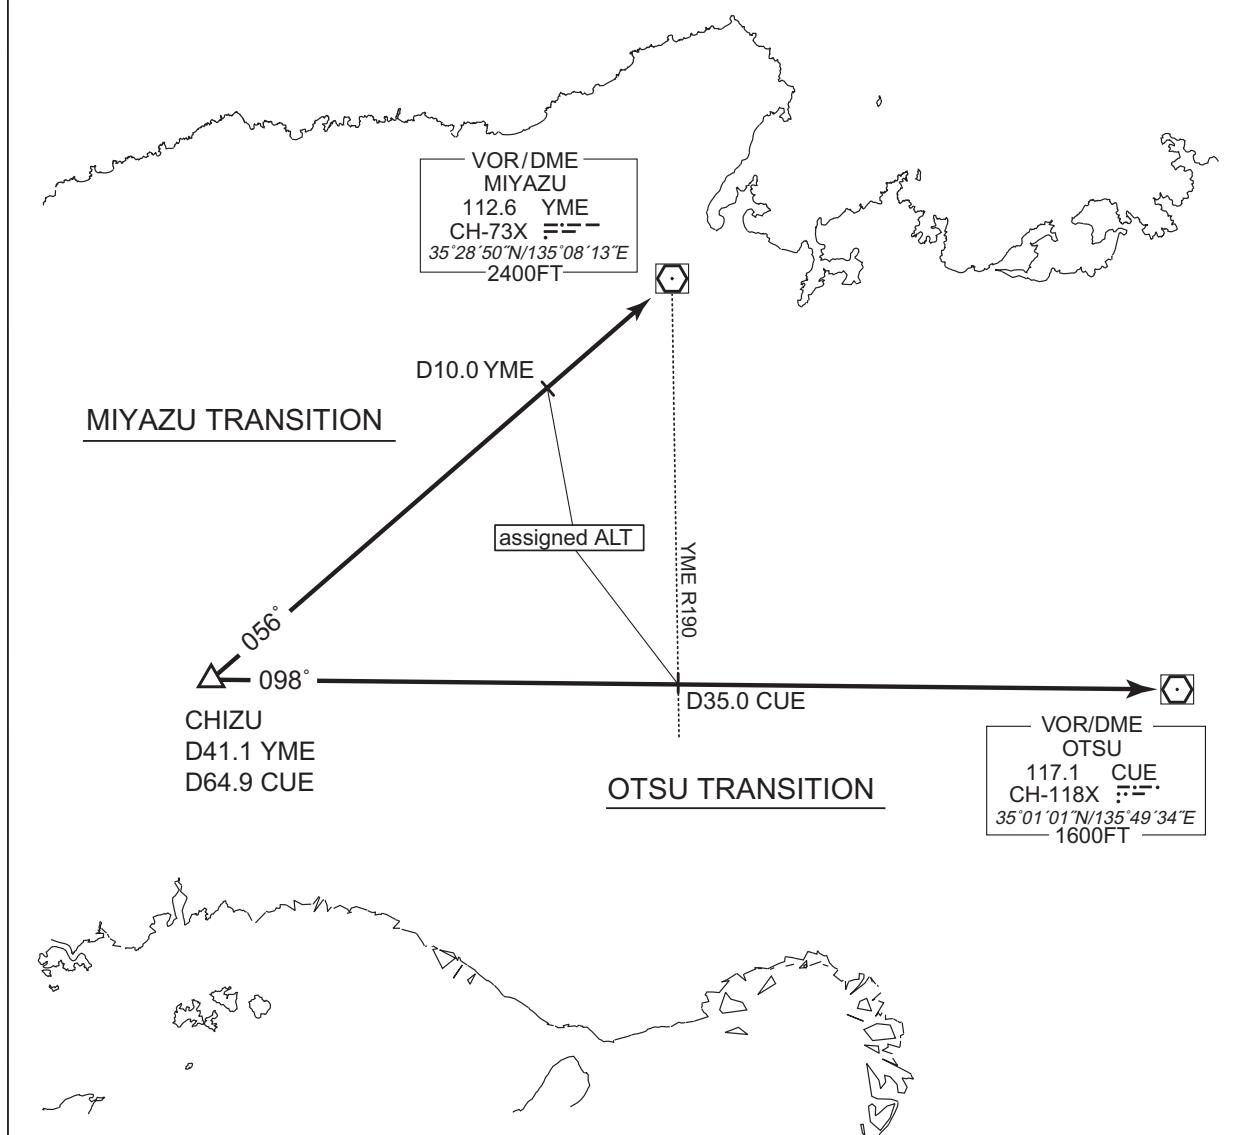

STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA

RNAV SID and TRANSITION

OLIVE THREE DEPARTURE
SANDA TRANSITION / SHTLE TRANSITION

Basic RNP1

Note GNSS required.

VAR 8°W (2016)

OLIVE THREE DEPARTURE

RWY07 : Climb on HDG067° at or above 1400FT, direct to OB700, to OLIVE.

RWY25 : Climb on HDG247° at or above 1400FT, turn left direct to OLIVE.

Note RWY07 : 5.4% climb gradient required up to 1400FT.

OBST ALT 1922FT located at 3.8NM 118° FM end of RWY07.

RWY25 : 4.0% climb gradient required up to 1600FT.

OBST ALT 1922FT located at 5.0NM 104° FM end of RWY25.

SANDA TRANSITION

From OLIVE, to HYOGO, to SANDA.

SHTLE TRANSITION

From OLIVE, to HYOGO, to SANDA, to SHTLE.

STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA

RNAV SID and TRANSITION

OLIVE THREE DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.1)	-7.7	—	—	+1400	—	—	Basic RNP1
002	DF	OB700	—	—	-7.7	—	—	—	—	—	Basic RNP1
003	TF	OLIVE	—	103 (094.9)	-7.7	25.8	—	—	—	—	Basic RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.1)	-7.7	—	—	+1400	—	—	Basic RNP1
002	DF	OLIVE	—	—	-7.7	—	L	—	—	—	Basic RNP1

SANDA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLIVE	—	—	-7.7	—	—	—	—	—	Basic RNP1
002	TF	HYOGO	—	085 (076.8)	-7.7	27.6	—	—	—	—	Basic RNP1
003	TF	SANDA	—	084 (076.4)	-7.7	18.6	—	—	—	—	Basic RNP1

SHTLE TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OLIVE	—	—	-7.7	—	—	—	—	—	Basic RNP1
002	TF	HYOGO	—	085 (076.8)	-7.7	27.6	—	—	—	—	Basic RNP1
003	TF	SANDA	—	084 (076.4)	-7.7	18.6	—	—	—	—	Basic RNP1
004	TF	SHTLE	—	102 (093.9)	-7.7	78.3	—	—	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA

RNAV SID

WASYU TWO DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2016)

VOR/DME
KIBI
111.0 OYE
CH-47X
34°45'01"N/133°50'06"E
900FT

067°
1400
1400

WASYU TWO DEPARTURE


DANGO
343251.6N
1333654.4E

7000

WASYU
342817.5N
1332301.1E

123°

256°

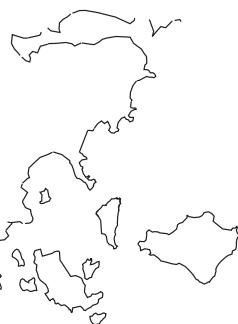WASYU TWO DEPARTURE

RWY07 : Climb on HDG067° at or above 1400FT, turn right direct to DANGO at or above 7000FT, to WASYU.

RWY25 : Climb on HDG247° at or above 1400FT, turn left direct to DANGO at or above 7000FT, to WASYU.

Note RWY07 : 5.4% climb gradient required up to 2300FT.

OBST ALT 1922FT located at 3.8NM 118° FM end of RWY07.

RWY25 : 4.0% climb gradient required up to 1400FT.

OBST ALT 1018FT located at 1.1NM 227° FM end of RWY25.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.1)	-7.7	—	—	+1400	—	—	Basic RNP1
002	DF	DANGO	—	—	-7.7	—	R	+7000	—	—	Basic RNP1
003	TF	WASYU	—	256 (248.3)	-7.7	12.3	—	—	—	—	Basic RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.1)	-7.7	—	—	+1400	—	—	Basic RNP1
002	DF	DANGO	—	—	-7.7	—	L	+7000	—	—	Basic RNP1
003	TF	WASYU	—	256 (248.3)	-7.7	12.3	—	—	—	—	Basic RNP1

INSTRUMENT APPROACH CHART




INSTRUMENT APPROACH CHART

RJOB / OKAYAMA

ILS Y RWY07



INSTRUMENT APPROACH CHART

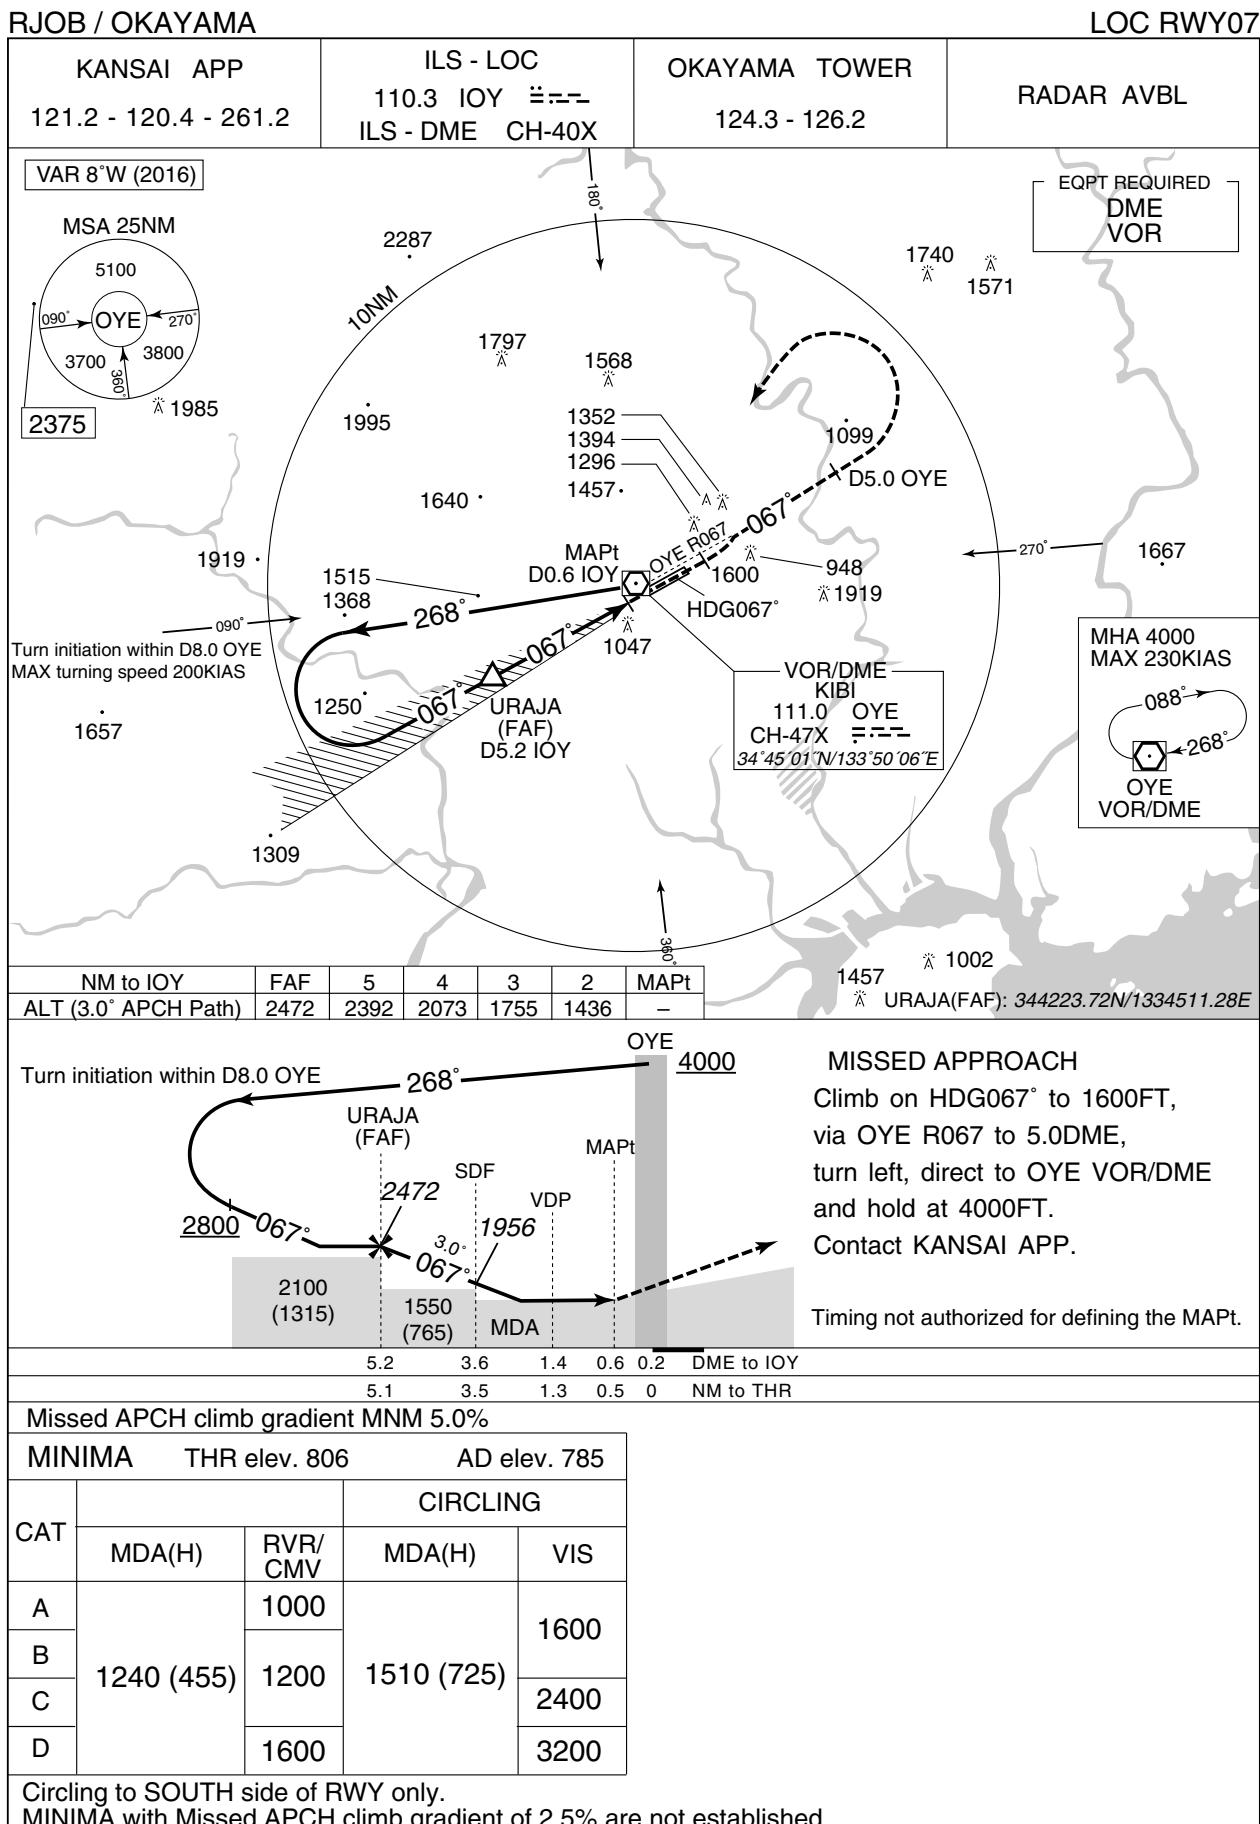

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJOB / OKAYAMA


RNAV(RNP) RWY07

KANSAI APP 121.2 - 120.4 - 261.2	GNSS and RF required	OKAYAMA TOWER 124.3 – 126.2	RADAR AVBL
-------------------------------------	----------------------	--------------------------------	------------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

VAR 7°W (2014)

MSA RW07 25NM



Aeronautical chart detail showing runway RW07, Obstruction B752, and various flight levels.

GNSS and RF required

OKAYAMA TOWER
124.3 126.2

RADAR AVBL

A horizontal number line starting at 1 and ending at 10. Tick marks are present at every integer from 1 to 10. Above the line, the label "KM" is positioned directly above the 10 mark. Below the line, the label "NM" is positioned directly below the 10 mark.

NOT TO SCALE

VOR/DME KIBI 111.0 OYE CH-47X	BENES (MAHF) D16.6 OYE
34°45'01"N/133°50'06"E	MHA4000 MAX 210KIAS

RW07
OB752
OB751 (FAF)
INARI (IF)
3500
1070
1369
1318
1346
981
1546
1303
941
1053
20°
066°
63°
066°
1922
1001
1047
1119
1247
1503
1025
1378
1428
1670
3.8
3.1
260°
R080
D22.0
OYE
080°
MAX 185KIAS
MAX 210KIAS
10NM

MISSED APPROACH

Climb to 4000FT, to OB753,
to BENES and hold.

Contact KANSAI APP.

RNP AR

Special Authorization Required

Missed APCH climb gradient MNM 4.0%.

INSTRUMENT APPROACH CHART

RJOB / OKAYAMA

RNAV(RNP) RWY07

RNAV (RNP) RWY07

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [°M(°T)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	BENES	—	—	-7.4	—	—	+4000	—	—	—
002	TF	INARI	—	238 (231.0)	-7.4	14.0	—	+3500	—	—	1.0
003	TF	OB750	—	238 (230.9)	-7.4	3.7	—	—	-185	—	1.0
004	RF Center: OBRF1 r=3.07NM	OB751	—	—	-7.4	3.8	R	3500	—	—	1.0
005	RF Center: OBRF1 r=3.07NM	OB752	—	—	-7.4	6.3	R	1507	—	-3.00	0.3
006	TF	RW07	Y	066 (059.1)	-7.4	2.0	—	860	—	-3.00/54	0.3
007	TF	OB753	—	066 (059.1)	-7.4	6.3	—	—	—	—	1.0
008	TF	BENES	—	087 (079.6)	-7.4	10.2	—	4000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
INARI	344115.72N / 1335605.70E	OBRF1	344119.08N / 1335015.95E
OB750	343855.80N / 1335236.42E		
OB751	343843.33N / 1334816.50E		
OB752	344357.48N / 1334821.64E		
RW07	344500.07N / 1335028.89E		
OB753	344814.99N / 1335705.97E		
BENES	345004.35N / 1340919.47E		

INSTRUMENT APPROACH CHART



INSTRUMENT APPROACH CHART

RJOB / OKAYAMA

RNAV(RNP) RWY25

RNAV (RNP) RWY25

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course [°M(°T)]	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	BENES	—	—	-7.4	—	—	+4000	—	—	—
002	TF	BIKAN	—	292 (284.5)	-7.4	5.0	—	+3000	—	—	1.0
003	TF	OB560	—	247 (239.2)	-7.4	4.0	—	3000	—	—	1.0
004	TF	RW25	Y	247 (239.1)	-7.4	6.7	—	854	—	-3.00/50	0.10 0.30
005	TF	OB561	—	246 (239.1)	-7.4	8.8	—	—	—	—	1.0
006	TF	OB562	—	157 (149.3)	-7.4	5.8	—	—	—	—	1.0
007	TF	OB563	—	066 (059.1)	-7.4	5.8	—	—	—	—	1.0
008	TF	BENES	—	059 (051.6)	-7.4	17.4	—	4000	—	—	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
BIKAN	345119.60N / 1340323.18E	—	—
OB560	344916.90N / 1335912.35E		
RW25	344549.88N / 1335210.24E		
OB561	344119.10N / 1334300.25E		
OB562	343617.70N / 1334637.94E		
OB563	343917.37N / 1335242.76E		
BENES	345004.35N / 1340919.47E		

RJOB / OKAYAMA

Visual REP

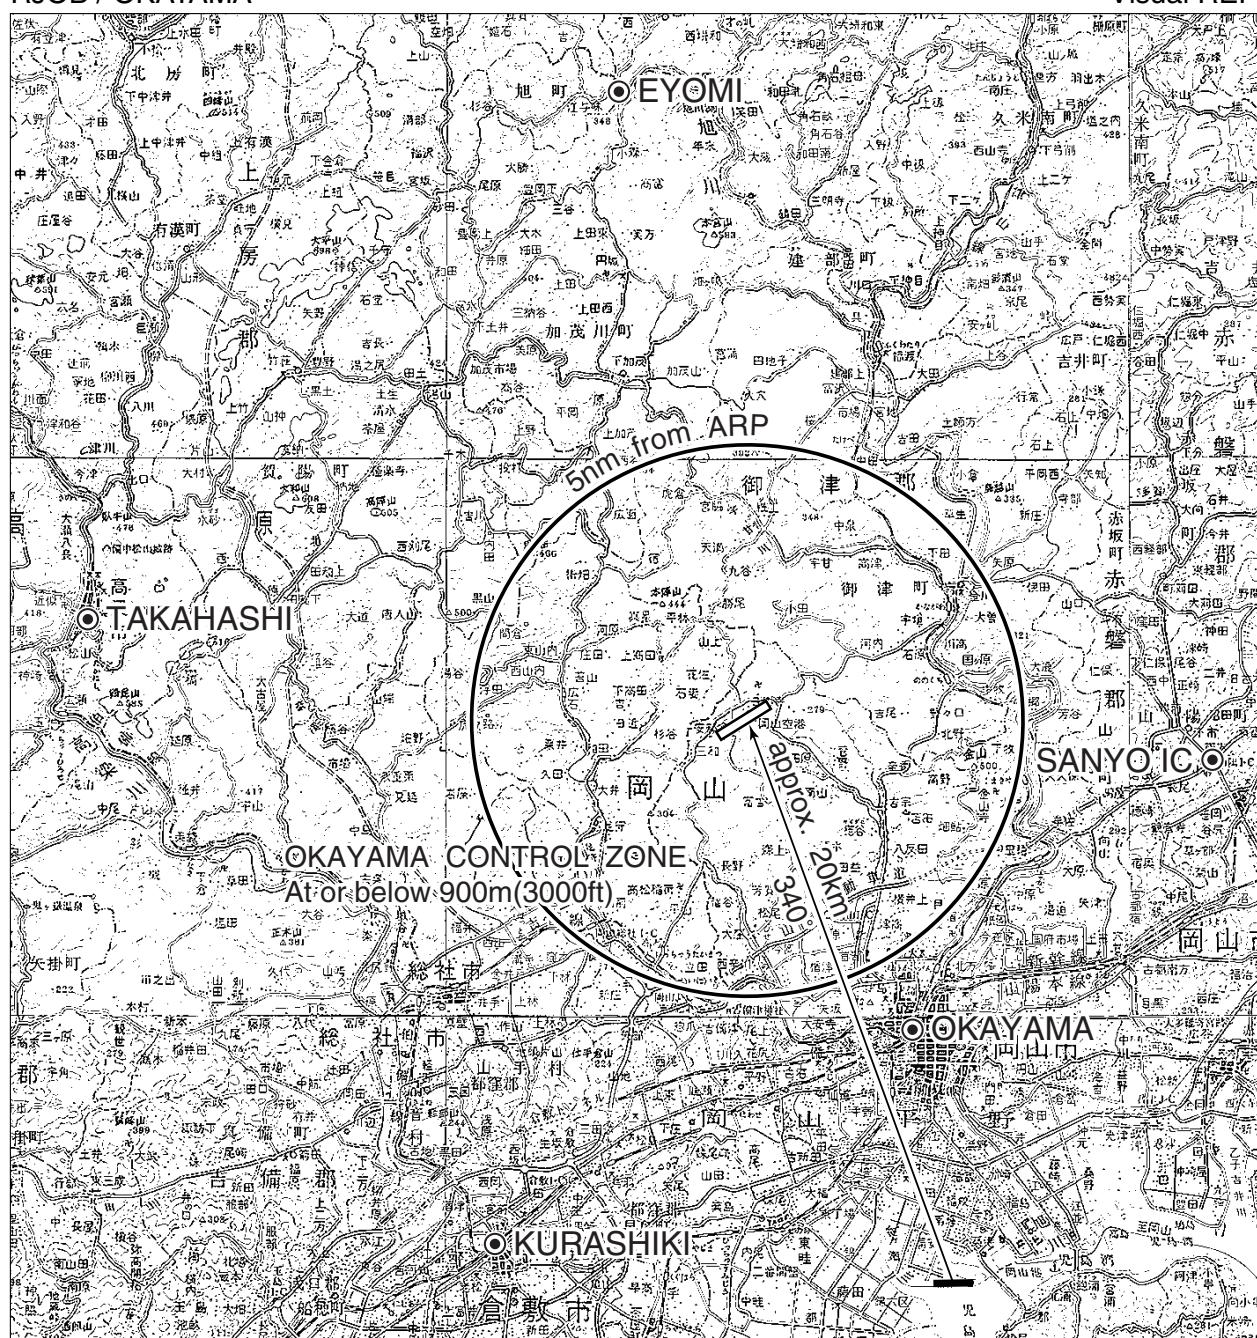

Call sign	BRG / DIST from ARP	Remarks
江与味 Eyomi	356°/11.5NM	江与味橋 Bridge
高梁 Takahashi	285°/11.9NM	JR駅 JR Station
倉敷 Kurashiki	212°/10.2NM	JR駅 JR Station
岡山 Okayama	156°/ 6.2NM	JR駅 JR Station
山陽IC Sanyo IC	102°/ 8.4NM	山陽インターチェンジ Sanyo Highway Interchange

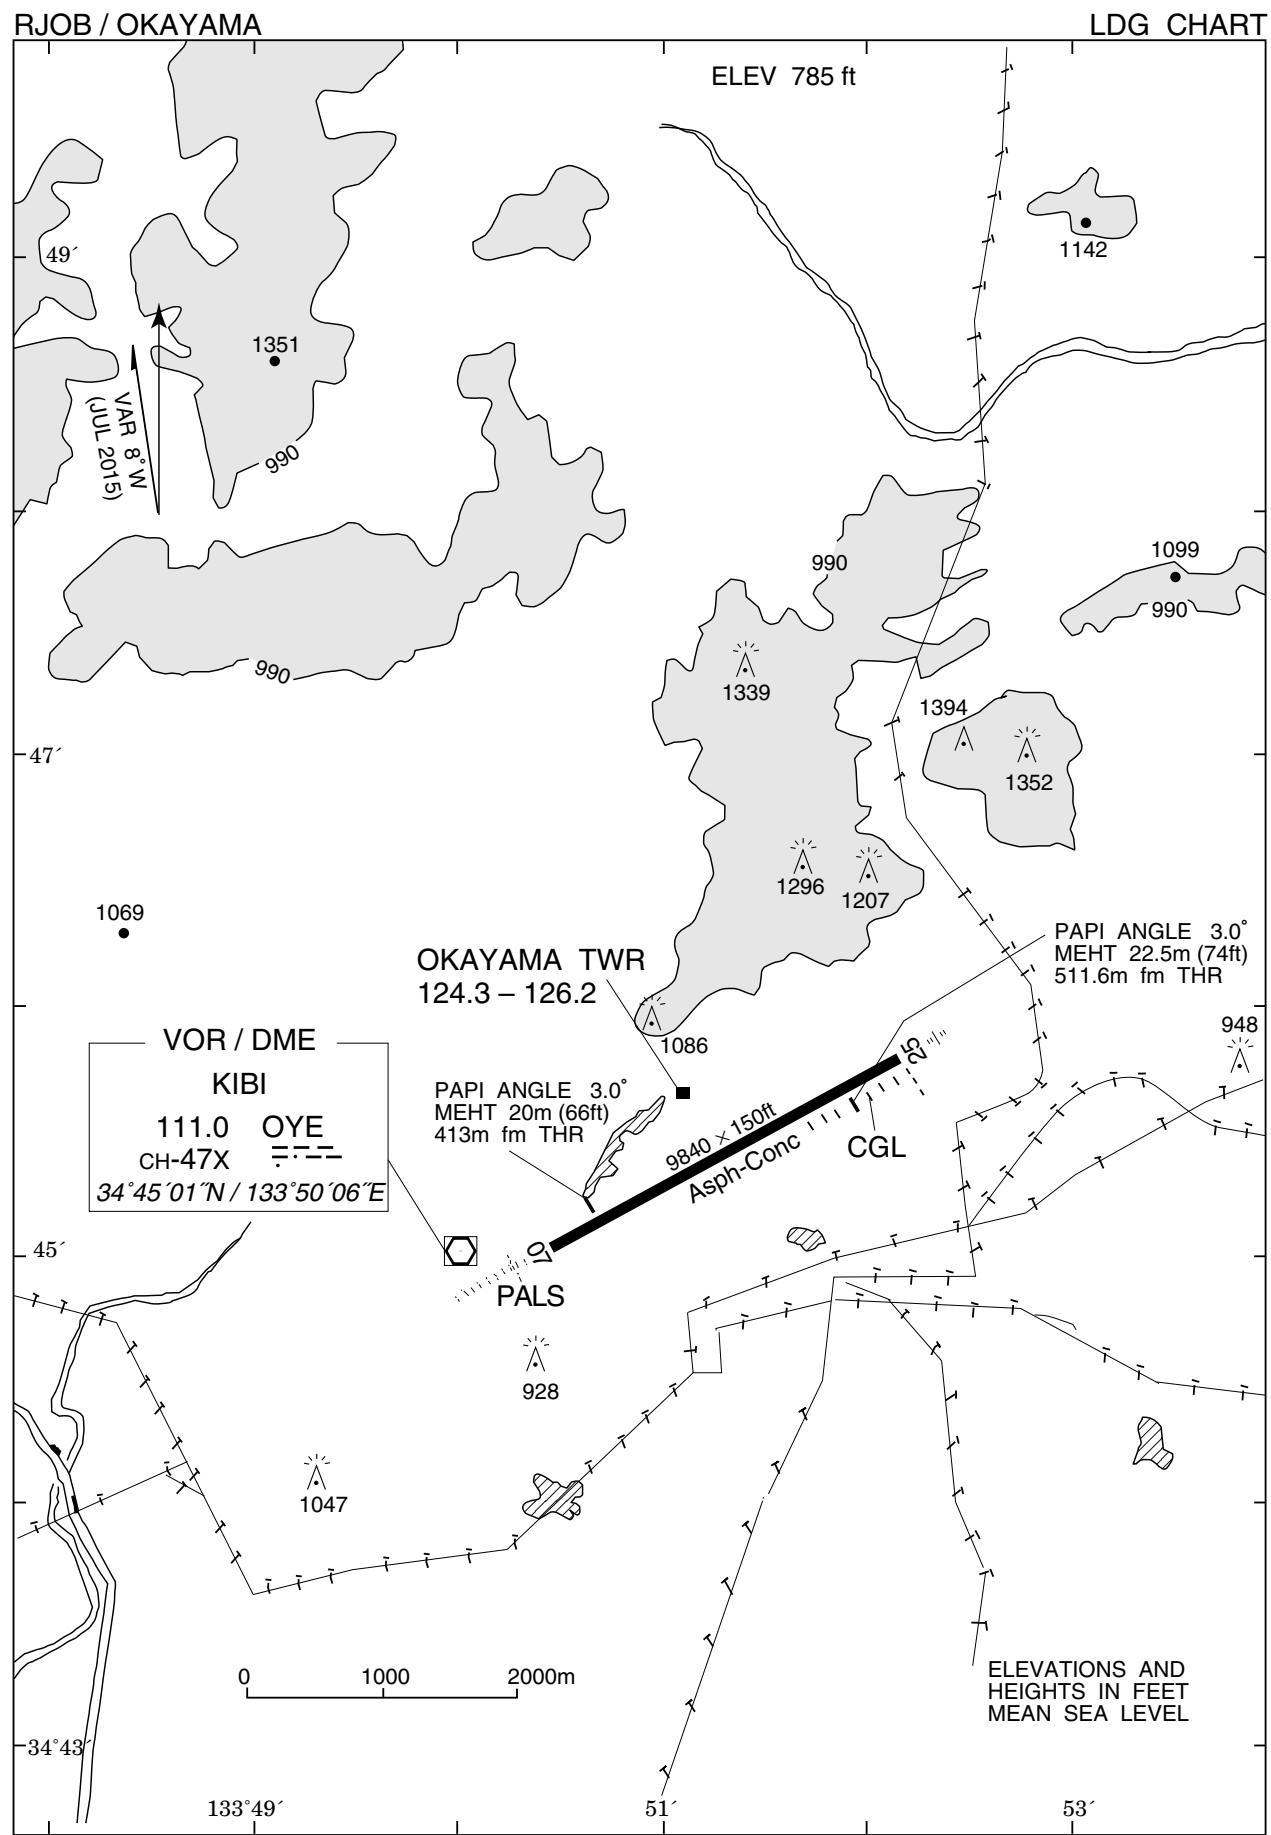

RJOB / OKAYAMA

Minimum Vectoring Altitude CHART

VAR 7°W (2009)



- | | |
|-----------|----------------------|
| (1) 4000 | (1) 342745N/1340555E |
| (2) 5000 | (2) 343708N/1340544E |
| (3) 6000 | (3) 344652N/1341352E |
| (4) 12000 | (4) 344751N/1341904E |

CENTER : 341315N/1340115E (RJOT RADAR SITE)

INTENTIONALLY LEFT BLANK