



AERODROME CHART

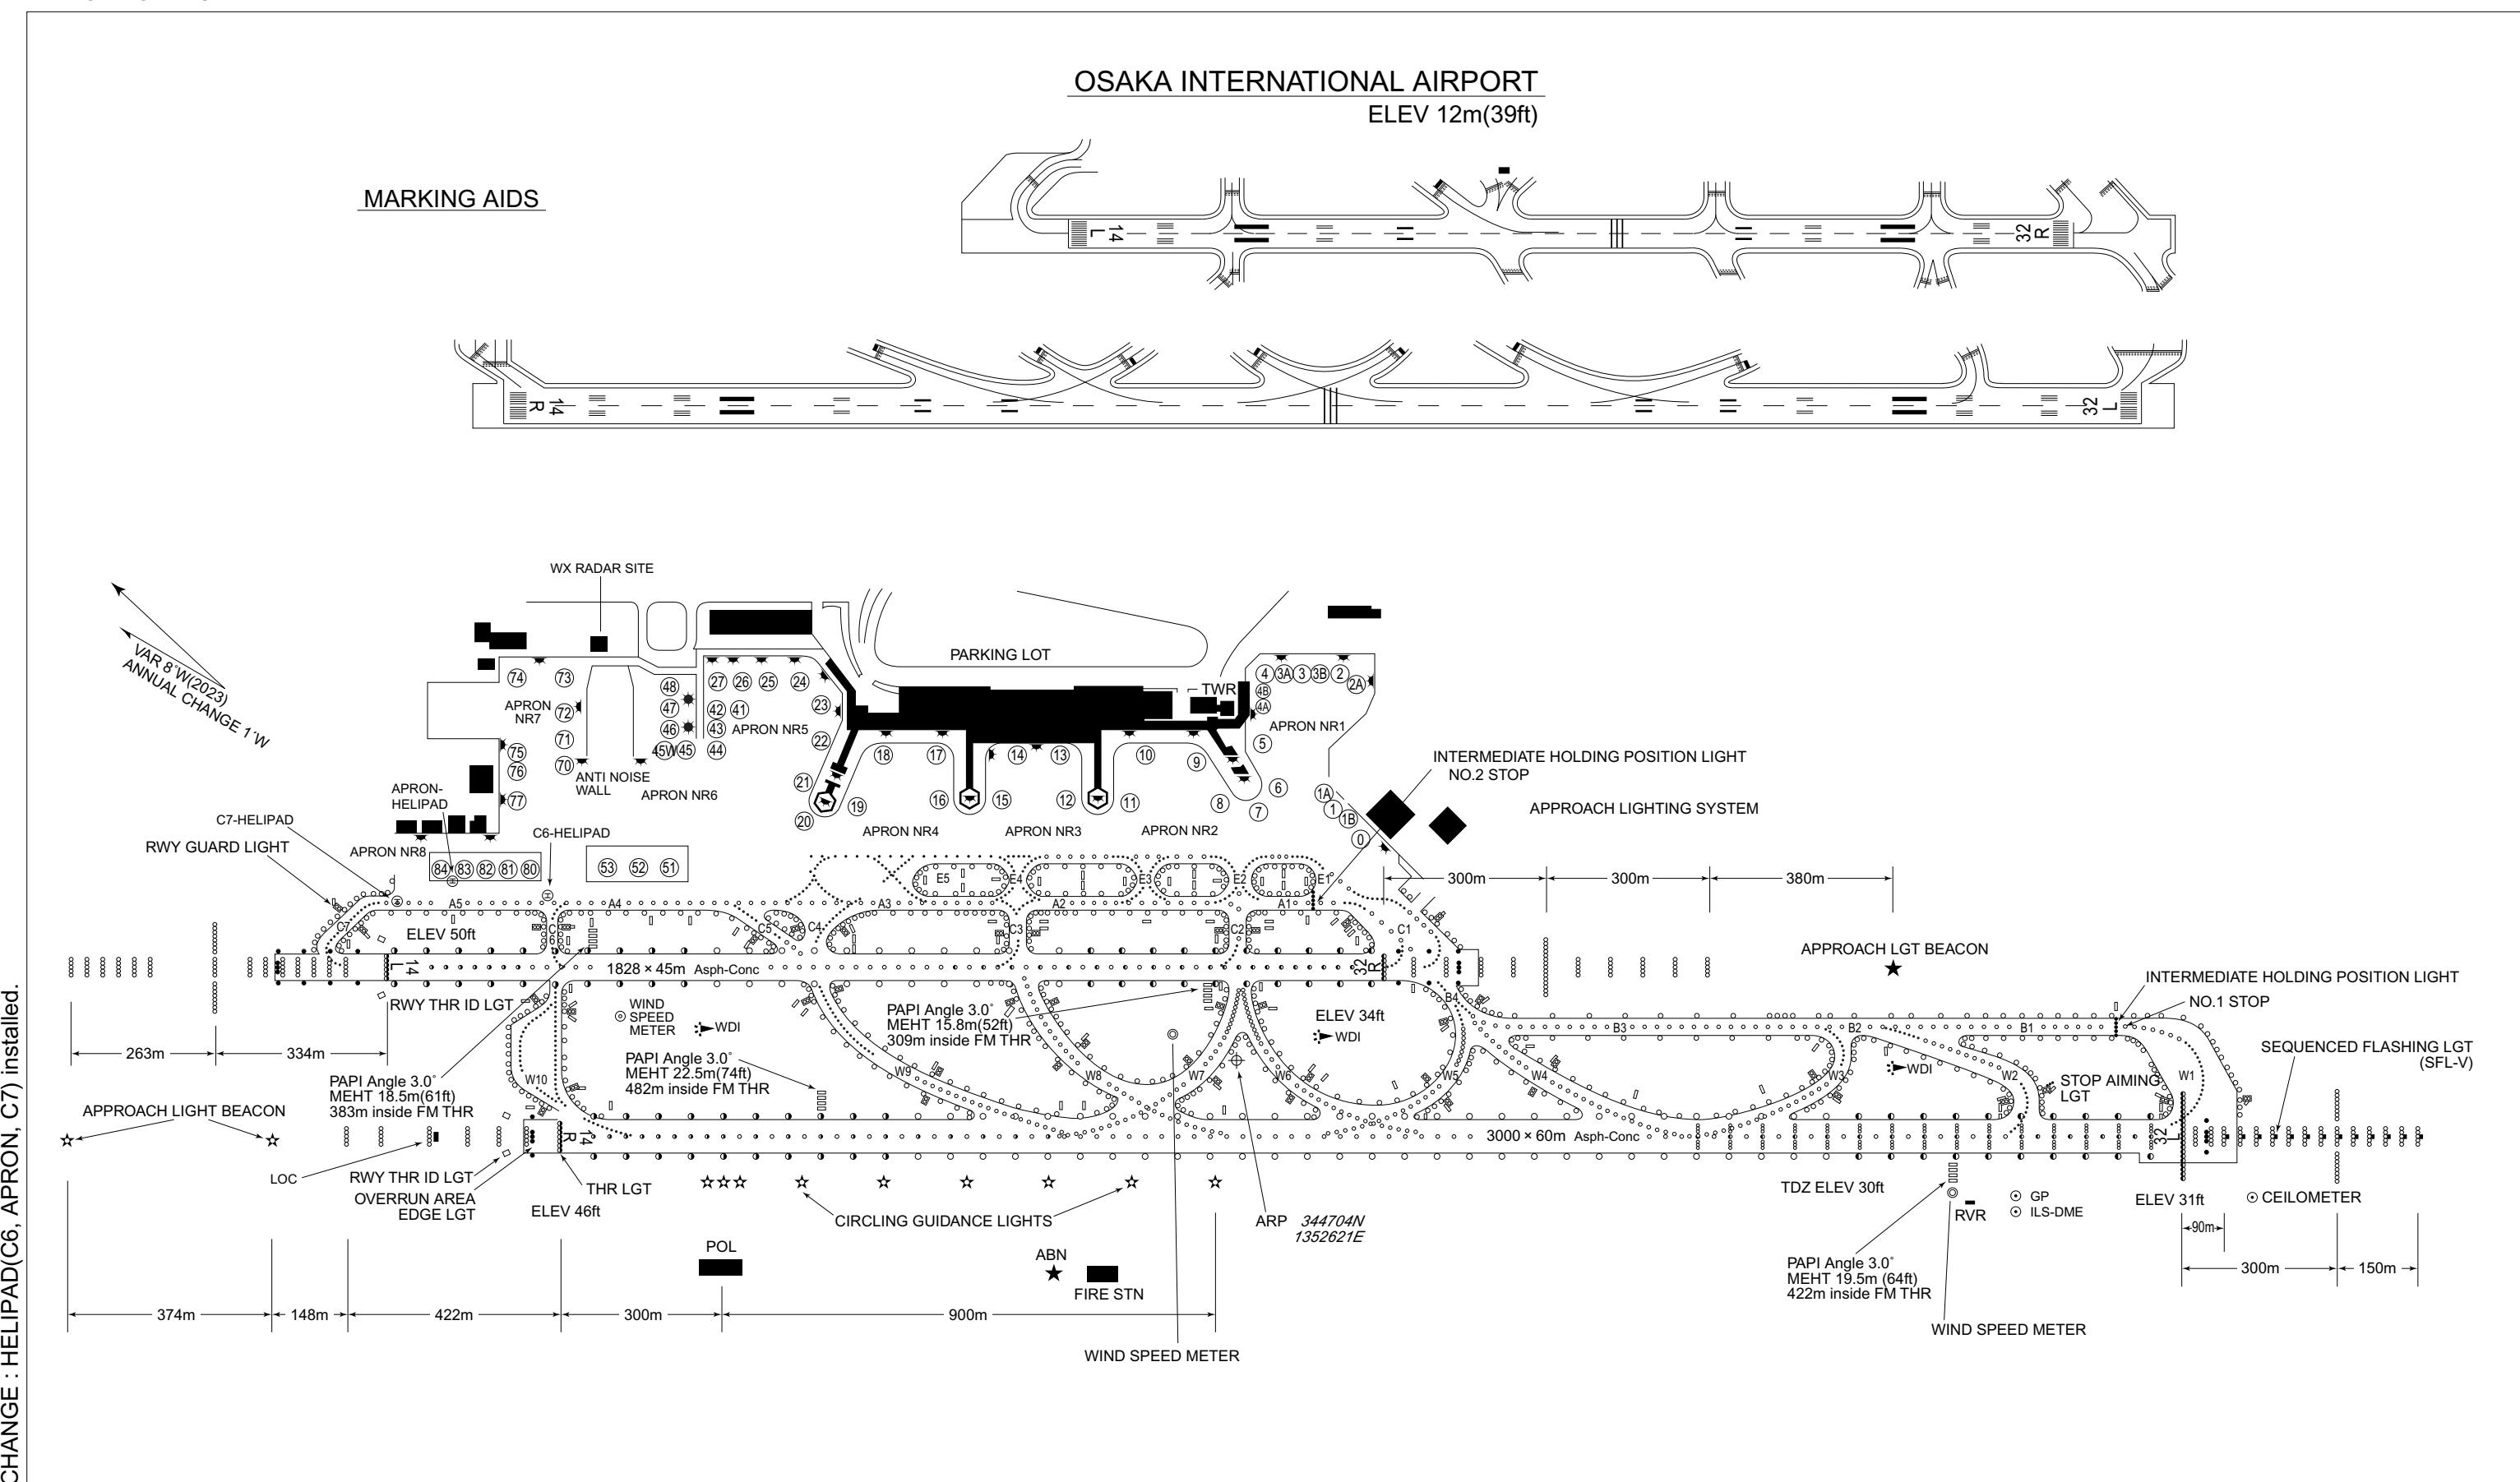

RJOO / OSAKA INTL

AD CHART

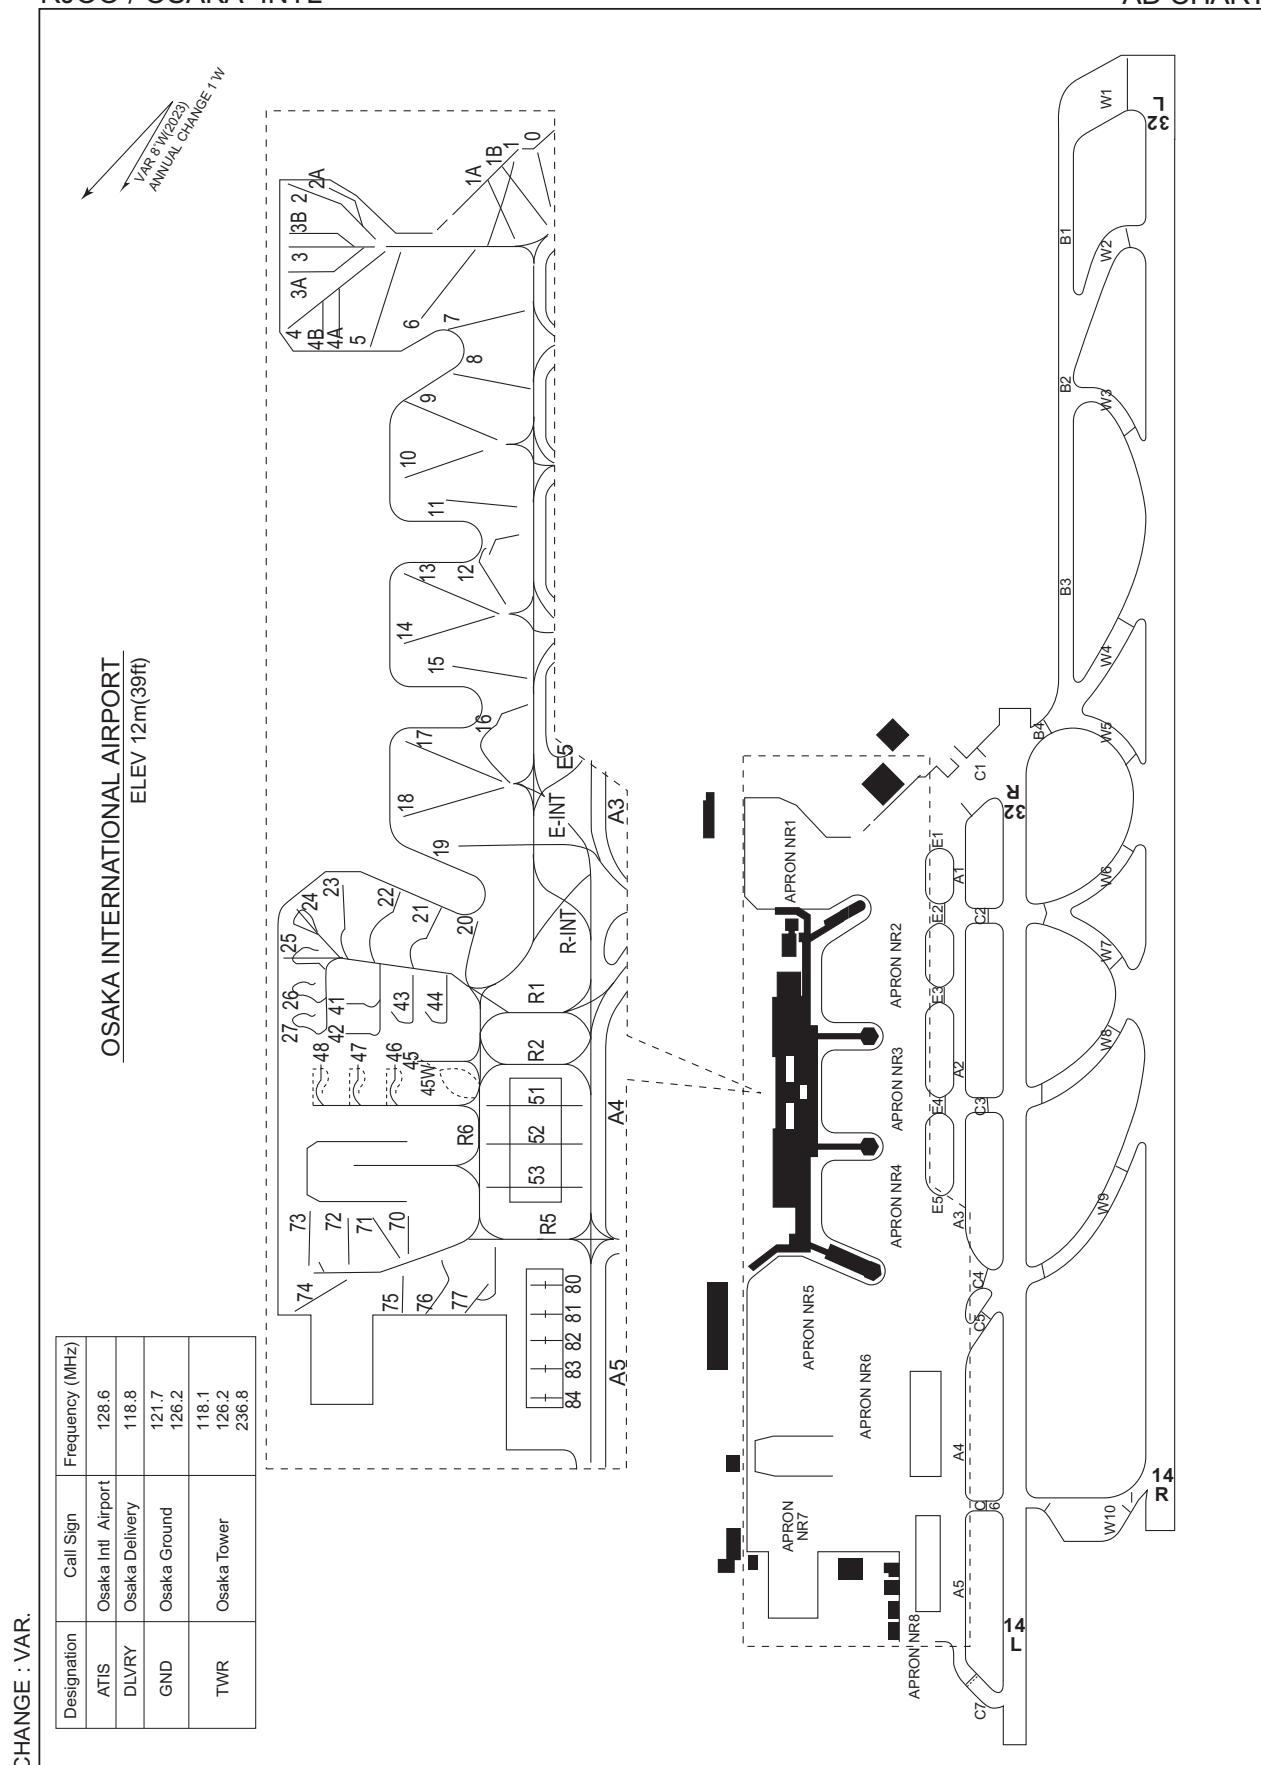

INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 8° W-FEB 2022



AERODROME OBSTACLE CHART-ICAO TYPE A (OPERATING LIMITATIONS)

OSAKA INTERNATIONAL AIRPORT
RWY : 14R/32L

DECLARED DISTANCES


RWY 14R	RWY 32L
3000m TAKE OFF RUN AVAILABLE	3000m
3000m TAKE OFF DISTANCE AVAILABLE	3000m
3000m ACCELERATE STOP DISTANCE AVAILABLE	3000m
3000m LANDING DISTANCE AVAILABLE	3000m

400
300
200
100
45
9842

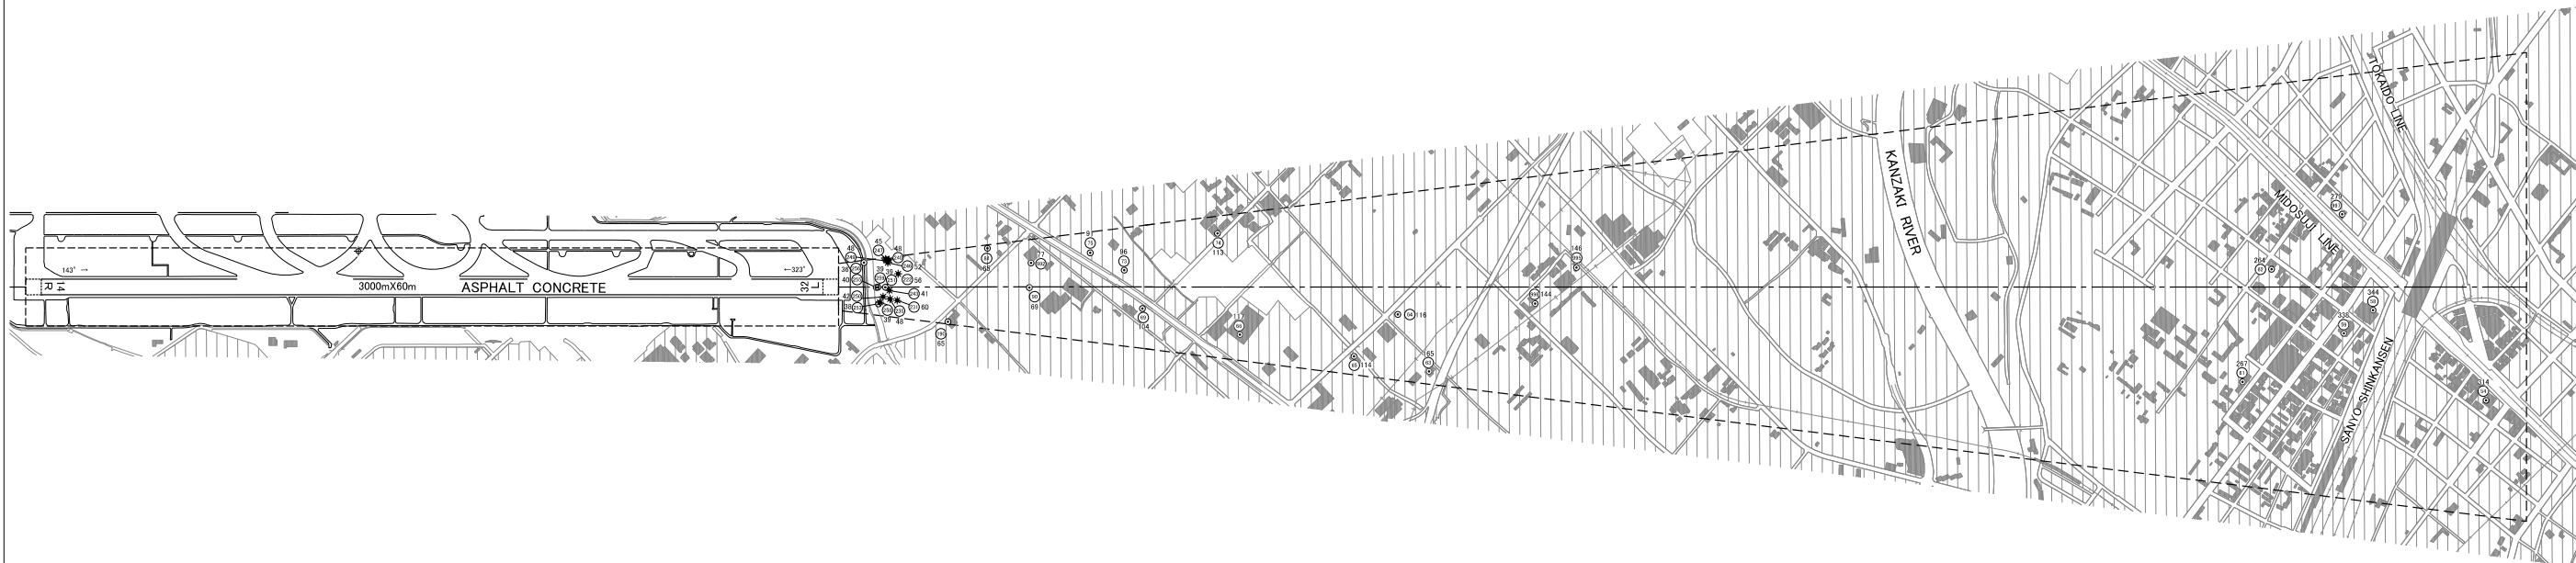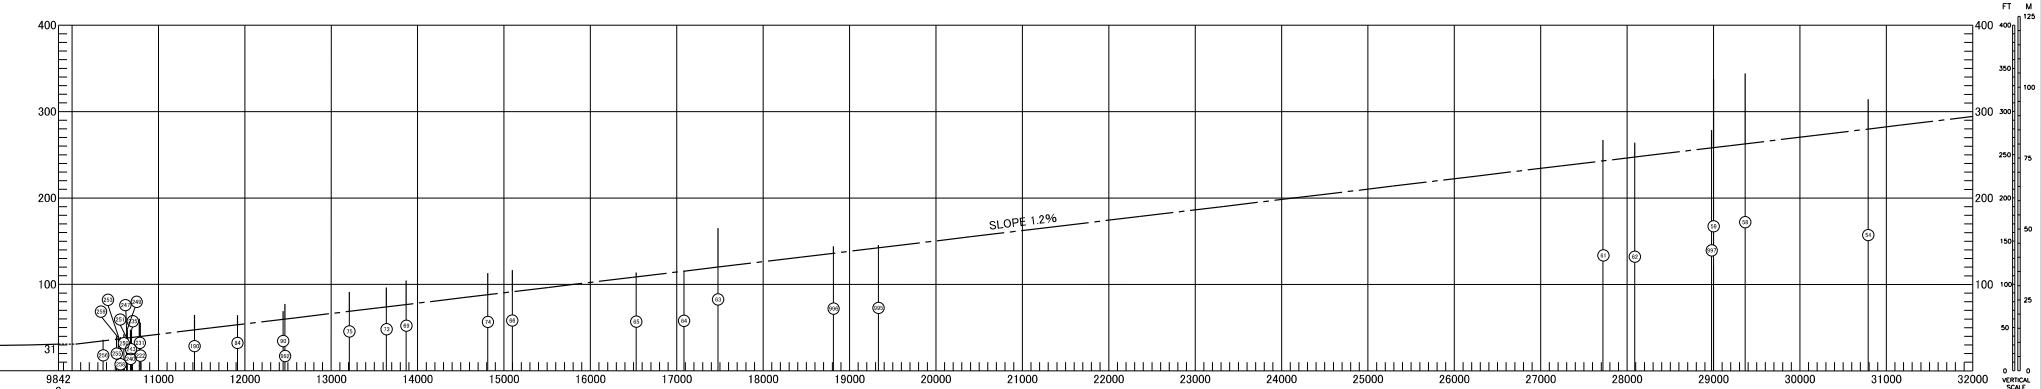

CHANGE : Update


LEGEND		AMENDMENT RECORD		
		NR	DATE	ENTERED BY
	IDENTIFICATION NUMBER			
	POLE, TOWER, SPIRE, ANTENNA, ETC			
	TREE		LEVEE	
	RAILROAD		RIVER	
	TRANSMISSION LINE OR OVERHEAD CABLE			
	TRIANGULATION POINT			
	AERONAUTICAL GROUND LIGHT			



DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC


AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8°W-FEB 2022

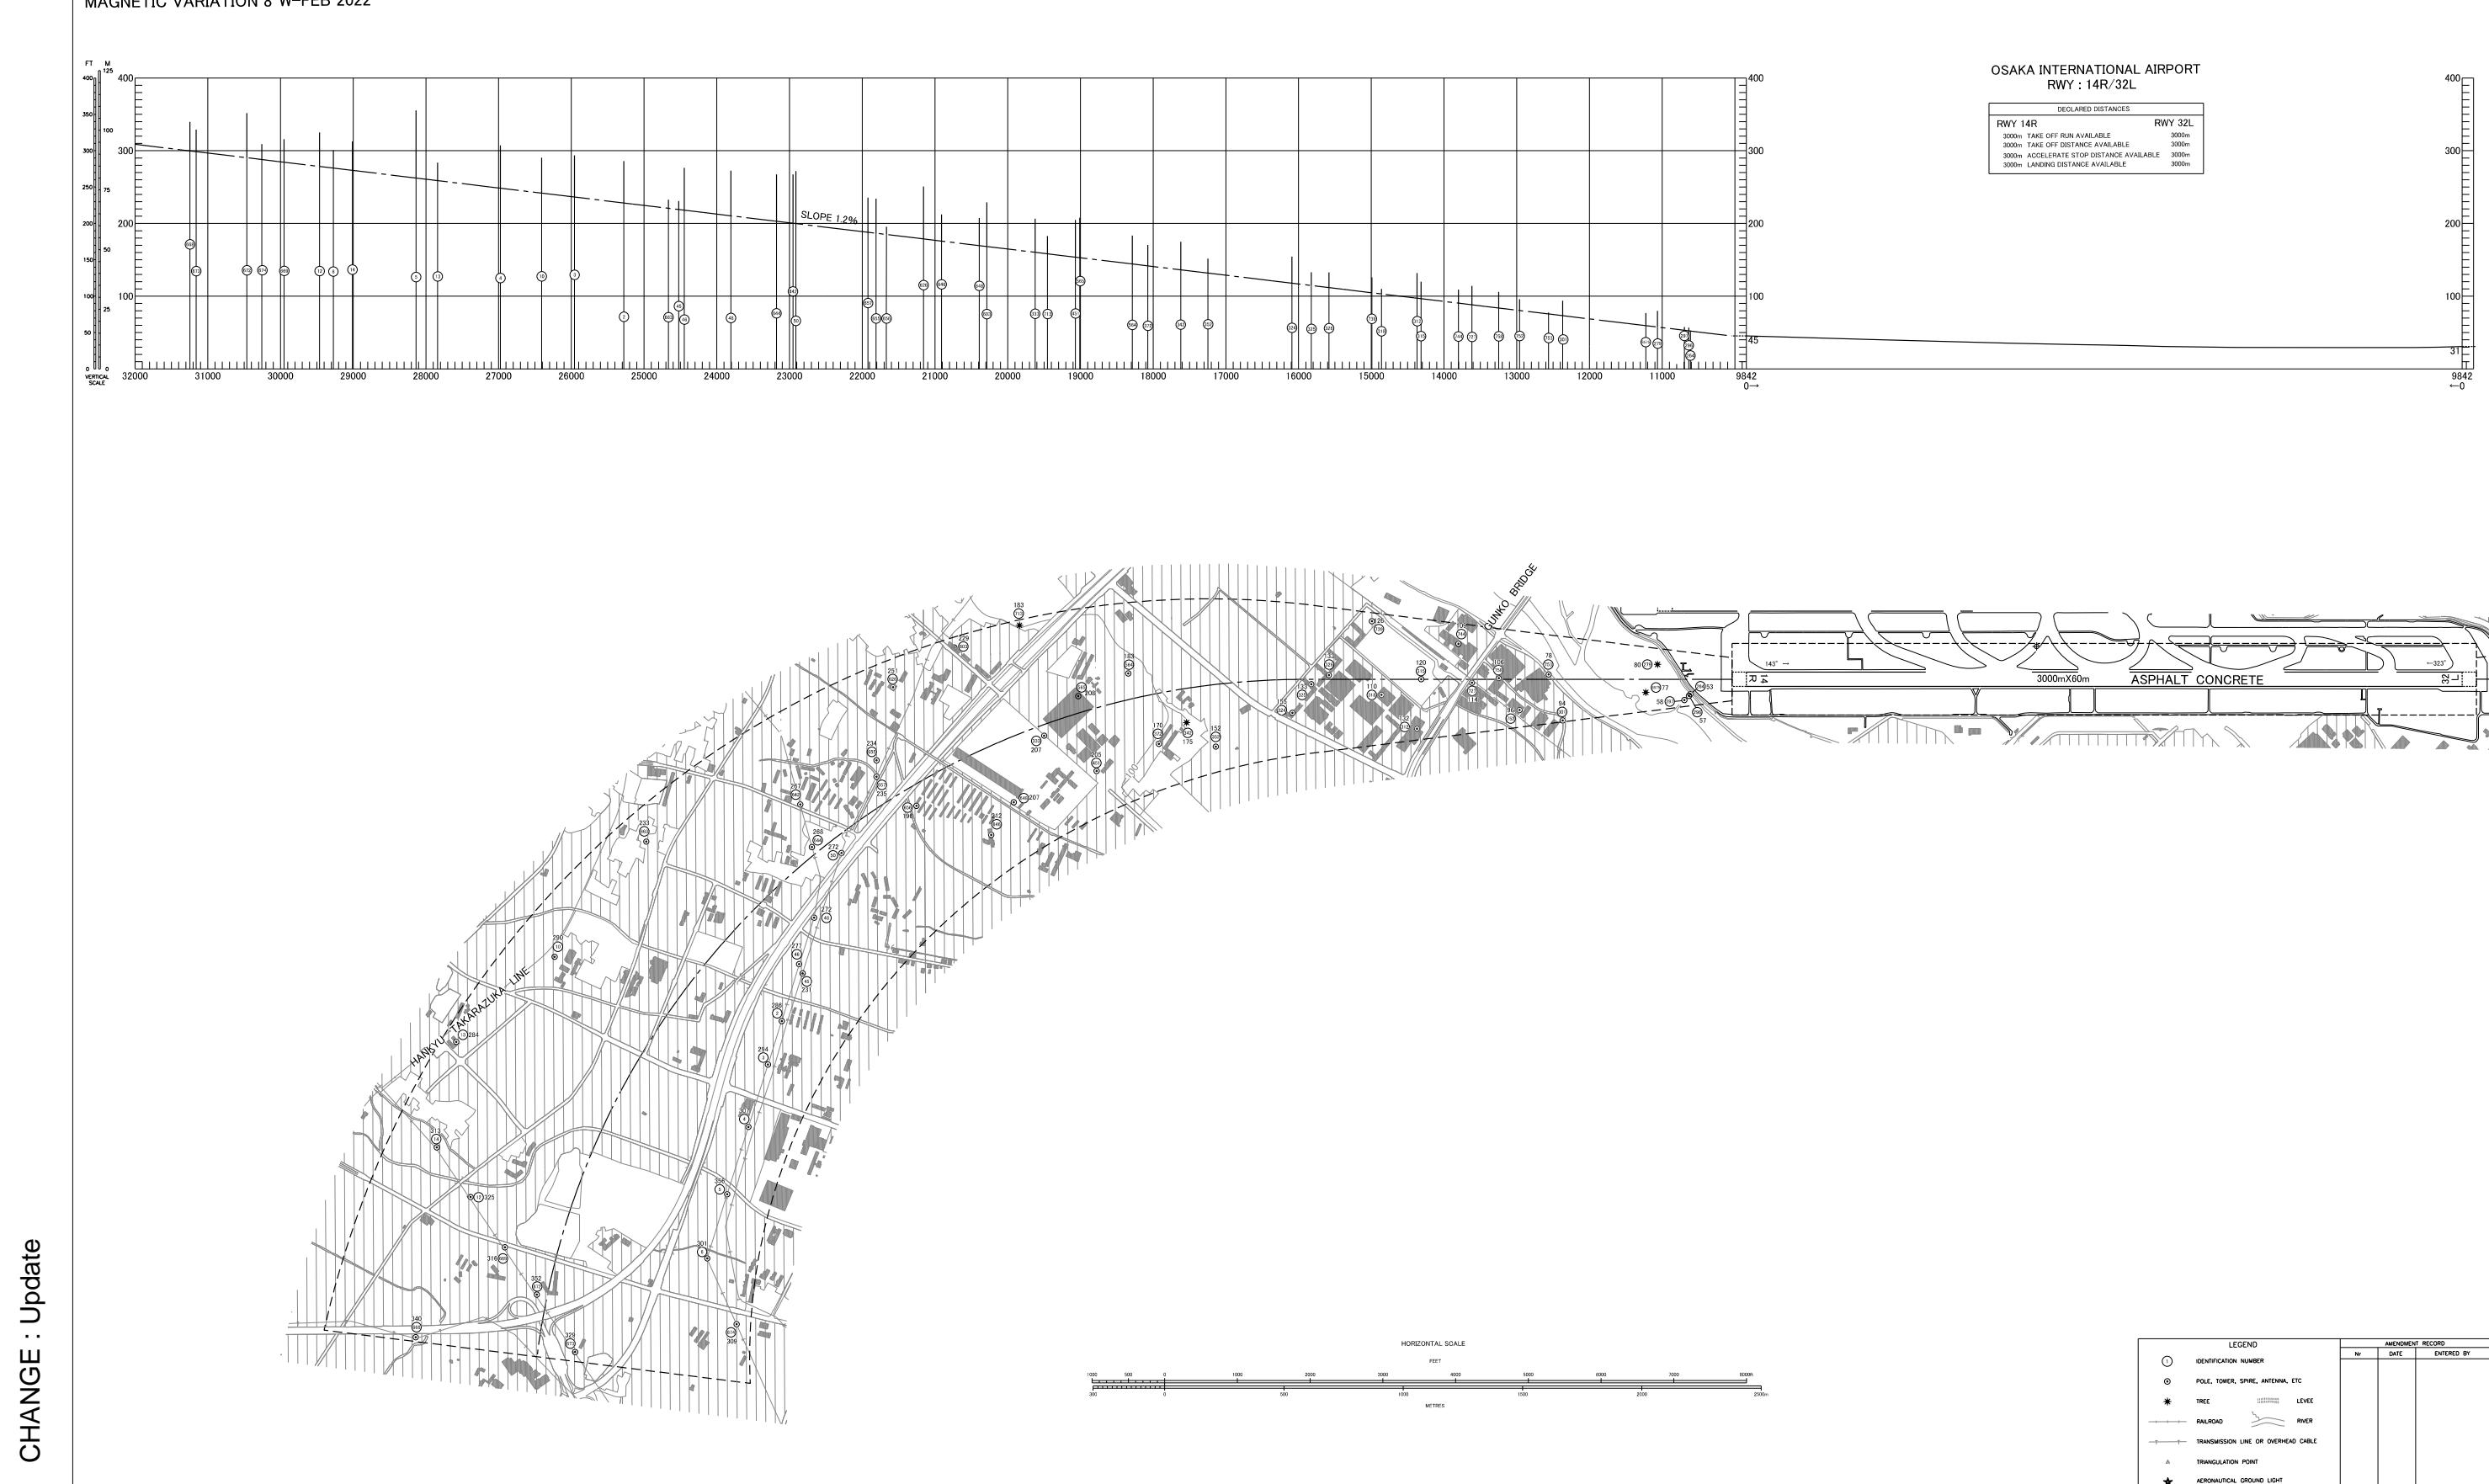

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

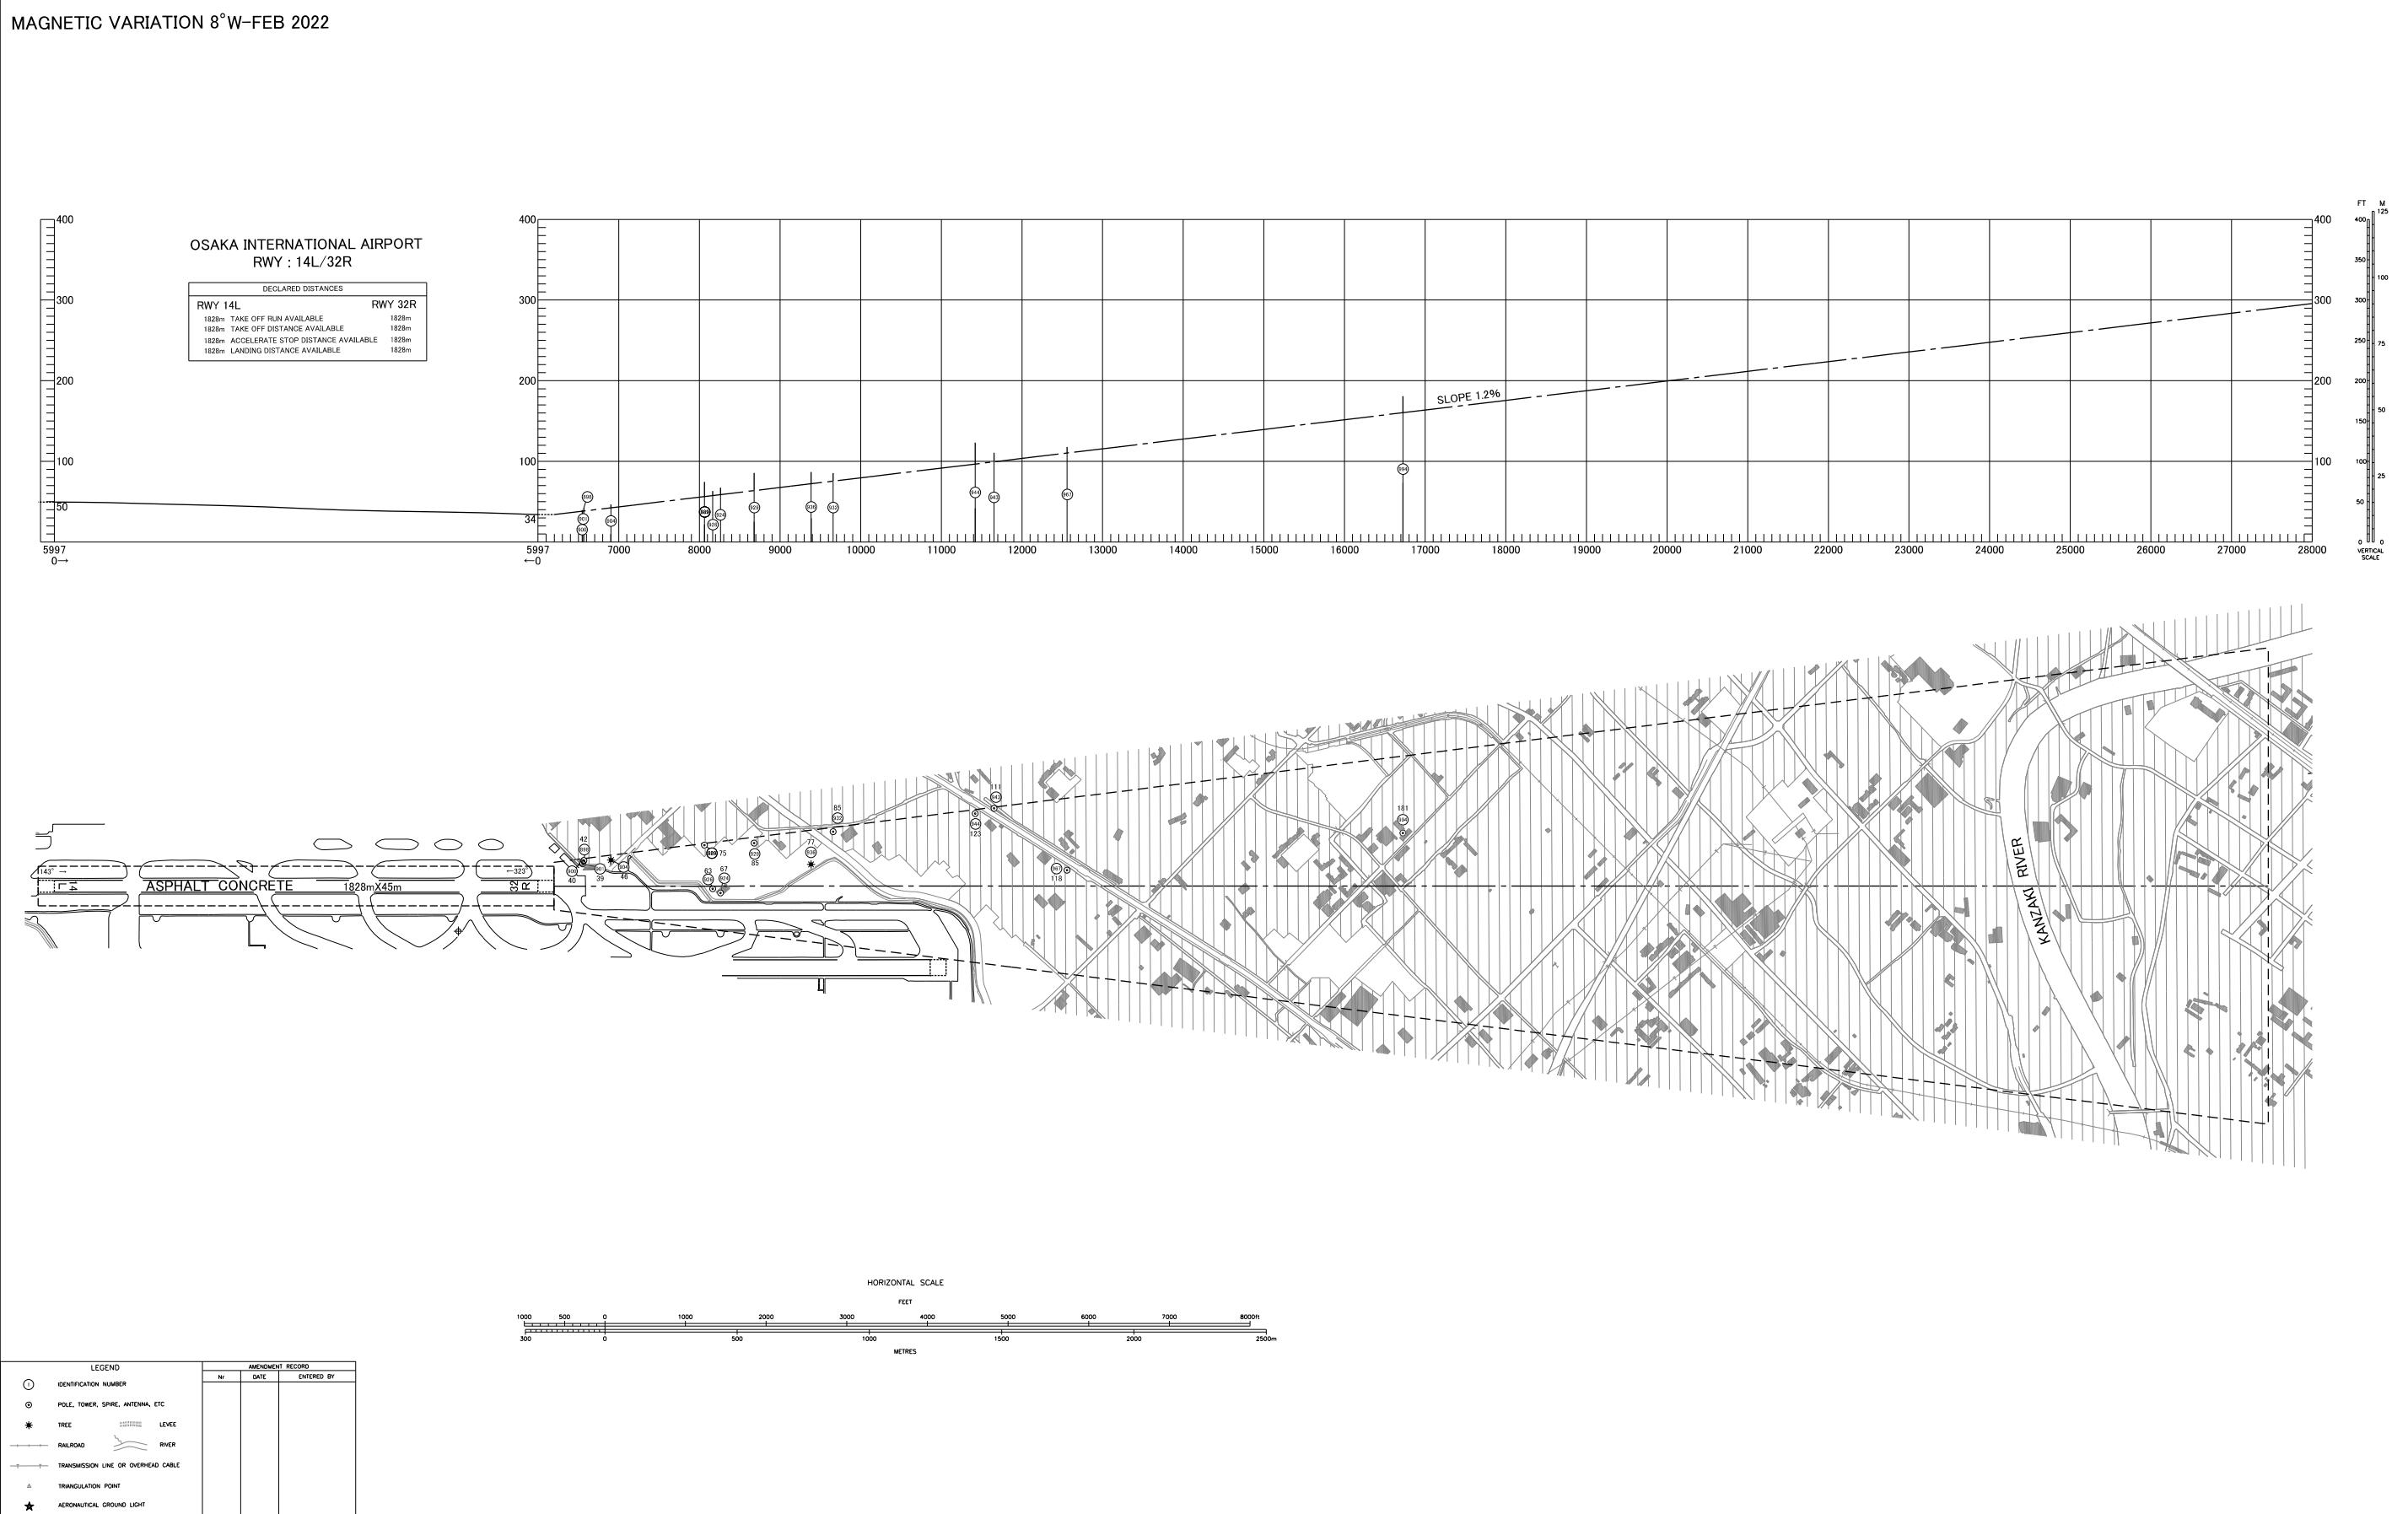


CHANGE : Update

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 8° W-FEB 2022

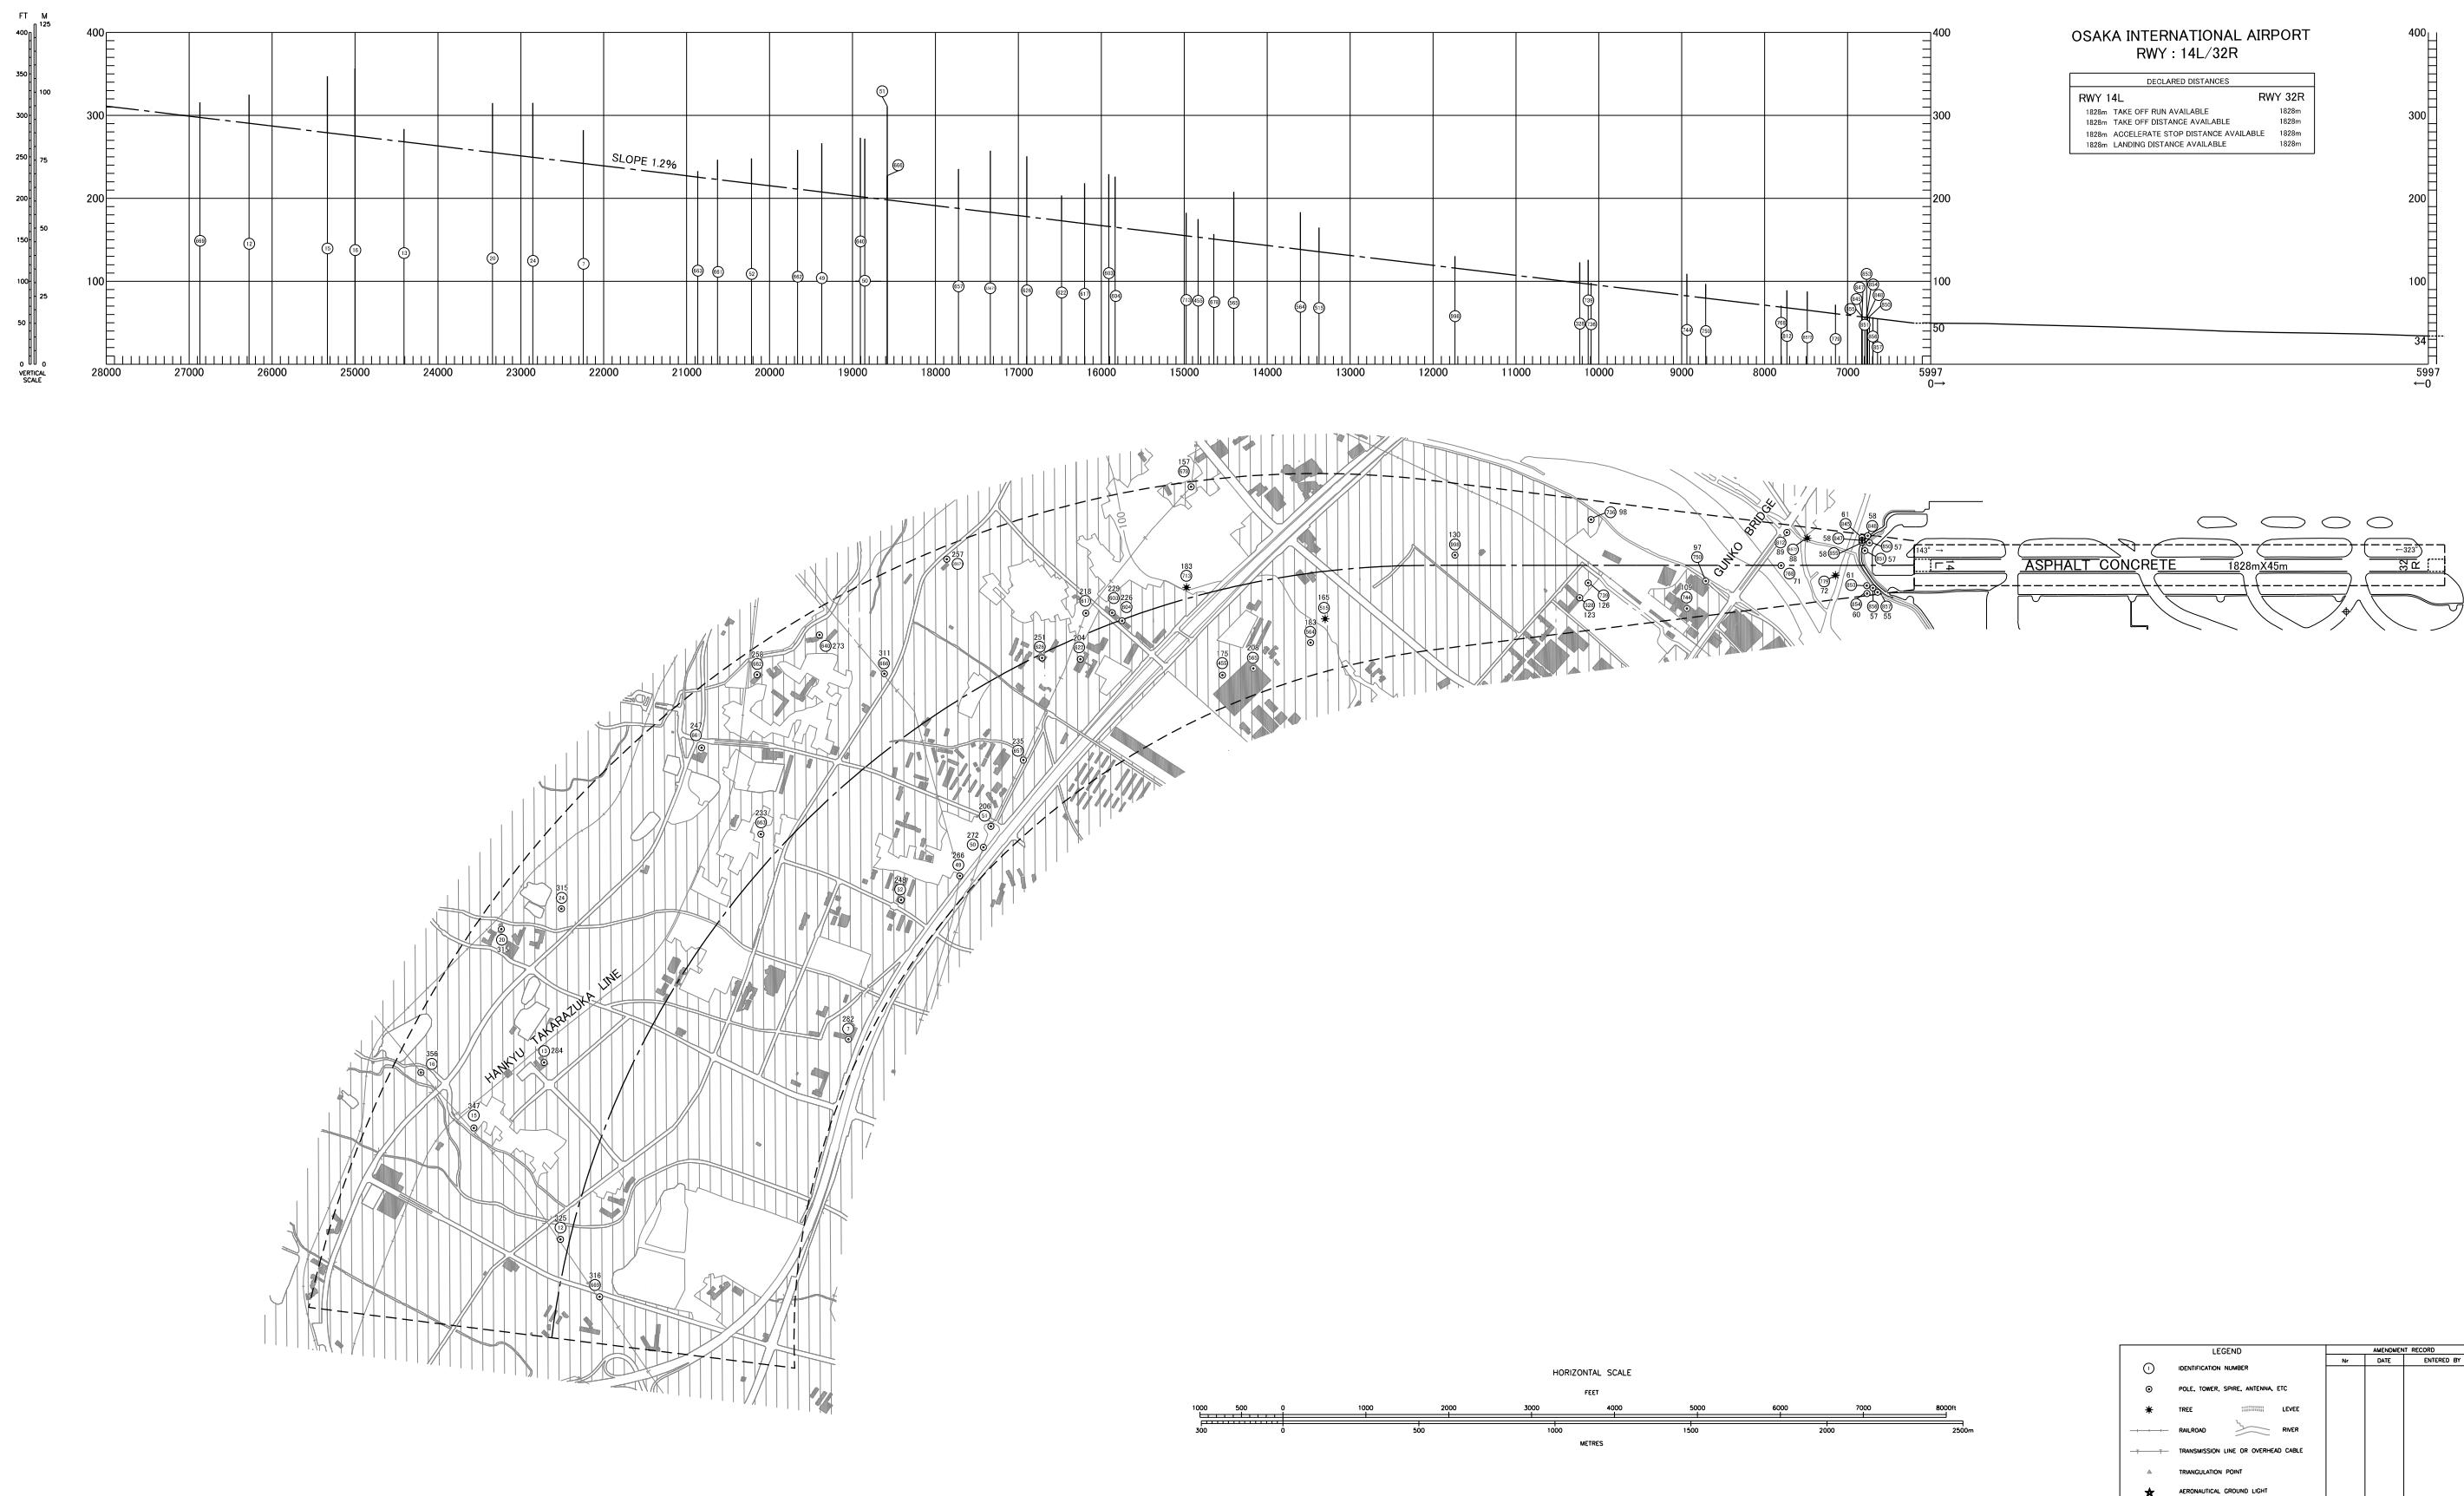

AERODROME OBSTACLE CHART-ICAO
TYPE B

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC



CHANGE : Update

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

ASUKA FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to ASUKA.

Cross ASUKA at or above 5000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

PANAS ONE DEPARTURE


RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to PANAS.


Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE: New PROC(PANAS ONE DEPARTURE).

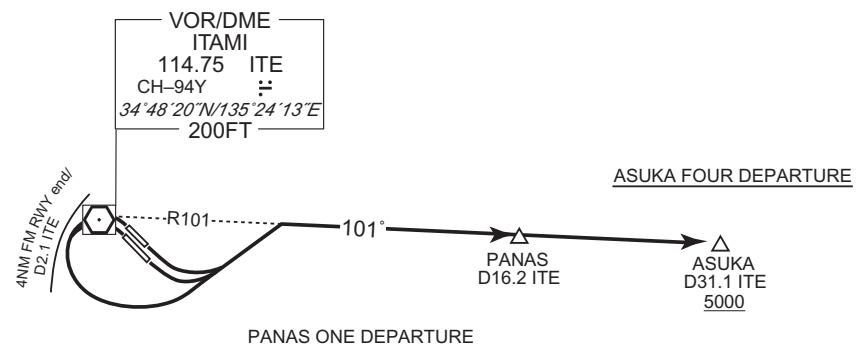

STANDARD DEPARTURE CHART -INSTRUMENT

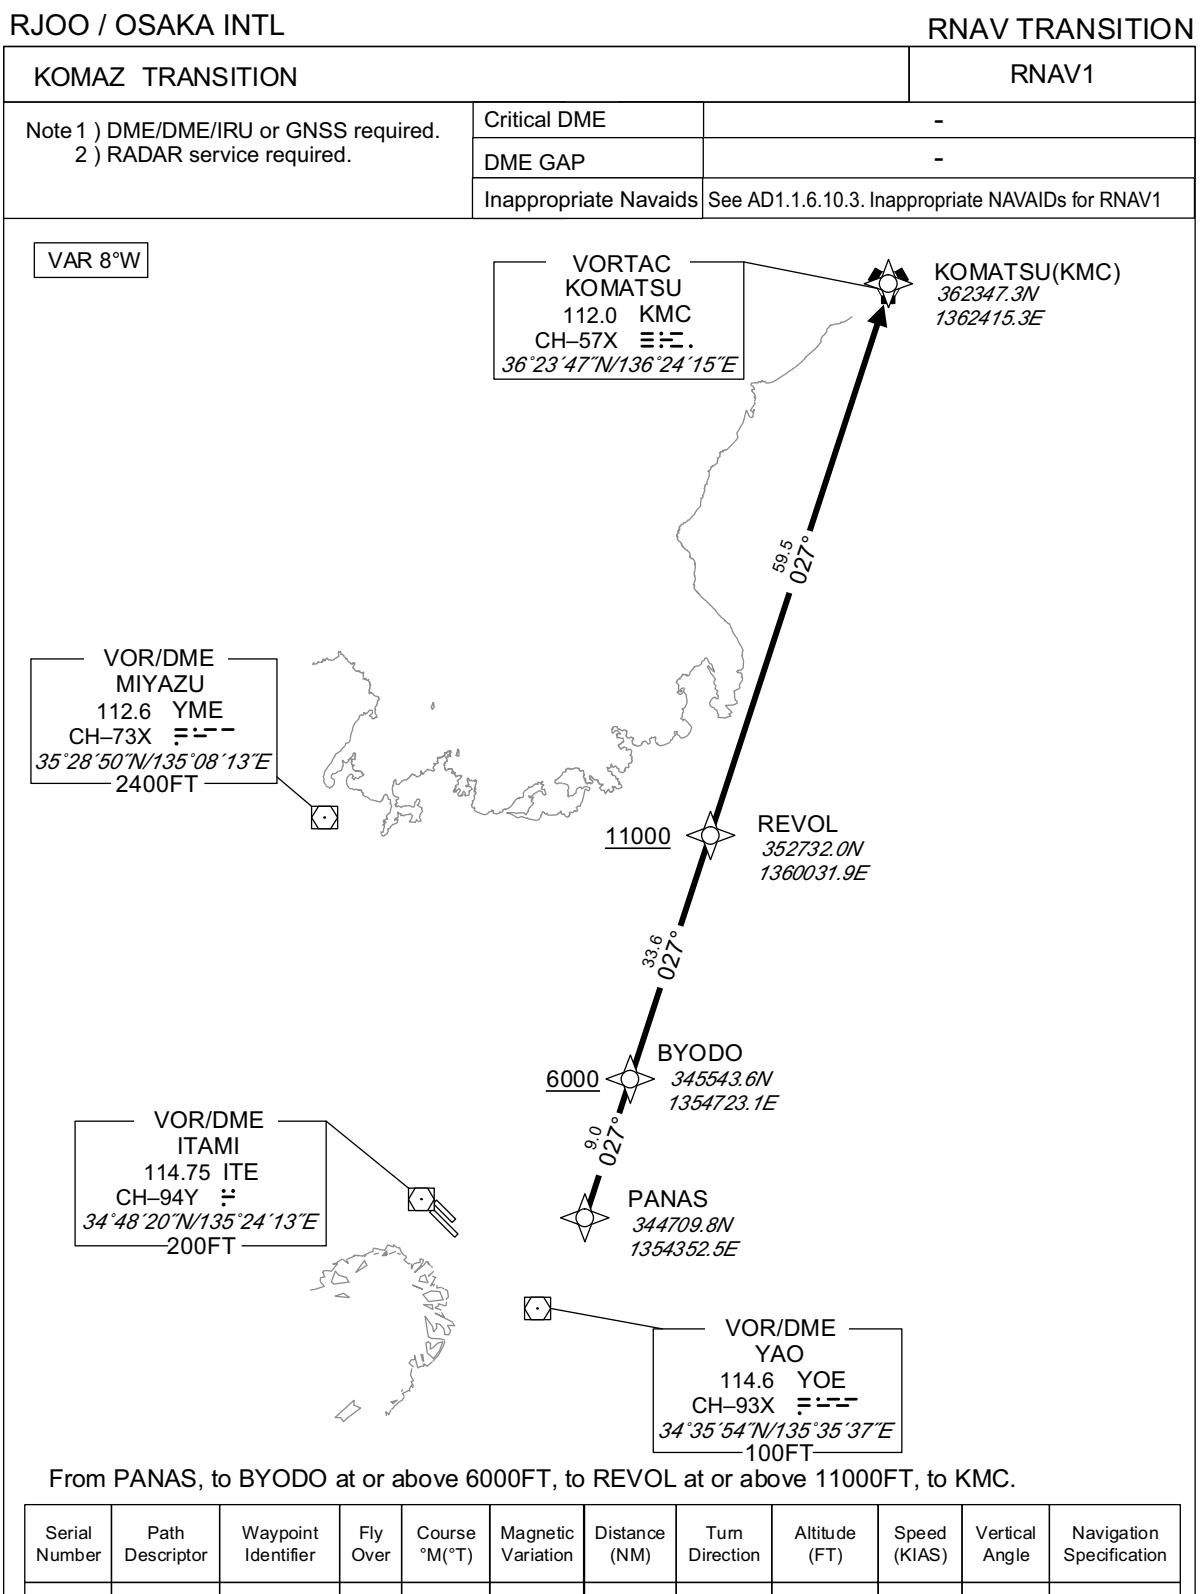

From PANAS, to BYODO at or above 6000FT, to REVOL at or above 11000FT, to KMC.

CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	PANAS	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	BYODO	-	027 (018.6)	-8.0	9.0	-	+6000	-	-	RNAV1
003	TF	REVOL	-	027 (018.6)	-8.0	33.6	-	+11000	-	-	RNAV1
004	TF	KMC	-	027 (018.7)	-8.0	59.5	-	-	-	-	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

IZUMI ONE DEPARTURE


RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 to YODOH,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° to intercept and proceed via ITE R201 to YODOH, ...
...turn left, via YOE R295 to intercept and proceed via ITE R184 to IZUMI.
Cross IZUMI at or above 6000FT.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

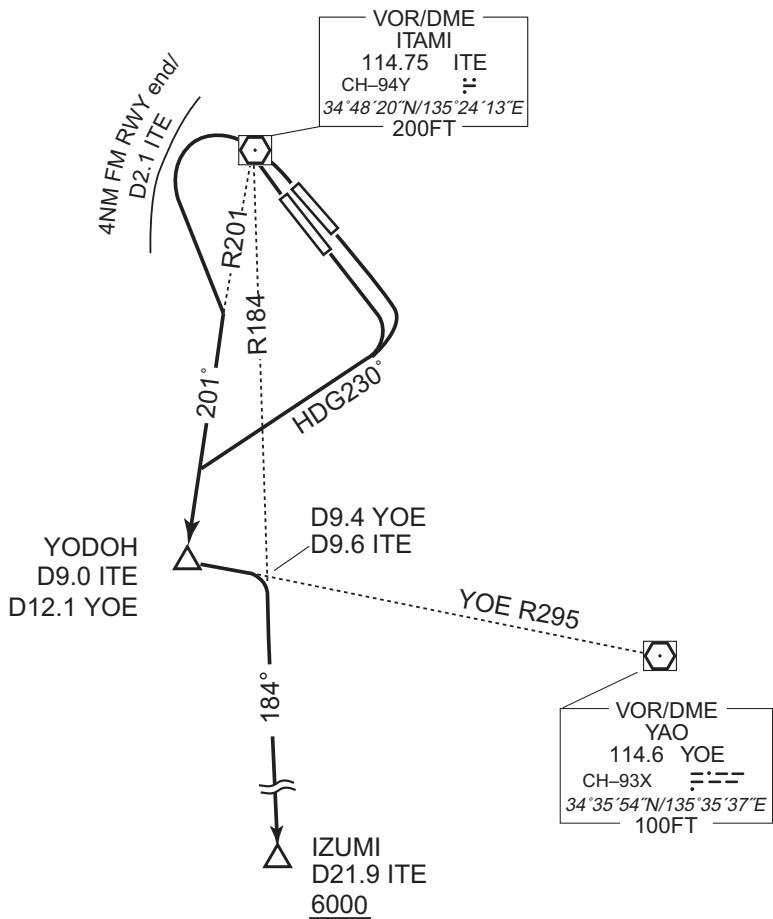

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

SID

EAST REVERSAL FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...


RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to 3000FT or above, turn left direct to ITE VOR/DME within ITE 14.0DME.

Cross ITE VOR/DME at assigned altitude.

Note : When take off RWY 14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

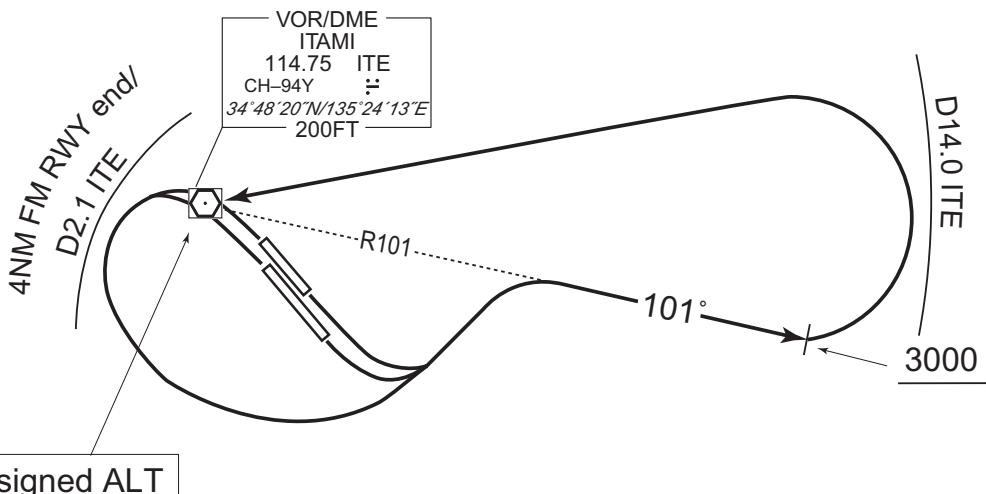

STANDARD DEPARTURE CHART -INSTRUMENT

AIP JAPAN
RJOO / OSAKA INTL

SID

TIGER TWO DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME, via ITE R201 until crossing YOE R301...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn right HDG230° until crossing YOE R301...


...turn right to intercept and proceed via YOE R291 to TIGER.

Cross TIGER at or above 6000FT.

Note : Following climb gradient should be maintained until 2500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : Description of PROC name.

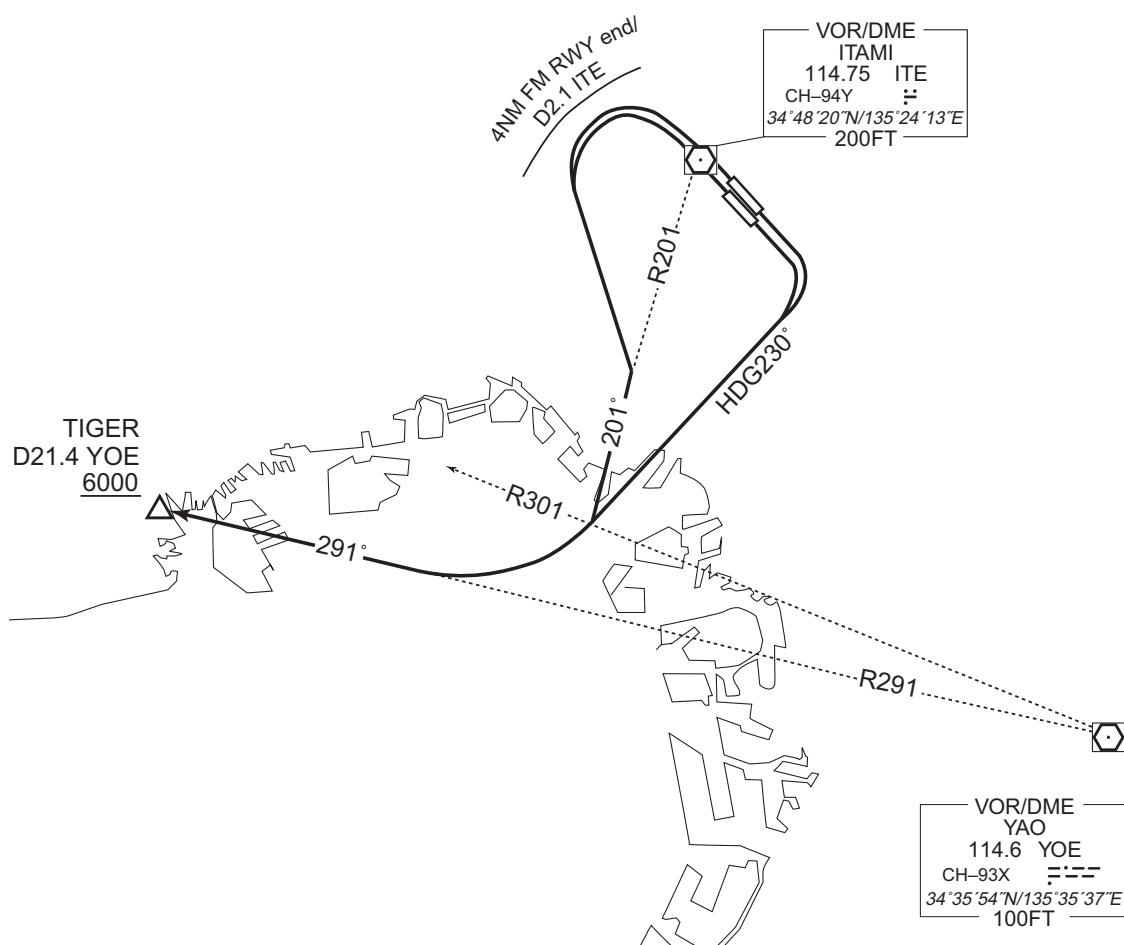

STANDARD DEPARTURE CHART -INSTRUMENT


RJOO / OSAKA INTL

TRANSITION

KAGAWA TRANSITION

From over TIGER, via YOE R291 to SUMAR, via ITE R260 to intercept and proceed via KTE R057 to KTE VOR/DME.

Cross SUMAR at or above 9000FT, cross ITE R260/43.1DME at or above FL180.

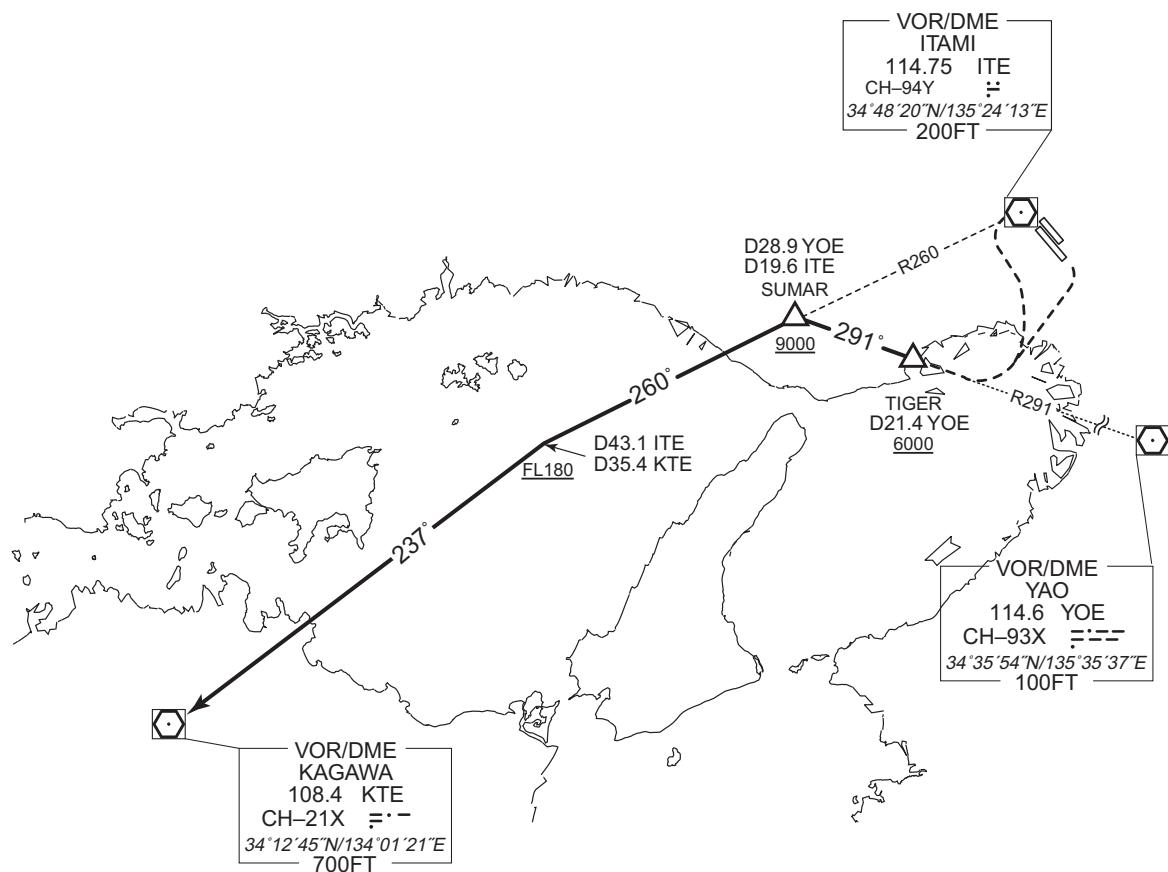

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART -INSTRUMENT

RJOO / OSAKA INTL

TRANSITION

ASAGI TRANSITION

From over TIGER, via KCE R324 to ASAGI.
Cross KCE R324/22.4DME at or above 7000FT.


TOZAN TRANSITION

From over TIGER, via KCE R324 to TOZAN, via ASAGI.
Cross KCE R324/22.4DME at or above 7000FT, cross KCE R324/47.0DME at or above 10000FT.

BUMER TRANSITION

From over TIGER, via YOE R291 to intercept and proceed via KCE R311 to BUMER.

CHANGE : TOZAN TRANSITION. Radial FM KCE.

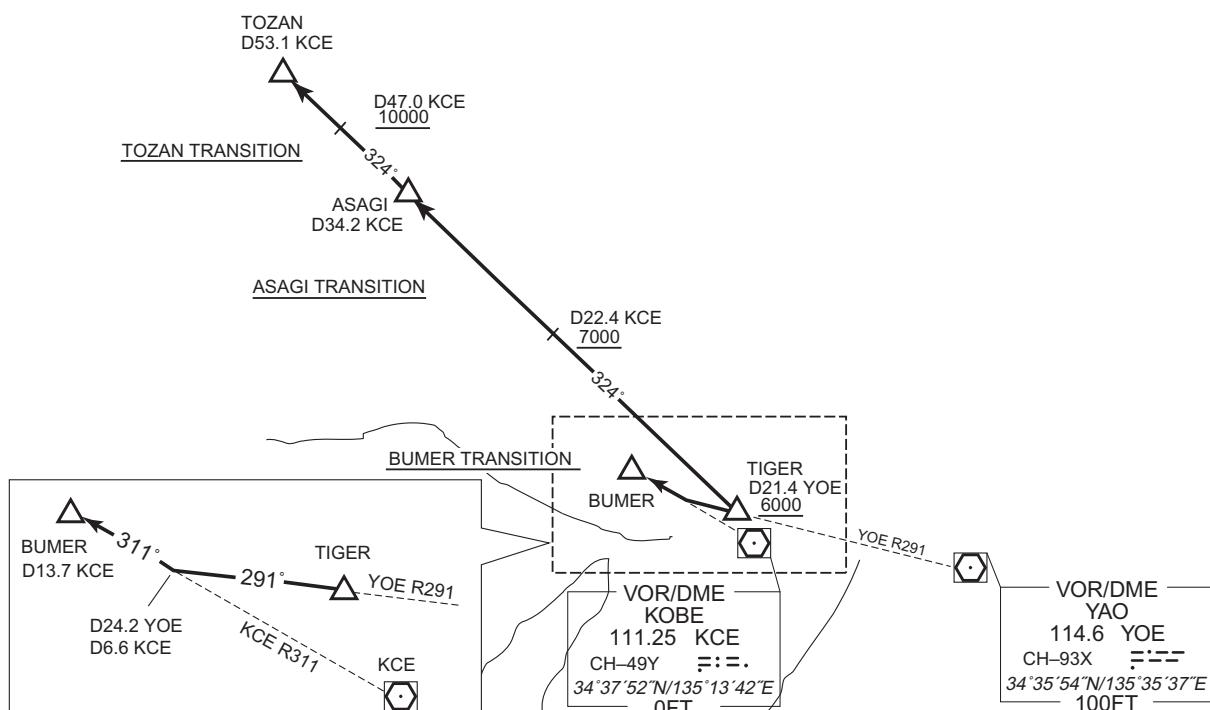

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

SID and TRANSITION

MINAC FOUR DEPARTURE

RWY 32R/32L : Climb RWY HDG to 500FT or above, turn left within 4NM from RWY end/ITE 2.1DME,...

RWY 14R/14L : Climb RWY HDG to 500FT or above, turn left,...
...via ITE R101 to intercept and proceed via KCE R077 to MINAC.


Note: When take off RWY14R/14L, following climb gradient should be maintained until 500FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

NAGOYA TRANSITION

From over MINAC, via KCE R077 to YOKKA, via KCC R243 to KCC VORTAC.

CHANGE : PROC renamed. Radial FM KCE.

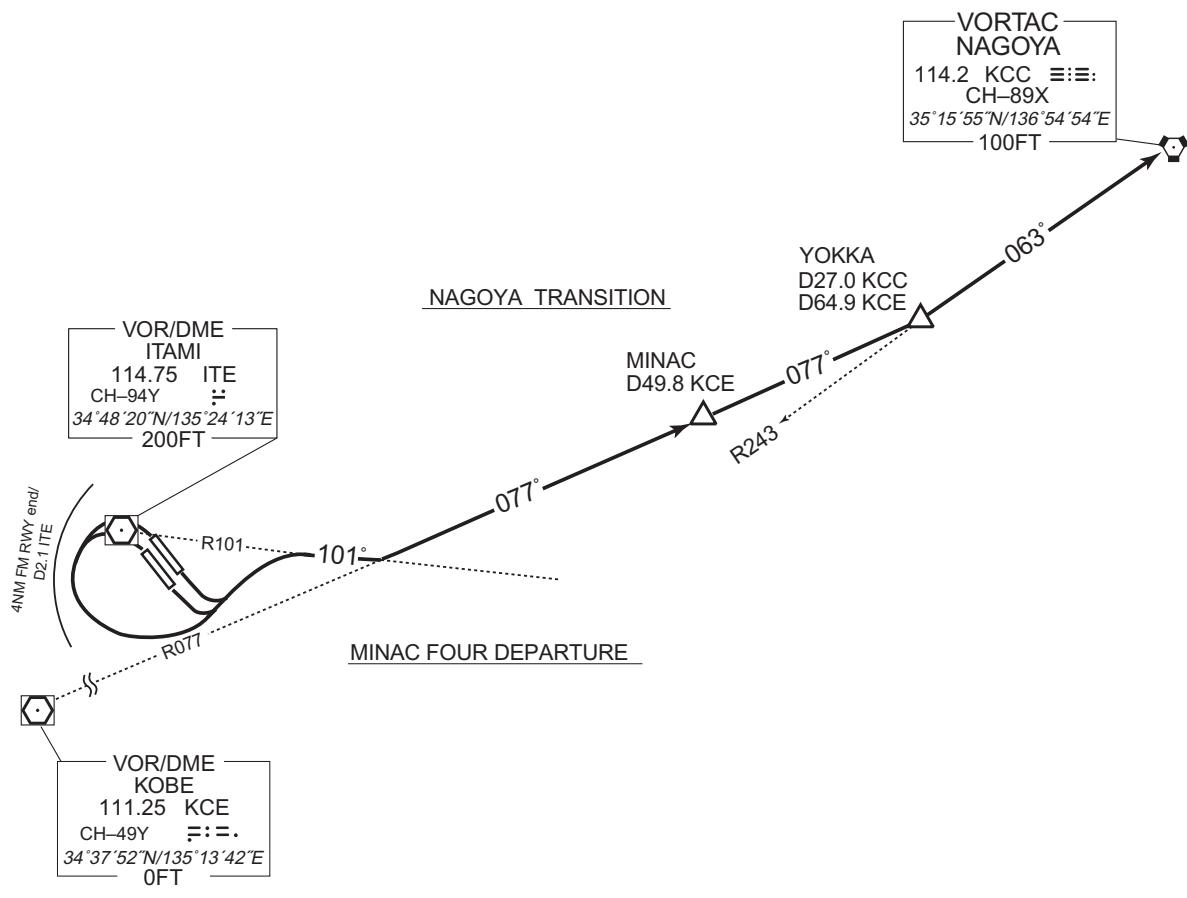


STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

GUJYO TRANSITION / SHTLE TRANSITION		RNAV1
NOTE 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—
	DME GAP	—
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

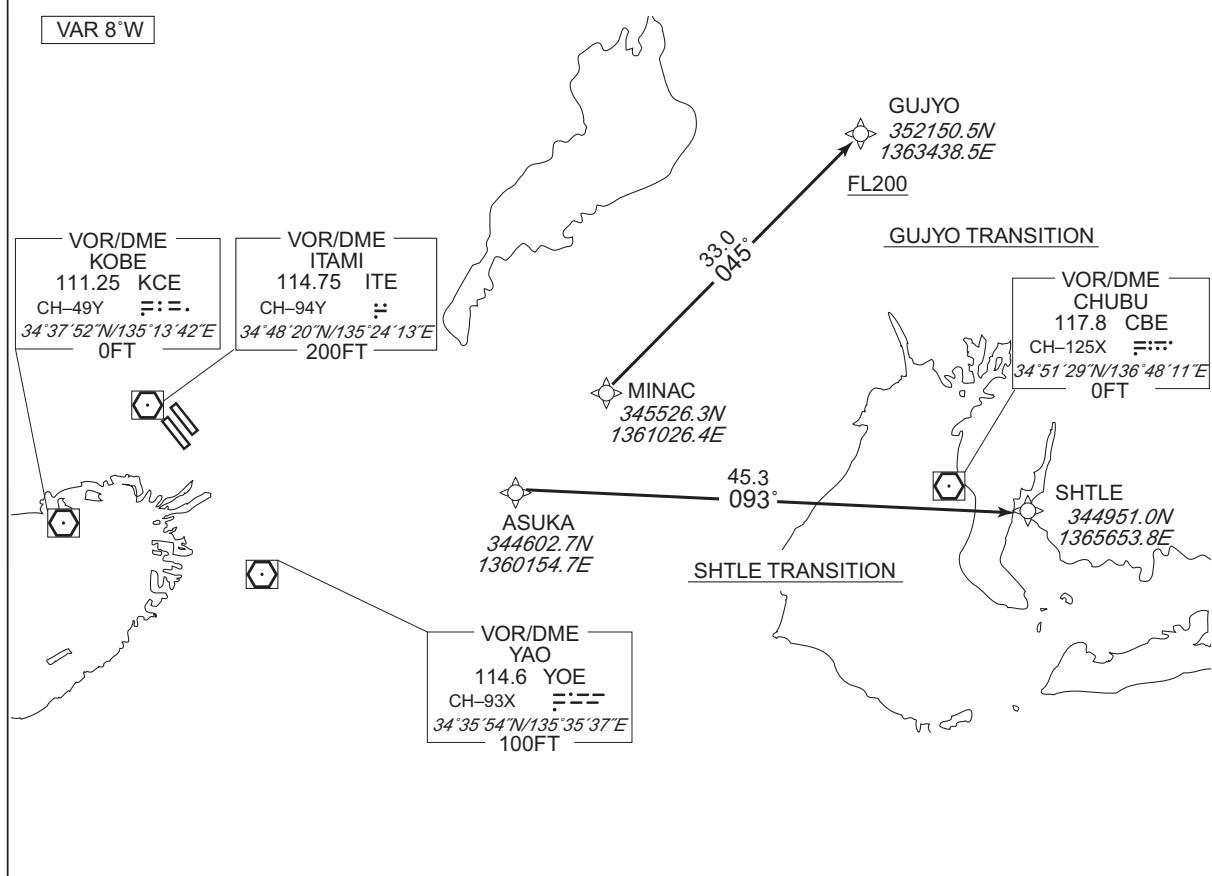

GUJYO TRANSITION

From MINAC, to GUJYO at or above FL200.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MINAC	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	GUJYO	—	045 (036.7)	-8.0	33.0	—	+FL200	—	—	RNAV1

CHANGE : Description of VAR.

SHTLE TRANSITION

From ASUKA, to SHTLE.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ASUKA	—	—	-8.0	—	—	—	—	—	RNAV1
002	TF	SHTLE	—	093 (084.9)	-8.0	45.3	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

MAIKO TRANSITION / AWAJI TRANSITION		RNAV1
NOTE 1) DME/DME/IRU or GNSS required.	Critical DME	-
2) RADAR service required.	DME GAP	-
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

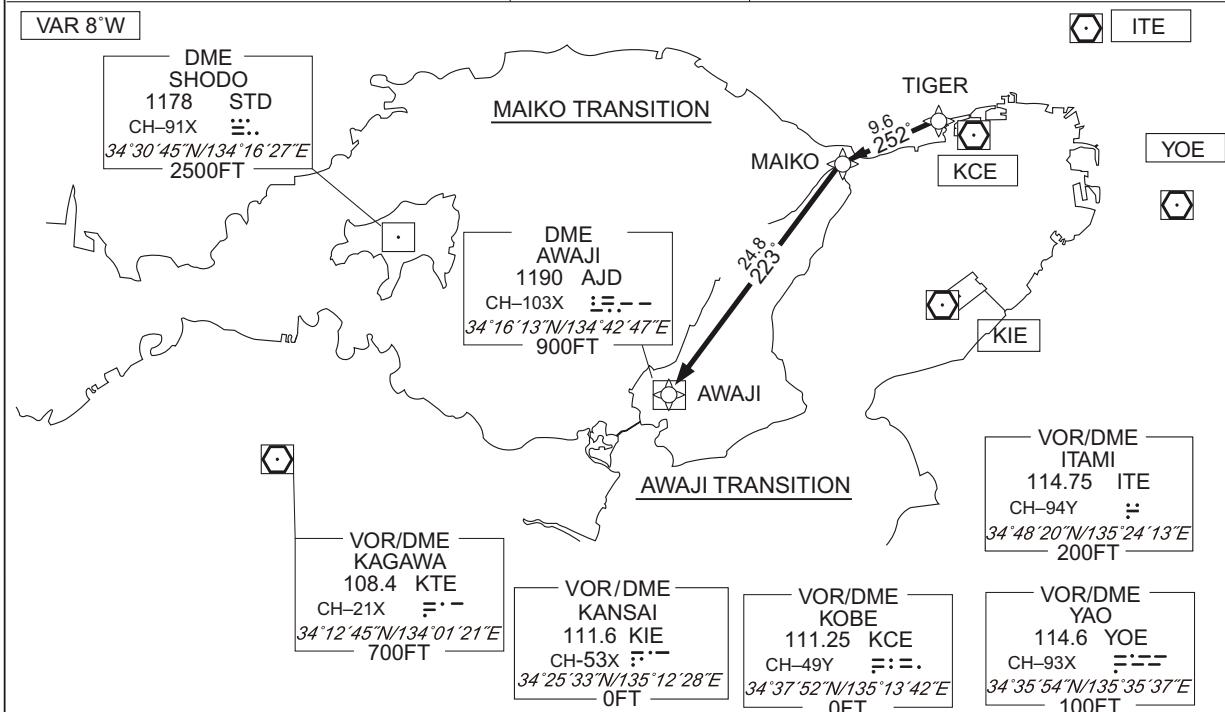MAIKO TRANSITION

From TIGER, to MAIKO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	-	-	-8.2	-	-	-	-	-	RNAV1
002	TF	MAIKO	-	252 (244.2)	-8.2	9.6	-	-	-	-	RNAV1

AWAJI TRANSITION

From TIGER, to MAIKO, to AWAJI.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	MAIKO	-	252 (244.2)	-8.0	9.6	-	-	-	-	RNAV1
003	TF	AWAJI	-	223 (214.6)	-8.0	24.8	-	-	-	-	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
TIGER	344050.4N / 1351016.7E	AWAJI	341613.1N / 1344246.6E
MAIKO	343639.7N / 1345949.1E		

CHANGE : MAIKO TRANSITION established. Waypoint Coordinates added.

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

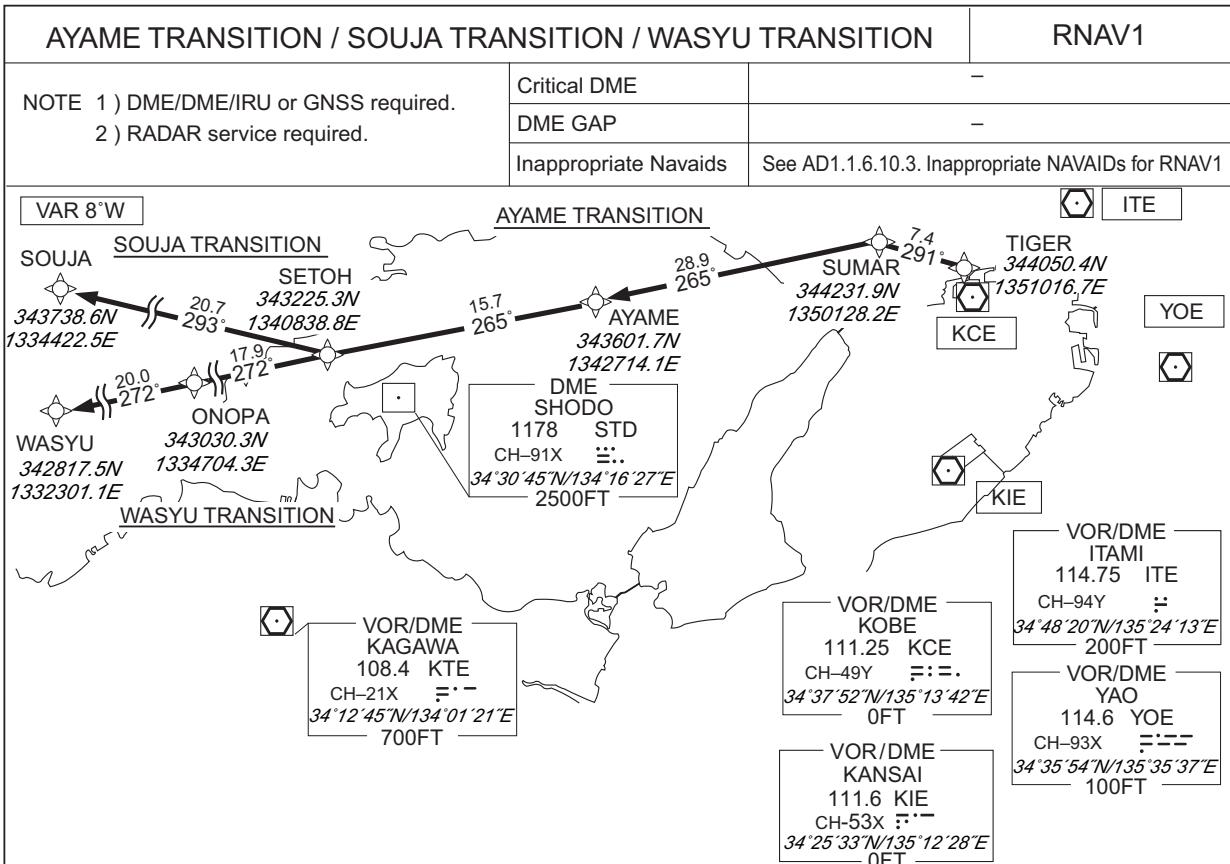

AYAME TRANSITION

From TIGER, to SUMAR, to AYAME.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1

CHANGE : TAKAMATSU TACAN abolished.

SOUJA TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to SOUJA.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1
005	TF	SOUJA	—	293 (284.8)	-8.1	20.7	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV TRANSITION

WASYU TRANSITION

From TIGER, to SUMAR, to AYAME, to SETOH, to ONOPA, to WASYU.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TIGER	—	—	-8.1	—	—	—	—	—	RNAV1
002	TF	SUMAR	—	291 (283.2)	-8.1	7.4	—	—	—	—	RNAV1
003	TF	AYAME	—	265 (257.2)	-8.1	28.9	—	—	—	—	RNAV1
004	TF	SETOH	—	265 (256.8)	-8.1	15.7	—	—	—	—	RNAV1
005	TF	ONOPA	—	272 (263.9)	-8.1	17.9	—	—	—	—	RNAV1
006	TF	WASYU	—	272 (263.7)	-8.1	20.0	—	—	—	—	RNAV1

CHANGE : VAR. PROC course. ONOPA established.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

STAR

IZUMI ARRIVAL

From over IZUMI, via ITE 21.9DME counter-clockwise ARC to intercept and proceed via ITE R141 to IKOMA.


Cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

AGPUK ARRIVAL

From over AGPUK, via YOE R113 to intercept and proceed via ITE R141 to IKOMA.

Cross AGPUK at or above 9000FT, cross YOE R113/21.0DME at or above 4700FT, cross ITE R141/19.0DME at or above 4000FT, cross IKOMA at or above 3500FT.

CHANGE : AGPUK ARRIVAL established.

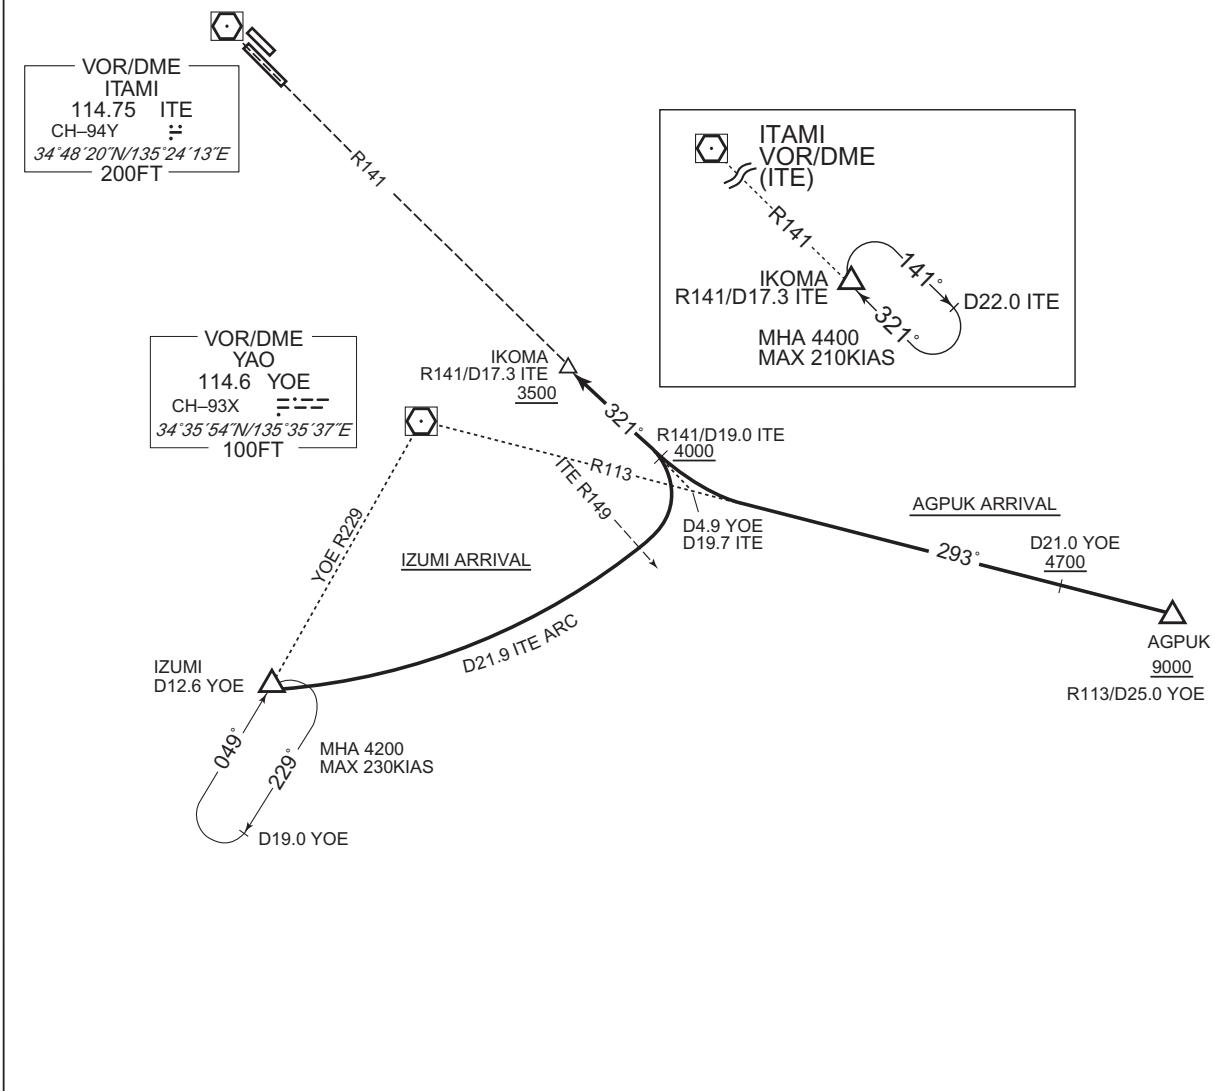

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL / IKOMA NORTH ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required
2) RADAR service required

VAR 8°W

ROKKO
350700.6N
1351800.9E
7000

VOR/DME
ITAMI
114.75 ITE
CH-94Y
34°48'20"N/135°24'13"E
200FT

KAMEO
345702.7N
1352804.2E
7000

VOR/DME
KOBE
111.25 KCE
CH-49Y
34°37'52"N/135°13'42"E
0FT

MAX 210KIAS for
IKOMA NORTH
ARRIVAL

IKOMA
343616.7N
1353914.8E
3500

VOR/DME
KANSAI
111.6 KIE
CH-53X
34°25'33"N/135°12'28"E
0FT

IKOMA NORTH ARRIVAL

22.8
148°2.3
296°5.0
226°10.5
297°9.5
297°2.3
296°5.0
226°10.5
297°9.5
297°

Using NAVAID

D28.0 YOE
MHA 7000
MAX 230KIAS
KAMEO D22.0 YOE
YAO VOR/DME (YOE)

Using NAVAID

MIRAI D34.9 KIE
R087
KANSAI VOR/DME (KIE)
MHA 6000
MAX 230KIAS
D41.0 KIE

OTABE
343928.9N
1354539.8E

MAX 210KIAS for
IKOMA NORTH
ARRIVAL

VOR/DME
YAO
114.6 YOE
CH-93X
34°35'54"N/135°35'37"E
100FT

IKOMA EAST ARRIVAL

Using NAVAID

ITAMI VOR/DME (ITE)
R141
IKOMA D17.3 ITE
MHA 4400
MAX 210KIAS

Using NAVAID

ITAMI VOR/DME (ITE)
R138
ABENO D19.4 ITE
MHA 4400
MAX 210KIAS

CHANGE : Description of VAR.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

IKOMA EAST ARRIVAL

From AGPUK, to MIRAI at or above 6000FT, to ABENO, to IKOMA at or above 3500FT.

Critical DME	KCC : AGPUK – MIRAI
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AGPUK	–	–	-8.0	–	–	–	–	–	RNAV1
002	TF	MIRAI	–	297 (288.7)	-8.0	9.5	–	+6000	–	–	RNAV1
003	TF	ABENO	–	297 (288.6)	-8.0	10.5	–	–	–	–	RNAV1
004	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	–	–	RNAV1

IKOMA NORTH ARRIVAL

From ROKKO at or above 7000FT, to KAMEO at or above 7000FT, to OTABE, to ABENO, to IKOMA at or above 3500FT.

Critical DME	ITE : 9.9NM to KAMEO – KAMEO YME : 19.7NM to OTABE – 13.7NM to OTABE
DME GAP	–
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ROKKO	–	–	-8.0	–	–	+7000	–	–	RNAV1
002	TF	KAMEO	–	148 (140.4)	-8.0	12.9	–	+7000	–	–	RNAV1
003	TF	OTABE	–	148 (140.5)	-8.0	22.8	–	–	–	–	RNAV1
004	TF	ABENO	–	226 (218.0)	-8.0	5.0	–	–	-210	–	RNAV1
005	TF	IKOMA	–	296 (288.5)	-8.0	2.3	–	+3500	-210	–	RNAV1

CHANGE : VAR. KODAI abolished. AGPUK established. PROC course.

STANDARD ARRIVAL CHART-INSTRUMENT

RJOO / OSAKA INTL

RNAV STAR RWY32L/32R

HABIK ARRIVAL

RNAV1

- Note 1) DME/DME/IRU or GNSS required
2) RADAR service required

VAR 8°W

VOR/DME
ITAMI
114.75 ITE
CH-94Y
34°48'20"N/135°24'13"E
200FT



VOR/DME
KOBE
111.25 KCE
CH-49Y
34°37'52"N/135°13'42"E
0FT

VOR/DME
YAO
114.6 YOE
CH-93X
34°35'54"N/135°35'37"E
100FT

IKOMA
343616.7N
1353914.8E
3500

VOR/DME
KANSAI
111.6 KIE
CH-53X
34°25'33"N/135°12'28"E
0FT

IZUMI
342628.5N
1352531.3E

HABIK
343246.8N
1353914.2E

Using NAVAID

IZUMI D12.6 YOE
YAO VOR/DME (YOE)
R229° 049° 229°
D19.0 YOE
MHA 4200 MAX 230KIAS

Using NAVAID

ITAMI VOR/DME (ITE)
R141° 141°
IKOMA D17.3 ITE
327°
D22.0 ITE


From IZUMI, to HABIK, to IKOMA at or above 3500FT.

Critical DME	-
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

CHANGE : Description of VAR and PROC name.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IZUMI	-	-	-8.0	-	-	-	-	-	RNAV1
002	TF	HABIK	-	(069 060.8)	-8.0	13.0	-	-	-	-	RNAV1
003	TF	IKOMA	-	(008 000.1)	-8.0	3.5	-	+3500	-	-	RNAV1


INSTRUMENT APPROACH CHART

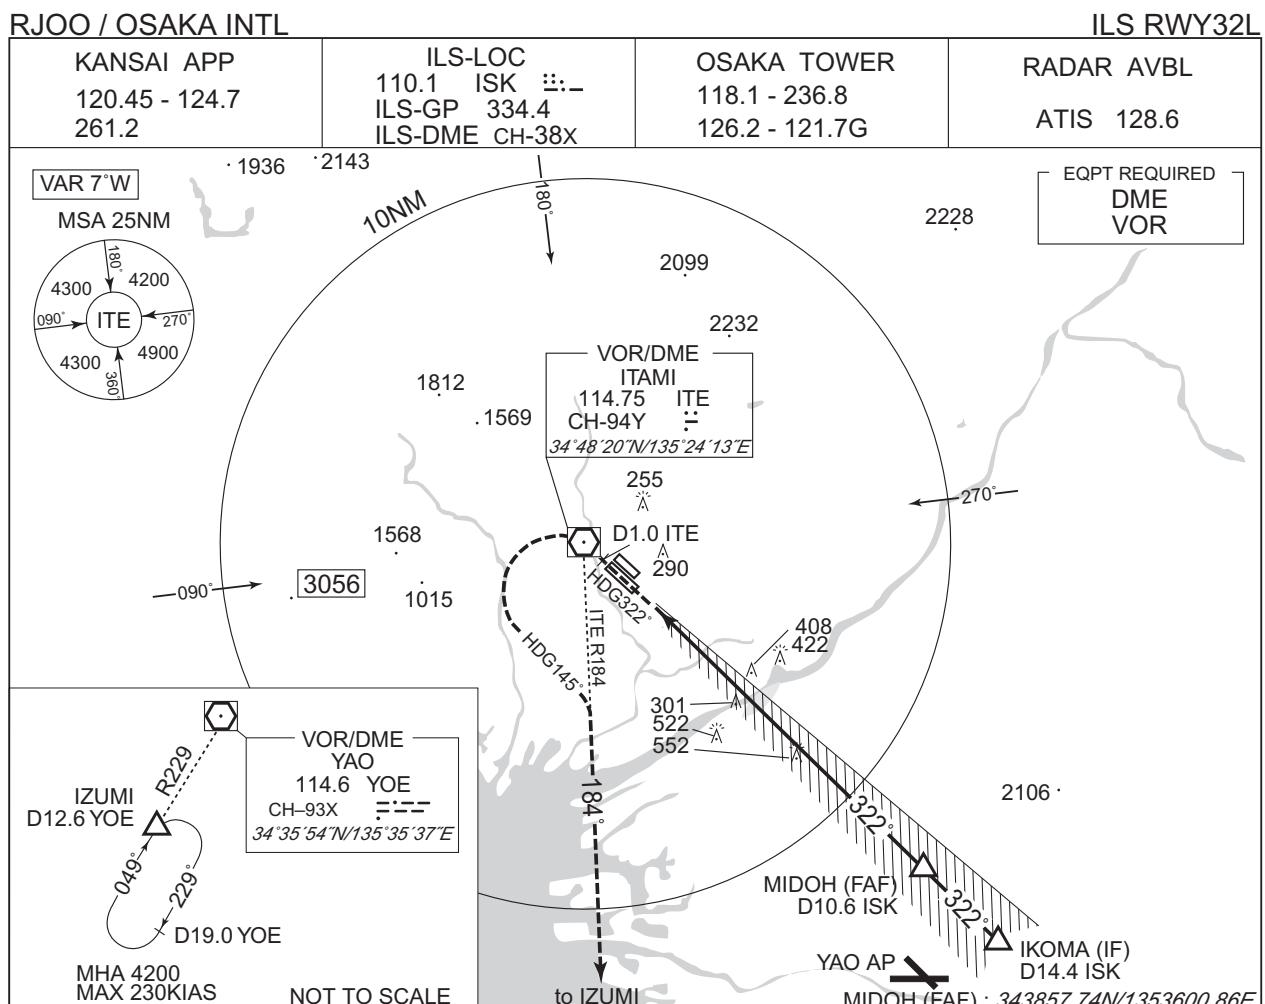

MISSED APPROACH

Climb to 5000FT on HDG322°, 1.0DME prior to ITE VOR/DME, turn left HDG145° to intercept and proceed via ITE R184 to IZUMI and hold.

Contact KANSAI APP.

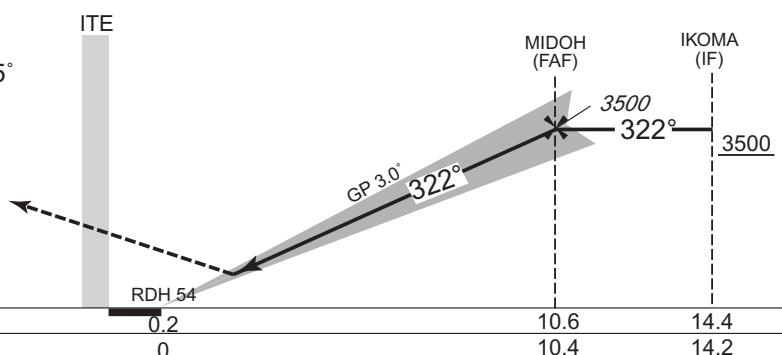

Missed APCH climb gradient MNM 4.0%

MINIMA THR elev. 31


AD elev. 39

CHANGE : MDA(H) for Circling(TOTAL AREA)


CAT	CAT I		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)		VIS
			TOTAL AREA	WEST of RWY	
A			590 (551)	590 (551)	1600
B	281 (250)	700	660 (621)	610 (571)	2400
C			-	760 (721)	3200
D					

MINIMA with Missed APCH climb gradient of 2.5% are not established.
JET circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART

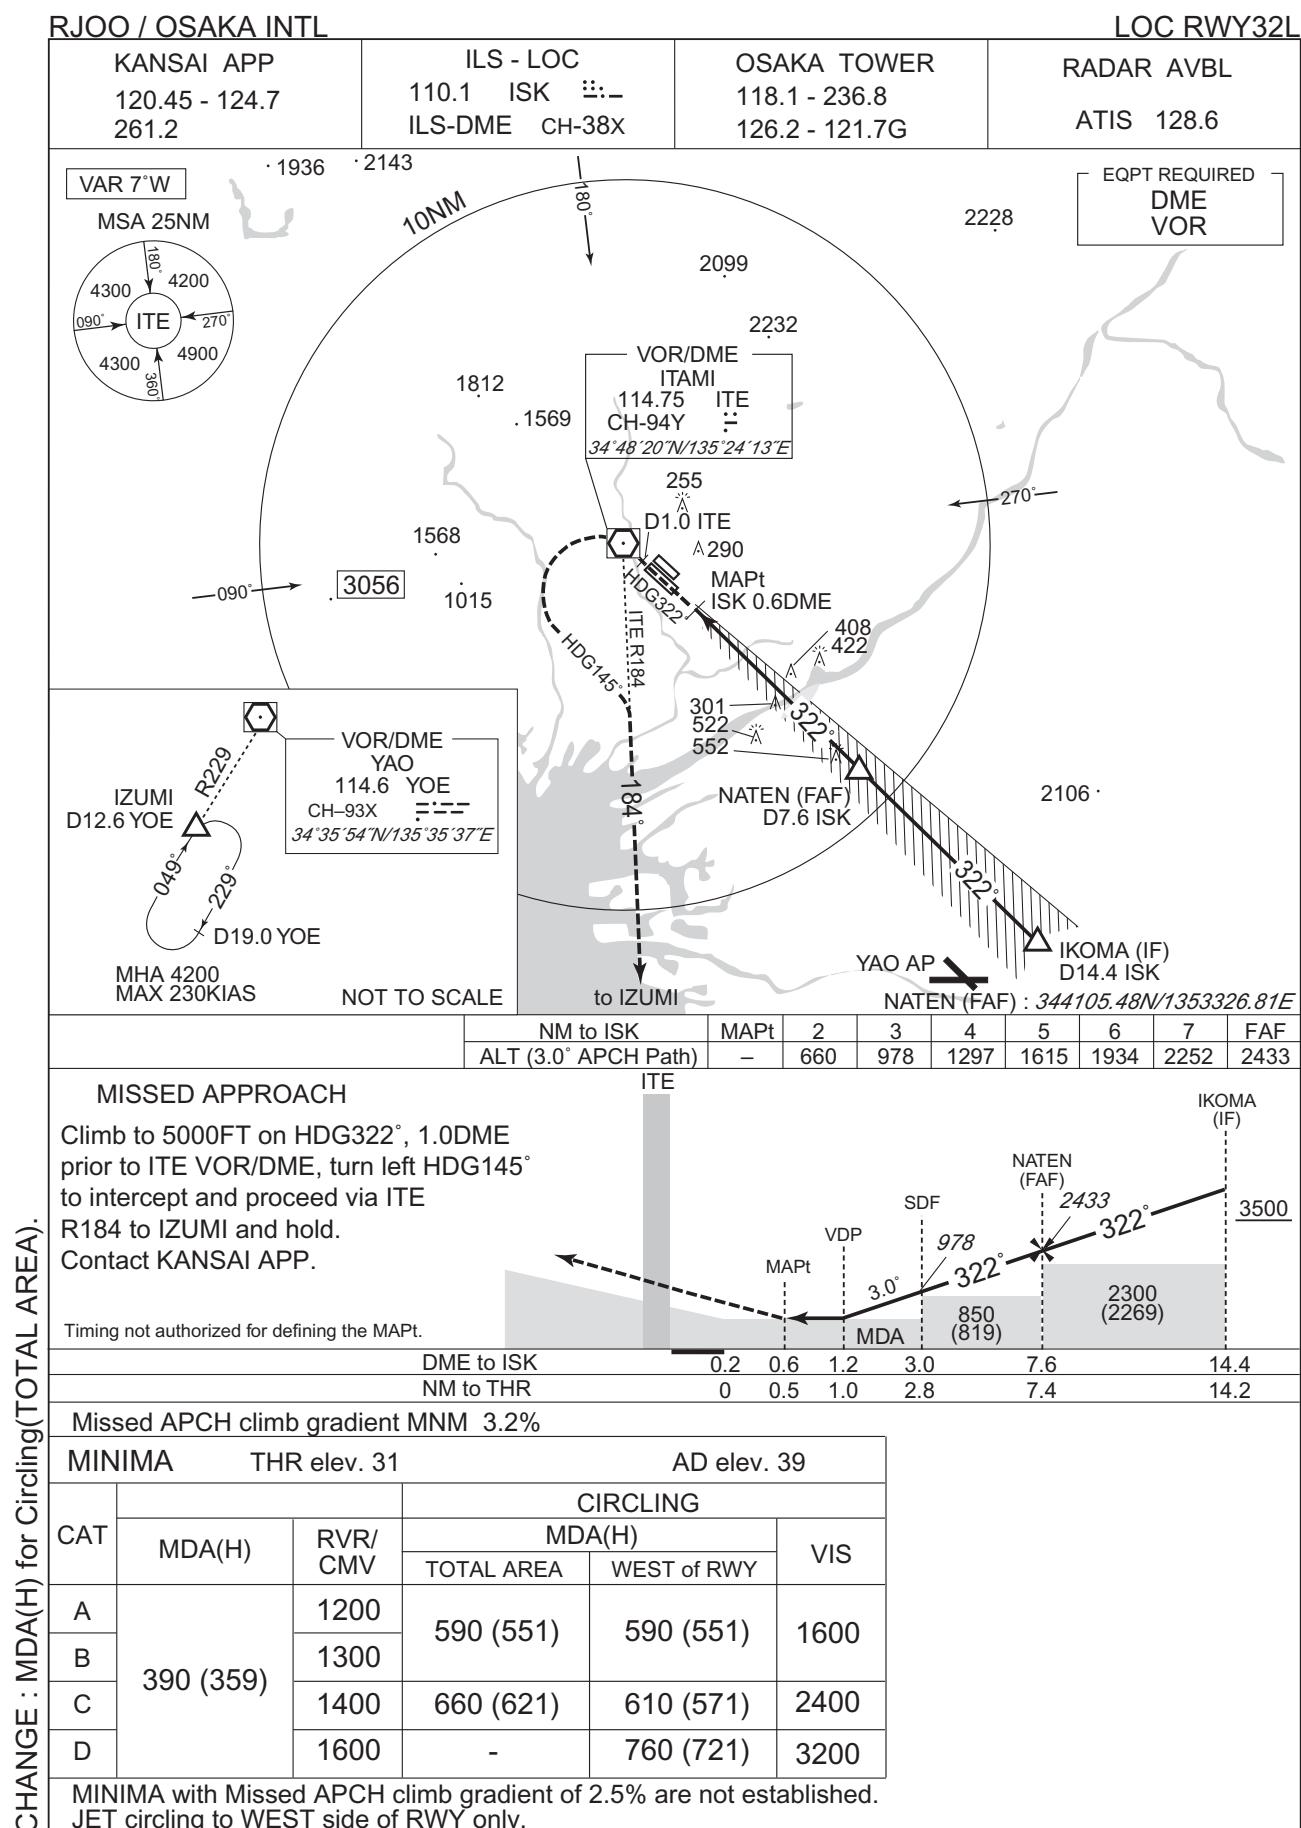

INSTRUMENT APPROACH CHART

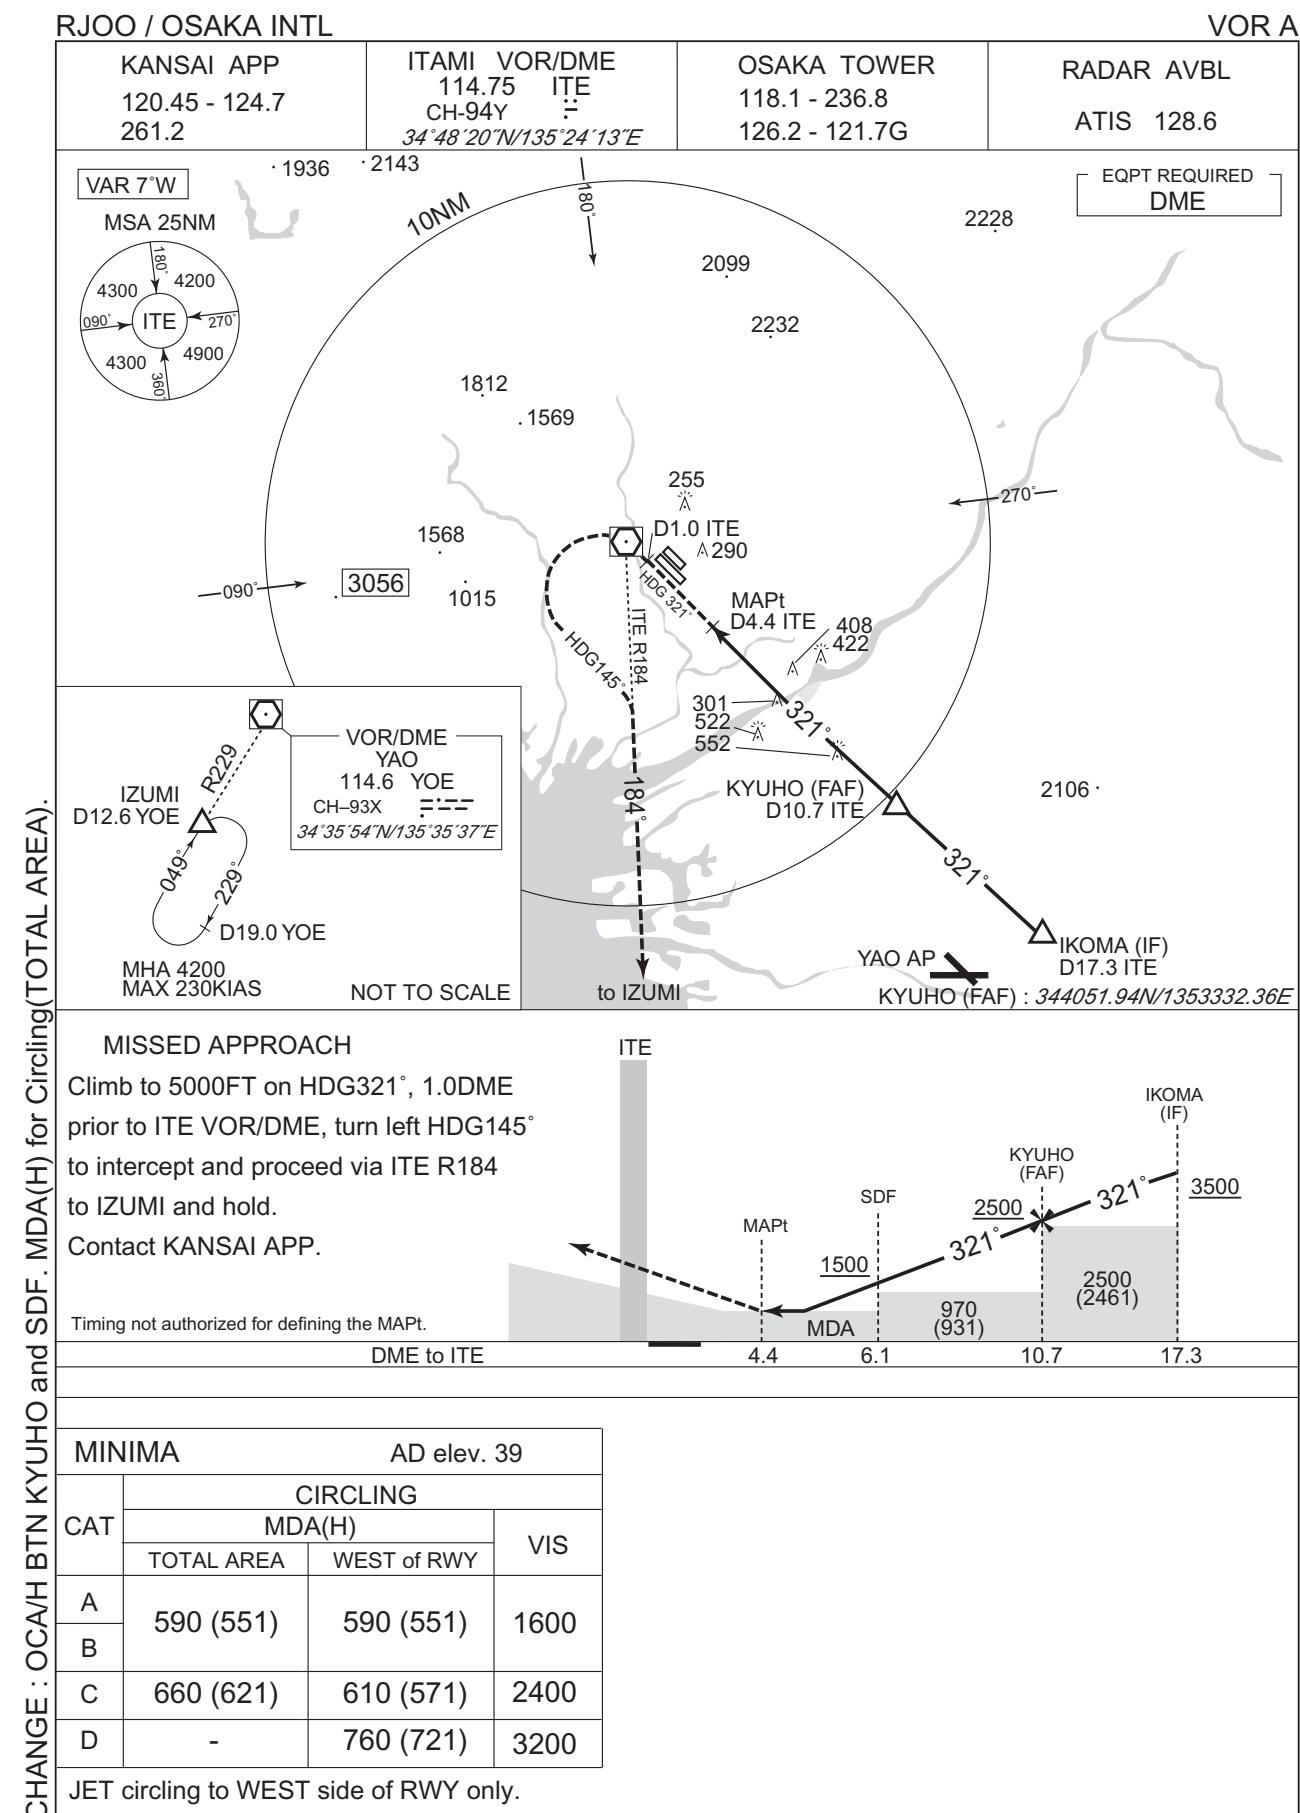


INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32L

MISSED APPROACH

Climb to 5000FT, to O2L50,
to O2L51, to O2L52,
to IZUMI and hold.
Contact KANSAI APP.

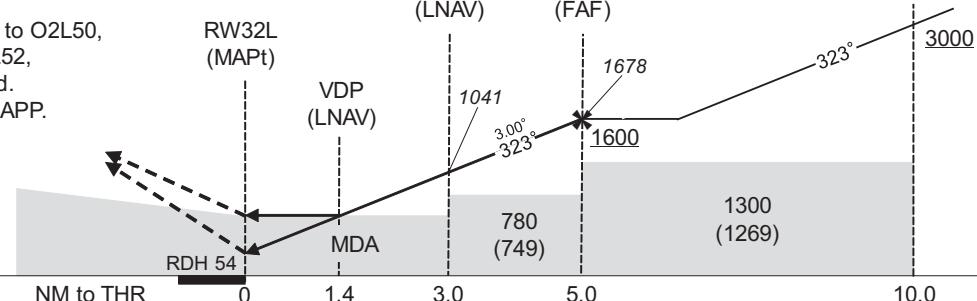

Missed APCH climb gradient MNM 6.0%

MINIMA									THR elev. 31		AD elev. 39	
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING			VIS		
	DA(H)		RVR/CMV		MDA(H)		MDA(H)		TOTAL AREA	WEST of RWY		
	DA(H)	RVR/CMV	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	MDA(H)				
A	289(258)	1000	510(479)	1400	510(479)	1400	590(551)	590(551)	590(551)	1600		
B	299(268)	1100		1500		1500		590(551)				
C	309(278)	1200		1600		1600		660(621)	610(571)		2400	
D	318(287)	1400		1800		1800		-	760(721)		3200	

JET circling to WEST side of RWY only.

Missed APCH climb gradient of 6.0% up to 2400FT.

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32L

FAS DATA BLOCK


Operation type	0	LTP/FTP ellipsoidal height	+00469
SBAS service provider identifier	2	FPAP latitude	344728.7535N
Airport identifier	RJOO	FPAP longitude	1352543.3300E
Runway	323	Threshold crossing height	00016.5
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32A	△ length offset	0000
LTP/FTP latitude	344619.8985N	HAL	40.0
LTP/FTP longitude	1352706.7455E	VAL	50.0
CRC remainder	D799CA35		

Required additional data

LTP/FTP orthometric height	9.6
----------------------------	-----

CHANGE : FAS DATA BLOCK, Required additional data established.

INSTRUMENT APPROACH CHART

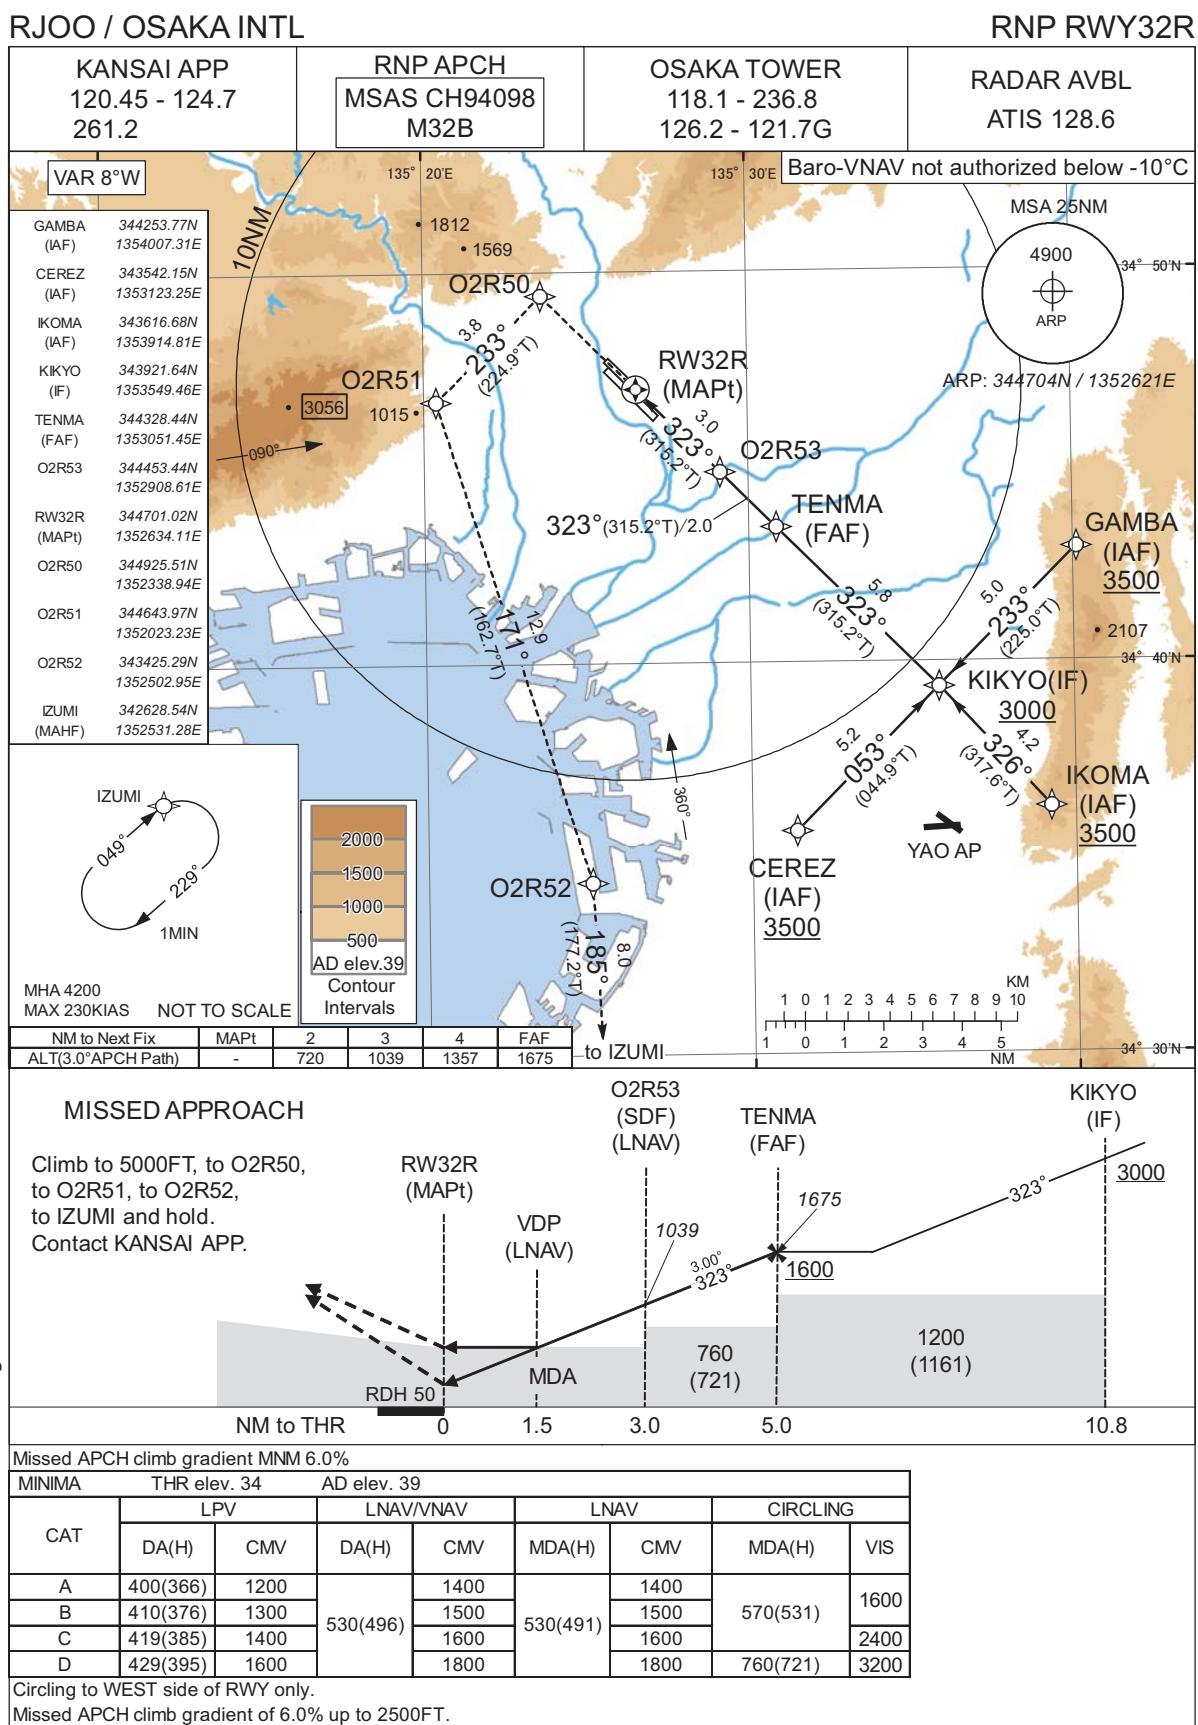

INSTRUMENT APPROACH CHART

RJOO / OSAKA INTL

RNP RWY32R

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00478
SBAS service provider identifier	2	FPAP latitude	344742.9515N
Airport identifier	RJOO	FPAP longitude	1352543.2590E
Runway	321	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32B	△ length offset	0000
LTP/FTP latitude	344700.9970N	HAL	40.0
LTP/FTP longitude	1352634.0960E	VAL	50.0
CRC remainder	49D4256C		


Required additional data

LTP/FTP orthometric height	10.6
----------------------------	------

CHANGE : FAS DATA BLOCK, Required additional data established.


RJOO / OSAKA INTL

HLDG PATTERN

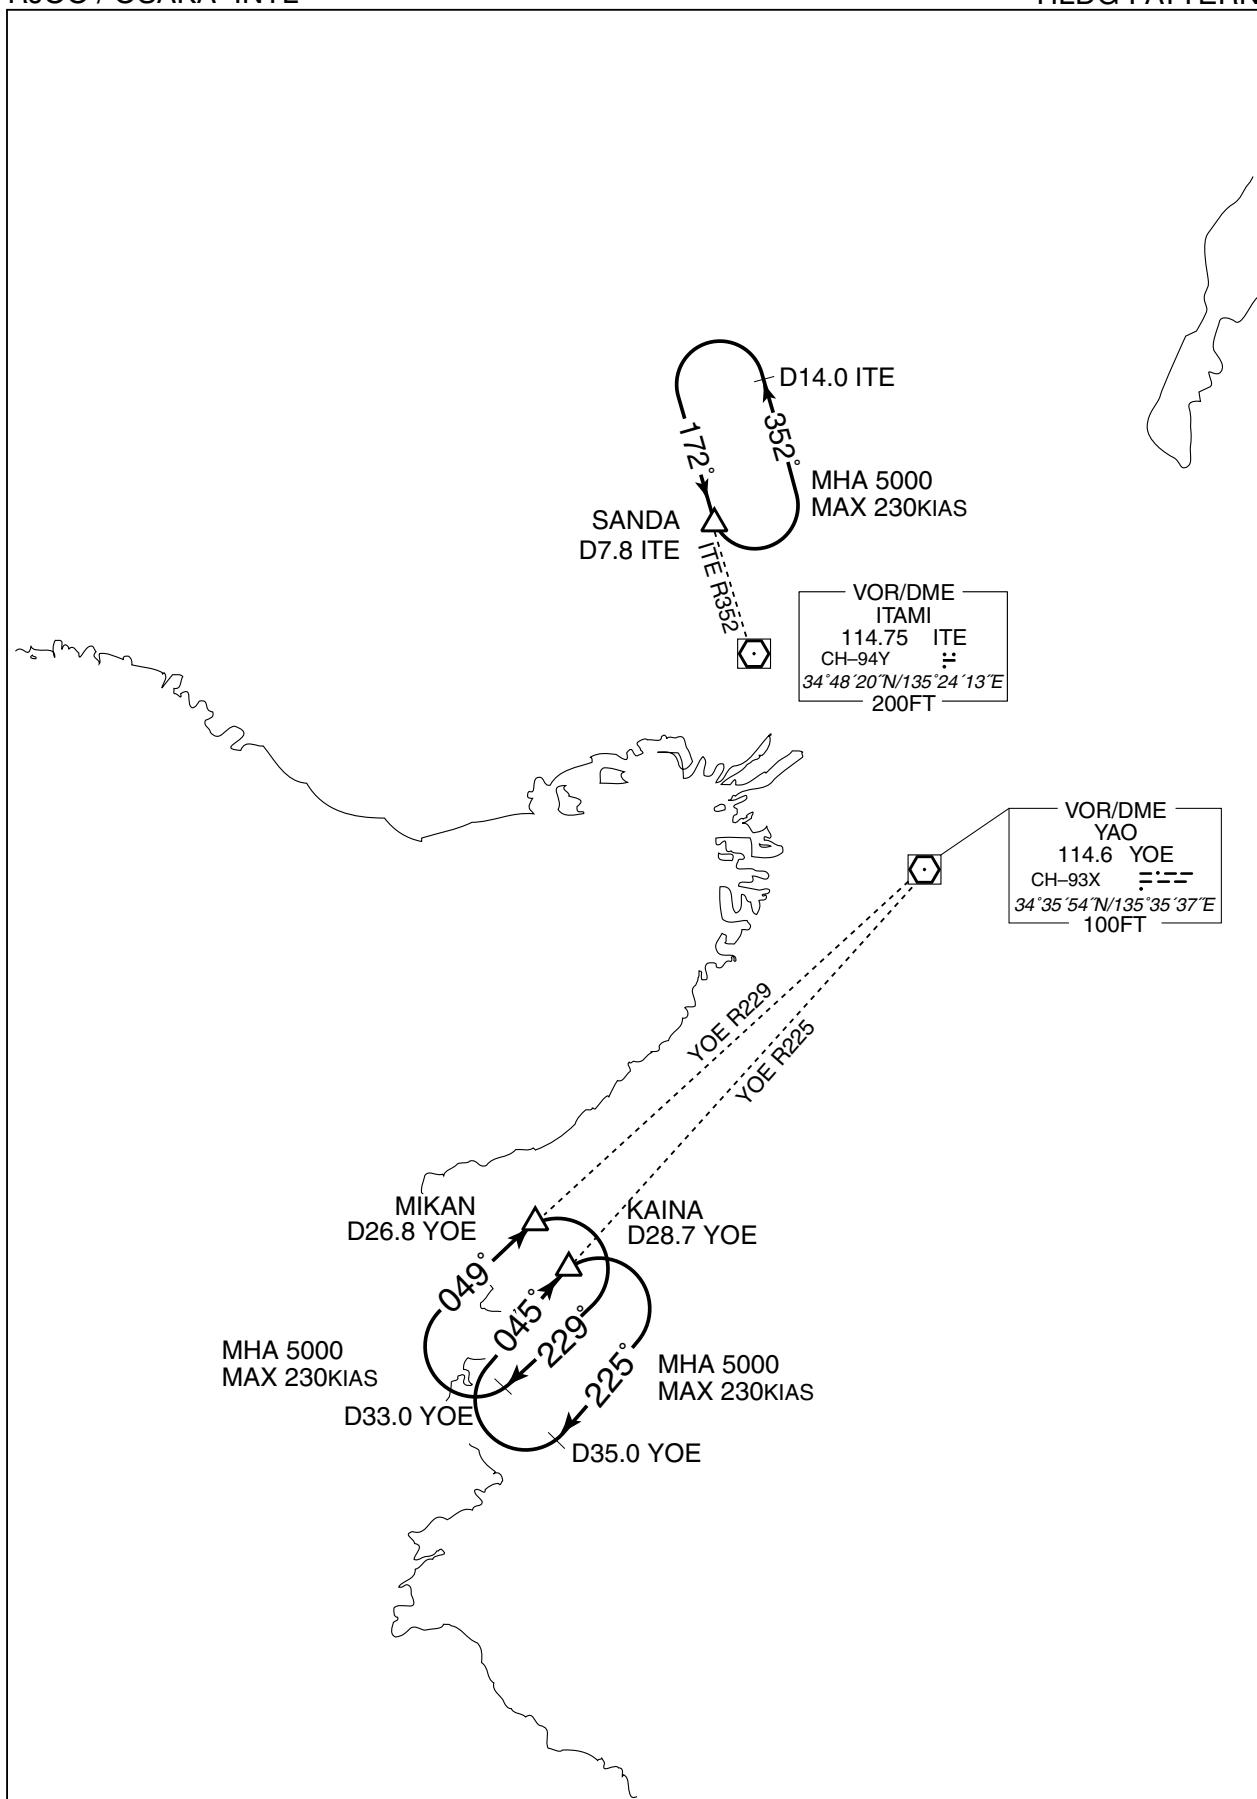

RJOO / OSAKA INTL


Visual REP

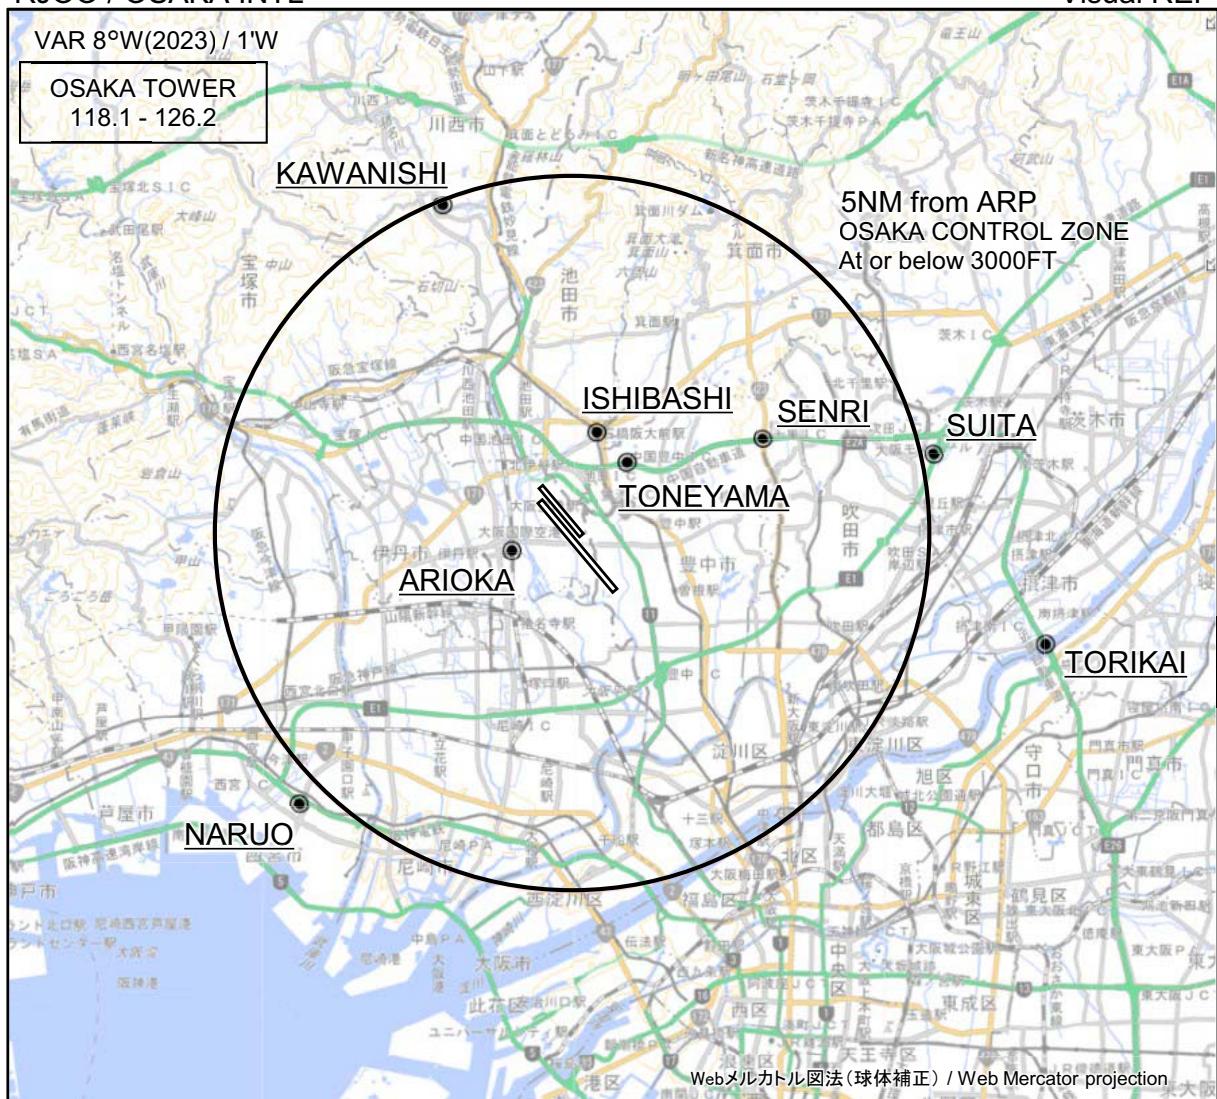

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
川西 Kawanishi	339°T / 4.9NM	多田神社 Shrine
石橋 Ishibashi	013°T / 1.5NM	阪急石橋阪大前駅 Station
千里 Senri	063°T / 3.0NM	千里インターチェンジ Interchange
吹田 Saita	077°T / 5.2NM	吹田ジャンクション Junction
刀根山 Toneyama	037°T / 1.2NM	中国豊中インターチェンジ Interchange
有岡 Arioka	255°T / 0.9NM	JR伊丹駅 Station
鳥飼 Torikai	103°T / 6.8NM	鳥飼大橋 Bridge
鳴尾 Naruo	225°T / 5.4NM	甲子園球場 Baseball ground


CHANGE: VAR.

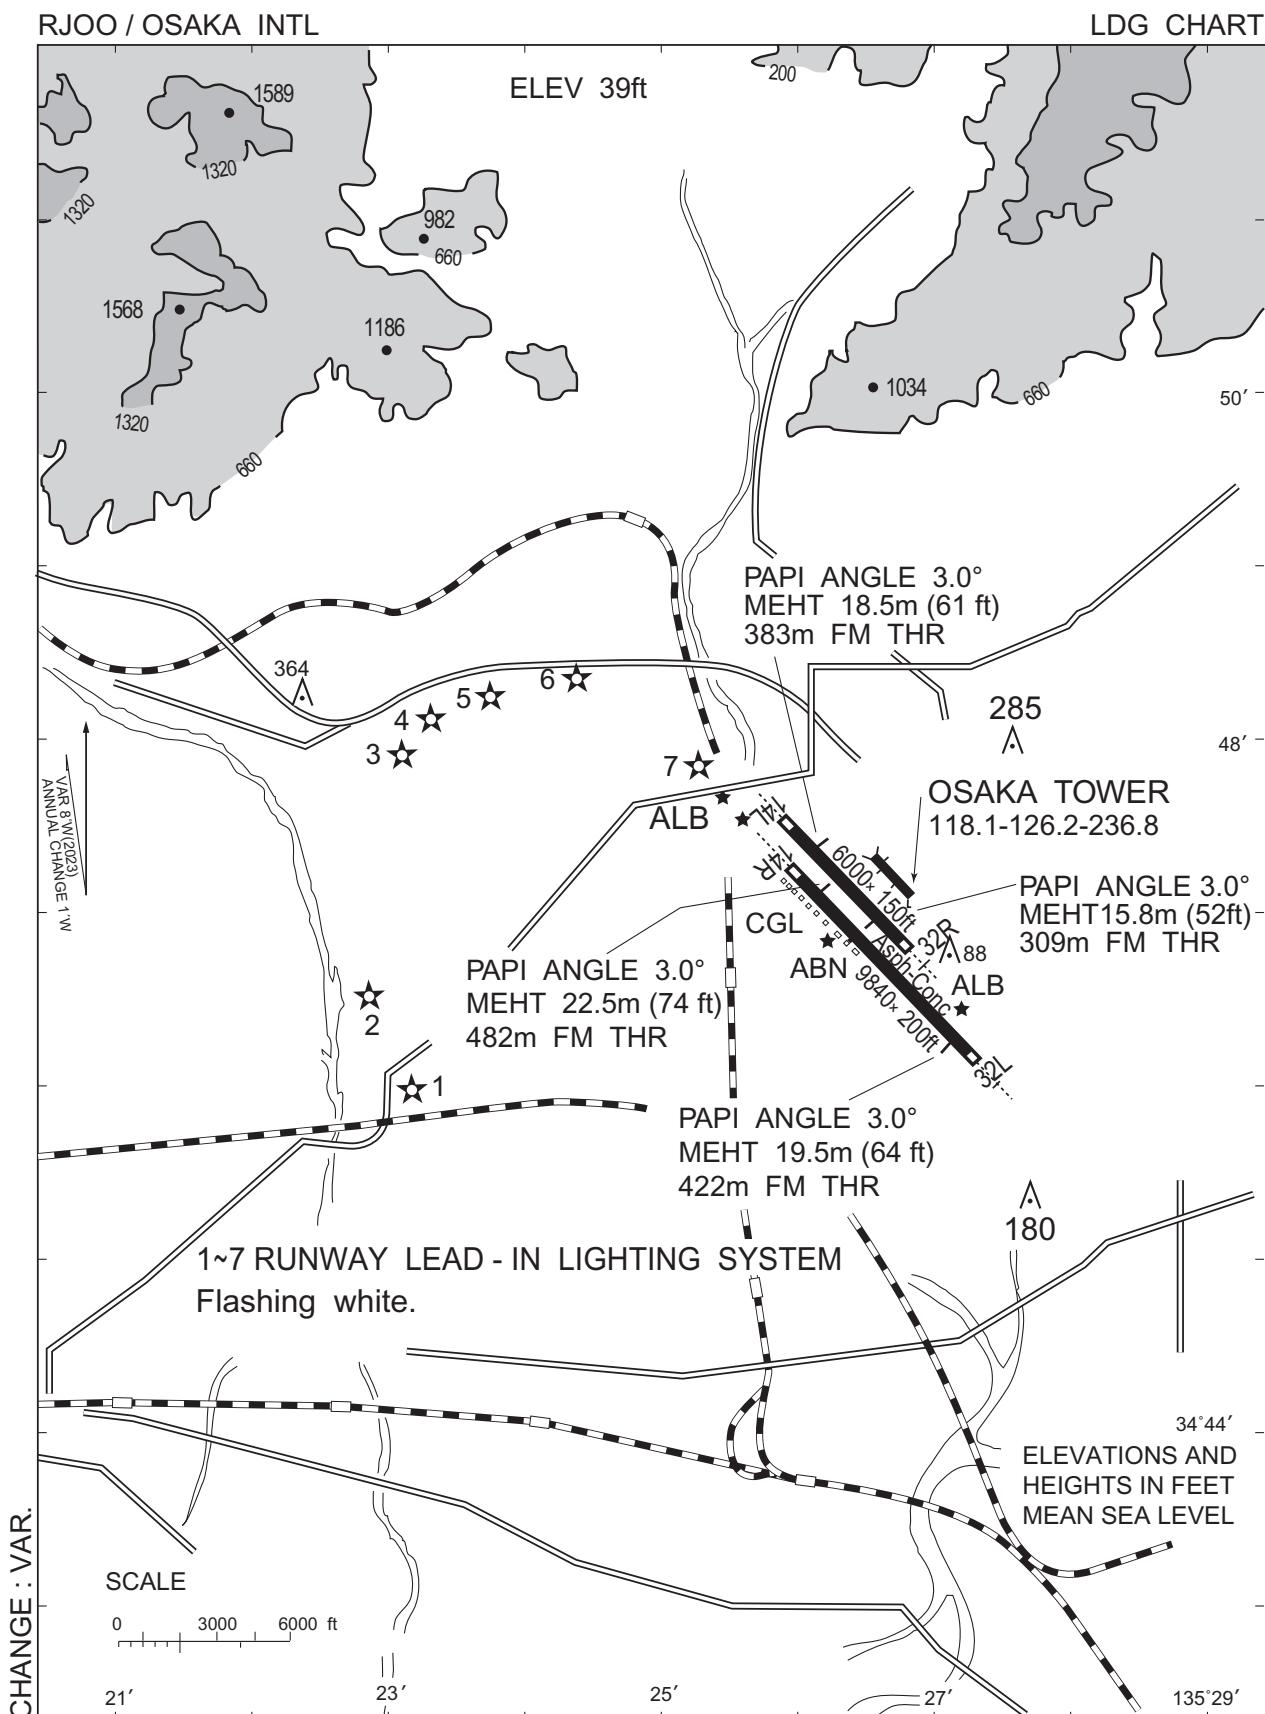

RJOO / OSAKA INTL

Minimum Vectoring Altitude CHART

VAR 8°W (2023)

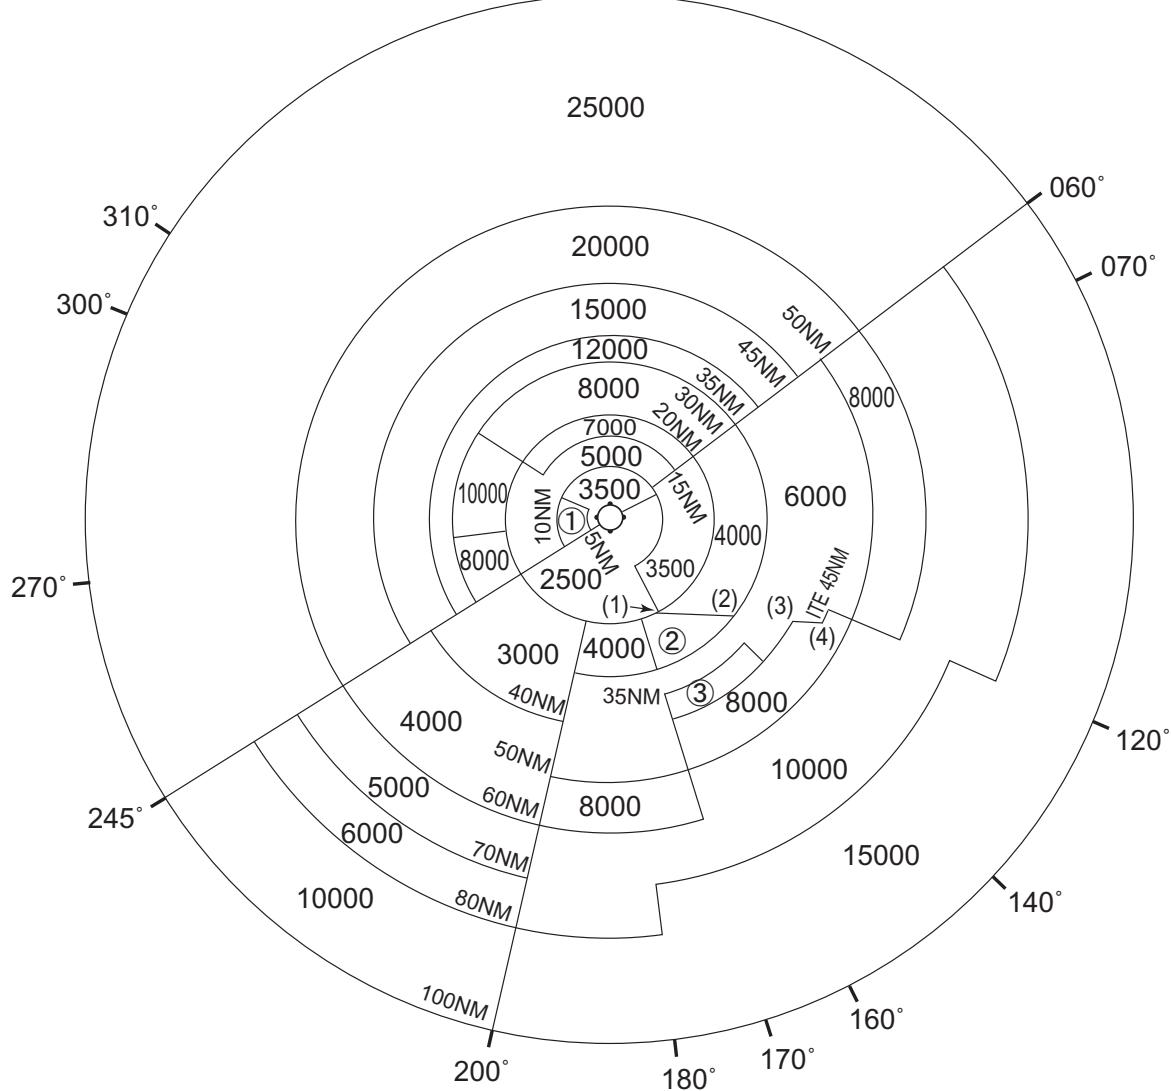

- ① 4100
 ② 5000
 ③ 7000

- (1) 342930N/1353527E
 (2) 342925N/1355432E
 (3) 342918N/1360849E
 (4) 342924N/1361335E

CENTER: 344752N/1352550E (No.1 RADAR SITE)
 CENTER: 344659N/1352600E (No.2 RADAR SITE)

CHANGE : Update(BTN 245° and 300°).