

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

SID

SOUTH SIX DEPARTURE

RWY03 : Climb RWY HDG to 500FT, turn right, direct to MDE VOR/DME.

RWY21 : Climb to MDE VOR/DME.

Cross MDE VOR/DME at or above 2400FT.

SOUTH SIX DEPARTURE



VOR/DME
MINAMIDAITO
117.8 MDE
CH-125X
25°51'16"N/131°15'50"E
200FT



RORK / KITADAITO

RNAV SID



NOTE RWY03 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	210 (205.4)	-4.9	—	—	+500	—	—	RNP1
002	DF	CORCO	—	—	-4.9	—	R	+5000	—	—	RNP1


INSTRUMENT APPROACH CHART

RORK / KITADAITO

VOR Z RWY03



NM from MDE	FAF	1	2	3	4	MAPt
ALT (3.0° APCH Path)	2030	1711	1393	1075	756	—

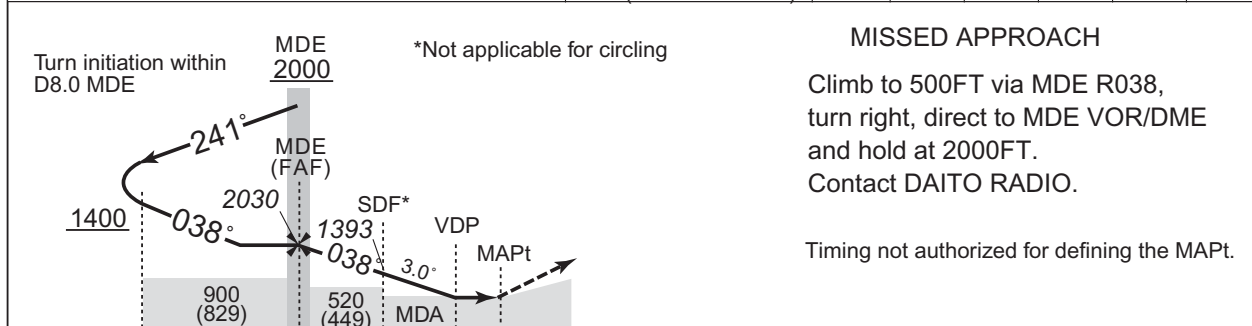

0	2.0	4.8	5.2	6.0	DME from MDE
6.0	4.0	1.2	0.8	0	NM to THR

MINIMA		THR elev. 74	AD elev. 71	
CAT	MDA(H)	CMV	MDA(H)	VIS
A	480 (409)	1500	560 (489)	1600
B	480 (409)	1500	560 (489)	1600
C	490 (419)	1800	630 (559)	2400
D	—	—	—	—

CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

RORK / KITADAITO

VOR Y RWY03



CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

RORK / KITADAITO

RNP RWY03



CHANGE:PROC renamed. Requirement for RNP:

RORK / KITADAITO

Visual REP

VAR 5°W (2014) / 2.1°W

DAITO RADIO
118.55

10NM N

沖縄

KITADAITO INFORMATION ZONE
At or below 3000FT

10NM W

5NM from ARP

北大東島

北大

MINAMIDAITOJIMA

南大東島

南大東

MINAMIDAITO INFORMATION ZONE
At or below 3000FT

大東諸島

Webメルカトル図法(球体補正) / Web Mercator projection

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
10NM W	270°T / 10.0NM	海上 Over the sea
南大東島 Minamidaitojima	210°T / 6.8NM	南大東空港 Minamidaito Airport

RORK / KITADAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

