


AD CHART

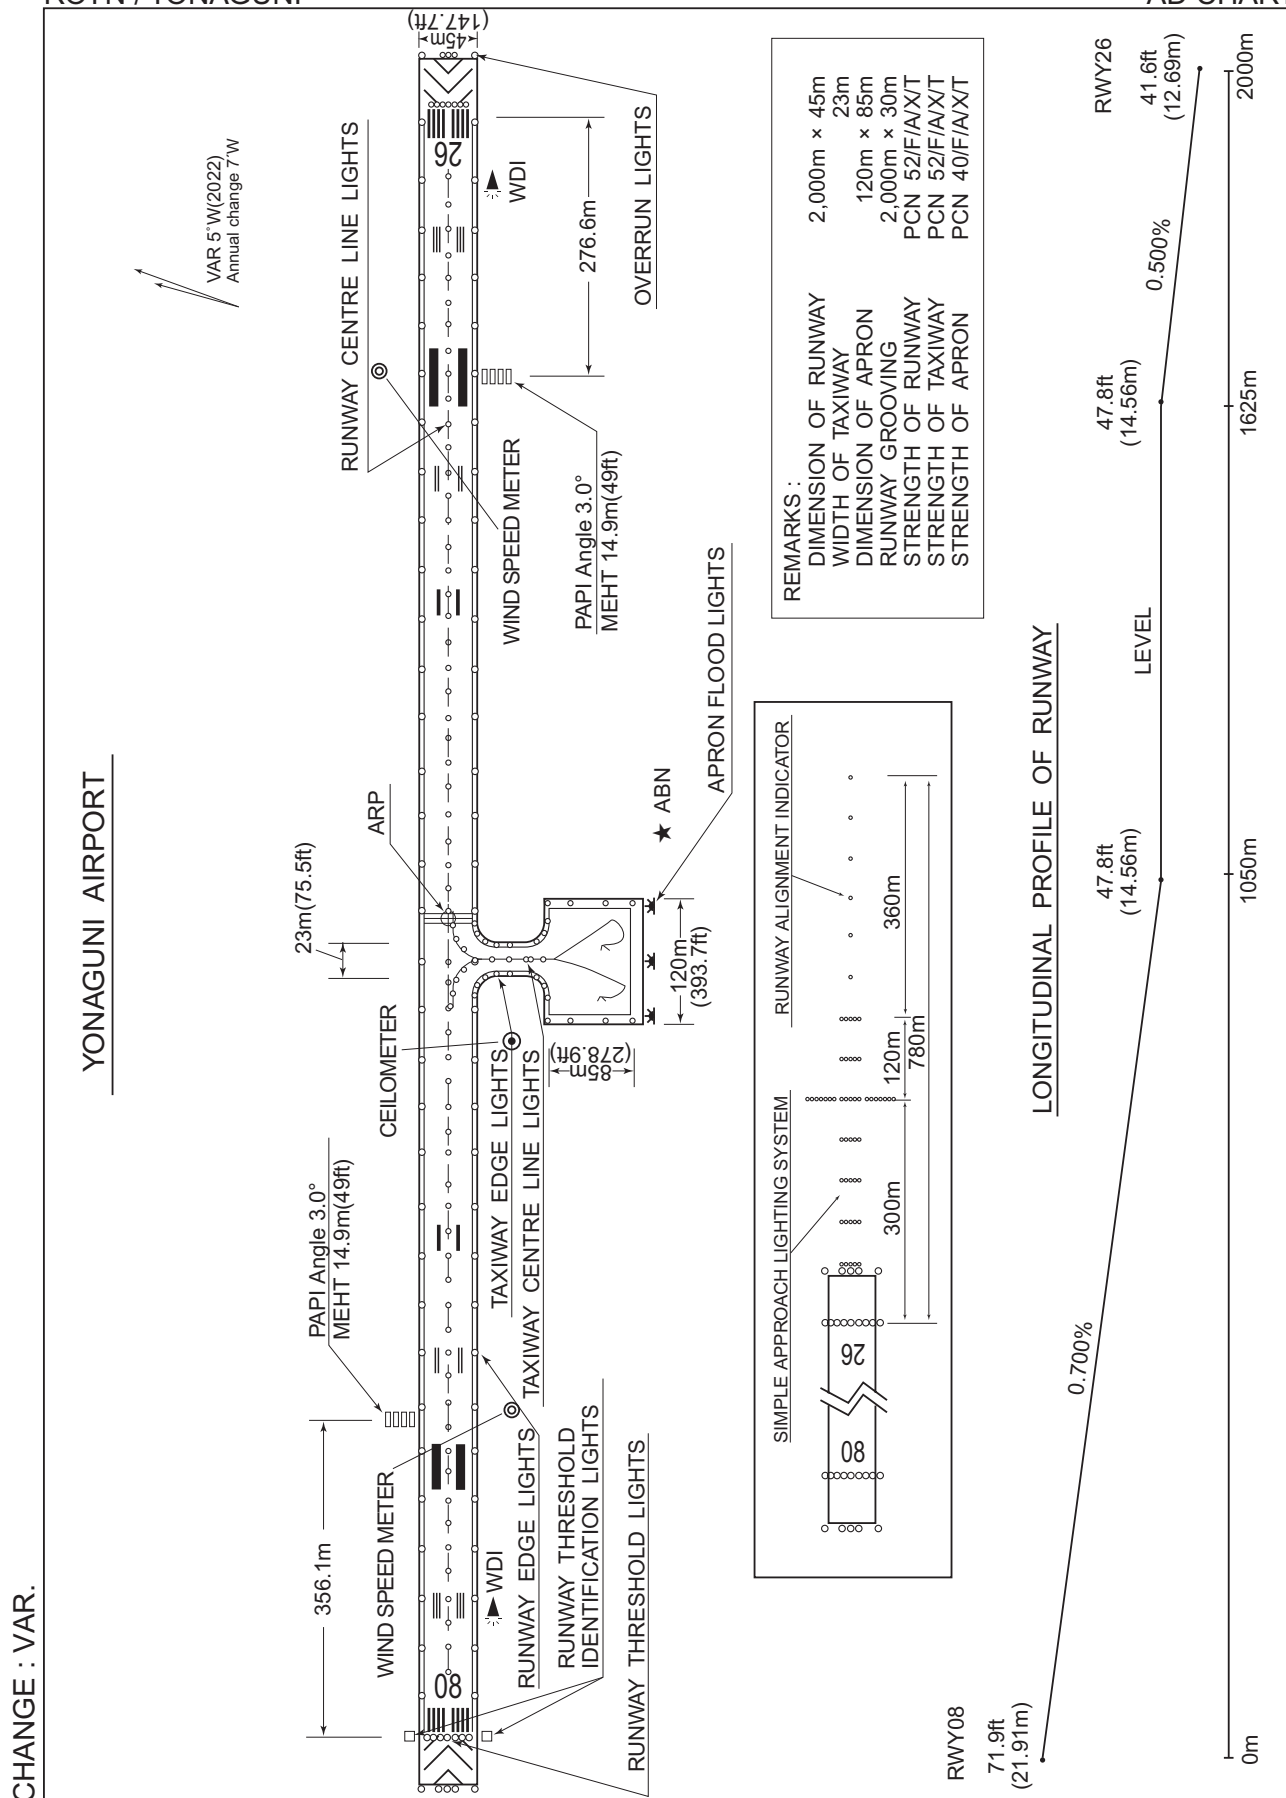

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

SID

TAKZO TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn left,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R022 to TAKZO.

Note RWY08 : 6.7% climb gradient required up to 700FT.

OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.

OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.

ABASA TWO DEPARTURE

RWY 08 : Climb RWY HDG until 3NM from RWY end/YNE 2.7DME, turn right,...

RWY 26 : Climb RWY HDG until 700FT, turn right,...

...climb via YNE R101 to ABASA.

Note RWY08 : 6.7% climb gradient required up to 700FT.

OBST ALT 89FT located at 0.1NM 126° FM end of RWY08.

RWY26 : No turn before DER.

In case of climbing with 9.0 % gradient up to 900FT, another TKOF WX MINIMA is applicable.

OBST ALT 358FT located at 0.6NM 236° FM end of RWY26,

OBST ALT 912FT located at 2.1NM 115° FM end of RWY26.



CHANGE : PROC renamed. Radial FM YNE. Note RWY08 added. OBST chart added.

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

RNAV SID



CHANGE : New PROC

STANDARD DEPARTURE CHART -INSTRUMENT

ROYN / YONAGUNI

RNAV SID

AYAKA ONE DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	080 (075.2)	-4.6	—	—	+700	—	—	Basic RNP1
002	DF	AYAKA	—	—	-4.6	—	R	—	—	—	Basic RNP1

RWY26


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	260 (255.2)	-4.6	—	—	+600	—	—	Basic RNP1
002	DF	YN600	—	—	-4.6	—	R	—	—	—	Basic RNP1
003	TF	AYAKA	—	111 (106.1)	-4.6	36.3	—	—	—	—	Basic RNP1

CHANGE : New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

ROYN / YONAGUNI

RNAV STAR RWY26

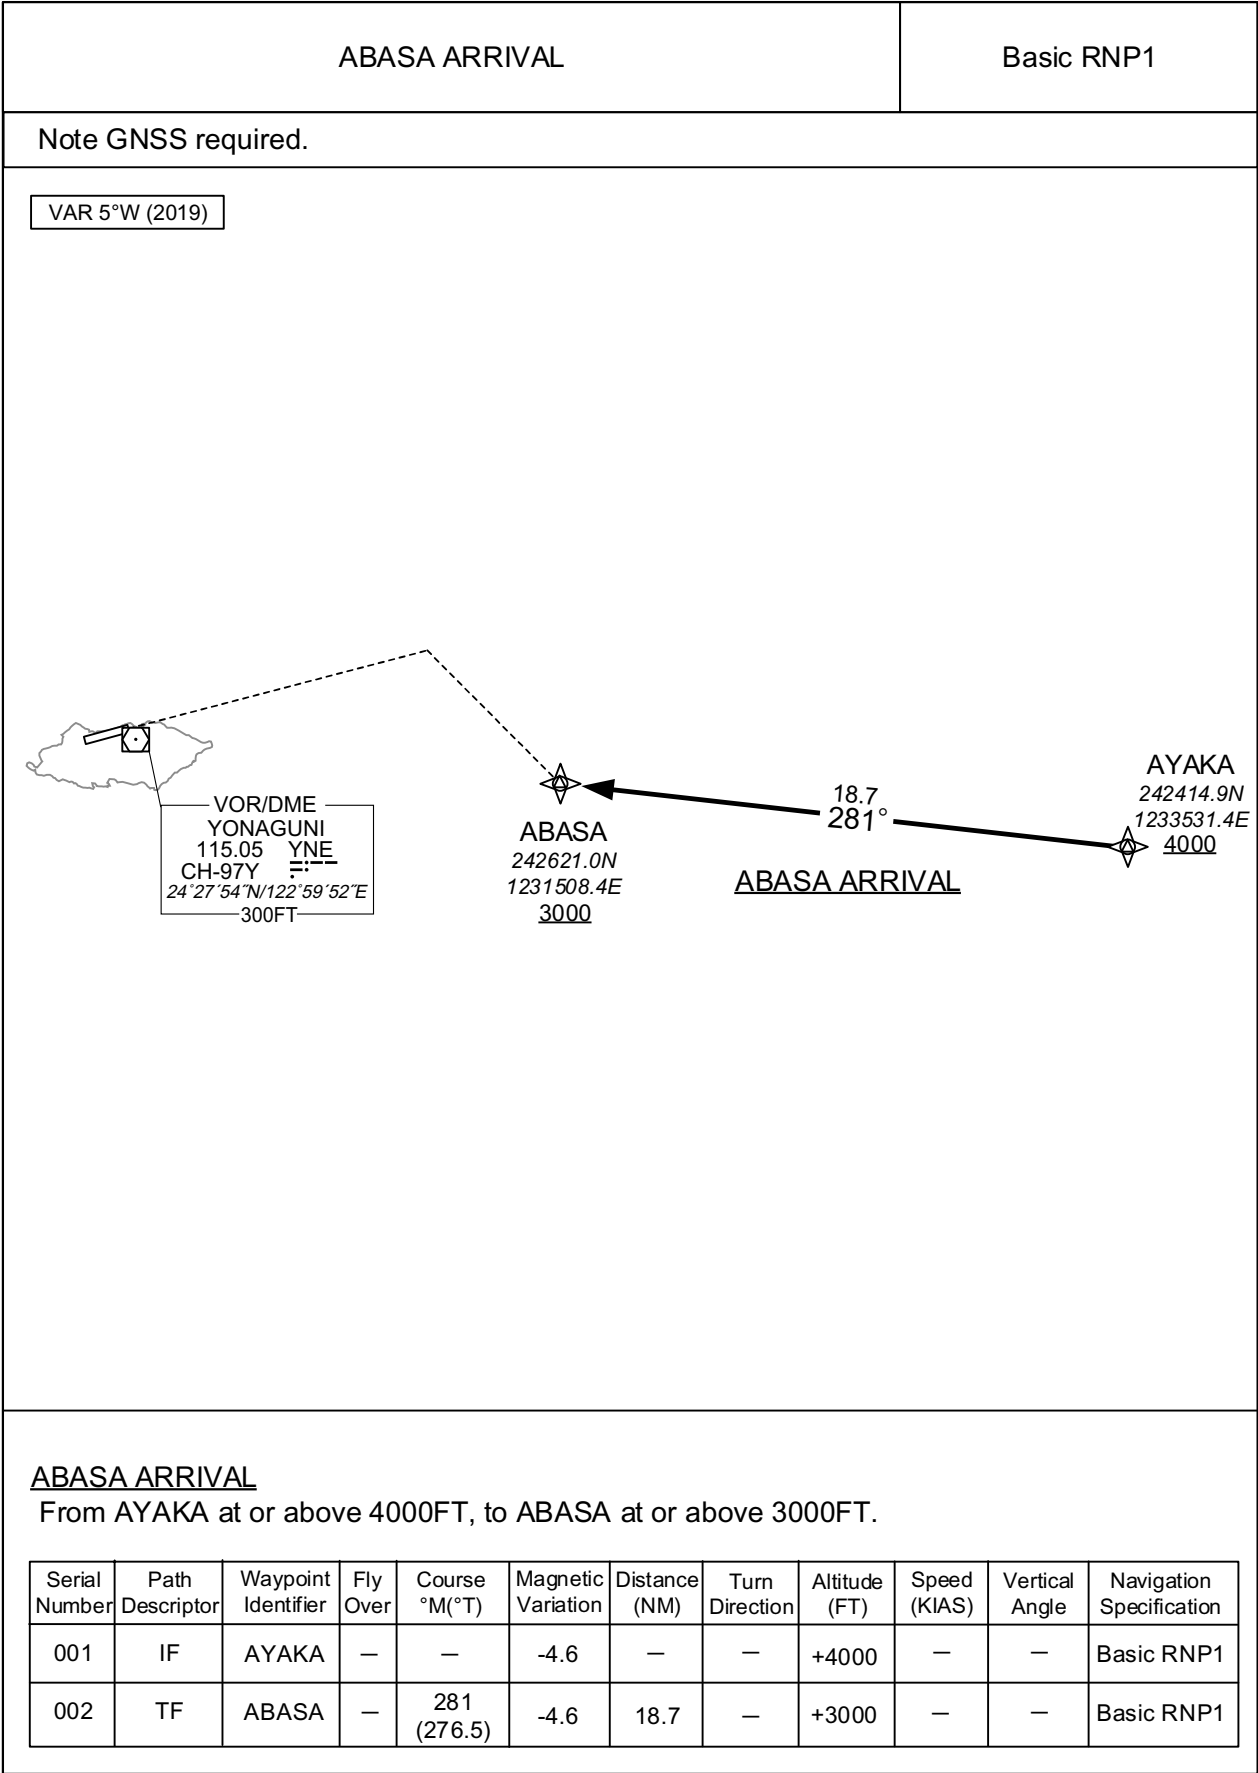

CHANGE : New PROC

INTENTIONALLY LEFT BLANK

ROYN / YONAGUNI

LOC RWY26

[illegible]

CHANGE : ATC call sign.


Missed APCH climb gradient MNM 5.0%					
MINIMA		THR elev. 42	AD elev. 49		
CAT			CIRCLING		
	MDA(H)	CMV	MDA(H)	VIS	
A	570 (521)	1000	1020 (971)	1600	
B		1200			
C				1600	2400
D					3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to **NORTH** side of RWY only.

INSTRUMENT APPROACH CHART

ROYN / YONAGUNI


VOR RWY26

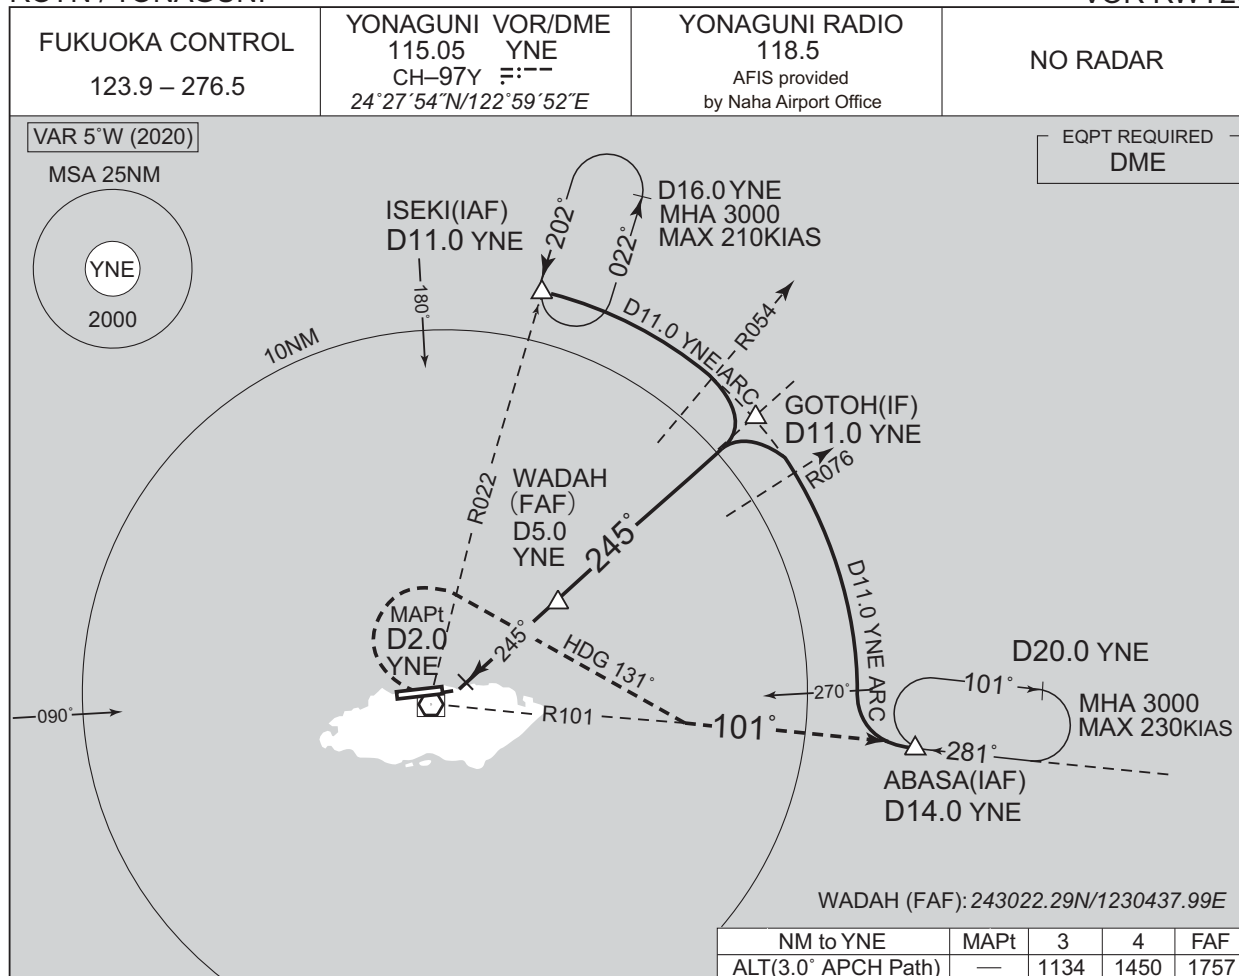

MISSED APPROACH

Turn right, climb to 3000FT via HDG 131° to intercept and proceed via YNE R101 to ABASA and hold.
Contact YONAGUNI RADIO.

Timing not authorized for defining the MAPt.

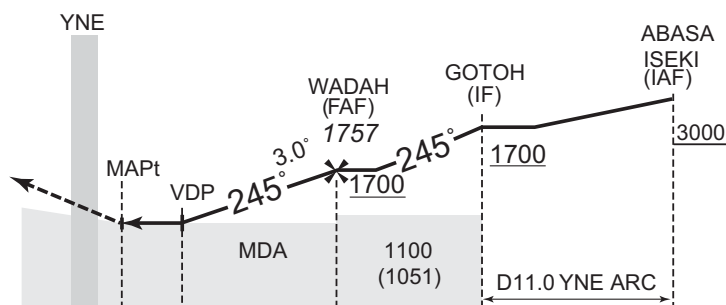

DME to YNE	0	2.0	2.3	5.0	11.0
NM to THR	0	2.3	2.6	5.3	11.3

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 42	AD elev. 49	
CAT	MDA(H)	CMV	MDA(H)	VIS
A	880 (831)	1200	1020 (971)	1600
B		1400		2400
C		1400		2400
D		1800		3200


MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to NORTH side of RWY only.

CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

ROYN/YONAGUNI

RNAV(GNSS) RWY26

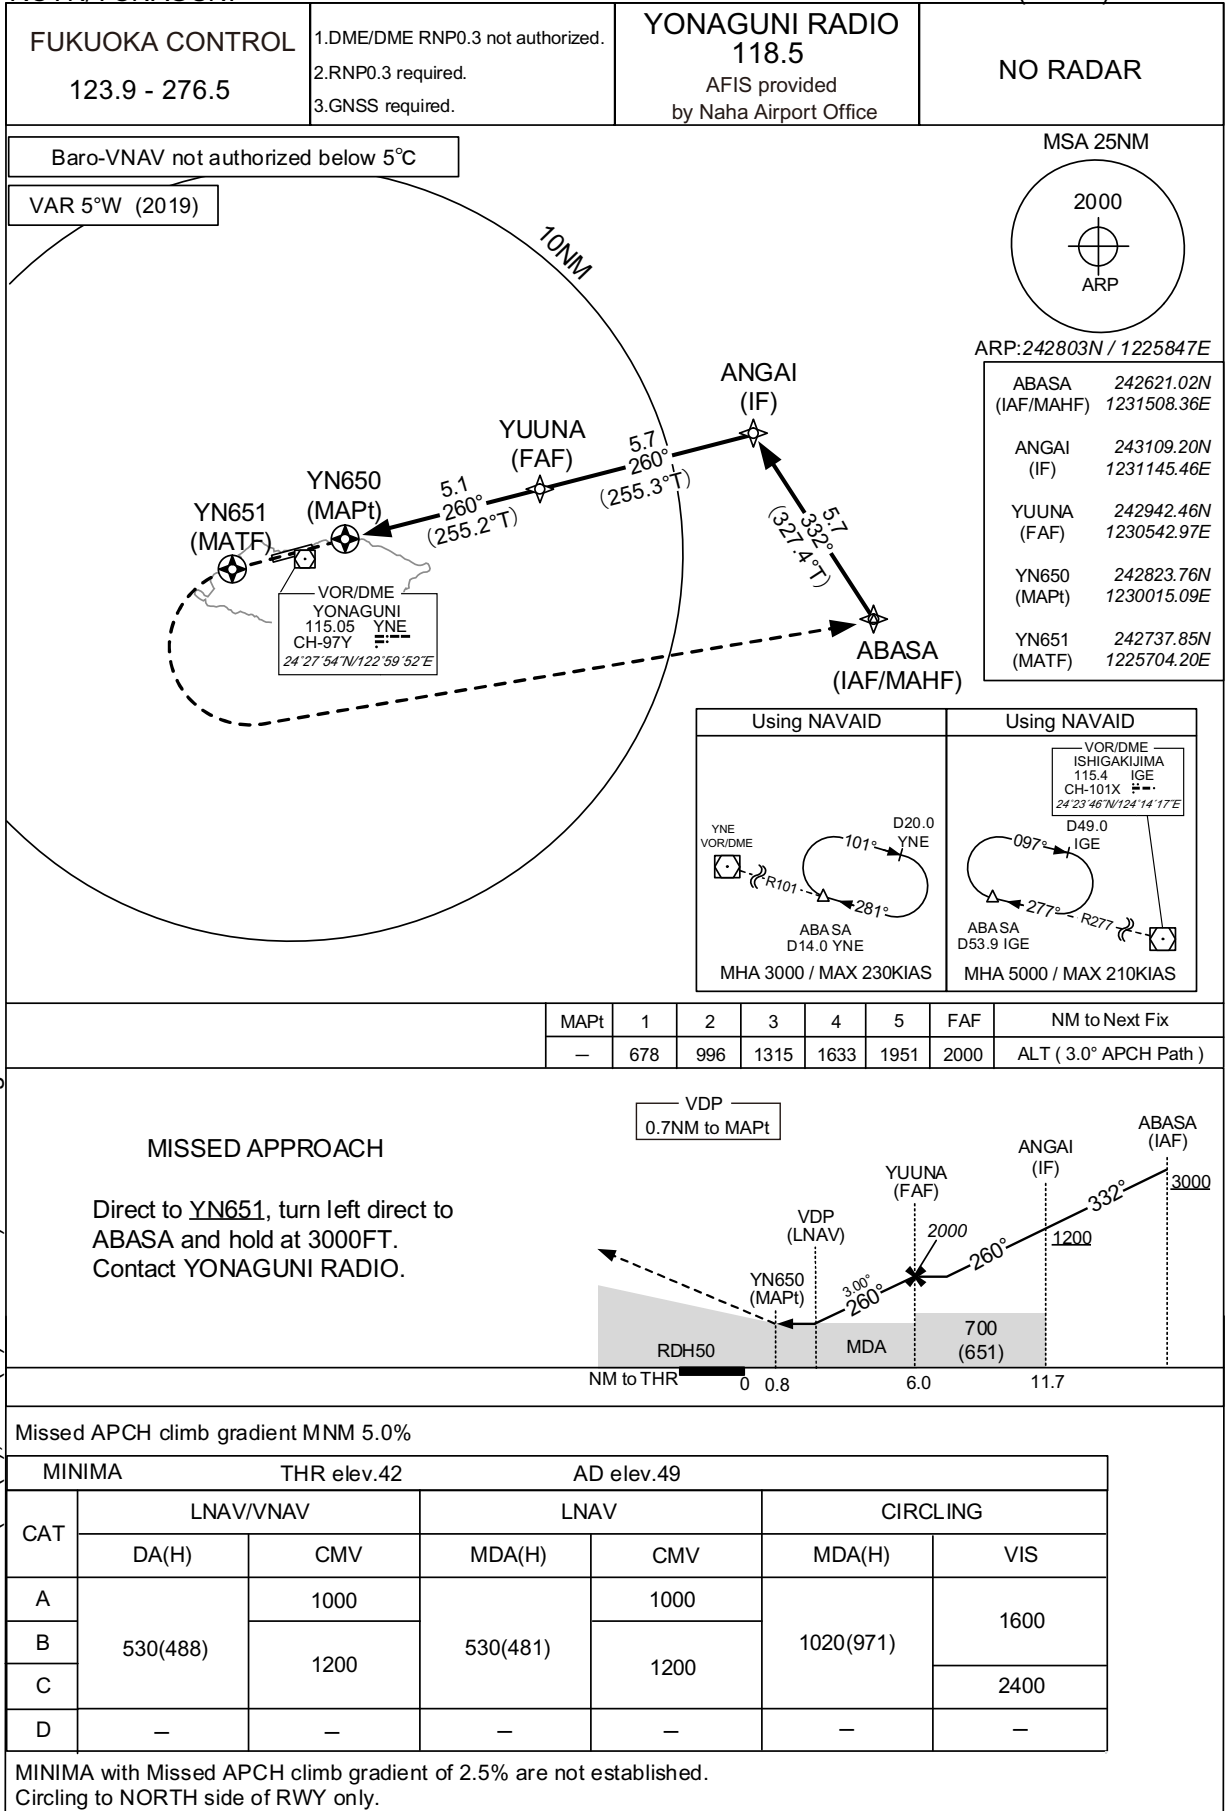

CHANGE : VDP, MINIMA(DA(H), MDA(H) for LNAV). ATC call sign. Sensor for RNAV.

INTENTIONALLY LEFT BLANK

ROYN / YONAGUNI

Visual REP



CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
10NM E	090°T / 10.0NM	海上 Over the sea

ROYN / YONAGUNI

Minimum Vectoring Altitude CHART

