

## AD CHART

**TRUE NORTH**

**SAGA AP**

★ ABN

286m

110m

WEST APRON

EAST APRON

T-2 TWY

T-1 TWY

PAPI Angle 3.0°  
MEHT 18.5m(61ft)

366.2m

65m

WDI

65m

TURNING POINT ID LGT

420m

300m 180m

APCH LGT BEACONS

SALS

65m

65m

65m

WDI

65m

TURNING POINT ID LGT

374.6m

RVR

PAPI Angle 3.0°  
MEHT 18.5m(61ft)

OVERRUN AREA EDGE LGT

**REMARKS :** RWY GROOVING 2000m×30m  
STRENGTH OF RWY PCN 68/F/C/X/T  
WIDTH & STRENGTH OF TWY  
T-1 30m PCN 55/F/B/X/T  
T-2 9m PCN 13/F/C/Y/T  
DIMENSION & STRENGTH OF APRON  
WEST APRON 220m×110m PCN 74/R/B/X/T  
EAST APRON 68m×52m PCN 13/F/C/Y/T

**LONGITUDINAL PROFILE OF RWY**

APCH LIGHTING SYSTEM

SEQUENCED FLASHING LGT (SFL-V)

300m

900m

6ft (1.7m)

6ft (1.9m)

0.1%

LEVEL

RWY 11

RWY 29

6ft (1.7m)

6ft (1.9m)

LEVEL

**DETAIL DRAWING EAST APRON**

68m

52m

10 2 4 6 8

1 3 5 7

**INTENTIONALLY LEFT BLANK**

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

SAGA REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 090° to intercept and proceed...  
...via SGE R135 to 9.0DME, turn left, direct to SGE VOR/DME.

Cross SGE VOR/DME at 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.


ARIAKE REVERSAL TWO DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right HDG 288°...

RWY29 : Climb RWY HDG to 500FT, turn left HDG 198°...

...to intercept and proceed via SGE R243 to 7.0DME, turn right, direct to SGE VOR/DME.  
Cross SGE VOR/DME at or above 6000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.

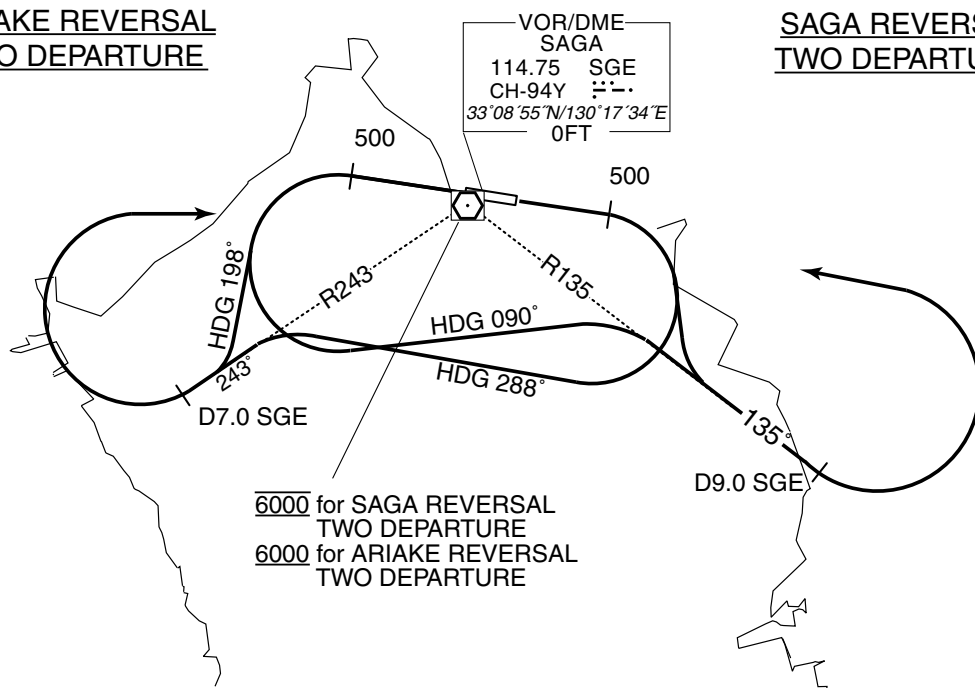ARIAKE REVERSAL  
TWO DEPARTURESAGA REVERSAL  
TWO DEPARTURE

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

TRANSITION

KUMAMOTO TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn left, via KUE R271 to KUE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.

NAGASAKI TRANSITION

From over SGE VOR/DME, via SGE R195 to 18.0DME, turn right, direct to OLE VOR/DME.

Cross SGE R195/6.0DME at 6000FT, cross SGE R195/18.0DME at or above 10000FT.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

SID

KIKYU FIVE DEPARTURE

RWY11 : Climb RWY HDG to 500FT, turn right,...

RWY29 : Climb RWY HDG to 500FT, turn left HDG075° to intercept and proceed...  
... via SGE R120 to 9.0DME, turn left HDG048° to intercept  
and proceed via SGE R093 to KIKYU.

Cross KIKYU at or above 13000FT.

Note RWY29 : 3.5% climb gradient required up to 500FT.



## STANDARD DEPARTURE CHART - INSTRUMENT


RJFS / SAGA

TRANSITION

MUSASHI TRANSITION

From over KIKYU, via TFE R253 to TFE VOR/DME.

Cross TFE R253/38.0DME at or above FL140, cross TFE R253/31.0DME at or above FL170.

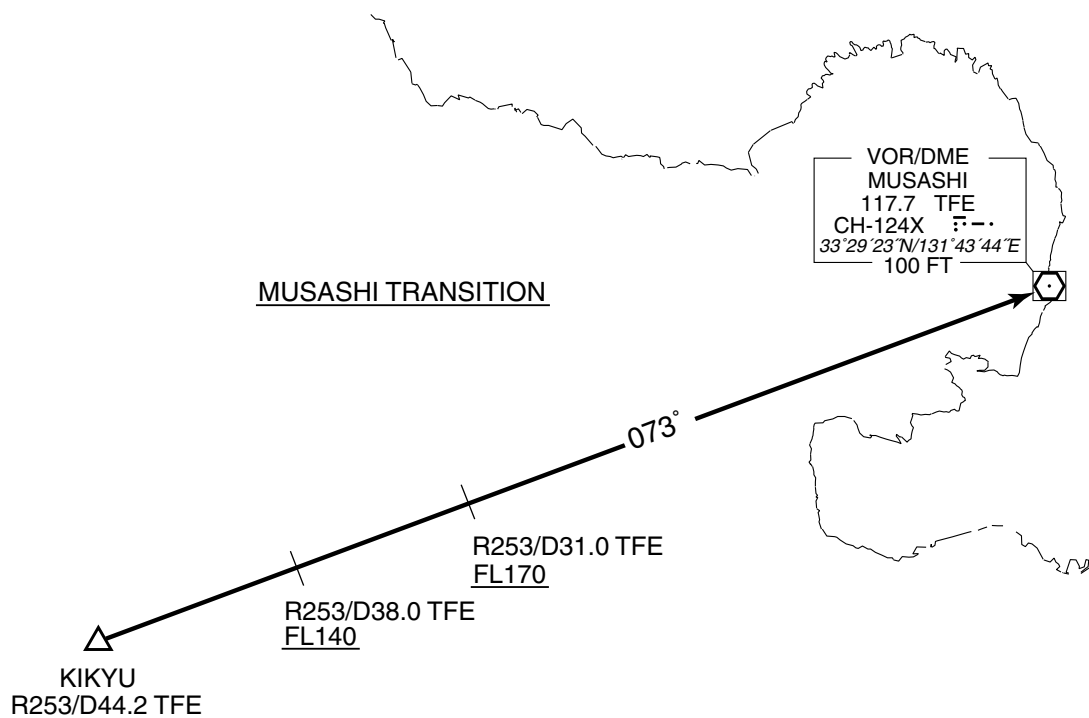

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV TRANSITION

OOITA TRANSITION			RNAV1
NOTE 1 ) DME/DME/IRU or GNSS required. 2 ) RADAR service required.	Critical DME	—	
	DME GAP	—	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 7° W(2016)

OOITA TRANSITION

From KIKYU at or above 13000FT, to WAITA at or above FL170, to OOITA.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIKYU	—	—	-7.2	—	—	+13000	—	—	RNAV1
002	TF	WAITA	—	094 (086.3)	-7.2	8.1	—	+FL170	—	—	RNAV1
003	TF	OOITA	—	094 (086.4)	-7.2	30.9	—	—	—	—	RNAV1

**INTENTIONALLY LEFT BLANK**



STANDARD DEPARTURE CHART - INSTRUMENT



## STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

BALLOON ONE DEPARTURE

## RWY11

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	106 (099.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	CF	FS100	—	120 (113.2)	-7.2	—	—	—	—	—	Basic RNP1
003	TF	KIKYU	—	084 (076.8)	-7.2	24.3	—	+13000	—	—	Basic RNP1

## RWY29

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	286 (279.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS900	—	—	-7.2	—	L	—	—	—	Basic RNP1
003	TF	FS100	—	089 (081.8)	-7.2	8.4	—	—	—	—	Basic RNP1
004	TF	KIKYU	—	084 (076.8)	-7.2	24.3	—	+13000	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

SOIGI ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 7° W(2016)



SOIGI ONE DEPARTURE

RWY11 : Climb on HDG106° at or above 500FT, turn right direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

RWY29 : Climb on HDG286° at or above 500FT, turn left direct to FS110, to FS111 at or above 6000FT, to FS112, to KUE.

NOTE RWY29 : 3.5% climb gradient required up to 500FT.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJFS / SAGA

RNAV SID

SOIGI ONE DEPARTURE

## RWY11

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	106 (099.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS110	—	—	-7.2	—	R	—	—	—	Basic RNP1
003	TF	FS111	—	153 (145.5)	-7.2	6.6	—	+6000	—	—	Basic RNP1
004	TF	FS112	—	153 (145.6)	-7.2	6.8	—	—	—	—	Basic RNP1
005	TF	KUE	—	091 (083.4)	-7.2	19.2	—	—	—	—	Basic RNP1

## RWY29

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	286 (279.3)	-7.2	—	—	+500	—	—	Basic RNP1
002	DF	FS110	—	—	-7.2	—	L	—	—	—	Basic RNP1
003	TF	FS111	—	153 (145.5)	-7.2	6.6	—	+6000	—	—	Basic RNP1
004	TF	FS112	—	153 (145.6)	-7.2	6.8	—	—	—	—	Basic RNP1
005	TF	KUE	—	091 (083.4)	-7.2	19.2	—	—	—	—	Basic RNP1

STANDARD ARRIVAL CHART-INSTRUMENT

RJFS / SAGA

STAR

IRPIN NORTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP, via SGE R194 to SGE VOR/DME via UGAMU.

Cross MILEP at 6000FT, cross SGE VOR/DME at or above 5000FT.

IRPIN SOUTH ARRIVAL

From over IRPIN, via OLE R102 to MILEP.

Cross MILEP at 6000FT.

CHANGE: New PROC



**INTENTIONALLY LEFT BLANK**

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

## ILS or LOC RWY29



## INSTRUMENT APPROACH CHART

RJFS / SAGA

VOR RWY29

FUKUOKA RADAR  
119.7 – 279.2SAGA VOR/DME  
114.75 SGE  
CH-94Y  
33°08'55"N/130°17'34"ESAGA RADIO  
118.025 – 126.2  
(2130–2300(UTC)  
1030–1500  
SAGA REMOTE  
118.025

NO RADAR

VAR 7°W (2014)

3431


1647

EQPT REQUIRED  
DME

1328

1194


MSA 25NM



1703

1122

1345

MHA 5000  
MAX 210KIAS

3529

CAUTION:  
After HIGH-STATION(SGE VOR/DME),  
maintain 5000FT or above until  
intercepting outbound SGE R118MOSSA(FAF)  
D6.0 SGE

204

282°

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.0 SGE

A153

282°

118°

135°

D9.0 SGE

Turn initiation within D10.0 SGE  
MAX Turning Speed 190KIAS

1643

1046

1394

784

1469

282°

HDG090°

R135

MAPt

D1.



## INSTRUMENT APPROACH CHART




## RJFS / SAGA

RNAV(RNP) RWY29


FUKUOKA RADAR 119.7 – 279.2	GNSS and RF required.	SAGA RADIO 118.025 – 126.2	<div> <div>2130–2300(UTC) 1030–1500</div> <div>SAGA REMOTE 118.025</div> </div>	NO RADAR
--------------------------------	-----------------------	-------------------------------	---	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

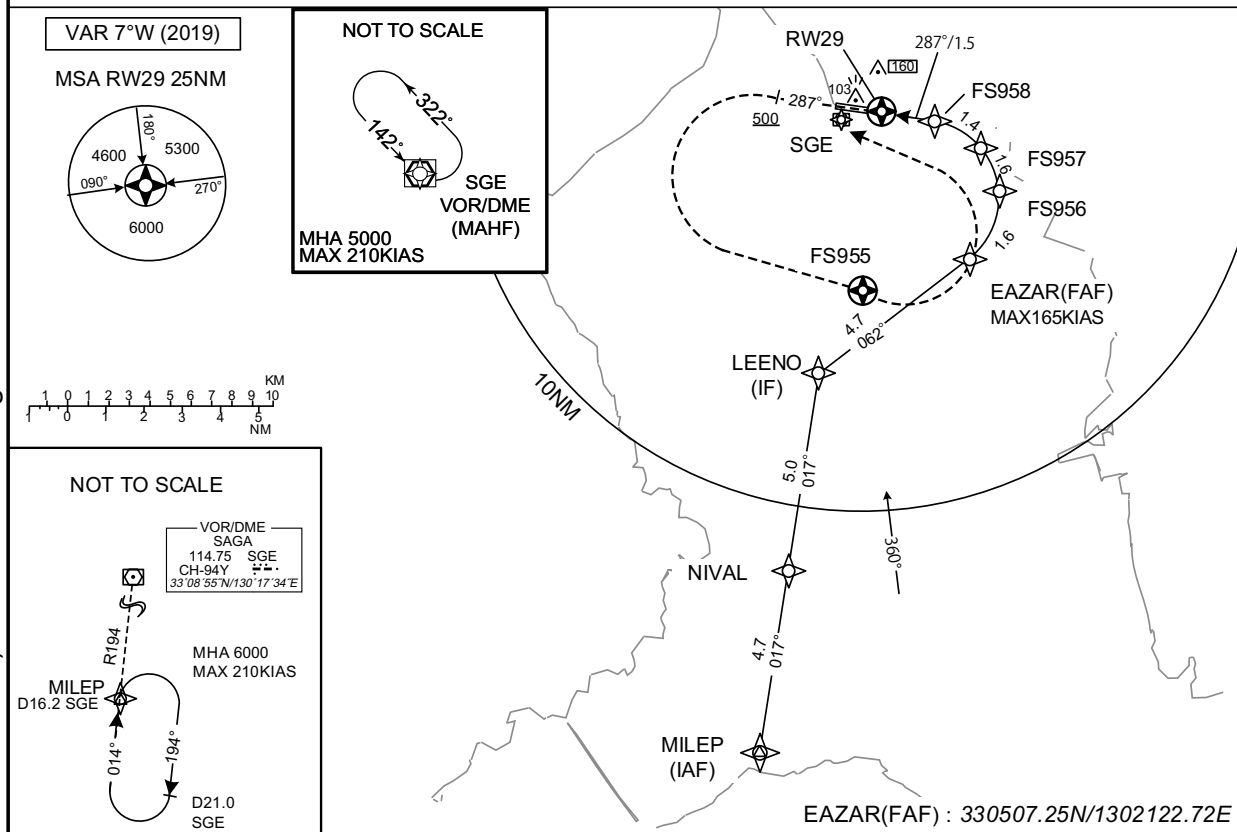

From RW29 on track 287° at  
or above 500FT, turn left direct  
to FS955, direct to SGE and  
hold at 5000FT.

Contact FUKUOKA RADAR.

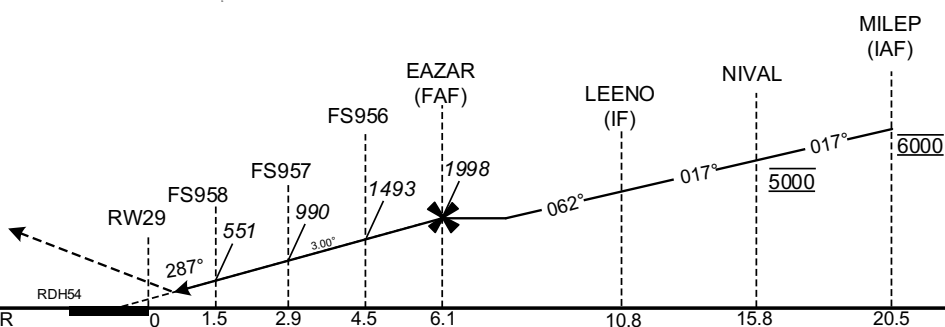

MINIMA	THR elev.6	AD elev.6
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	—	—
B		
C	306 (300)	1000
D		1400

# RNP AR

## Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

## INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY29

RNAV(RNP) RWY29Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MILEP	-	-	-7.5	-	-	6000	-	-	-
002	TF	NIVAL	-	017 (009.2)	-7.5	4.7	-	5000	-	-	0.3
003	TF	LEENO	-	017 (009.2)	-7.5	5.0	-	-	-	-	0.3
004	TF	EAZAR	-	062 (054.2)	-7.5	4.7	-	1998	-165	-	0.3
005	RF Center: FSRF8 r=2.02NM	FS956	-	-	-7.5	1.6	L	1493	-	-3.00	0.3
006	RF Center: FSRF9 r=1.98NM	FS957	-	-	-7.5	1.6	L	990	-	-3.00	0.3
007	RF Center: FSRF0 r=1.75NM	FS958	-	-	-7.5	1.4	L	551	-	-3.00	0.3
008	TF	RW29	Y	287 (279.3)	-7.5	1.5	-	60	-	-3.00/54	0.3
009	FA	-	-	287 (279.3)	-7.5	-	-	+500	-	-	1.0
010	DF	FS955	Y	-	-7.5	-	L	-	-	-	1.0
011	DF	SGE	-	-	-7.5	-	L	5000	-	-	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MILEP	325250.49N/1301501.22E	FSRF8	330645.72N/1301958.78E
NIVAL	325726.55N/1301554.33E	FSRF9	330646.63N/1302001.15E
LEENO	330223.31N/1301651.53E	FSRF0	330654.73N/1302014.52E
EAZAR	330507.25N/1302122.72E		
FS956	330626.19N/1302220.91E		
FS957	330756.35N/1302156.32E		
FS958	330838.87N/1302034.72E		
RW29	330853.77N/1301846.08E		
FS955	330424.77N/1301815.75E		
SGE	330855.03N/1301734.43E		



CHANGE: Update

## RJFS / SAGA

RNAV(RNP) RWY11

FUKUOKA RADAR 119.7 – 279.2	GNSS and RF required.	SAGA RADIO 118.025 – 126.2	(2130–2300(UTC) 1030–1500 SAGA REMOTE 118.025	NO RADAR
--------------------------------	-----------------------	-------------------------------	--	----------

For uncompensated Baro-VNAV systems, procedure not authorized below -10°C / above 45°C

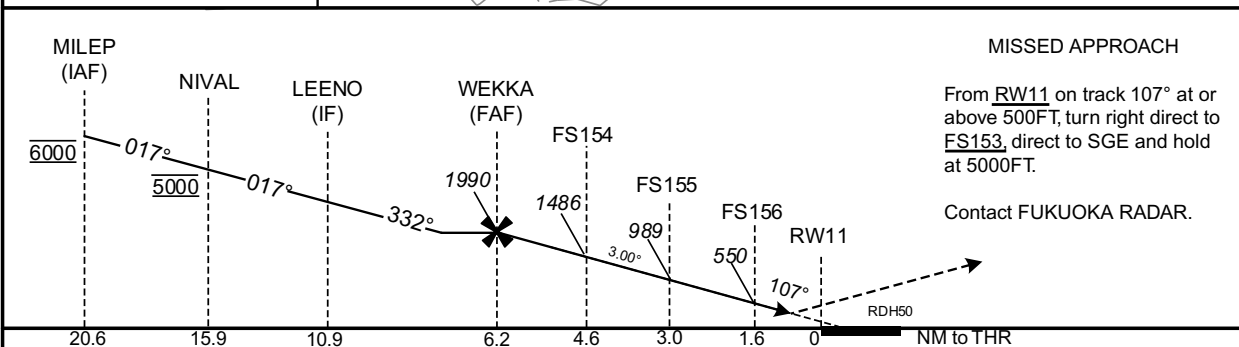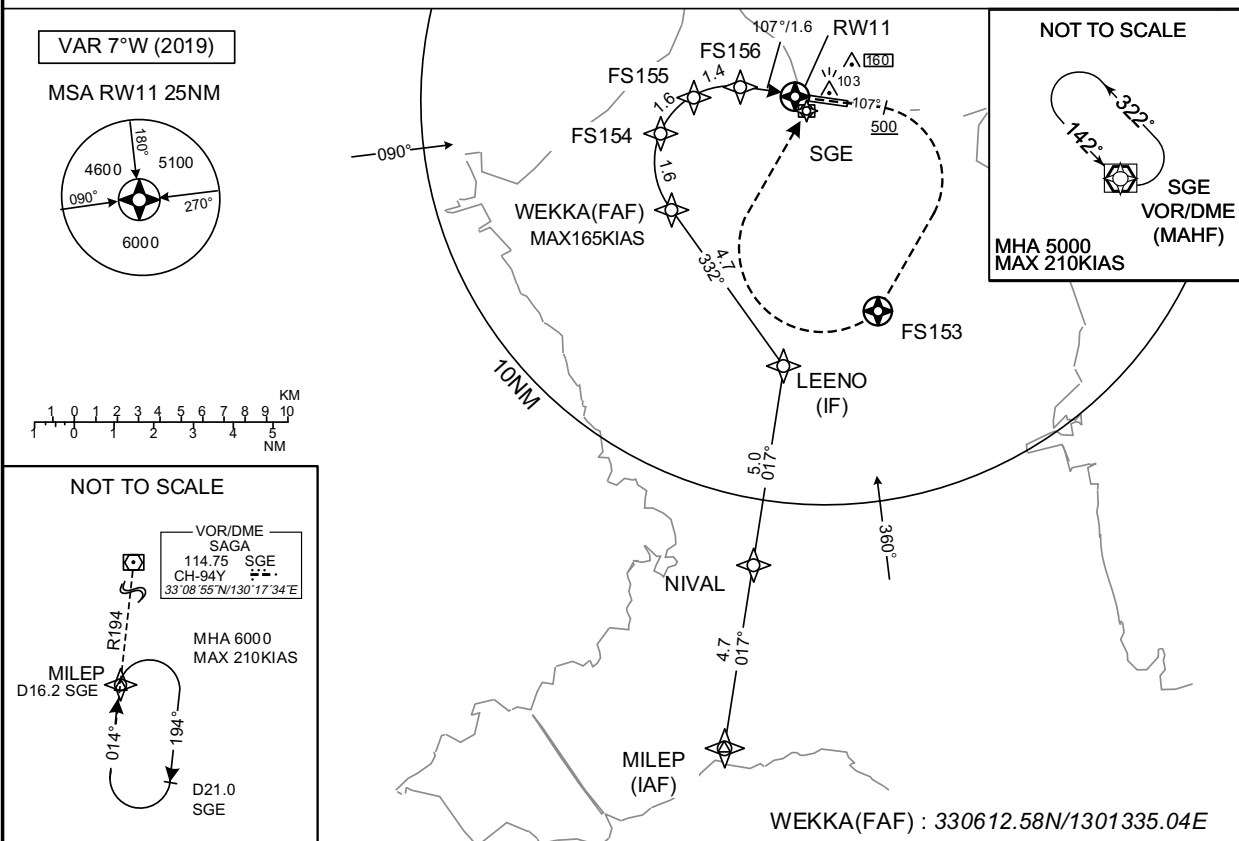

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev.6	AD elev.6
CAT	RNP 0.30		
	DA(H)	CMV	
A	—	—	
B			
C	306 (300)	1400	
D		1600	

MINIMA with Missed APCH climb gradient of 2.5% are not established.

# RNP AR

## Special Authorization Required

CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.

## INSTRUMENT APPROACH CHART

RJFS / SAGA

RNAV(RNP) RWY11

RNAV(RNP) RWY11Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MILEP	-	-	-7.5	-	-	6000	-	-	-
002	TF	NIVAL	-	017 (009.2)	-7.5	4.7	-	5000	-	-	0.3
003	TF	LEENO	-	017 (009.2)	-7.5	5.0	-	-	-	-	0.3
004	TF	WEKKA	-	332 (324.3)	-7.5	4.7	-	1990	-165	-	0.3
005	RF Center: FSRF5 r=2.02NM	FS154	-	-	-7.5	1.6	R	1486	-	-3.00	0.3
006	RF Center: FSRF6 r=1.98NM	FS155	-	-	-7.5	1.6	R	989	-	-3.00	0.3
007	RF Center: FSRF7 r=1.77NM	FS156	-	-	-7.5	1.4	R	550	-	-3.00	0.3
008	TF	RW11	Y	107 (099.3)	-7.5	1.6	-	56	-	-3.00/50	0.3
009	FA	-	-	107 (099.3)	-7.5	-	-	+500	-	-	1.0
010	DF	FS153	Y	-	-7.5	-	R	-	-	-	1.0
011	DF	SGE	-	-	-7.5	-	R	5000	-	-	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MILEP	325250.49N/1301501.22E	FSRF5	330723.51N/1301531.82E
NIVAL	325726.55N/1301554.33E	FSRF6	330723.80N/1301529.68E
LEENO	330223.31N/1301651.53E	FSRF7	330735.05N/1301520.05E
WEKKA	330612.58N/1301335.04E		
FS154	330742.91N/1301309.63E		
FS155	330900.65N/1301406.71E		
FS156	330919.21N/1301540.15E		
RW11	330904.20N/1301729.91E		
FS153	330340.13N/1301934.46E		
SGE	330855.03N/1301734.43E		

CHANGE: Update

## INSTRUMENT APPROACH CHART

RJFS/SAGA

VOR A

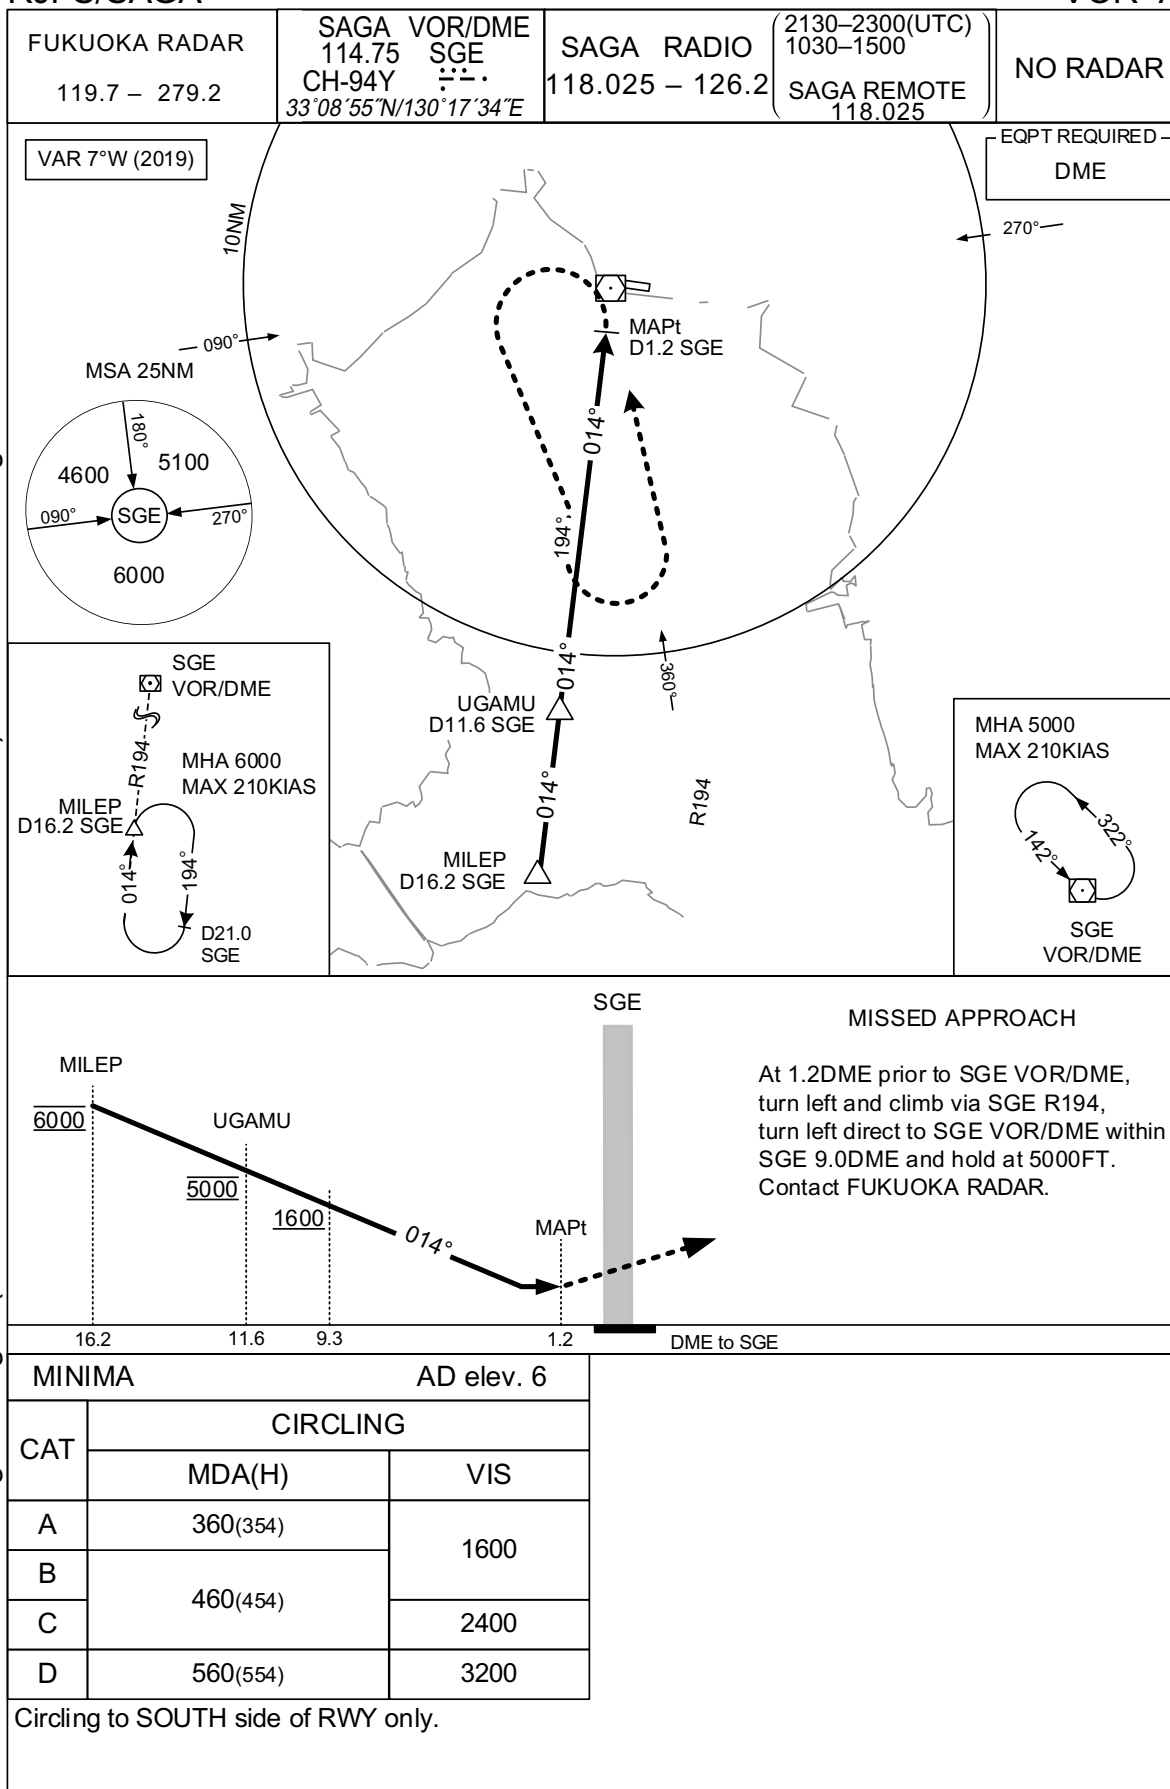

INSTRUMENT APPROACH CHART



## INSTRUMENT APPROACH CHART

RJFS/SAGA

VOR C



CHANGE : ATC callsign changed (FUKUOKA DEP→FUKUOKA RADAR). ATC FREQ changed.



RJFS / SAGA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
佐賀大和 Sagayamato	353°T / 10.4NM	佐賀大和インターチェンジ Interchange
久保田 Kubota	329°T / 4.9NM	久保田橋 Bridge
大中島 Onakashima	037°T / 4.9NM	筑後川昇開橋 Bridge
筑後 Chikugo	072°T / 11.7NM	八女インターチェンジ Interchange
鹿島 Kashima	249°T / 9.5NM	新浜大橋 Bridge
南関 Nankan	111°T / 13.1NM	南関インターチェンジ Interchange
大牟田 Omuta	135°T / 10.1NM	JR大牟田駅 Station
10NM S	180°T / 10.0NM	海上 Over the sea
竹崎 Takezaki	200°T / 12.4NM	竹崎港 Harbor

CHANGE : Map updated. BRG/DIST from ARP.

RJFS / SAGA

BALLOON

熱気球の飛行が下図区域内で行われる。(期間：5月中旬から6月中旬まで及び10月中旬から2月下旬まで：RJFSノータム参照)

Hot air balloon flight will be conducted within below area.  
(Period: from mid MAY to mid JUN and from mid OCT to late FEB: see NOTAM RJFS)



飛行高度 3000ft 以下  
FLT ALT At or below 3000ft

飛行高度 4000ft 以下  
FLT ALT At or below 4000ft

I Balloon FLT area Nr1    II Balloon FLT area Nr2\*    III Balloon FLT area Nr3\*

\* 佐賀空港を発着する航空機に対し、熱気球に係る情報(飛行空域2及び3内で飛行する気球の概数等)の提供が佐賀ディオまたは佐賀エーディトにより行われる。

\* The information of hot air balloon(aprx number of balloon etc.in flight area number 2 and 3) will be provided for departing/arriving acft from/to SAGA airport by SAGA RADIO or SAGA REMOTE.

Example of phraseology:"Two flying balloons reported in balloon flight area number two."

CHANGE : NOTAM location (RJFF→RJFS).

## Minimum Vectoring Altitude CHART

