

**INTENTIONALLY LEFT BLANK**

## ROMY / MIYAKO

## RNAV SID and TRANSITION

CHANGE : Navigation Specification(Basic RNP1  $\rightarrow$  RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

RNAV SID and TRANSITION

UMAKI TWO DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (038.2)	-5.1	-	-	+700	-	-	RNP1
002	DF	WAIDO	-	-	-5.1	-	R	+3000	-	-	RNP1
003	TF	UMAKI	-	266 (261.0)	-5.1	26.3	-	+3000	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (218.2)	-5.1	-	-	+600	-	-	RNP1
002	DF	UMAKI	-	-	-5.1	-	R	+3000	-	-	RNP1

YUNTA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	UMAKI	-	-	-5.1	-	-	+3000	-	-	RNP1
002	TF	YUNTA	-	267 (261.7)	-5.1	26.5	-	+3000	-	-	RNP1

JOTTO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	UMAKI	-	-	-5.1	-	-	+3000	-	-	RNP1
002	TF	YAIMA	-	240 (234.5)	-5.1	44.0	-	-	-230	-	RNP1
003	TF	JOTTO	-	311 (305.5)	-5.1	5.0	-	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT


ROMY / MIYAKO

RNAV SID

FREED TWO DEPARTURE

RNP1

Note GNSS required.

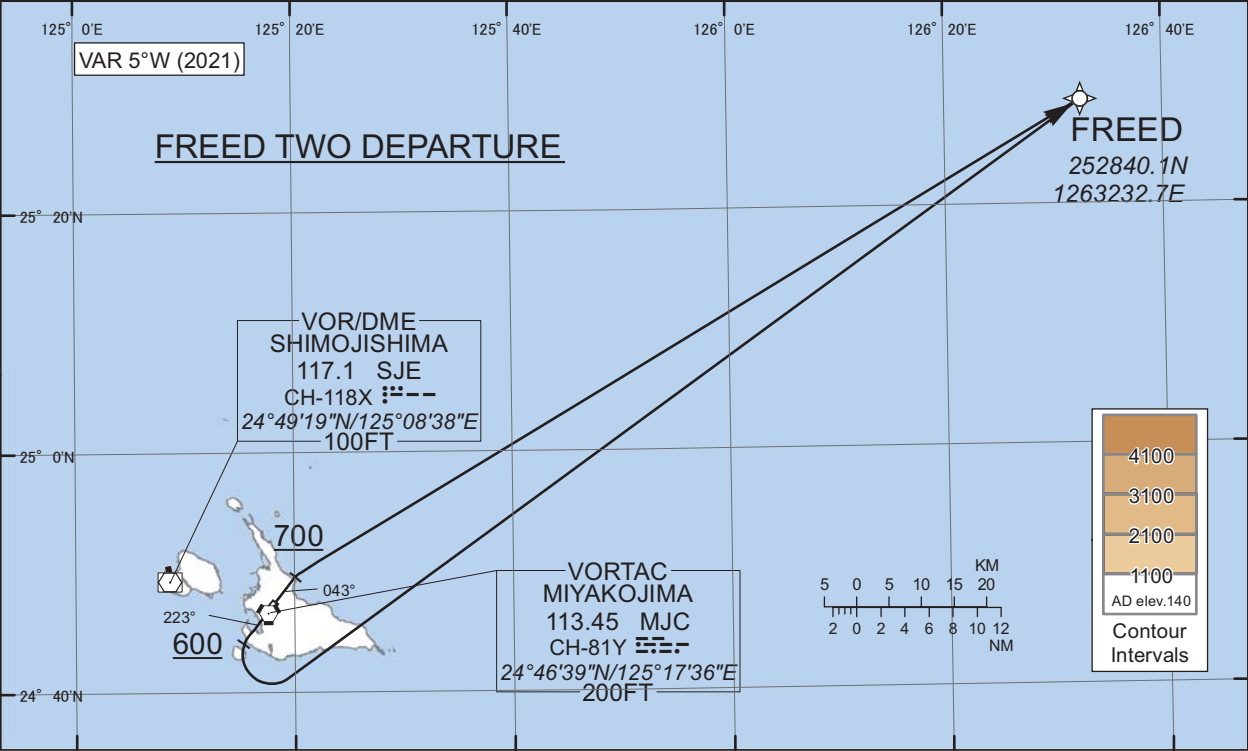

FREED TWO DEPARTURE

RWY04 : Climb on HDG043° at or above 700FT, turn right direct to FREED.  
RWY22 : Climb on HDG223° at or above 600FT, turn left direct to FREED.

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RWY04

Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (038.2)	-5.1	-	-	+700	-	-	RNP1
002	DF	FREED	-	-	-5.1	-	R	-	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (218.2)	-5.1	-	-	+600	-	-	RNP1
002	DF	FREED	-	-	-5.1	-	L	-	-	-	RNP1


## STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

SID

NAHA SIX DEPARTURE

RWY 04 : Climb RWY HDG to 700FT, turn right...

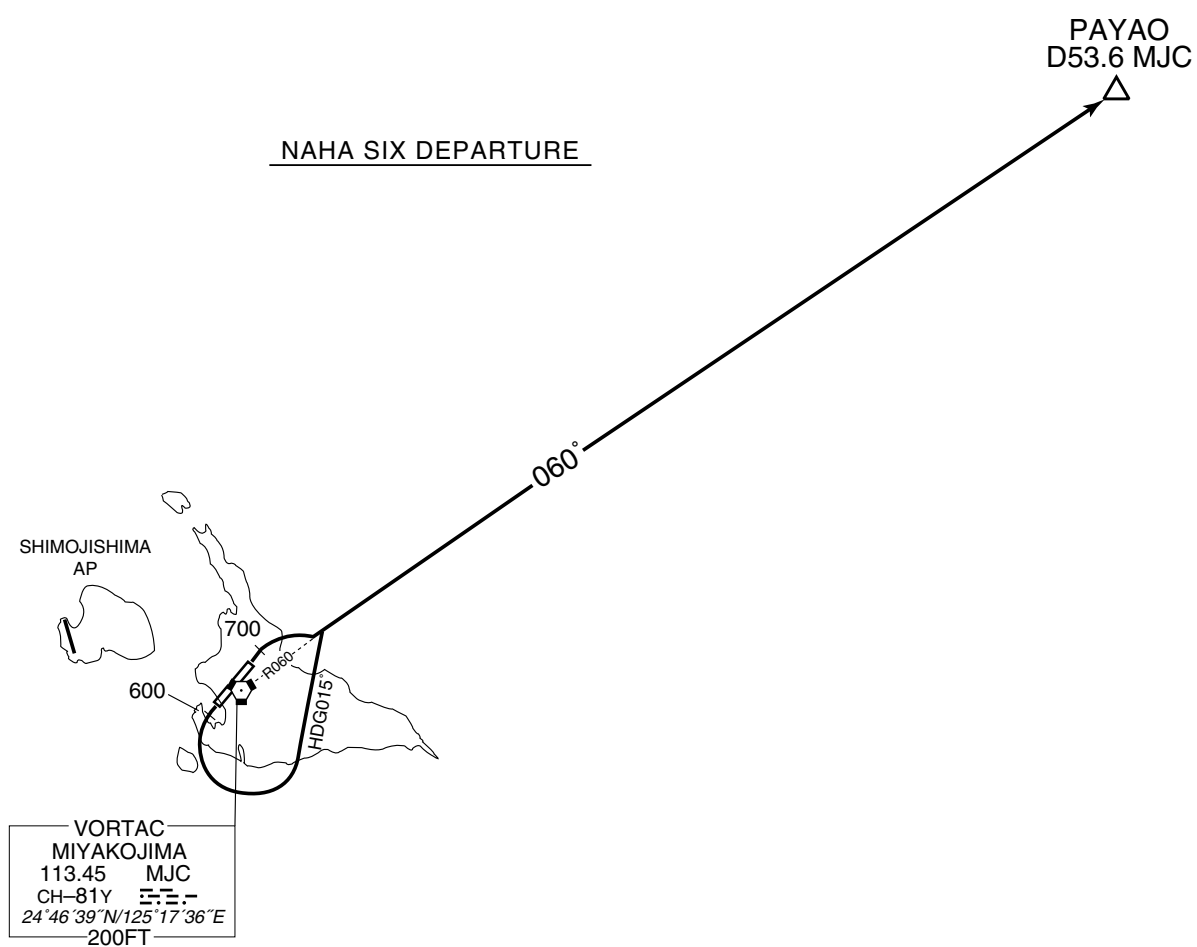RWY 22 : Climb RWY HDG to 600FT, turn left HDG015°...  
... to intercept and proceed via MJC R060 to PAYAO.

STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

SID


WEST SEVEN DEPARTURE

RWY 04 : Climb RWY HDG to 700FT, turn right...

RWY 22 : Climb RWY HDG to 600FT, turn right...

... to intercept and proceed via MJC R253 to SHUJI.


Cross SHUJI at or above 3000FT.

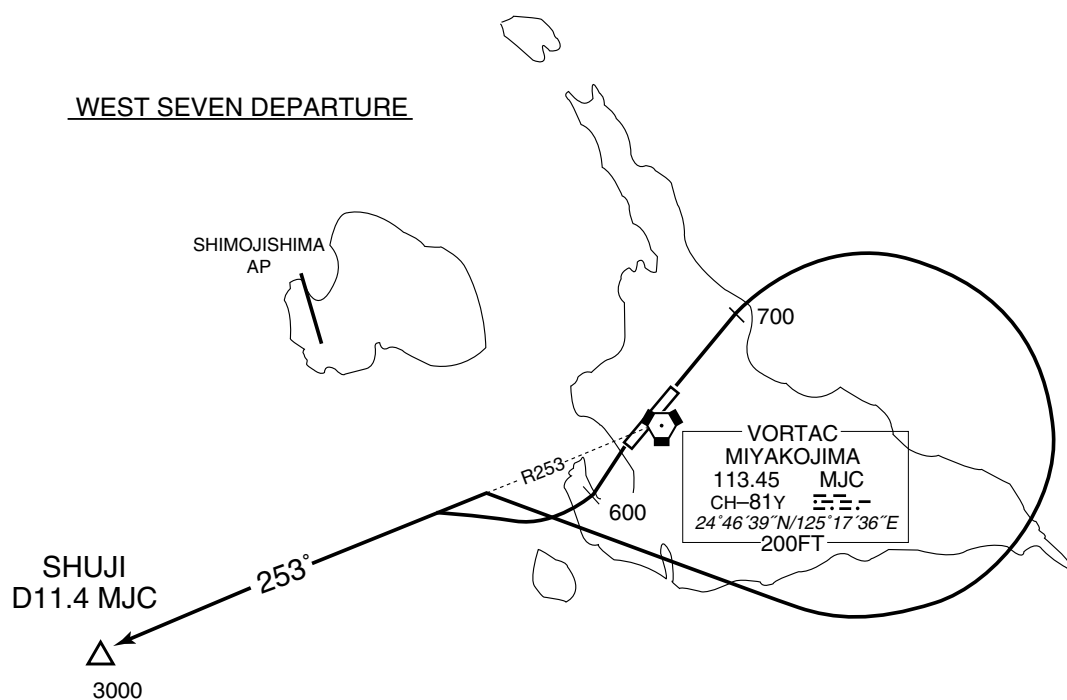

STANDARD ARRIVAL CHART - INSTRUMENT

ROMY / MIYAKO

RNAV STAR RWY04

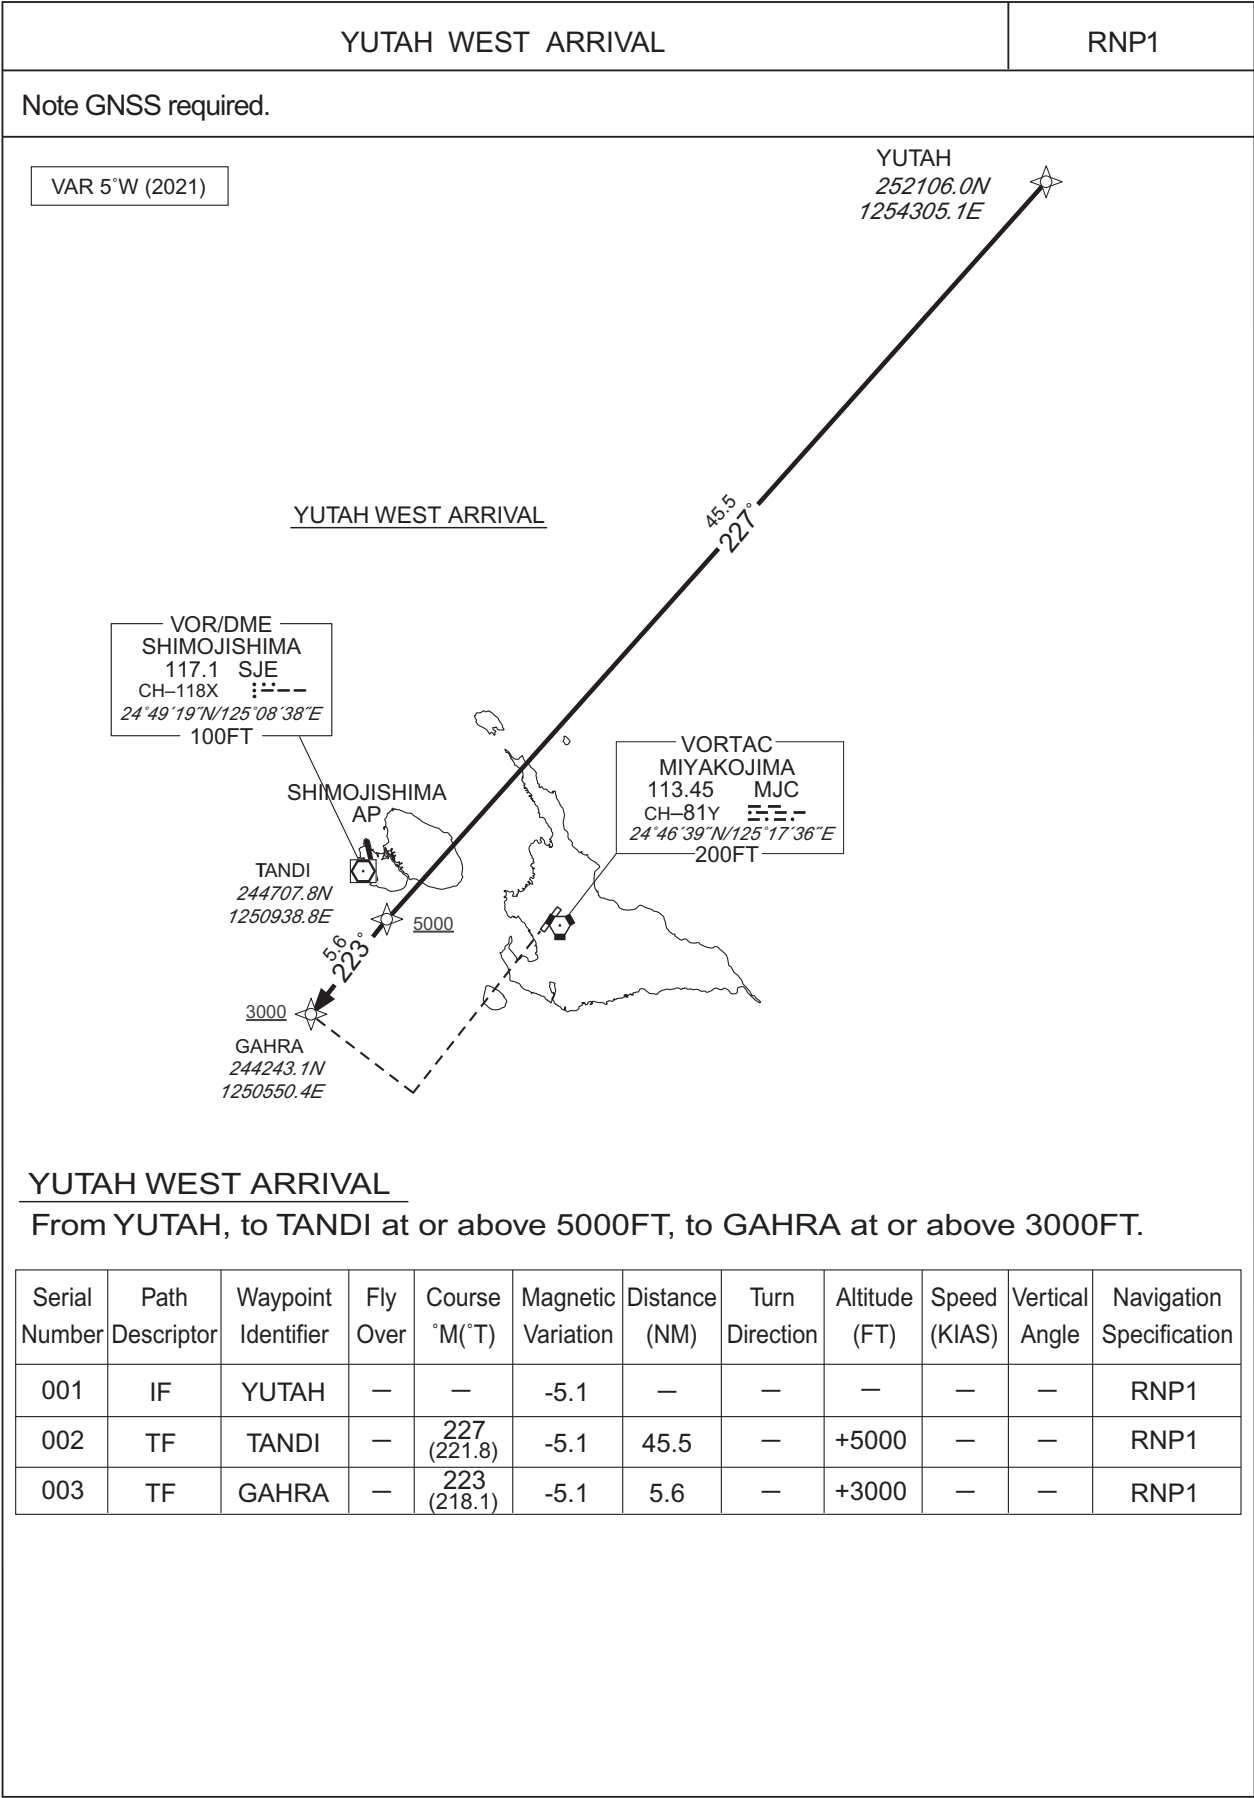



STANDARD ARRIVAL CHART - INSTRUMENT

ROMY / MIYAKO

RNAV STAR RWY22

YUTAH NORTH ARRIVAL

RNP1

Note GNSS required.

VAR 5°W (2021)

YUTAH

252106.0N

1254305.1E

31.3

218°

MIBAI

245444.1N

1252426.3E

1600

VOR/DME  
SHIMOJISHIMA  
117.1 SJE  
CH-118X  
24°49'19"N/125°08'38"E  
100FT

SHIMOJISHIMA  
AP

VORTAC  
MIYAKOJIMA  
113.45 MJC  
CH-81Y  
24°46'39"N/125°17'36"E  
200FT

YUTAH NORTH ARRIVAL

From YUTAH, to MIBAI at or above 1600FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YUTAH	—	—	-5.1	—	—	—	—	—	RNP1
002	TF	MIBAI	—	218 (212.7)	-5.1	31.3	—	+1600	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).


Civil Aviation Bureau,Japan (EFF:16 MAY 2024)

18/4/24

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO


ILS Z or LOC Z RWY22

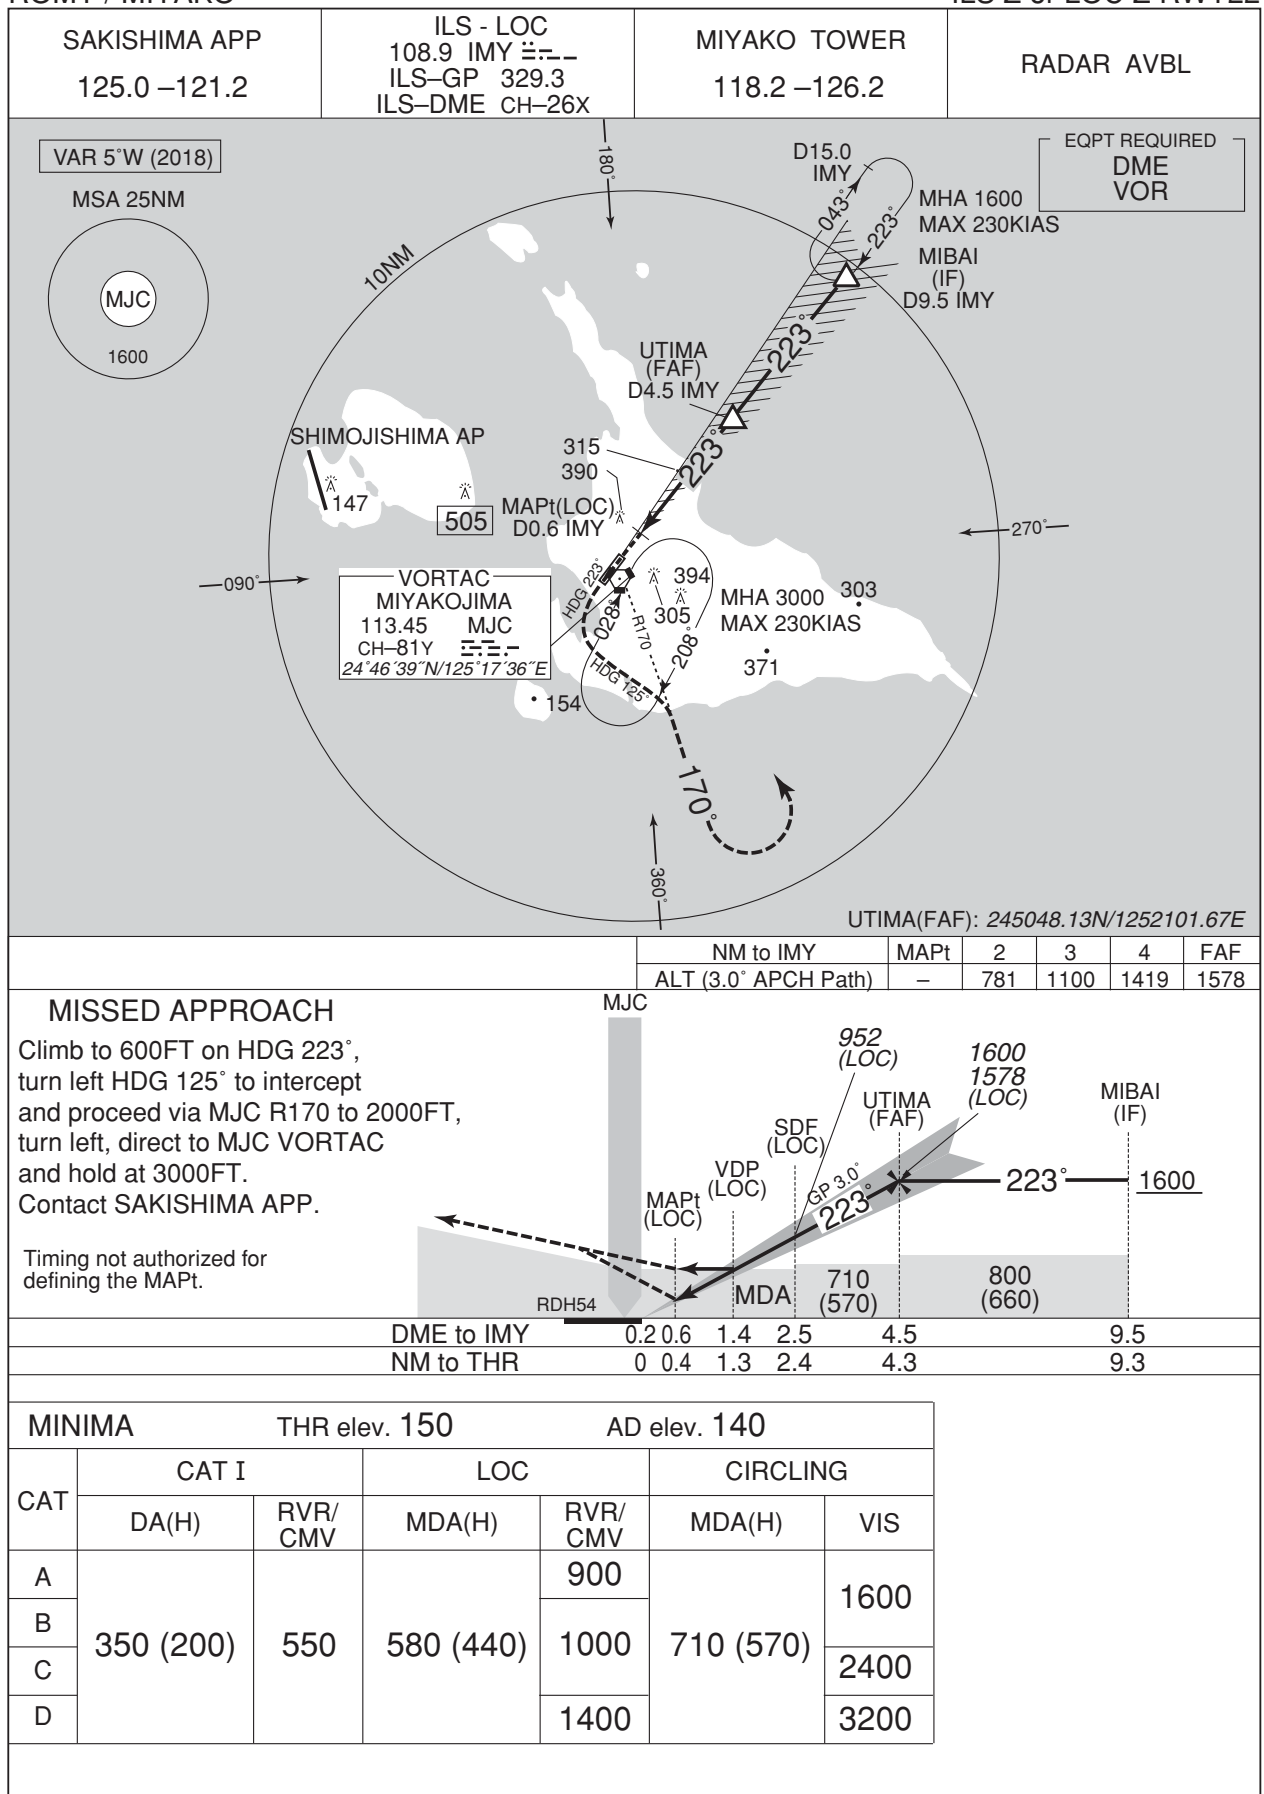

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO


ILS Y or LOC Y RWY22

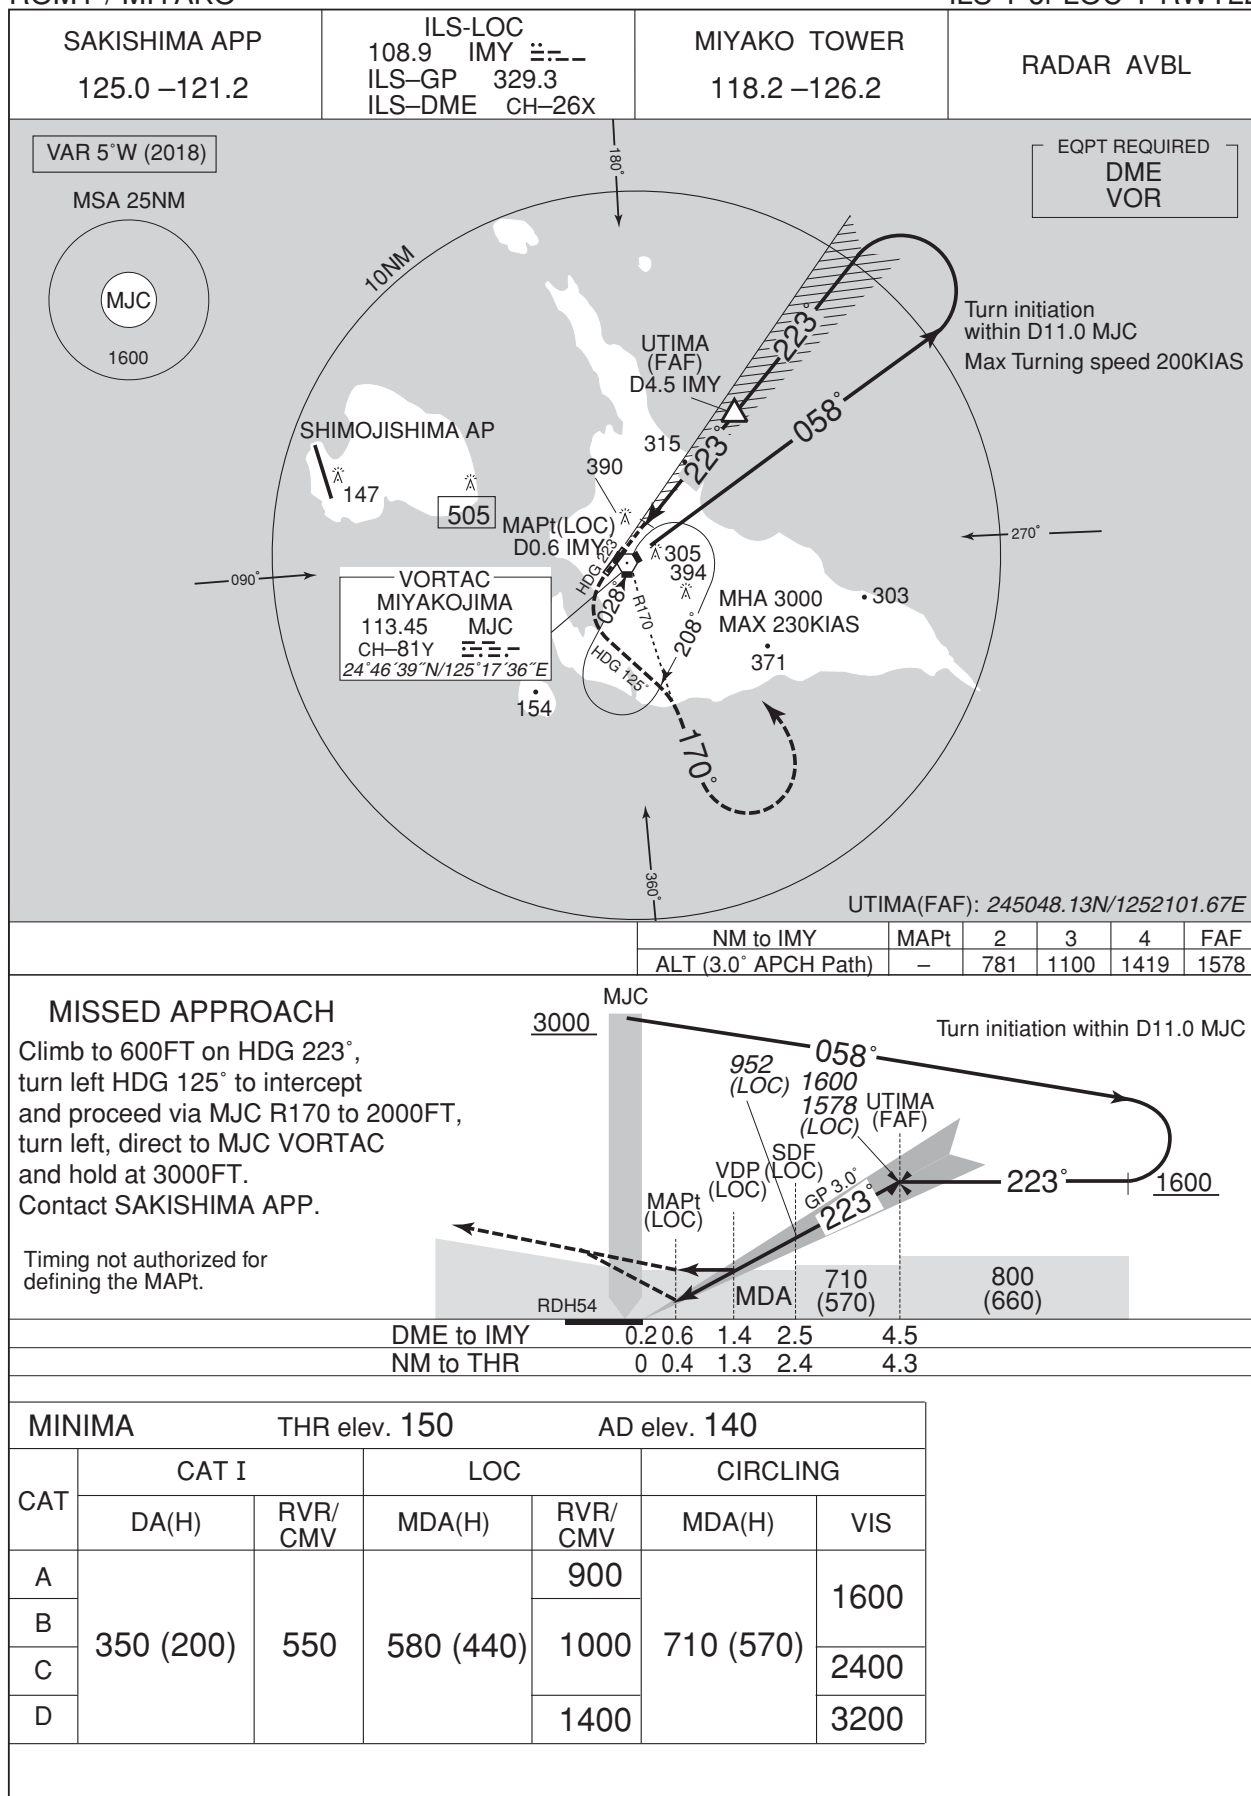

INSTRUMENT APPROACH CHART

ROMY / MIYAKO


VOR RWY04

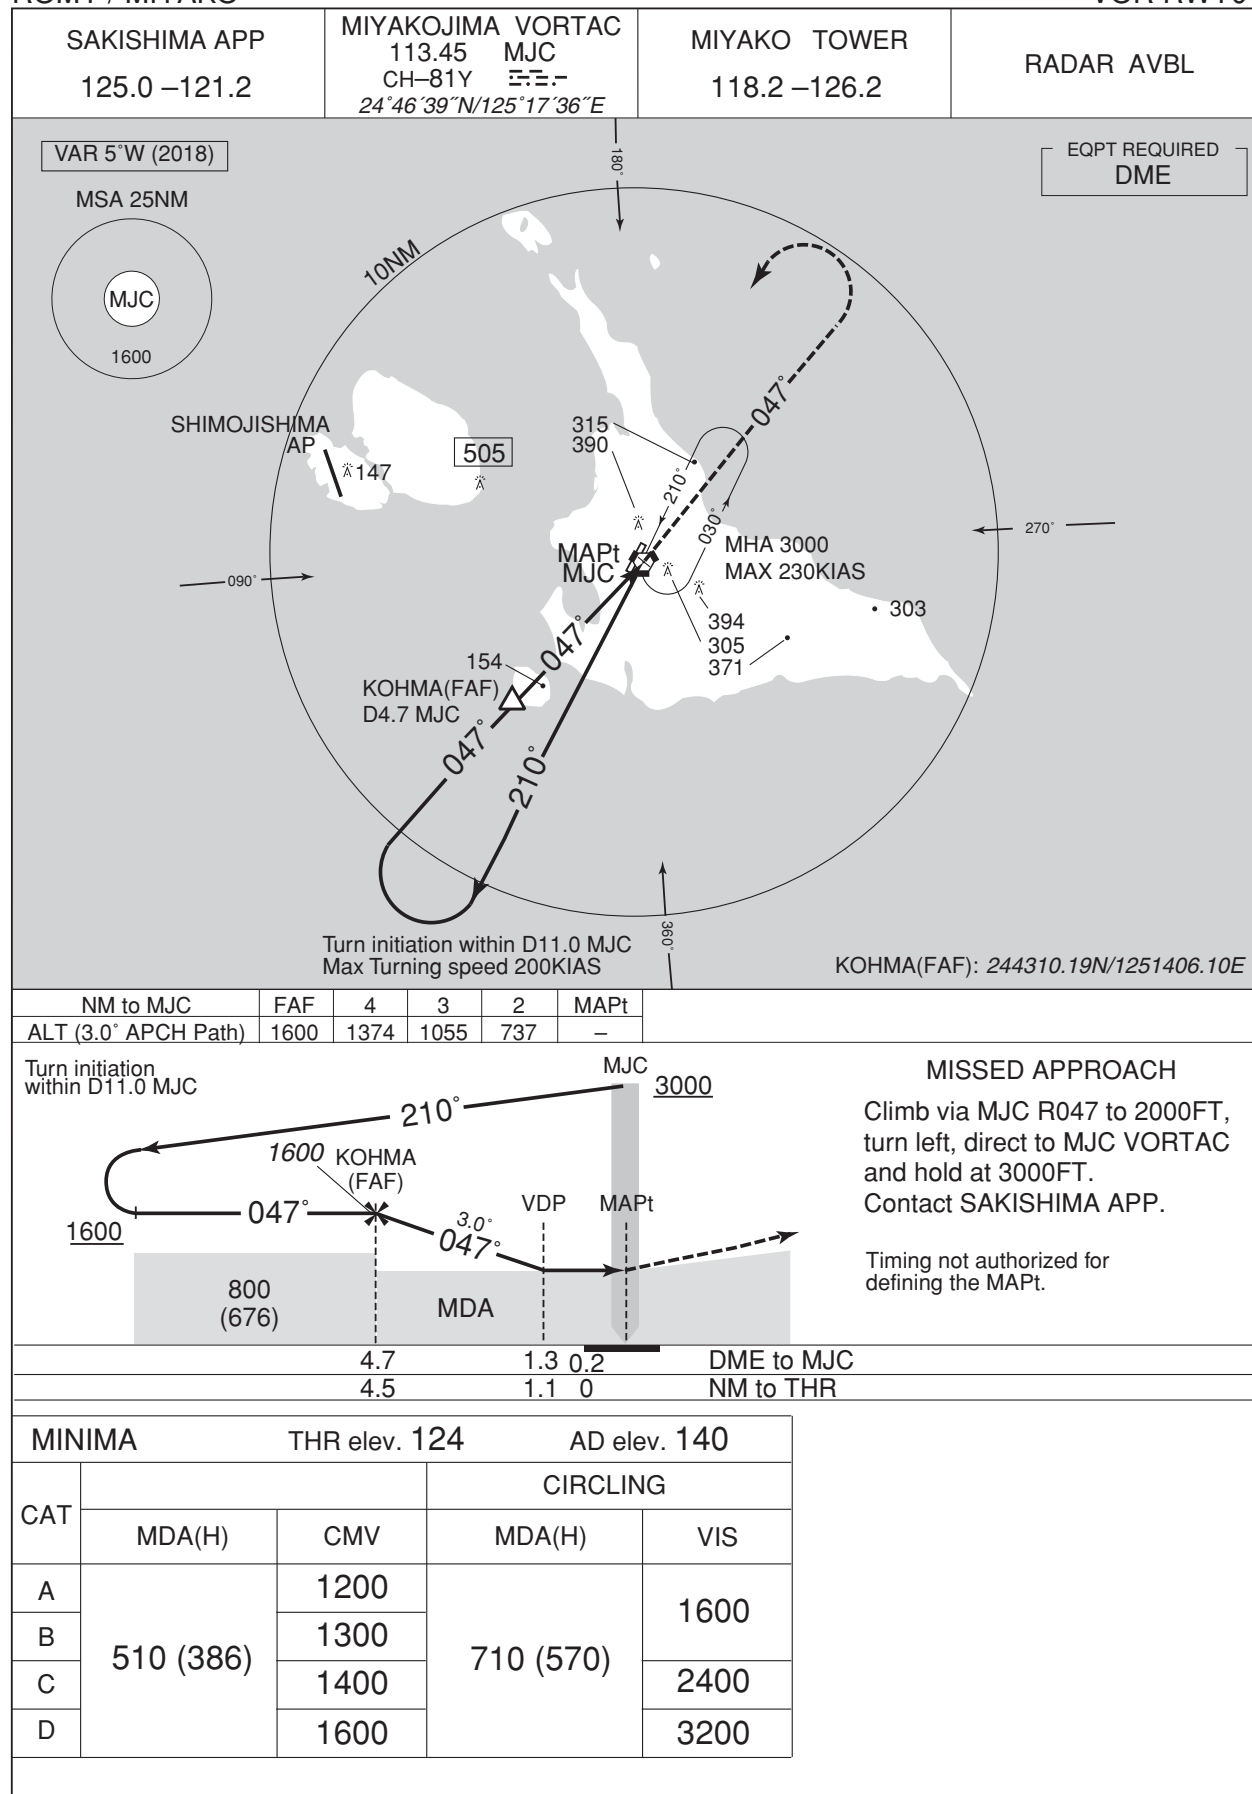

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO


VOR RWY22

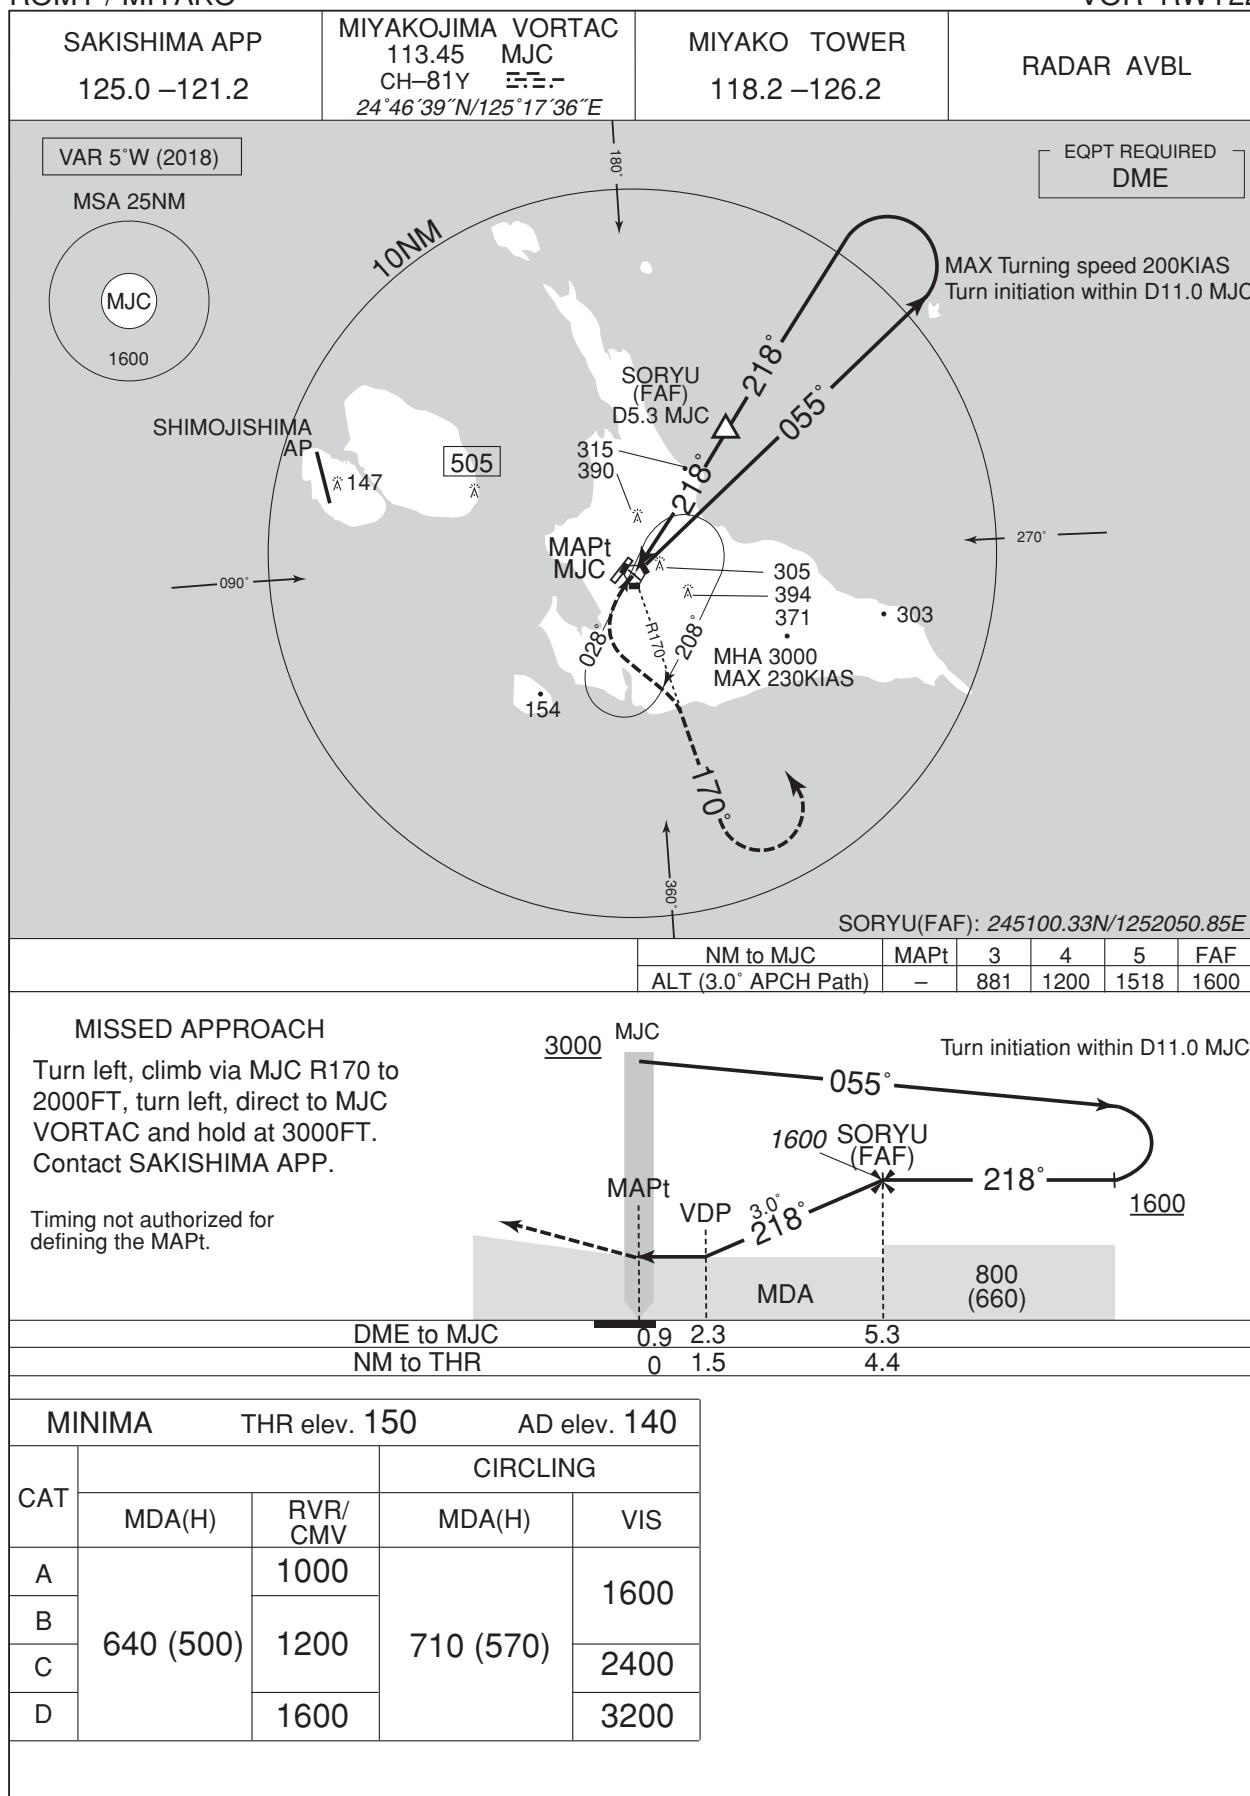

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Z RWY04

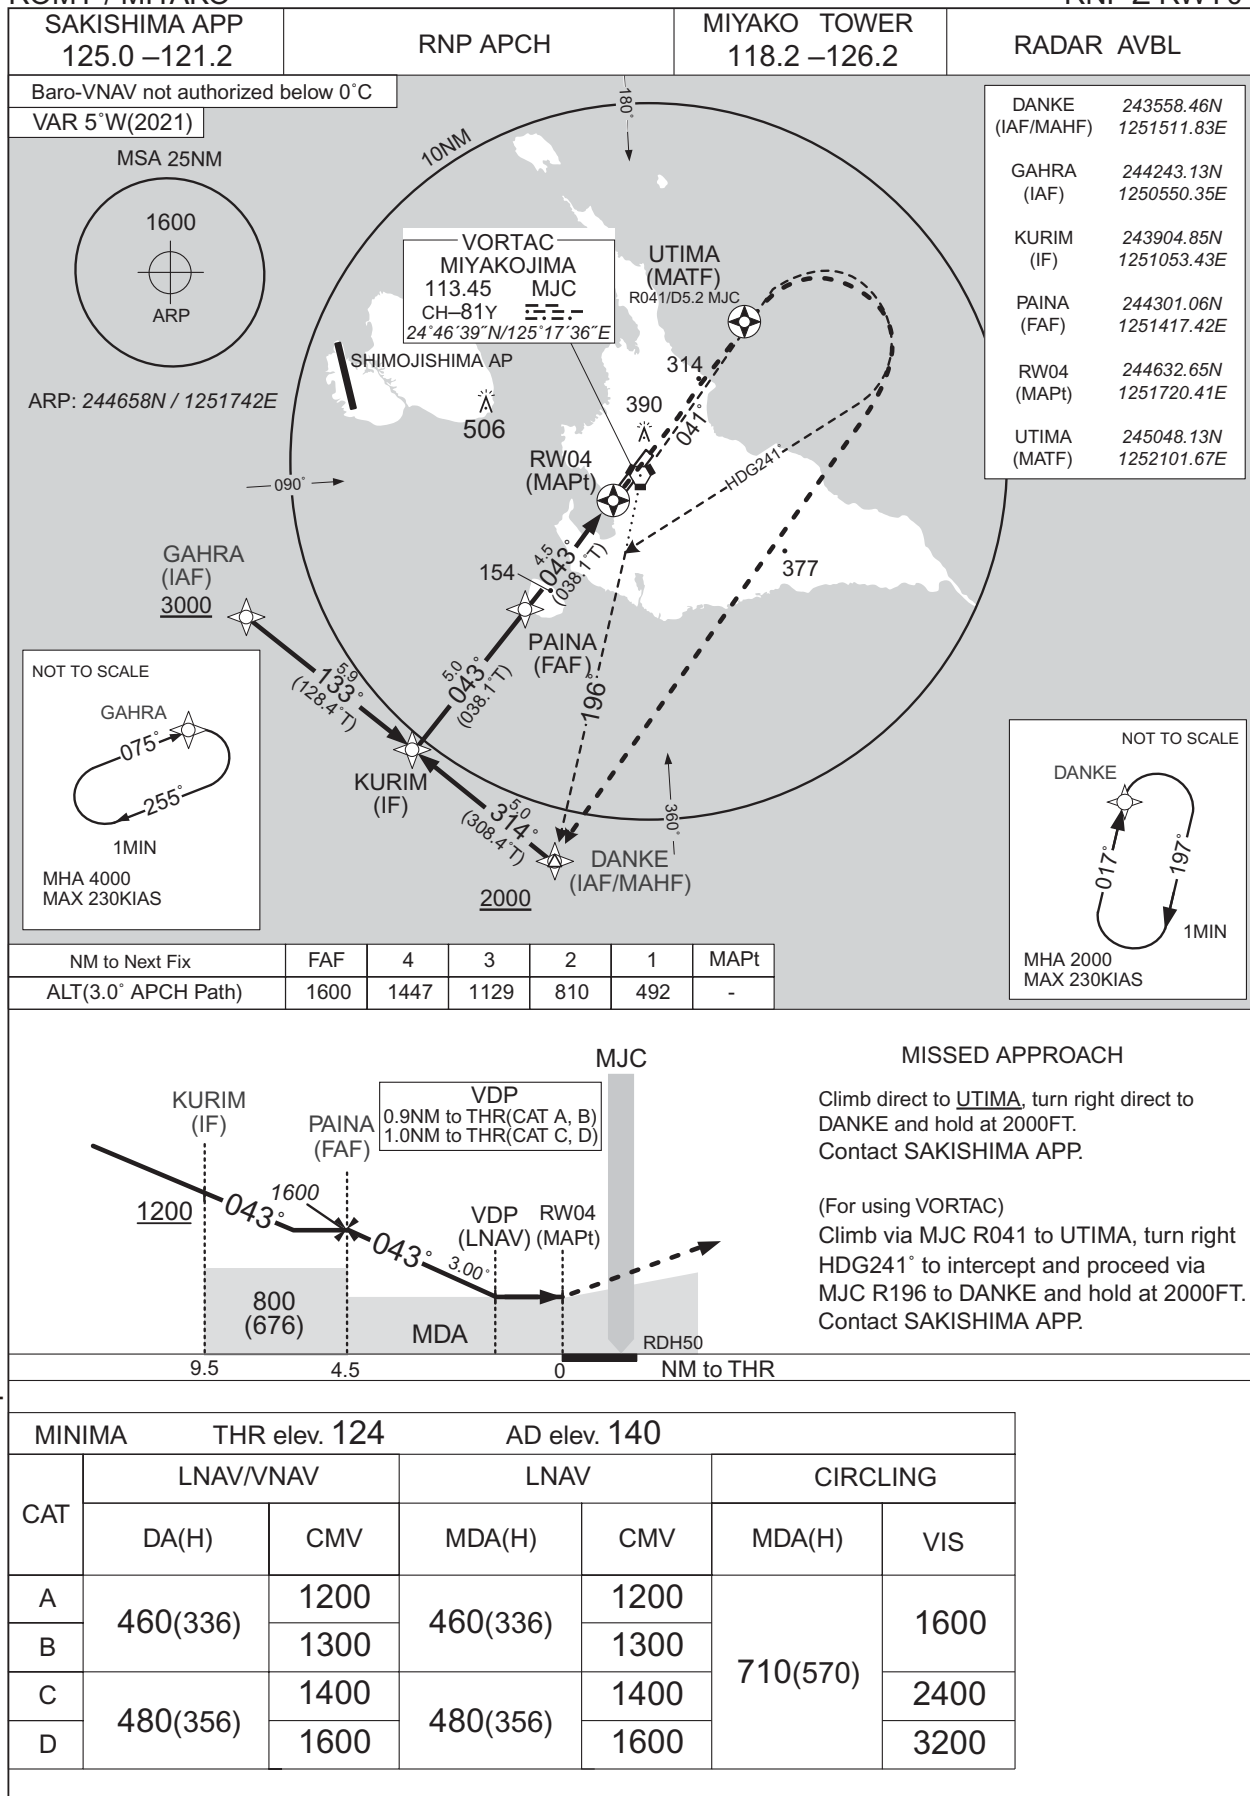

CHANGE:PROC renamed. Requirement for RNP.



## INSTRUMENT APPROACH CHART

## ROMY / MIYAKO

## RNP Y RWY04(AR)

SAKISHIMA APP 125.0 - 121.2	RNP AR RF required.	MIYAKO TOWER 118.2 - 126.2	RADAR AVBL
--------------------------------	------------------------	-------------------------------	------------

For uncompensated Baro-VNAV systems, procedure not authorized below 0°C / above 45°C

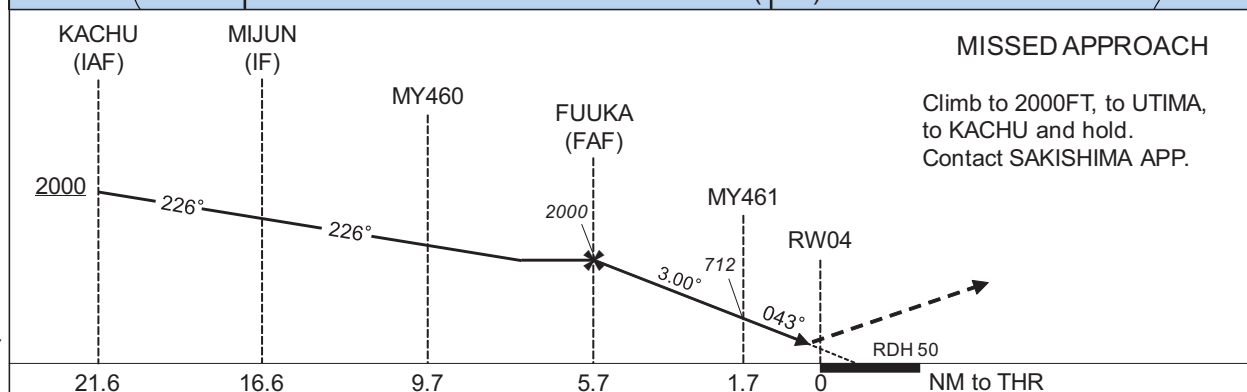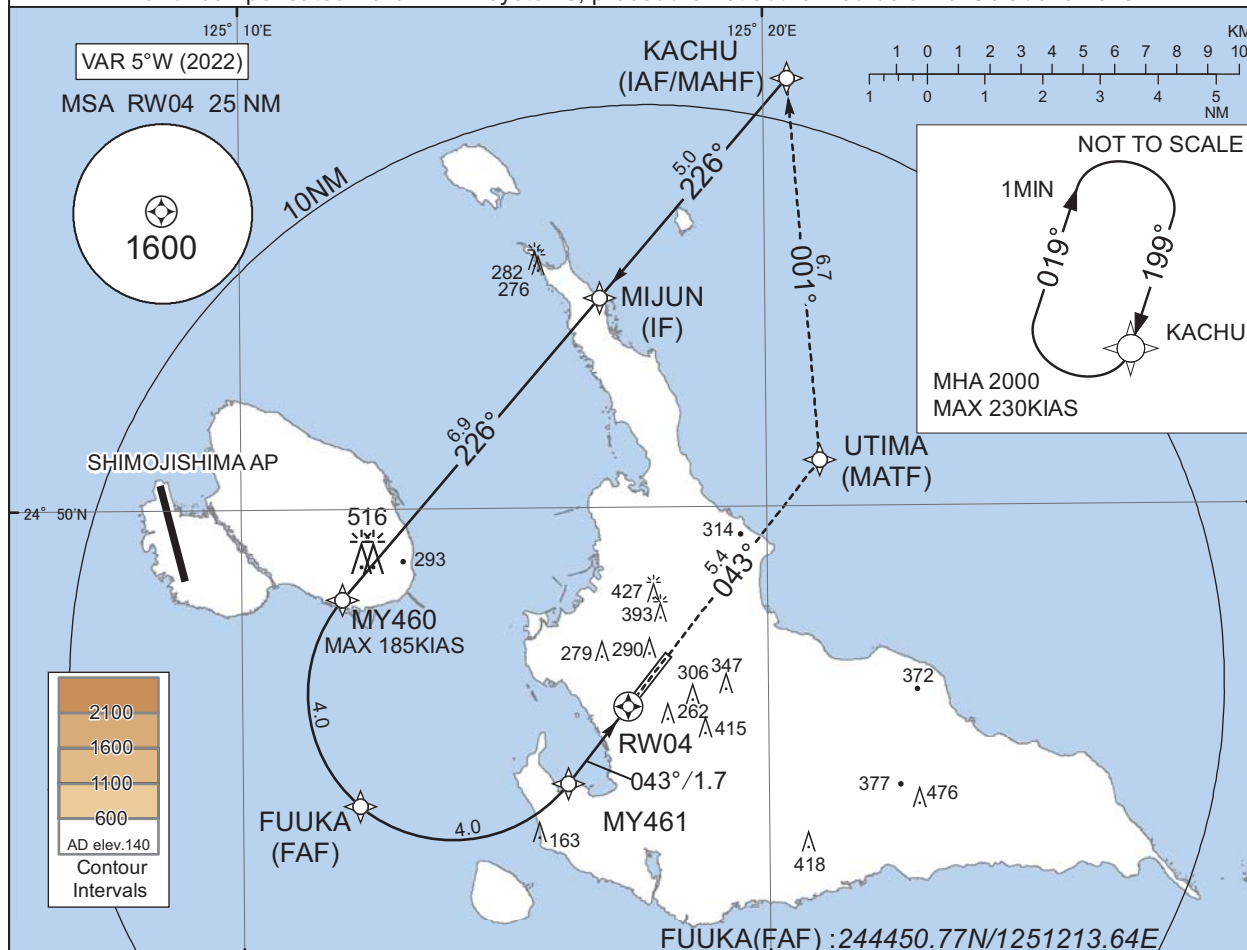

MINIMA	THR elev. 124		AD elev. 140	
	RNP 0.29		RNP 0.30	
CAT	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B	-	-	-	-
C	424(300)	1400	430(306)	1400
D		1600	440(316)	1600

**Authorization Required**

CHANGE : PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Y RWY04(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KACHU	-	-	-5.2	-	-	+2000	-	-	-
002	TF	MIJUN	-	226 (220.8)	-5.2	5.0	-	-	-	-	1.0
003	TF	MY460	-	226 (220.7)	-5.2	6.9	-	+2000	-185	-	1.0
004	RF Center: MYRF1 r=2.52NM	FUUKA	-	-	-5.2	4.0	L	2000	-	-	1.0
005	RF Center: MYRF1 r=2.52NM	MY461	-	-	-5.2	4.0	L	712	-	-3.00	0.29 0.30
006	TF	RW04	Y	043 (038.1)	-5.2	1.7	-	174	-	-3.00/50	0.29 0.30
007	TF	UTIMA	-	043 (038.2)	-5.2	5.4	-	-	-	-	1.0
008	TF	KACHU	-	001 (355.6)	-5.2	6.7	-	2000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KACHU	199 (193.5)	-5.2	1.0 (-14000)	R	2000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KACHU	245726.14N / 1252027.95E	MYRF1	244646.77N / 1251400.81E
MIJUN	245338.80N / 1251651.84E		
MY460	244826.09N / 1251155.10E		
FUUKA	244450.77N / 1251213.64E		
MY461	244512.72N / 1251611.26E		
RW04	244632.65N / 1251720.41E		
UTIMA	245048.13N / 1252101.67E		


CHANGE : PROC renamed.



INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP X RWY04(AR)

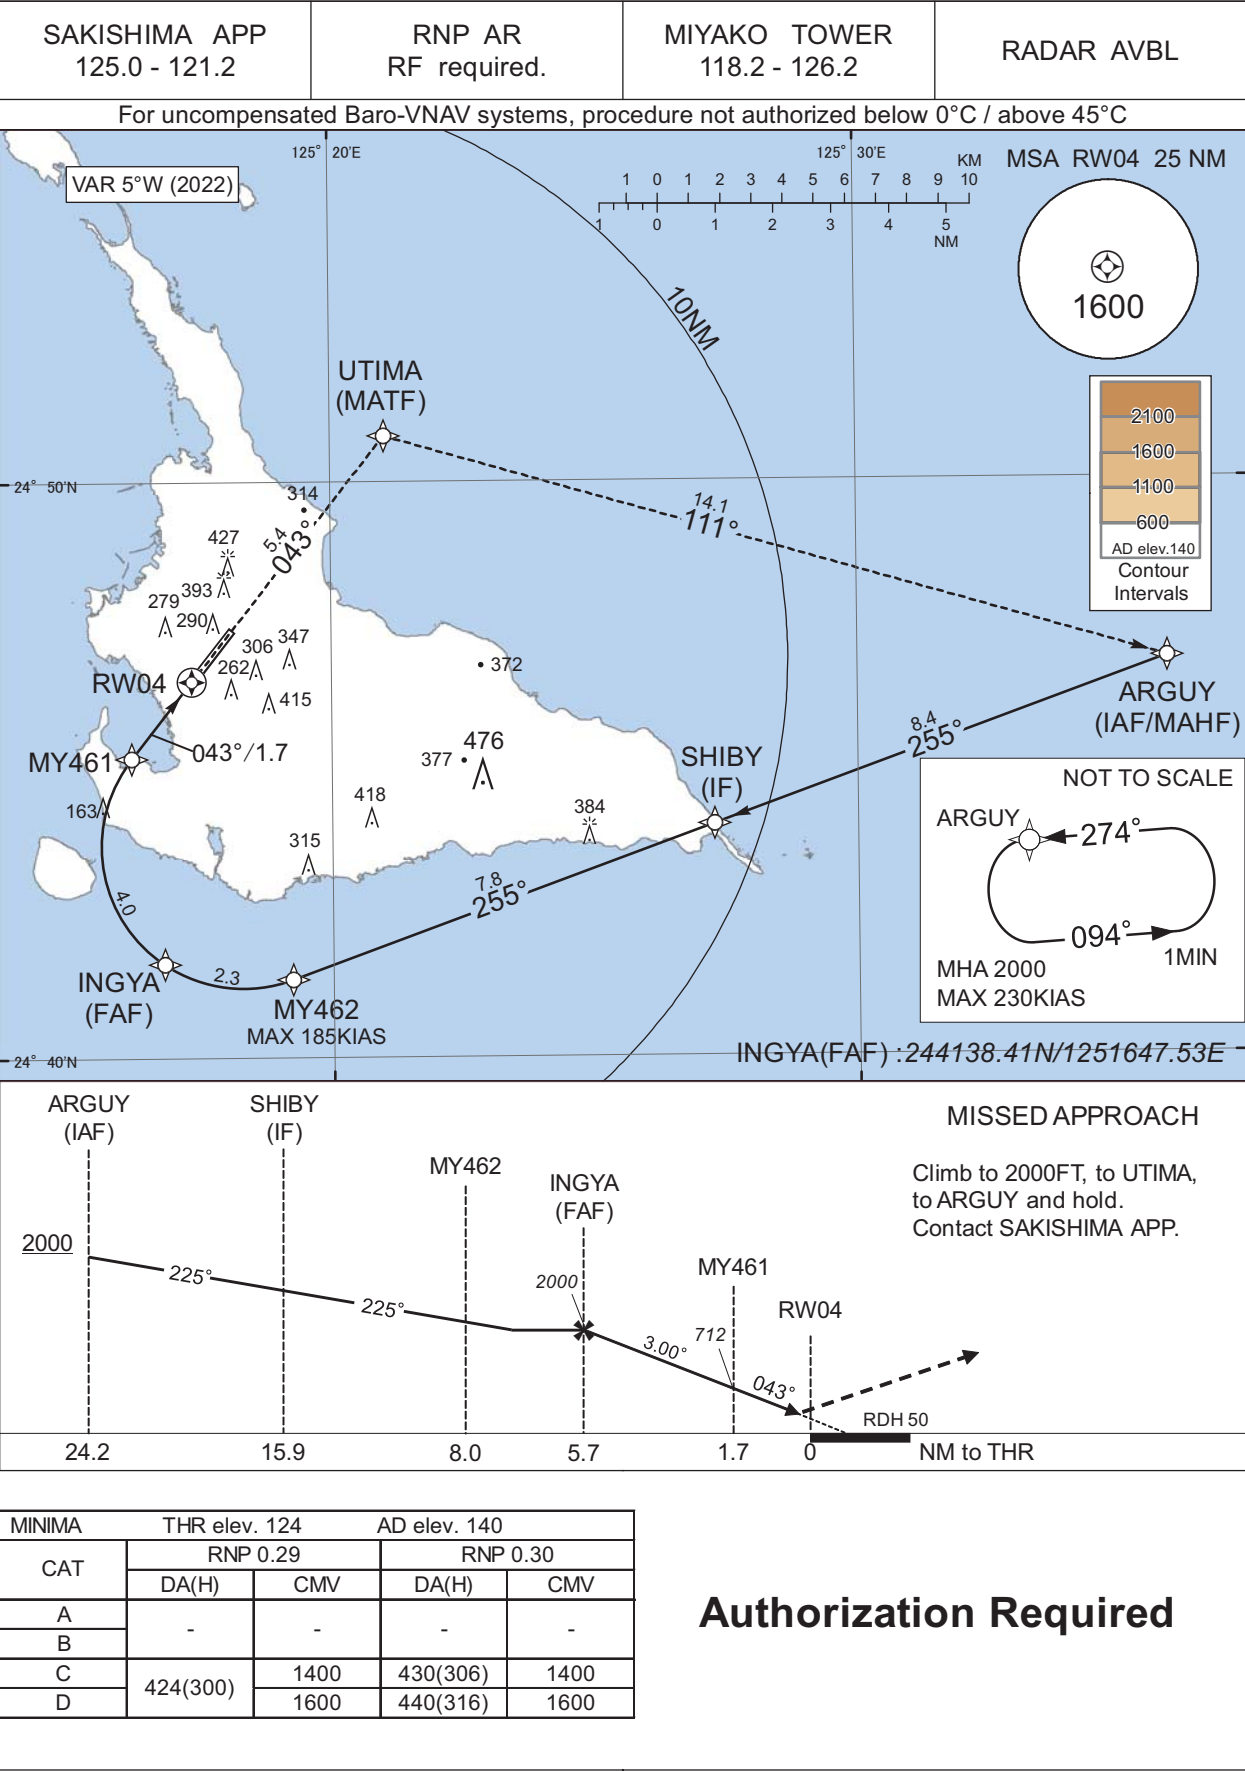

CHANGE : PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP X RWY04(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	ARGUY	-	-	-5.2	-	-	+2000	-	-	-
002	TF	SHIBY	-	255 (250.0)	-5.2	8.4	-	-	-	-	1.0
003	TF	MY462	-	255 (250.0)	-5.2	7.8	-	+2000	-185	-	1.0
004	RF Center: MYRF2 r=2.46NM	INGYA	-	-	-5.2	2.3	R	2000	-	-	1.0
005	RF Center: MYRF2 r=2.46NM	MY461	-	-	-5.2	4.0	R	712	-	-3.00	0.29 0.30
006	TF	RW04	Y	043 (038.1)	-5.2	1.7	-	174	-	-3.00/50	0.29 0.30
007	TF	UTIMA	-	043 (038.2)	-5.2	5.4	-	-	-	-	1.0
008	TF	ARGUY	-	111 (106.1)	-5.2	14.1	-	2000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	ARGUY	274 (269.3)	-5.2	1.0 (-14000)	L	2000	FL140	-230 (-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
ARGUY	244652.87N / 1253554.53E	MYRF2	244340.95N / 1251818.44E
SHIBY	244401.74N / 1252716.29E		
MY462	244121.83N / 1251913.79E		
INGYA	244138.41N / 1251647.53E		
MY461	244512.72N / 1251611.26E		
RW04	244632.65N / 1251720.41E		
UTIMA	245048.13N / 1252101.67E		

CHANGE : PROC renamed.

ROMY / MIYAKO

Visual REP

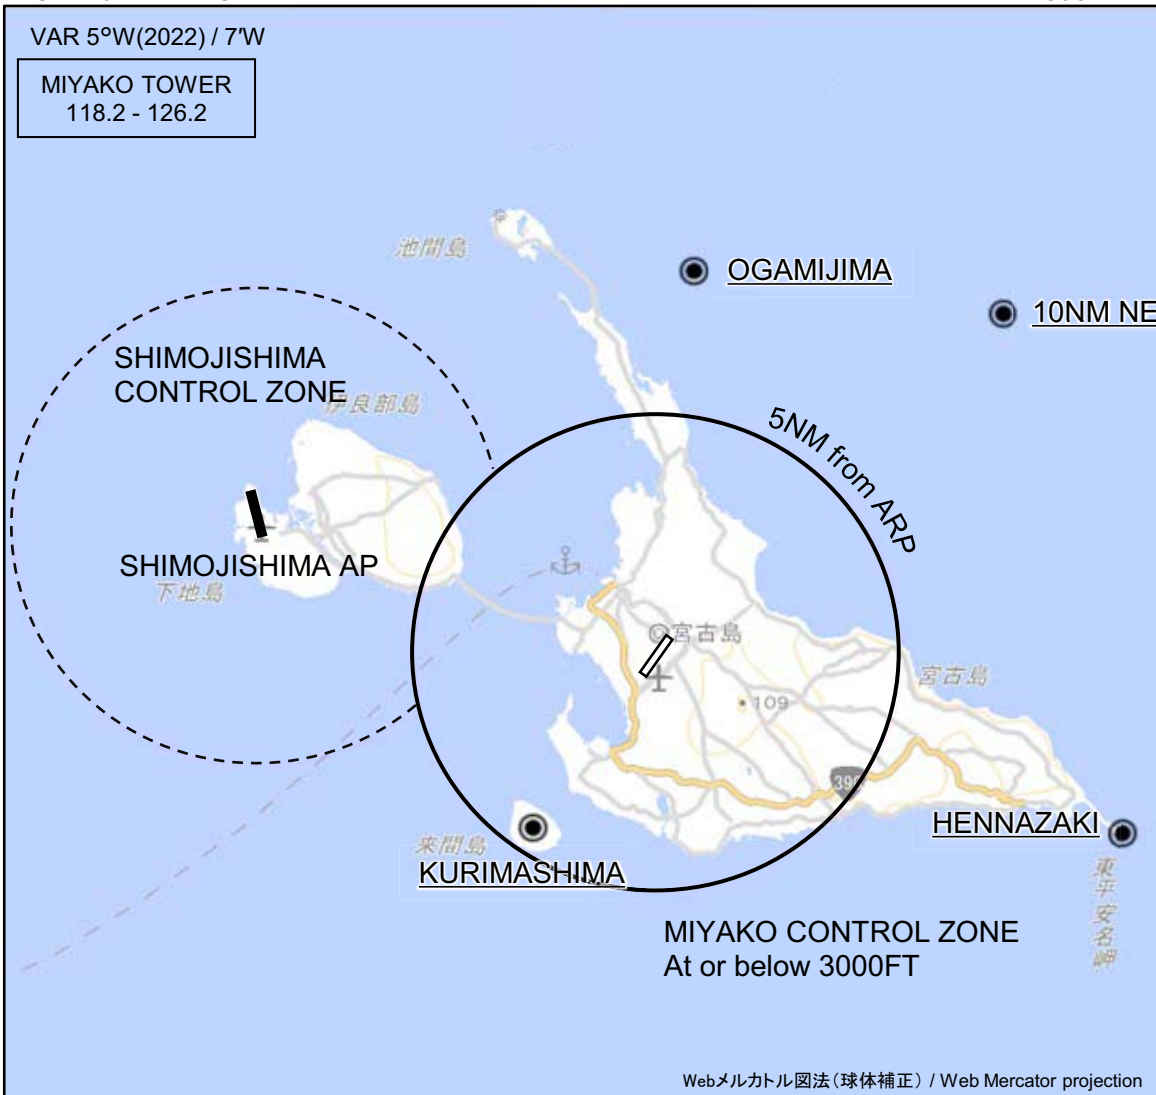

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
大神島 Ogamijima	005°T / 8.0NM	島 Island
10NM NE	045°T / 10.0NM	海上 Over the sea
来間島 Kurimashima	215°T / 4.5NM	島 Island
平安名崎 Hennazaki	112°T / 10.2NM	灯台 Lighthouse

## ROMY / MIYAKO

## Minimum Vectoring Altitude CHART

