



STANDARD DEPARTURE CHART - INSTRUMENT

RJOR / TOTTORI SID

AYABE THREE DEPARTURE

RWY 10: Climb RWY HDG to 500FT, turn left HDG345°...

RWY 28: Climb RWY HDG to 500FT, turn right HDG075°...

...to intercept and proceed via TRE R030 to 13.0DME, turn right, via YME R300 to

YME VOR/DME.

Note RWY10:5.5% climb gradient required up to 1300FT.

OBST ALT 1247FT located at 3.73NM 105° FM end of RWY10.

RWY28:4.0% climb gradient required up to 700FT.

OBST ALT 374FT located at 2.62NM 271° FM end of RWY28.

TOTTORI REVERSAL THREE DEPARTURE

RWY 10: Climb RWY HDG to 500FT, turn left HDG345°...

RWY 28: Climb RWY HDG to 500FT, turn right HDG075°...


...to intercept and proceed via TRE R030 to 13.0DME, turn left, direct to TRE VOR/DME.

Note RWY10:5.5% climb gradient required up to 1300FT.


OBST ALT 1247FT located at 3.73NM 105° FM end of RWY10.

RWY28:4.0% climb gradient required up to 700FT.

OBST ALT 374FT located at 2.62NM 271° FM end of RWY28.

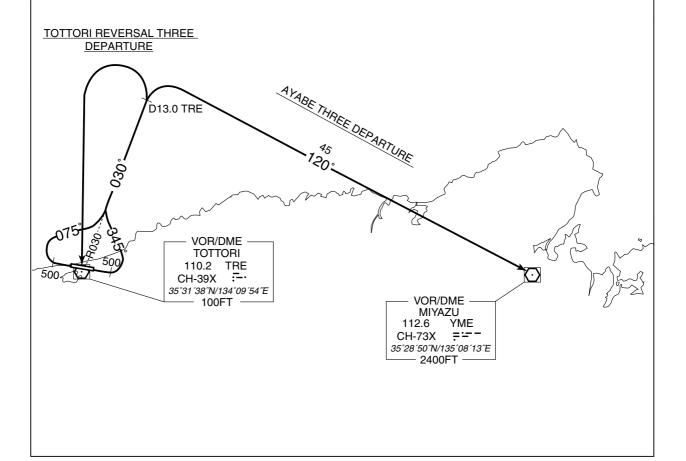

STANDARD DEPARTURE CHART -INSTRUMENT

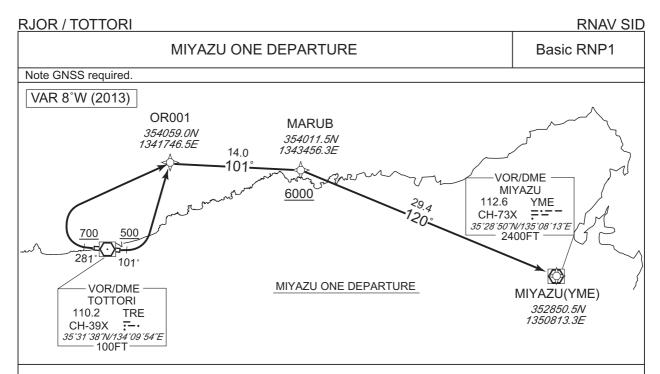

MIYAZU ONE DEPARTURE

RWY10: Climb on HDG 101° at or above 500FT, turn left direct to OR001, to MARUB at or above 6000FT, to YME.

RWY28: Climb on HDG 281° at or above 700FT, turn right direct to OR001, to MARUB at or above 6000FT, to YME.

NOTE RWY10: 5.3% climb gradient required up to 1100FT.

OBST ALT 853FT located at 3.6NM 102° FM end of RWY10.

RWY28: 3.6% climb gradient required up to 700FT.


OBST ALT 394FT located at 2.2NM 264° FM end of RWY28.


RWY10


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)		Navigation Specification
001	VA	_	_	101 (093.8)	-7.6	_	_	+500	_	_	Basic RNP1
002	DF	OR001	_	-	-7.6	_	L	_	_	_	Basic RNP1
003	TF	MARUB	_	101 (093.2)	-7.6	14.0	_	+6000	_	_	Basic RNP1
004	TF	YME	_	120 (112.6)	-7.6	29.4	_	_	_	_	Basic RNP1

RWY28

Serial	Path	Waypoint	Fly	Course	Magnetic	Distance	Turn	Altitude	Speed	Vertical	Navigation
Number	Descriptor	Identifier	Over	°M(°T)	Variation	(NM)	Direction	(FT)	(KIAS)	Angle	Specification
001	VA	_	_	281 (273.8)	-7.6	_	_	+700	_	_	Basic RNP1
002	DF	OR001	_	_	-7.6	_	R	_	_	_	Basic RNP1
003	TF	MARUB	_	101 (093.2)	-7.6	14.0	-	+6000	_	_	Basic RNP1
004	TF	YME	_	120 (112.6)	-7.6	29.4	_	_	_	_	Basic RNP1

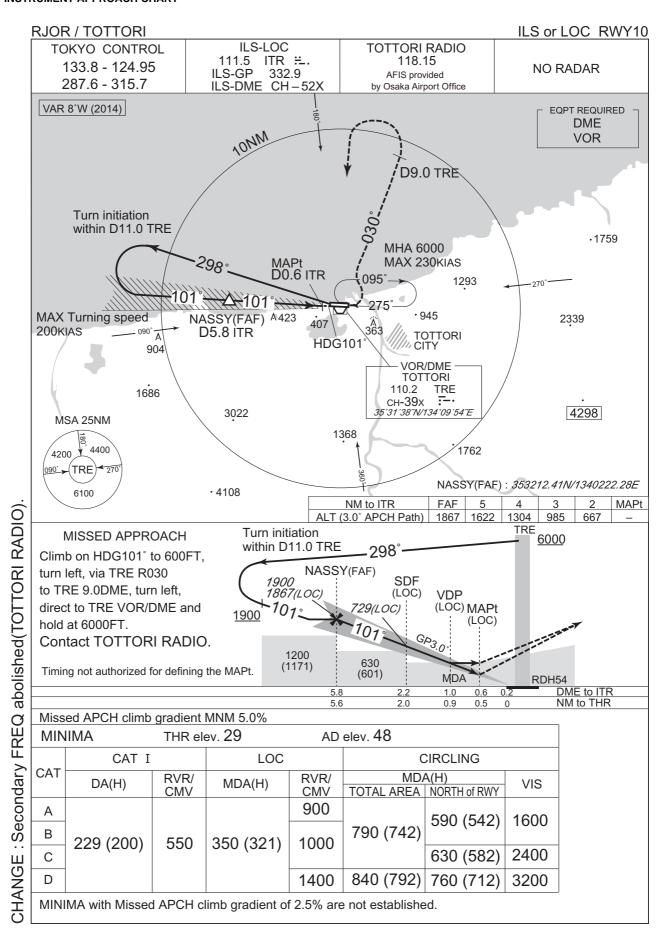

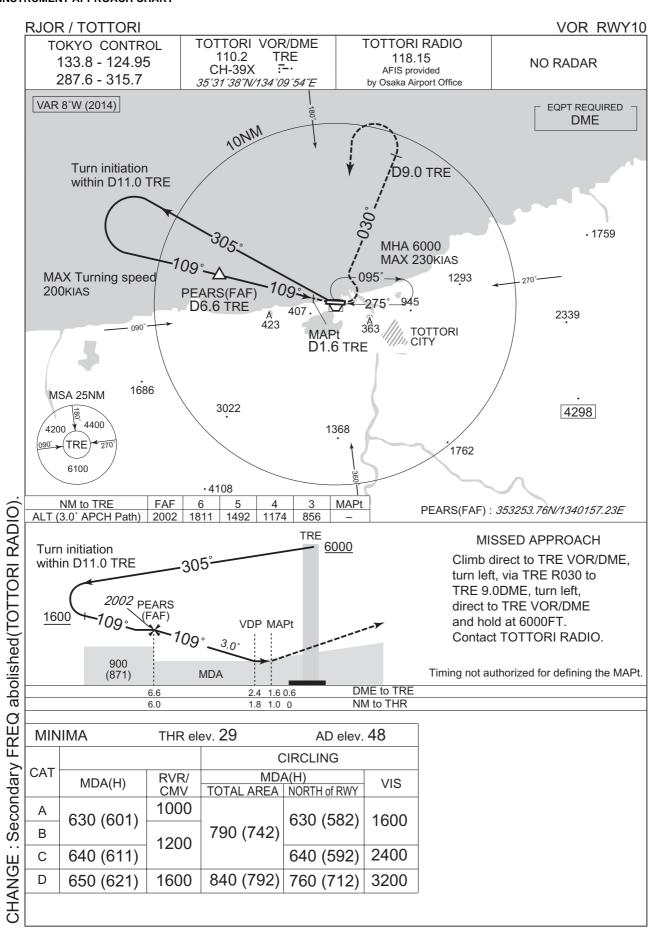

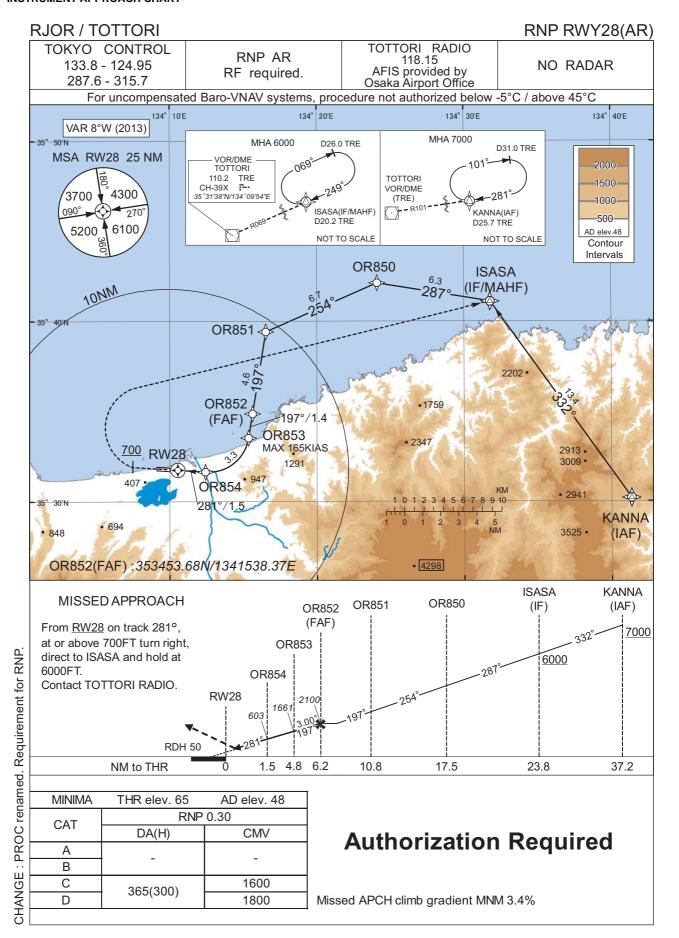

RJOR / TOTTORI


RNP RWY28(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KANNA	1	-	-7.6	-	-	+7000	1	ı	-
002	TF	ISASA	-	332 (324.6)	-7.6	13.4	-	+6000	-	-	1.0
003	TF	OR850	-	287 (279.4)	-7.6	6.3	-	-	-	-	1.0
004	TF	OR851	1	254 (246.2)	-7.6	6.7	-	-	1	1	1.0
005	TF	OR852	-	197 (189.2)	-7.6	4.6	-	2100	1	1	1.0
006	TF	OR853	1	197 (189.2)	-7.6	1.4	-	1661	-165	-3.00	0.3
007	RF Center: ORRF1 r=2.25NM	OR854	1	ı	-7.6	3.3	R	603	1	-3.00	0.3
800	TF	RW28	Υ	281 (273.8)	-7.6	1.5	-	115	-	-3.00/50	0.3
009	FA	-	-	281 (273.8)	-7.6	-	-	+700	-	-	1.0
010	DF	ISASA	-	-	-7.6	-	R	6000	-	-	1.0

Waypoint Coordinates

Waypoint Ide	ntifier	Coordinates	RF Arc Center Identifier	Coordinates	
KANNA		353011.27N / 1344121.95E	ORRF1	353354.77N / 1341238.96E	
ISASA		354107.52N / 1343147.31E			
OR850		354209.38N / 1342406.43E			
OR851		353926.62N / 1341632.67E			
OR852		353453.68N / 1341538.37E			
OR853		353333.13N / 1341522.36E			
OR854		353139.90N / 1341226.53E			
RW28		353146.03N / 1341033.79E			
-			1		

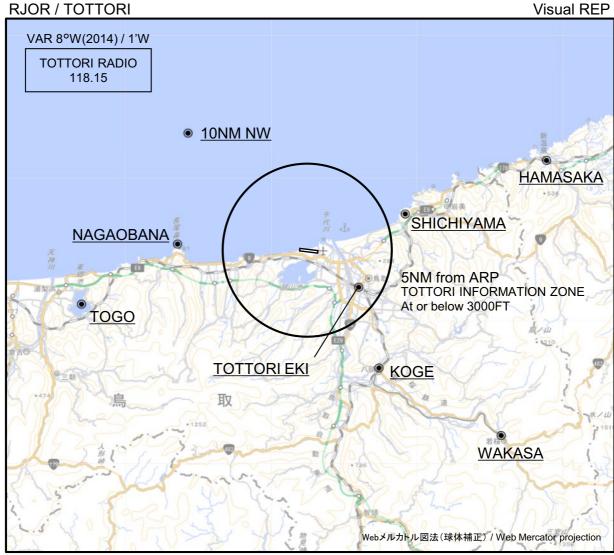

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

	Call sign	BRG / DIST from ARP	Remarks			
	10NM NW	315°T / 10.0NM	海上 Over the sea			
ned.	浜坂 Hamasaka	069°T / 15.1NM	駅 Station			
abolished.	駟馳山 Shichiyama	069°T / 6.2NM	山 Mountain			
REQ	長尾鼻 Nagaobana	273°T / 7.7NM	岬 Cape			
Secondary FREQ	鳥取駅 Tottori eki	126°T / 3.7NM	駅 Station			
Secon	東郷 Togo	257°T / 13.7NM	池 Pond			
	郡家 Koge	149°T / 8.2NM	駅 Station			
CHANGE	若桜 Wakasa	134°T / 15.9NM	駅 Station			

