

STANDARD DEPARTURE CHART - INSTRUMENT

RJAW / IWOTO

SID and TRANSITION

IWO TWO DEPARTURE

RWY 07/25 : Climb RWY HDG to 1000FT or above, then proceed as directed by ATC.  
Remarks: IWO TWO DEPARTURE is not illustrated.

TIDRI TWO DEPARTURE

RWY 07 : Climb RWY HDG to 1000FT or above, turn left HDG306° to intercept and proceed via IJT R336 to TIDRI.  
RWY 25 : Climb RWY HDG to 1000FT or above, turn right HDG006° to intercept and proceed via IJT R336 to TIDRI.

VASHU TRANSITION

From over TIDRI, proceed via IJT R336 to VASHU.  
Cross VASHU at assigned altitude.



CHANGE : PROC renamed. IWOTO NDB(OX) abolished.

STANDARD DEPARTURE CHART - INSTRUMENT

RJAW /IWOTO

RNAV SID

VASKO ONE DEPARTURE

RNP1

Note GNSS required.

VAR 4°W

VASKO  
250015.8N  
1420213.0E  
6000

800 800 072° 252°

RWY07 : Climb on HDG072° at or above 800FT, direct to VASKO at or above 6000FT.  
RWY25 : Climb on HDG252° at or above 800FT, turn right direct to VASKO at or above 6000FT.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	072 (067.8)	-3.9	—	—	+800	—	—	RNP1
002	DF	VASKO	—	—	-3.9	—	—	+6000	—	—	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	252 (247.8)	-3.9	—	—	+800	—	—	RNP1
002	DF	VASKO	—	—	-3.9	—	R	+6000	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART - INSTRUMENT

RJAW / IWOTO

STAR

KANGO ARRIVAL

From over VASHU, proceed via IJT R336 to IJT R336/15.0DME, then turn right via IJT 15.0DME counterclockwise ARC to KANGO.

Cross TIDRI at altitude specified by ATC.

SAUNA ARRIVAL

From over VASHU, proceed via IJT R336 to IJT R336/15.0DME, then turn left via IJT 15.0DME clockwise ARC to SAUNA.

Cross TIDRI at altitude specified by ATC.

CHANGE : CHIDORI ARRIVAL abolished. KANGO ARRIVAL SAUNA ARRIVAL established.



STANDARD ARRIVAL CHART - INSTRUMENT


RJAW /IWOTO

RNAV STAR

VASKO ARRIVAL	RNP1
---------------	------

Note GNSS required.

VAR 4°W

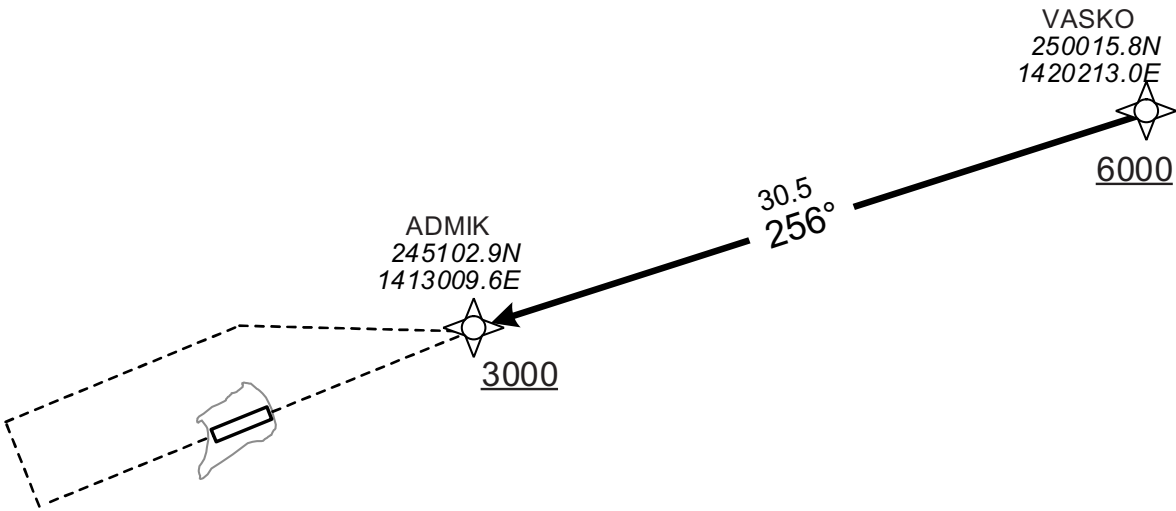

From VASKO at or above 6000FT, to ADMIK at or above 3000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VASKO	—	—	-3.9	—	—	+6000	—	—	RNP1
002	TF	ADMIK	—	256 (252.5)	-3.9	30.5	—	+3000	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJAW / IWOTO



TACAN Z RWY07

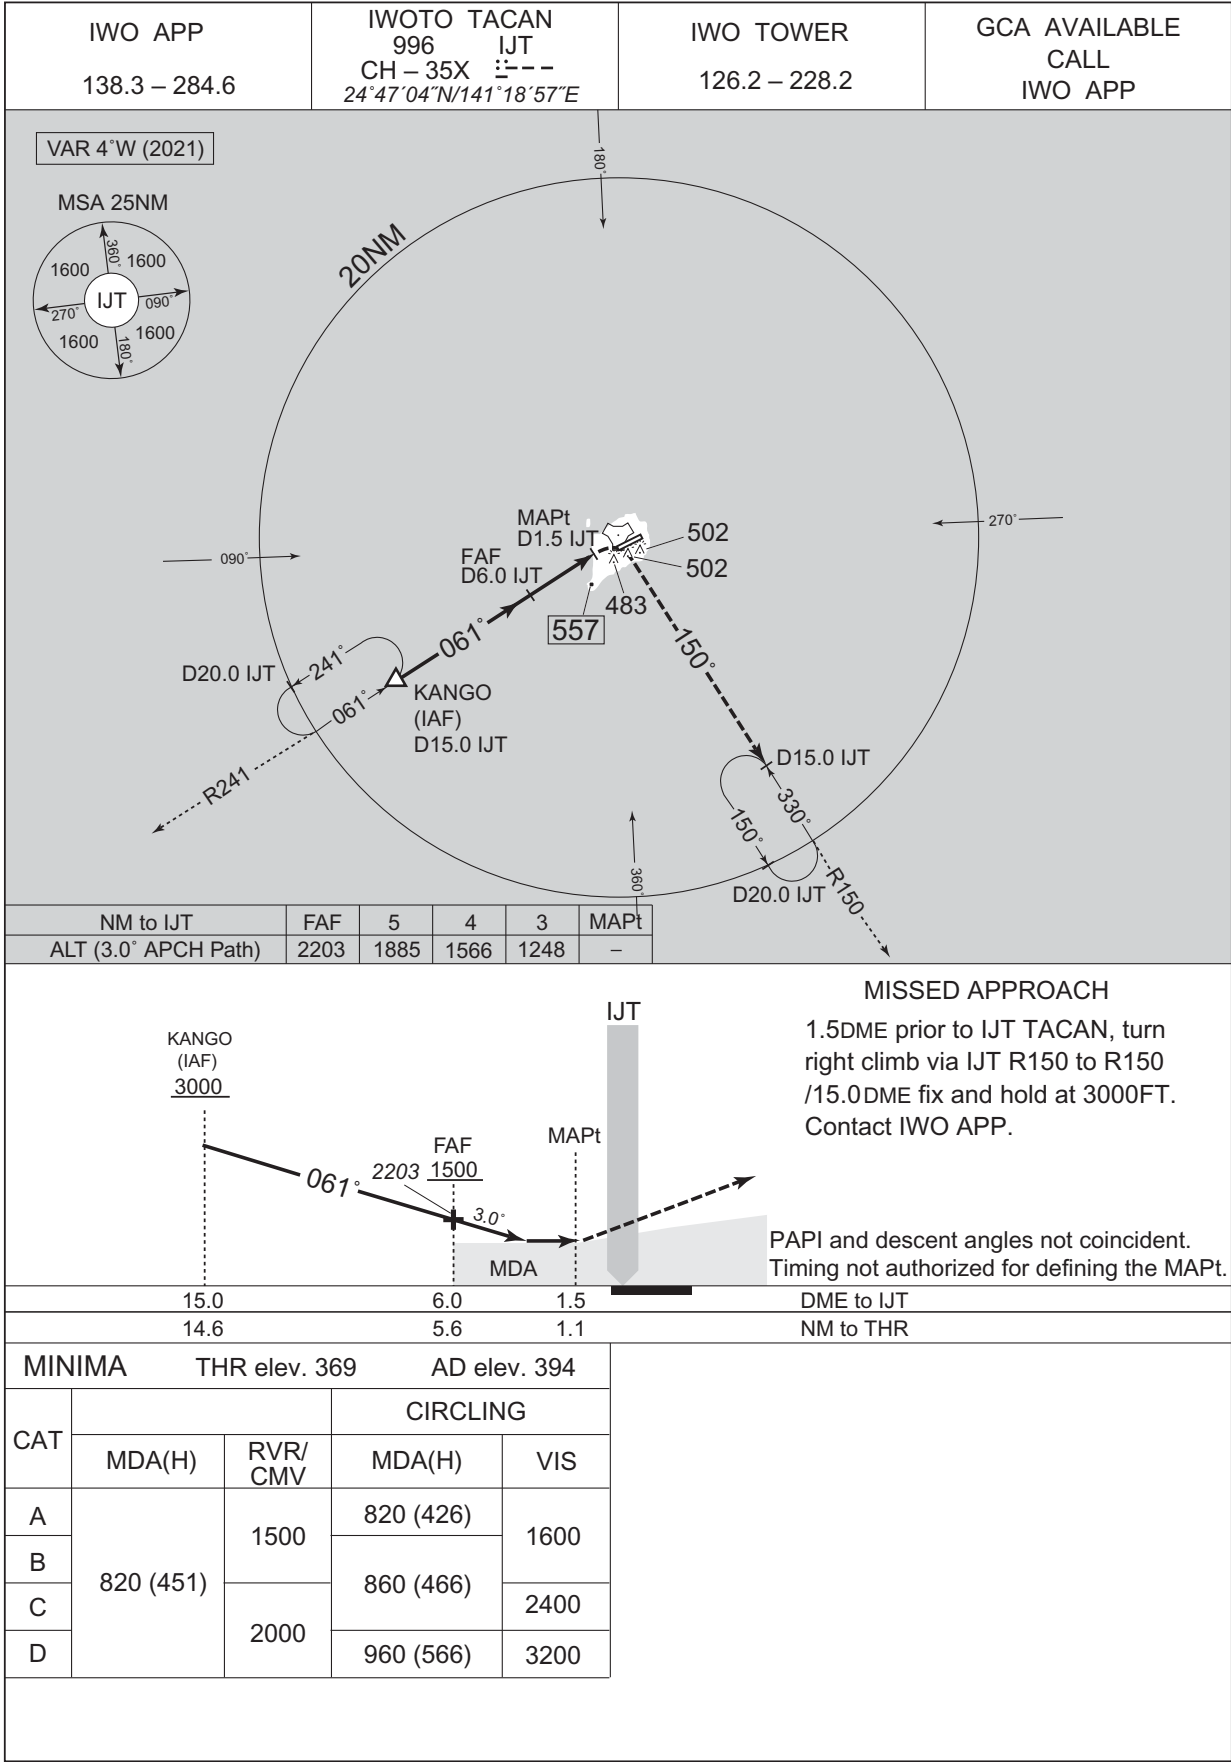

## INSTRUMENT APPROACH CHART

RJA W / IWOTO

TACAN Y RWY07

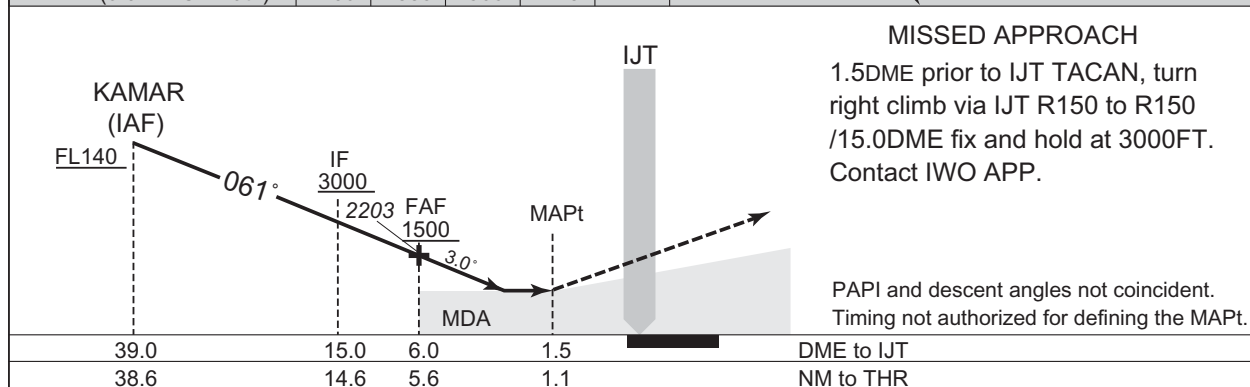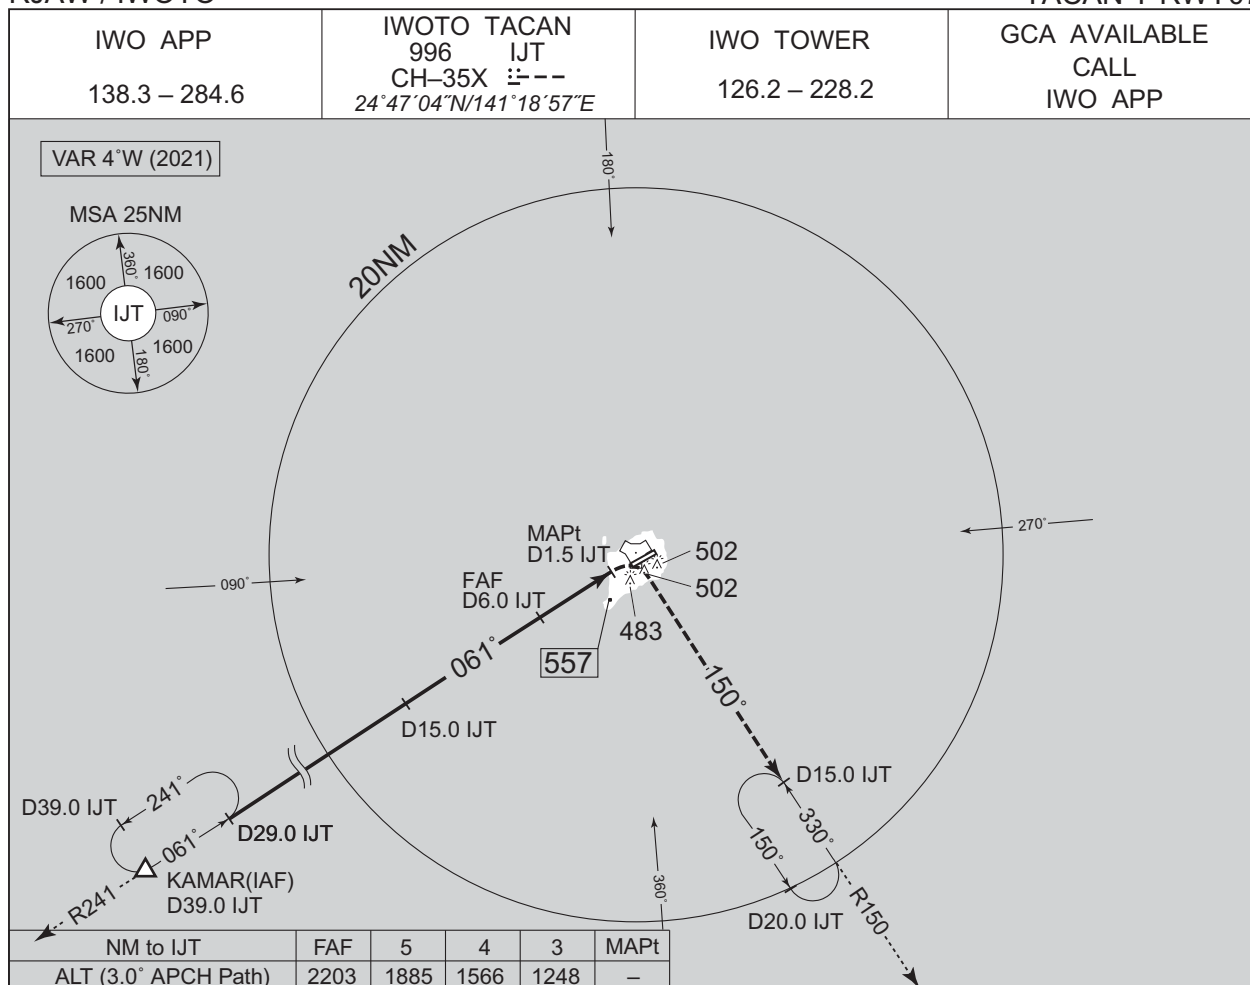


MINIMA		THR elev. 369	AD elev. 394	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	820 (451)	1500	820 (426)	1600
B			860 (466)	
C		2000		
D				960 (566)

## INSTRUMENT APPROACH CHART

RJAW / IWOTO


TACAN X RWY07

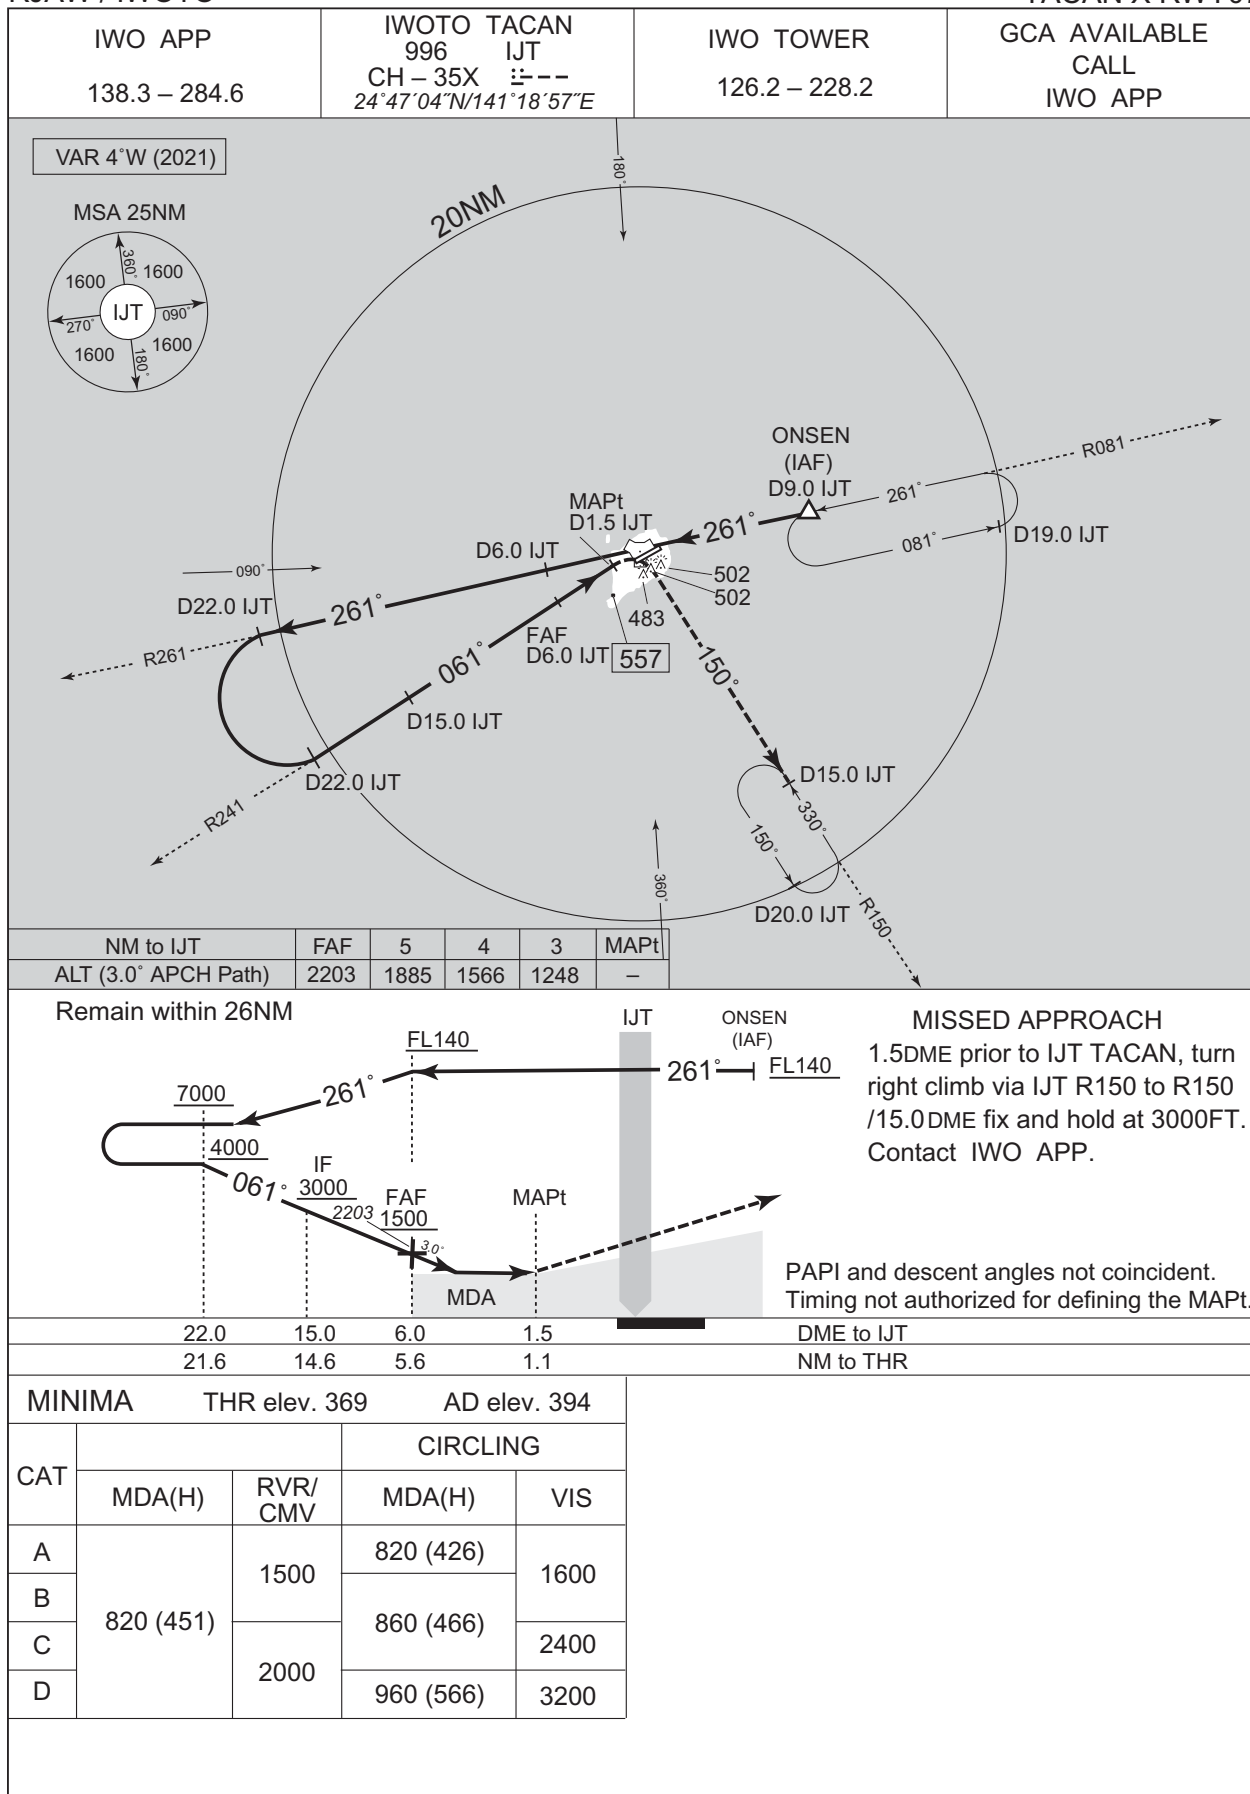

INSTRUMENT APPROACH CHART

RJAW / IWOTO


TACAN Z RWY25

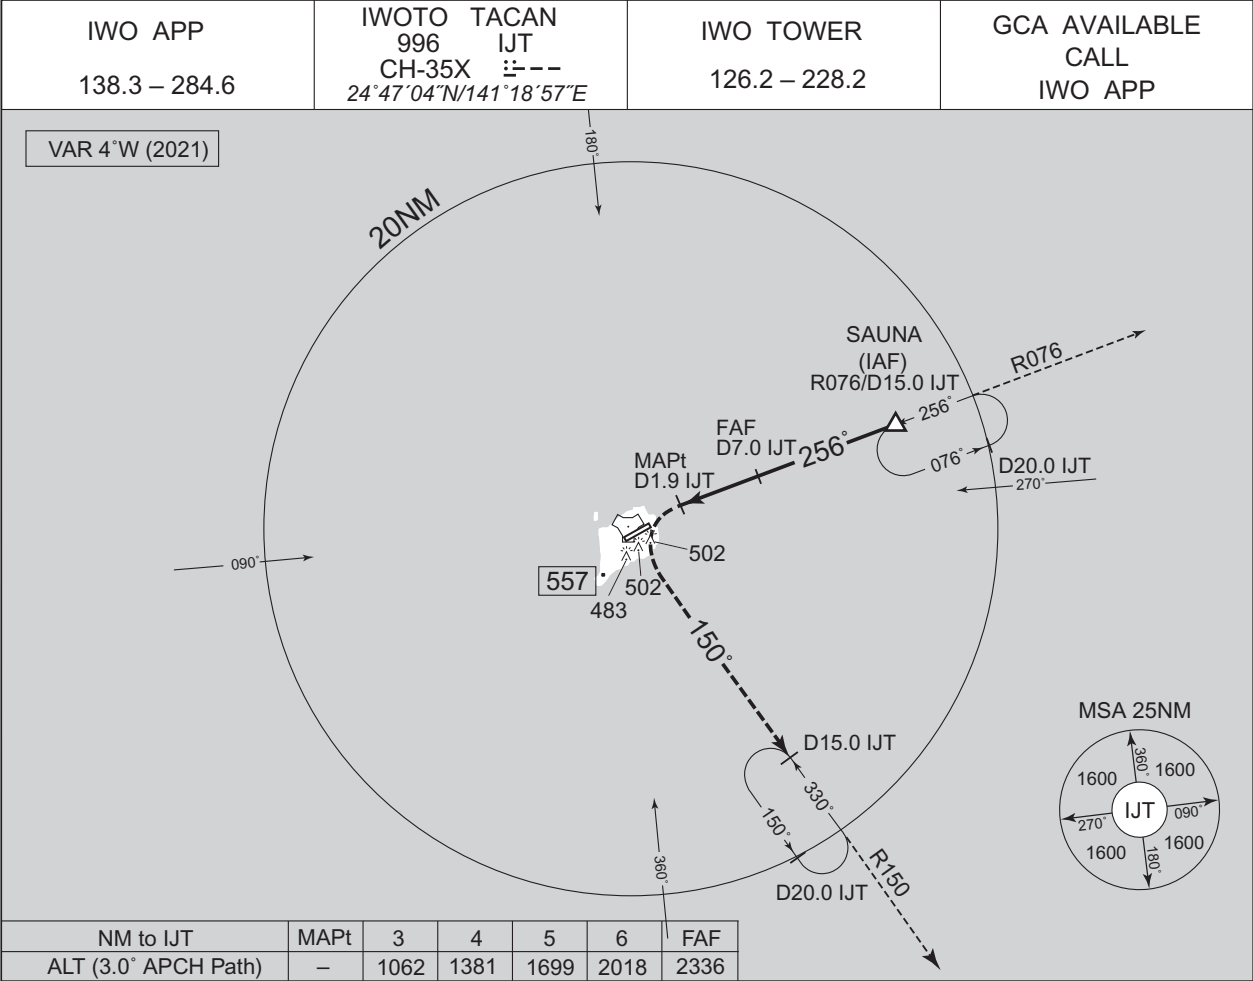

MISSED APPROACH

1.9DME prior to IJT TACAN, turn left climb via IJT R150 to R150 /15.0DME fix and hold at 3000FT. Contact IWO APP.

PAPI and descent angles not coincident.  
Timing not authorized for defining the MAPt.

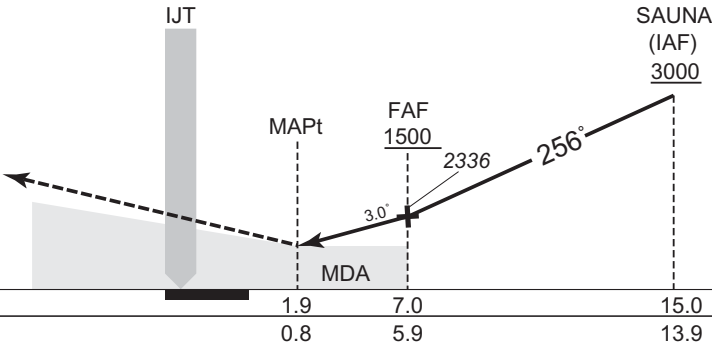

MINIMA      THR elev. 394      AD elev. 394

CAT	MDA(H)		CIRCLING	
	MDA(H)	RVR/CMV	MDA(H)	VIS
A	660 (266)	1500	820 (426)	1600
B		1600	860 (466)	2400
C		1800	960 (566)	3200
D				

CHANGE : Shape of PROC course for profile view.



## RJAW / IWOTO

TACAN Y RWY25

[illegible]

**MISSED APPROACH**  
1.9DME prior to IJT TACAN, turn left climb via IJT R150 to R150 /15.0DME fix and hold at 3000FT. Contact IWO APP.




MINIMA		THR elev. 394	AD elev. 394	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	660 (266)	1500	820 (426)	1600
B			860 (466)	
C		1600		2400
D		1800	960 (566)	3200

INSTRUMENT APPROACH CHART

RJAW / IWOTO


TACAN X RWY25

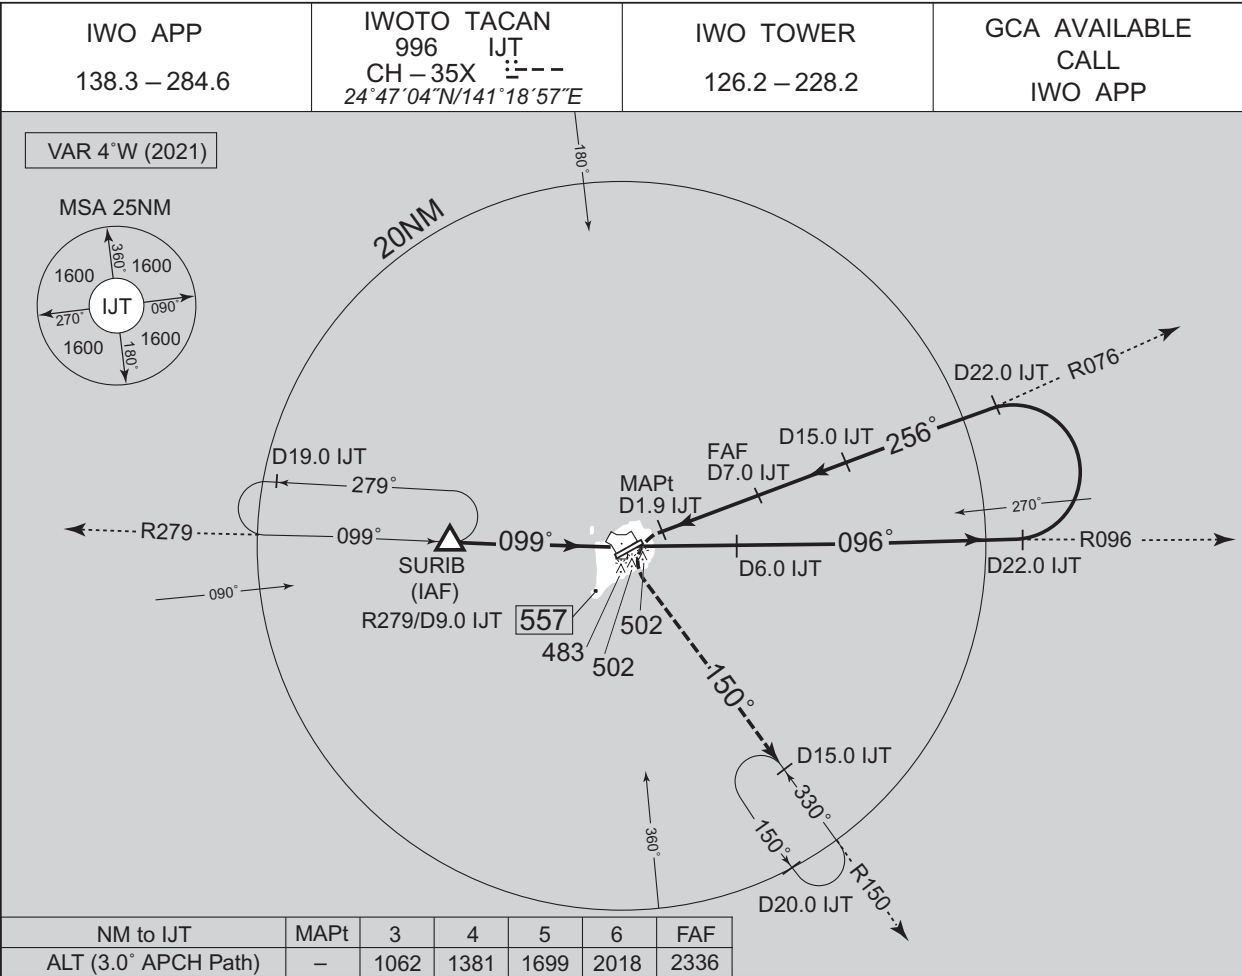

MISSED APPROACH

1.9DME prior to IJT TACAN, turn left climb via IJT R150 to R150 /15.0DME fix and hold at 3000FT. Contact IWO APP.

PAPI and descent angles not coincident.  
Timing not authorized for defining the MAPt.

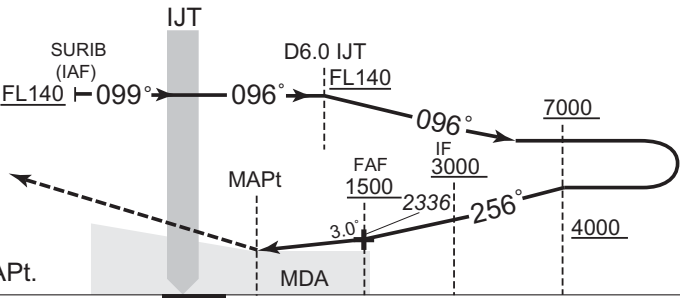

DME to IJT	1.9	7.0	15.0	22.0
NM to THR	0.8	5.9	13.9	20.9


MINIMA		THR elev. 394	AD elev. 394	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	660 (266)	1500	820 (426)	1600
B			860 (466)	
C		1600		2400
D		1800	960 (566)	3200

CHANGE : "D6.0 IJT" added in profile view.

## INSTRUMENT APPROACH CHART

RJAW /IWOTO


RNP RWY07

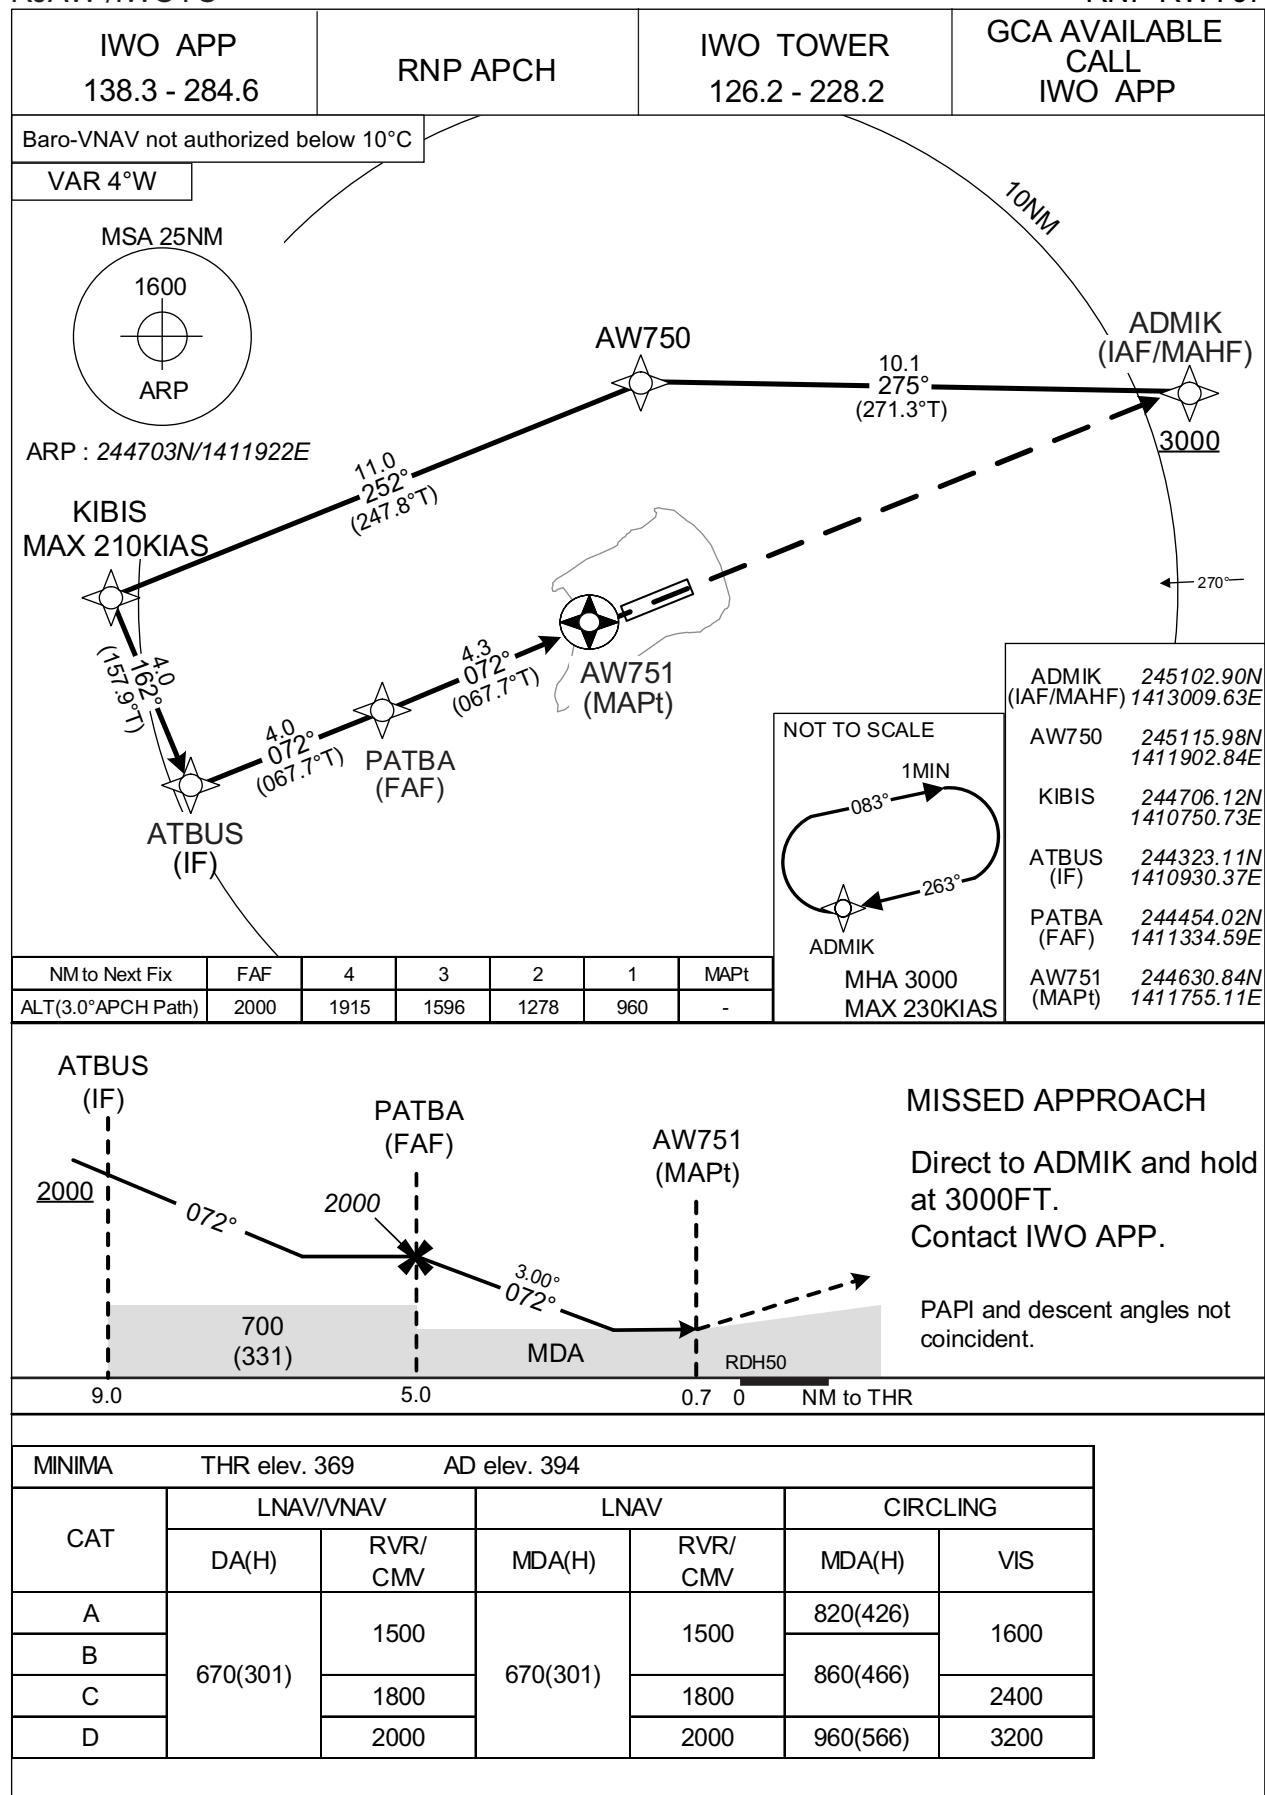

## INSTRUMENT APPROACH CHART

RJAW /IWOTO


RNP RWY25

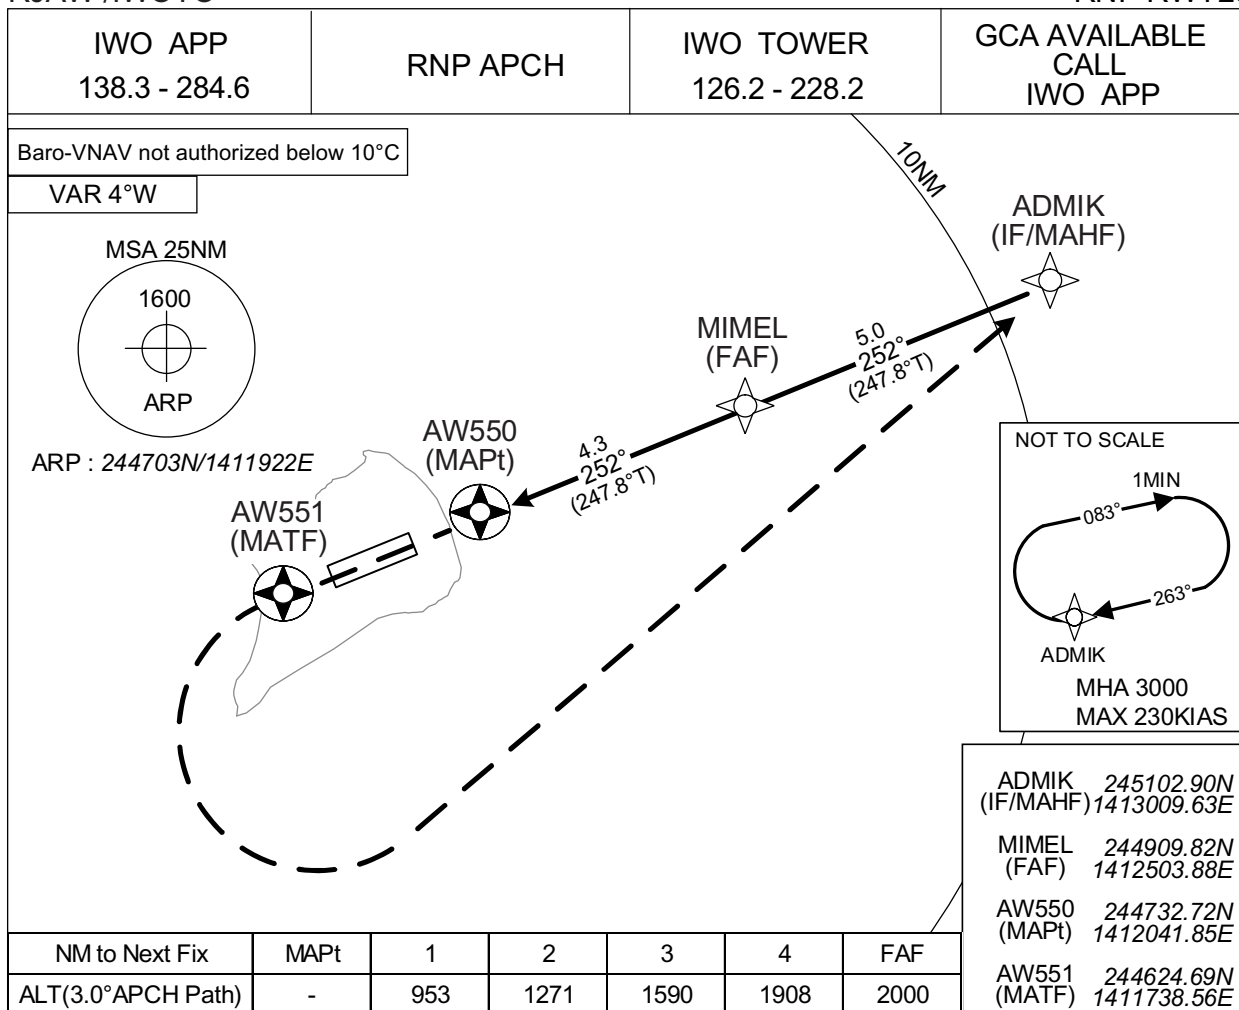

## MISSED APPROACH

Direct to AW551, turn left  
direct to ADMIK and hold at  
3000FT.  
Contact IWO APP.

PAPI and descent angles not  
coincident.

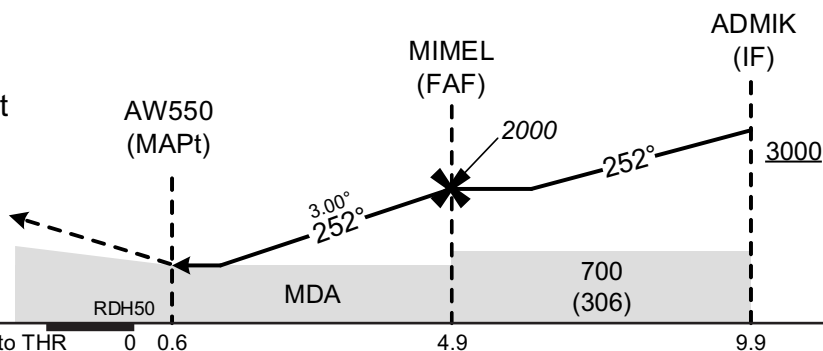

MINIMA	THR elev. 394		AD elev. 394			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	669(275)	1500	660(266)	1500	820(426)	1600
B		1600		1600	860(466)	
C		1800		1800	960(566)	2400
D						3200