

AD 2 AERODROMES

RORT AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RORT - TARAMA

RORT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

| | | |
|---|--|---|
| 1 | ARP coordinates and site at AD | 243914N/1244031E 352°/1.0km from RWY 36 THR |
| 2 | Direction and distance from (city) | |
| 3 | Elevation/ Reference temperature | 33.8ft / 32° C(2004-2008) |
| 4 | Geoid undulation at AD ELEV PSN | 95ft |
| 5 | MAG VAR/ Annual change | 4°W(2009) / 3.7°W |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | OKINAWA PREF. PUBLIC AP. 2351-7, Aza-Nakasuji, Tarama-son, Miyako-gun, Okinawa Pref. TEL : 0980-79-2637 FAX : 0980-79-2211 |
| 7 | Types of traffic permitted(IFR/VFR) | IFR/VFR |
| 8 | Remarks | Nil |

RORT AD 2.3 OPERATIONAL HOURS

| | | |
|----|---------------------------|---|
| 1 | AD Administration | 2300 - 0900 |
| 2 | Customs and immigration | On request Customs: 0980-72-2310 Immigration: 0980-72-3440 |
| 3 | Health and sanitation | Quarantine(human): On request(0980-73-5115) Quarantine(animal, plant): Nil |
| 4 | AIS Briefing Office | Nil |
| 5 | ATS Reporting Office(ARO) | Nil |
| 6 | MET Briefing Office | H24 (NAHA) |
| 7 | ATS | ATS: 2300 - 0900 Remarks: AFIS provided by NAHA Airport Office. |
| 8 | Fuelling | Nil |
| 9 | Handling | Ask AD Administration |
| 10 | Security | Ask AD Administration |
| 11 | De-icing | Nil |
| 12 | Remarks | Nil |

RORT AD 2.4 HANDLING SERVICES AND FACILITIES

| | | |
|---|---|-----|
| 1 | Cargo-handling facilities | Nil |
| 2 | Fuel/ oil types | Nil |
| 3 | Fuelling facilities/ capacity | Nil |
| 4 | De-icing facilities | Nil |
| 5 | Hangar space for visiting aircraft | Nil |
| 6 | Repair facilities for visiting aircraft | Nil |
| 7 | Remarks | Nil |

RORT AD 2.5 PASSENGER FACILITIES

| | | |
|---|----------------------|--|
| 1 | Hotels | Hotels in Tarama village |
| 2 | Restaurants | In Tarama village |
| 3 | Transportation | Nil |
| 4 | Medical facilities | Clinic 5km from airport |
| 5 | Bank and Post Office | Bank in Tarama village / Post Office in Tarama village |
| 6 | Tourist Office | Nil |
| 7 | Remarks | Nil |

RORT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

| | | |
|---|---|----------------------------------|
| 1 | AD category for fire fighting | CAT 6 |
| 2 | Rescue equipment | Chemical fire fighting truck x 2 |
| 3 | Capability for removal of disabled aircraft | Incapable |
| 4 | Remarks | Nil |

RORT AD 2.7 SEASONAL AVAILABILITY-CLEARING

| | | |
|---|-----------------------------|----------------|
| 1 | Types of clearing equipment | Not Applicable |
| 2 | Clearance priorities | Not Applicable |
| 3 | Remarks | Nil |

RORT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

| | | |
|---|-------------------------------------|--|
| 1 | Apron surface and strength | Surface : Asphalt-concrete Strength : PCN 16/F/B/Y/T |
| 2 | Taxiway width, surface and strength | Width : 18m Surface : Asphalt-concrete Strength : PCN 16/F/B/Y/T |
| 3 | ACL and elevation | Not Available |
| 4 | VOR checkpoints | Not Available |
| 5 | INS checkpoints | (Spot NR) 1 : 243913.23N 1244036.86E 2 : 243914.85N 1244036.64E |
| 6 | Remarks | Nil |

RORT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

| | | |
|---|--|---|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | Nil |
| 2 | RWY and TWY markings and LGT | RWY:RWY18/36 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe TWY: (Marking) TWY CL, TWY side stripe |
| 3 | Stop bars | Nil |
| 4 | Remarks | (Marking) Overrun area |

RORT AD 2.10 AERODROME OBSTACLES

- In Area2 Nil
- In Area3 To be developed

RORT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

| | | |
|----|--|--|
| 1 | Associated MET Office | NAHA |
| 2 | Hours of service MET Office outside hours | H24 (NAHA) |
| 3 | Office responsible for TAF preparation Periods of validity | Nil |
| 4 | Trend forecast Interval of issuance | Nil |
| 5 | Briefing/ consultation provided | Briefing is available upon inquiry at NAHA |
| 6 | Flight documentation Language(s) used | C En |
| 7 | Charts and other information available for briefing or consultation | S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /T _r , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N |
| 8 | Supplementary equipment available for providing information | Nil |
| 9 | ATS units provided with information | RADIO |
| 10 | Additional information(limitation of service, etc.) | Nil |

RORT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations RWY NR | TRUE BRG | Dimensions of RWY(M) | Strength(PCN) and surface of RWY | THR coordinates THR geoid undulation | THR elevation and highest elevation of TDZ of precision APP RWY |
|------------------------|----------|-------------------------|-------------------------------------|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 18 | 172.78° | 1500x45 | PCN 16/F/B/Y/T Asphalt concrete | 243937.89N 1244028.34E 95ft | THR ELEV:34ft |
| 36 | 352.78° | 1500x45 | PCN 16/F/B/Y/T Asphalt concrete | 243849.53N 1244035.04E 95ft | THR ELEV:36ft |
| Slope of RWY | | Strip Dimensions(M) | RESA(Overrun) Dimensions(M) | Remarks | |
| 7 | | 10 | 11 | 14 | |
| See AD2.24 AD chart | | 1620x150 1620x150 | 42x155 42x155 | RWY Grooving : 1500mx30m | |

RORT AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA (m) | TODA (m) | ASDA (m) | LDA (m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 18 | 1500 | 1500 | 1500 | 1500 | Nil |
| 36 | 1500 | 1500 | 1500 | 1500 | Nil |

RORT AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator | APCH LGT type LEN INTST | RTHL Color WBAR | PAPI (VASIS) Angle DIST FM THR MEHT | RTZL LEN | RCLL LEN Spacing Color INTST | REDL LEN Spacing Color INTST | RENL Color WBAR | STWL LEN Color |
|--|-------------------------------------|-----------------------|--|-------------|--|--|-----------------------|----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 18 | Nil | Nil | PAPI 3.0°/LEFT 293M 45FT | Nil | Nil | Nil | Nil | Nil |
| 36 | Nil | Nil | PAPI 3.0°/LEFT 307.4M 45FT | Nil | Nil | Nil | Nil | Nil |
| Remarks | | | | | | | | |
| 10 | | | | | | | | |
| RWY THR ID LGT for RWY 18/36 THR (Color:White) | | | | | | | | |

RORT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

| | | |
|---|--|--|
| 1 | ABN/IBN location, characteristics and hours of operation | Nil |
| 2 | LDI location and LGT Anemometer location and LGT | LDI: Nil Anemometer: RWY18 : 303m FM RWY18 THR, LGTD RWY36 : 260m FM RWY36 THR, LGTD |
| 3 | TWY edge and center line lighting | Nil |
| 4 | Secondary power supply/ switch-over time | Within 15 sec : PAPI, RWY THR ID LGT |
| 5 | Remarks | Nil |

RORT AD 2.16 HELICOPTER LANDING AREA

| |
|-----|
| Nil |
|-----|

RORT AD 2.17 ATS AIRSPACE

| Designation and lateral limits | | Vertical limits (ft) | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|--|----------------------------|----------------------------|--------------------------------|---------|
| 1 | | 2 | 3 | 4 | 6 |
| Tarama Information Zone | Area within a radius of 5nm(9km) of Tarama ARP | 3,000 or below | E | Tarama Radio En | |

RORT AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign | Frequency | Hours of operation | Remarks |
|---------------------|--------------|-----------|--------------------|----------------------------------|
| 1 | 2 | 3 | 4 | 5 |
| AFIS | Tarama Radio | 118.6MHz | 2300 - 0900 | Operated by Naha Airport Office. |

RORT AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid (VOR declination) | ID | Frequency | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks |
|----------------------------------|----|------------|--------------------|--|---------------------------------------|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| MSAS | | 1575.42MHz | H24 | | | Transmitting antennas are satellite based |

RORT AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

| |
|-----|
| Nil |
|-----|

2. Taxiing to and from stands

| |
|-----|
| Nil |
|-----|

3. Parking area for small aircraft(General aviation)

| |
|-----|
| Nil |
|-----|

4. Parking area for helicopters

| |
|-----|
| Nil |
|-----|

5. Apron - taxiing during winter conditions

| |
|-----|
| Nil |
|-----|

6. Taxiing - limitations

| |
|-----|
| Nil |
|-----|

7. School and training flights - technical test flights - use of runways

| |
|-----|
| Nil |
|-----|

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RORT AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RORT AD 2.22 FLIGHT PROCEDURES**TAKE OFF MINIMA**

| | RWY | ACFT CAT | REDL & RCLL | | REDL or RCLL or RCL Marking | | NIL (DAYTIME ONLY) | |
|--|-----|-------------|-----------------|----------|--------------------------------|------------|-----------------------|------------|
| | | | CEIL-RVR | CEIL-VIS | CEIL-RVR | CEIL-VIS | CEIL-RVR | CEIL-VIS |
| Multi-Engine ACFT with TKOF ALTN AP FILED | 18 | A,B,C | - | - | - | 200'-1600m | - | 200'-1600m |
| | 36 | A,B,C | - | - | - | 200'-1600m | - | 200'-1600m |
| OTHER | 18 | A,B,C | AVBL LDG MINIMA | | | | | |
| | 36 | | | | | | | |

RORT AD 2.23 ADDITIONAL INFORMATION

Nil

RORT AD 2.24 CHARTS RELATED TO AN AERODROME


Aerodrome/Heliport Chart
Standard Departure Chart - Instrument (GAHRA-RNAV)

Instrument Approach Chart (RNAV (GNSS) RWY18)
Instrument Approach Chart (RNAV (GNSS) RWY36)
Other Chart (Visual REP)
Other Chart (LDG CHART)
Other Chart (MVA CHART)

INTENTIONALLY LEFT BLANK


AD CHART

TARAMA AIRPORT

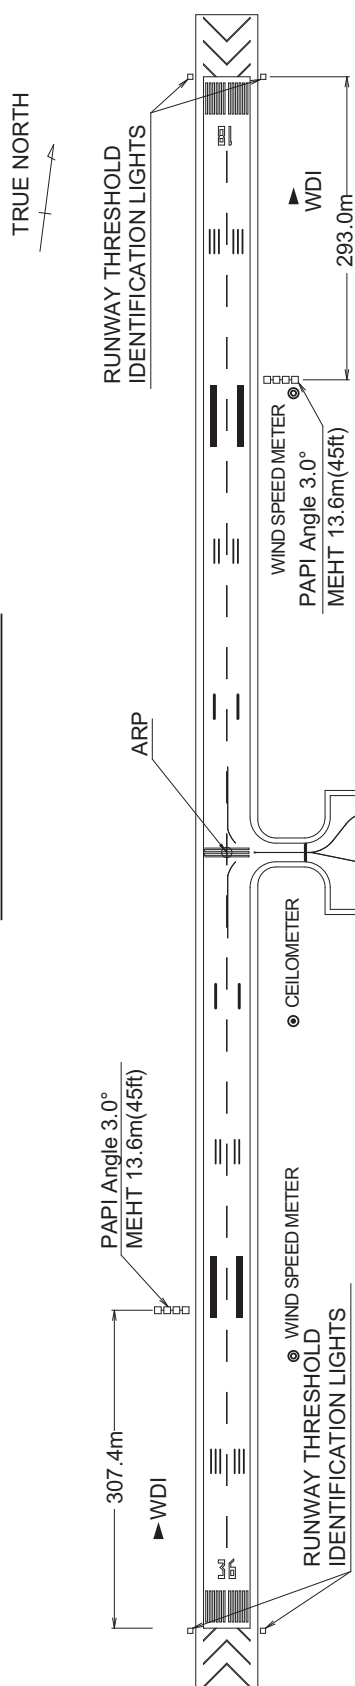

| | |
|-----------------------|----------------|
| REMARKS: WIDTH OF RWY | 1500m x 45m |
| WIDTH OF TWY | 77.5m x 18m |
| WIDTH OF APRON | 110m x 70m |
| RWY GROOVING | 1500m x 30m |
| STRENGTH OF RWY | PCN 16/F/B/Y/T |
| STRENGTH OF TWY | PCN 16/F/B/Y/T |
| STRENGTH OF APRON | PCN 16/F/B/Y/T |

LONGITUDINAL PROFILE OF RUNWAY

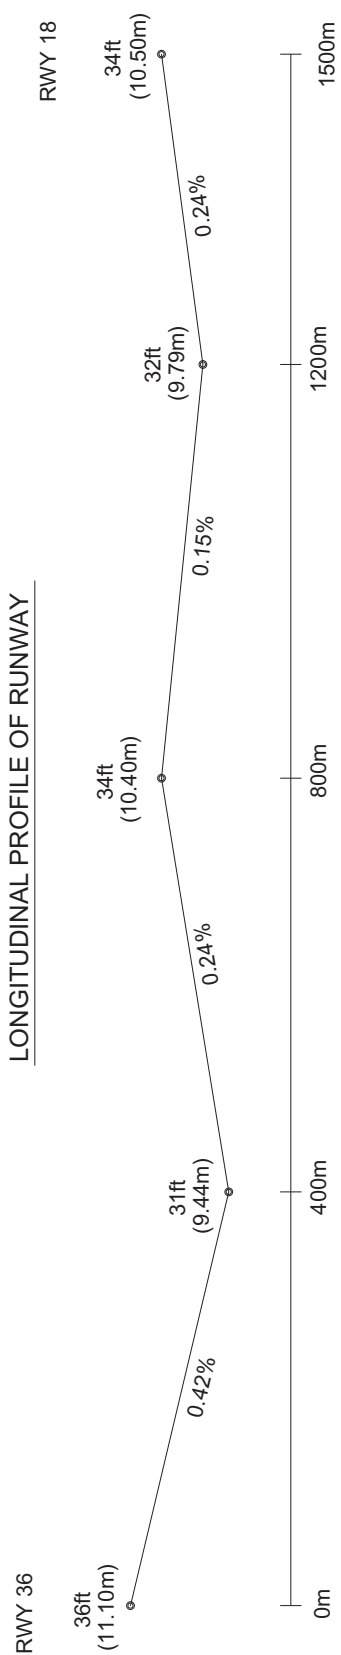

INTENTIONALLY LEFT BLANK

RORT / TARAMA

RNAV SID and TRANSITION

Basic RNP1

VAR 5°W (2020)



RWY18 : Climb on HDG178° at or above 500FT, turn left direct to GAHRA at or above 3000FT.
RWY36 : Climb on HDG358° at or above 500FT, turn right direct to GAHRA at or above 3000FT.

From GAHRA at or above 3000FT, to MJC.

25/2/21

STANDARD DEPARTURE CHART -INSTRUMENT

RORT / TARAMA

RNAV SID and TRANSITION

GAHRA THREE DEPARTURE

RWY18

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 178 (172.8) | -4.9 | — | — | +500 | — | — | Basic RNP1 |
| 002 | DF | GAHRA | — | — | -4.9 | — | L | +3000 | — | — | Basic RNP1 |

RWY36

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 358 (352.8) | -4.9 | — | — | +500 | — | — | Basic RNP1 |
| 002 | DF | GAHRA | — | — | -4.9 | — | R | +3000 | — | — | Basic RNP1 |

MIYAKO TRANSITION


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | GAHRA | — | — | -4.9 | — | — | +3000 | — | — | Basic RNP1 |
| 002 | TF | MJC | — | 075 (069.8) | -4.9 | 11.4 | — | — | — | — | Basic RNP1 |

CHANGE : VAR. SID course. SID renamed. MIYAKO TRANSITION established.

INSTRUMENT APPROACH CHART

RORT / TARAMA

RNAV(GNSS) RWY18

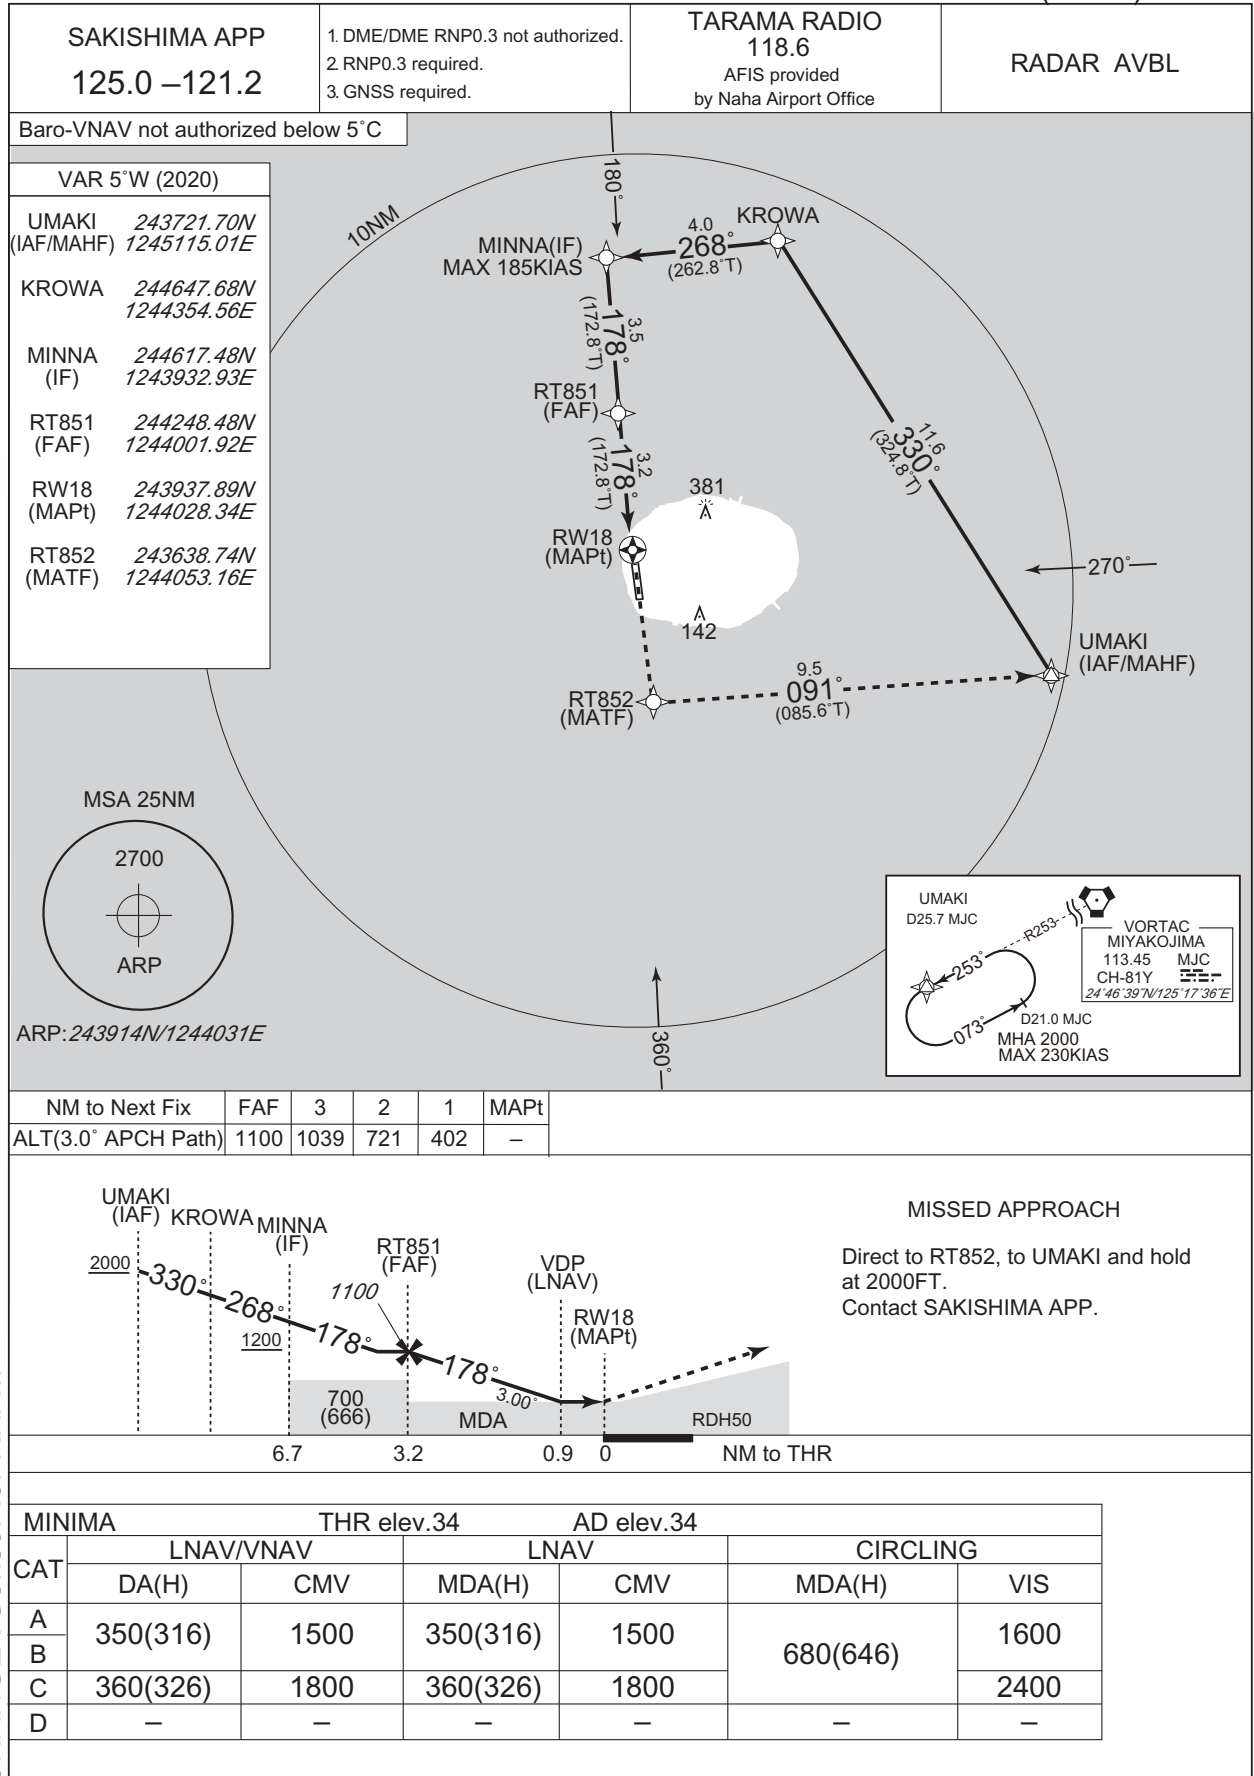


CHANGE : Sensor for RNAV.

INSTRUMENT APPROACH CHART

RORT / TARAMA


RNAV(GNSS) RWY36

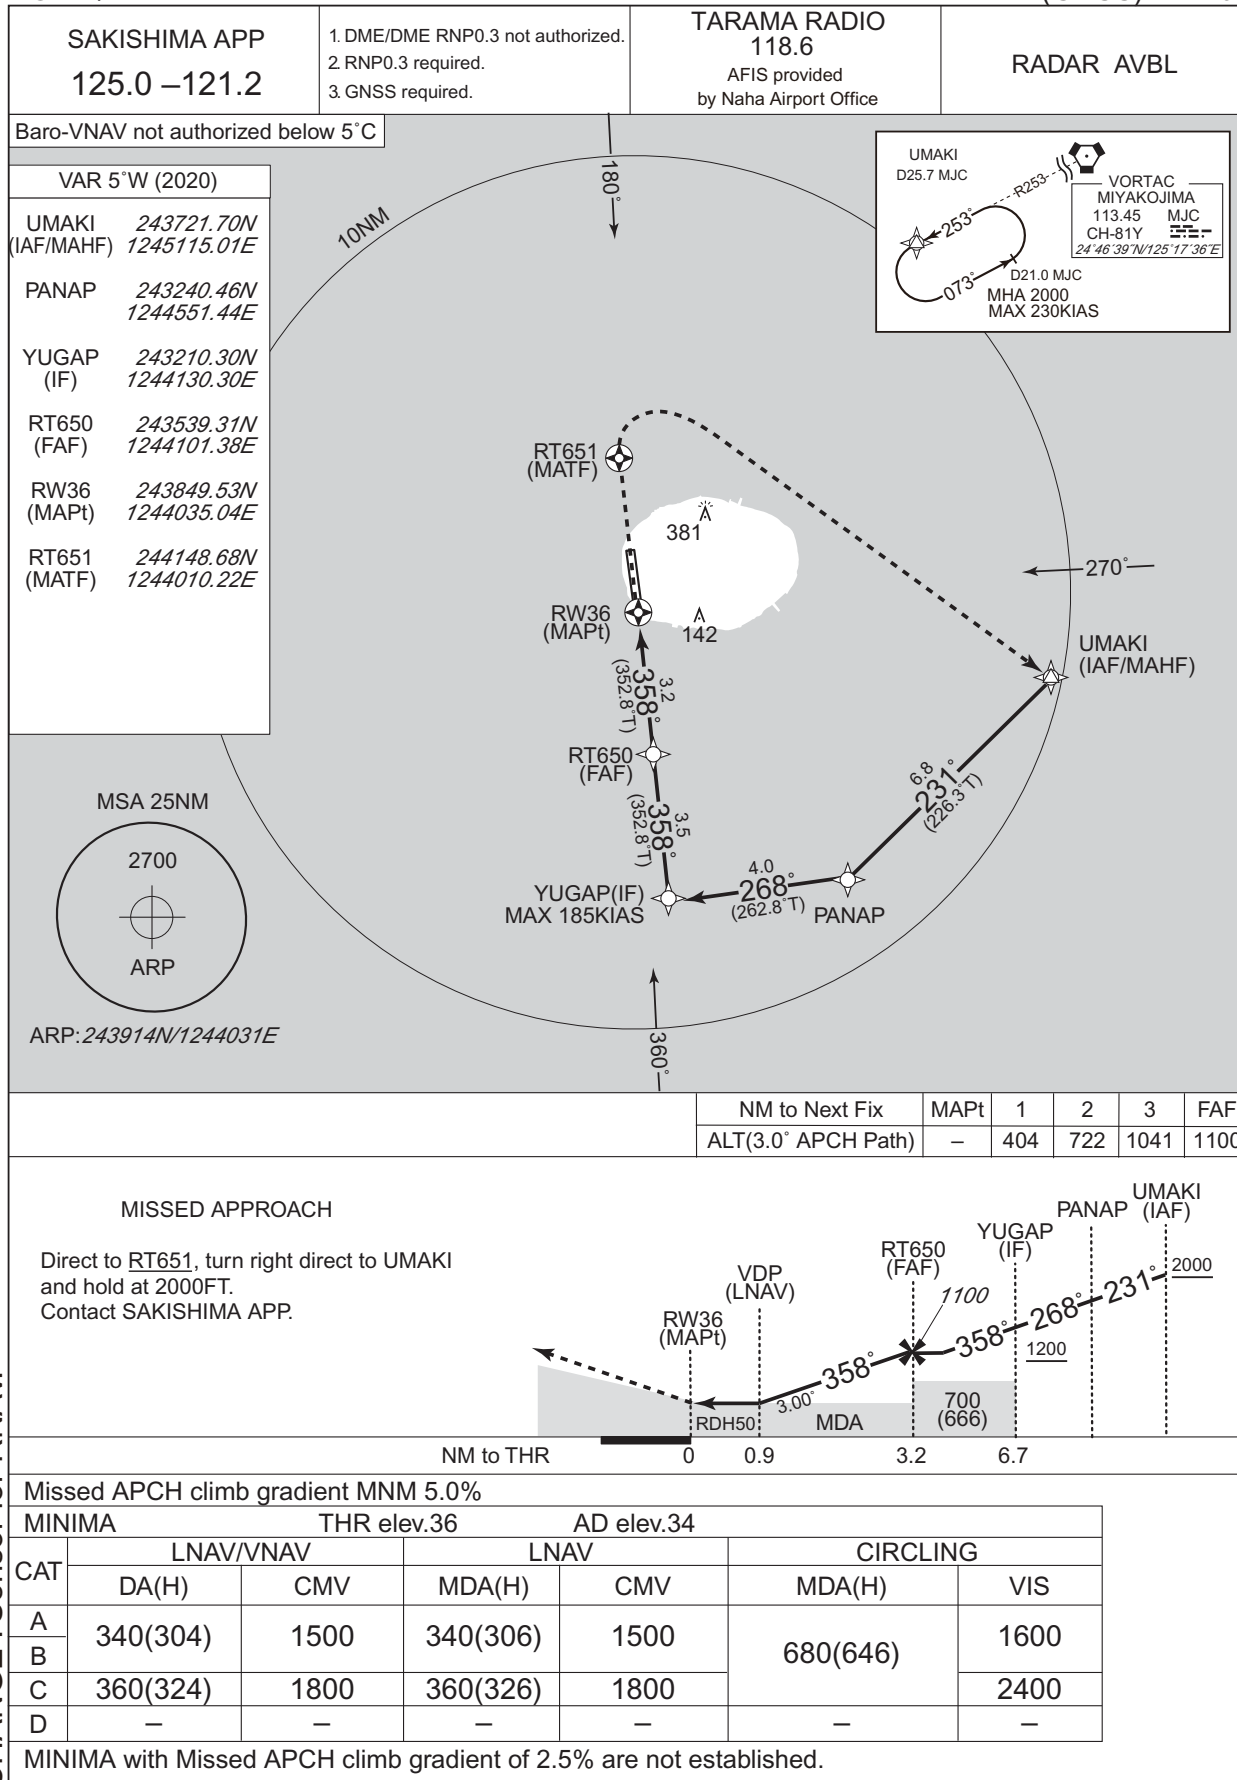

CHANGE : Sensor for RNAV.

RORT / TARAMA


Visual REP

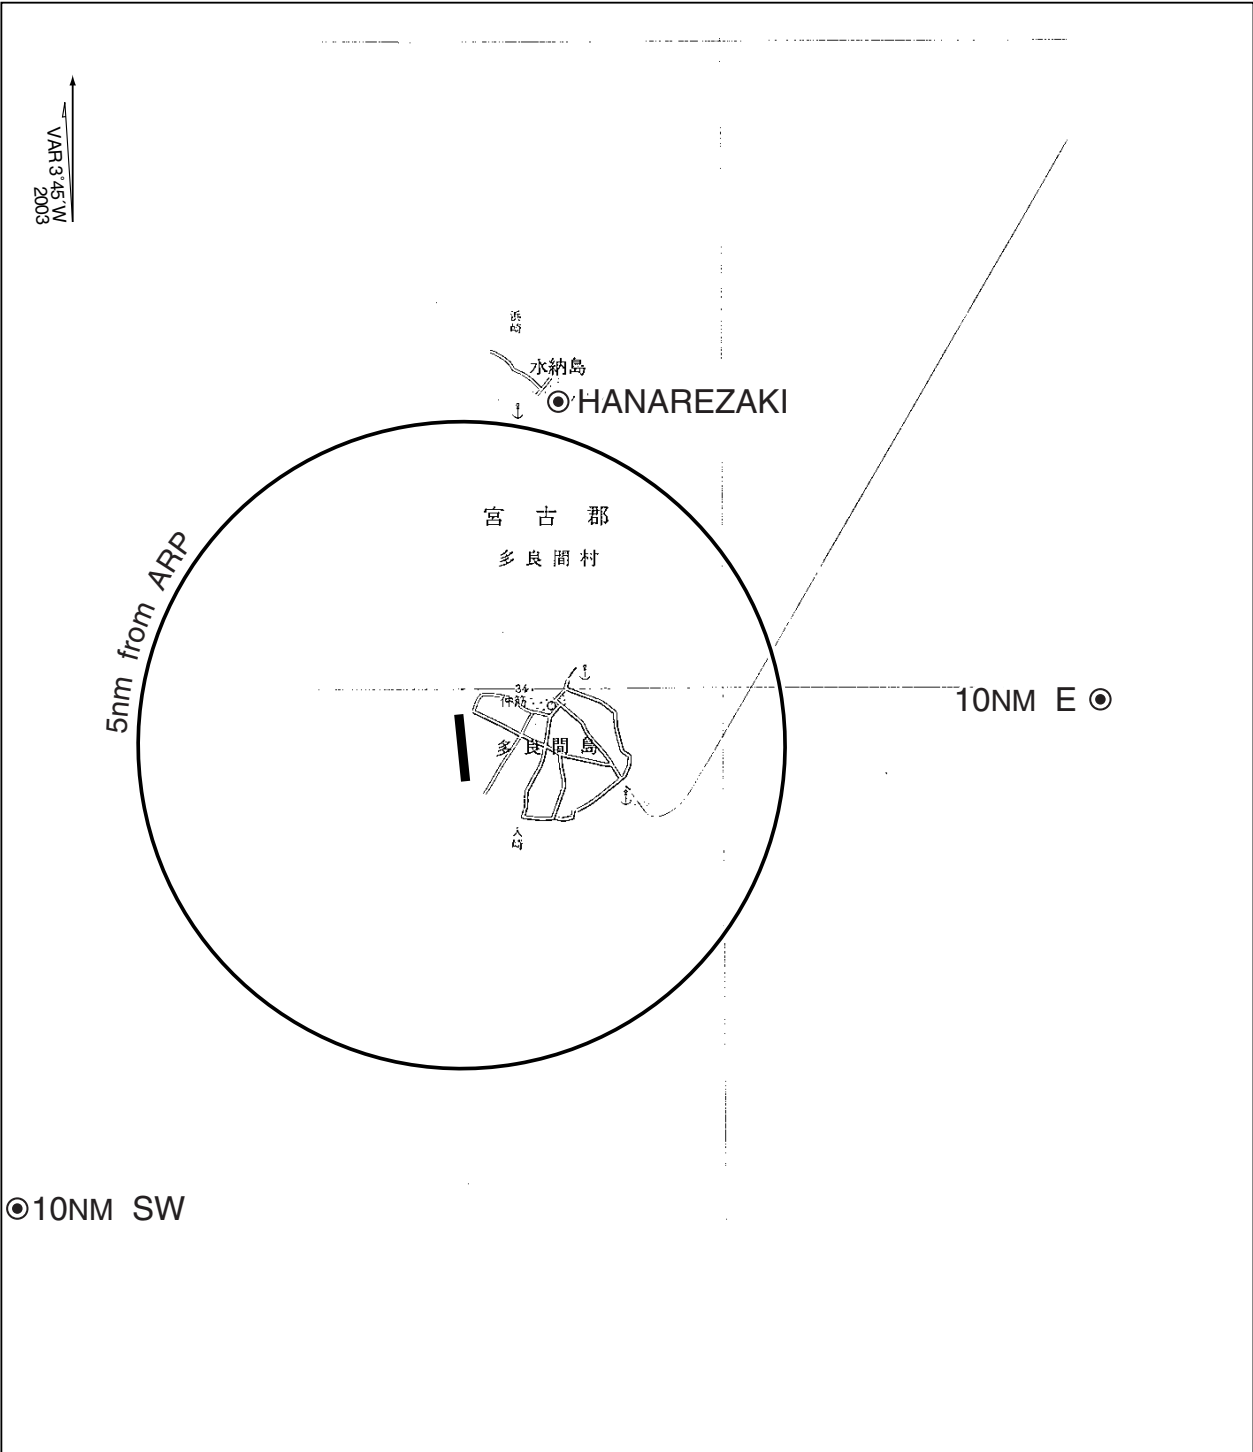

| Call sign | BRG / DIST from ARP | Remarks |
|--------------------|---------------------|--------------------|
| ハナレ崎 HANAREZAKI | 021° / 5.7NM | 岬 Cape |
| 10NM E | 090° / 10.0NM | 海上 Over the sea |
| 10NM SW | 225° / 10.0NM | 海上 Over the sea |



Minimum Vectoring Altitude CHART



INTENTIONALLY LEFT BLANK