



STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5
CLNC DEL
123.3 235.0
GND CON
118.5 275.8
TOWER
134.1 315.8
NAHA DEP CON
119.1 335.8 (NW)
126.5 258.3 (SE)

JILEE THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
05L	V/V(fpm)	221	442	663	884	1105	1326

Minimum Climb Rate to 2800



TLv FL140
TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 05L/05R: Climb heading 055° to KAD VORTAC 5 DME then turn right to intercept the KAD R-066 outbound to JILEE. Cross JILEE at or above 2800 not to exceed 10,000 or altitude specified by ATC.

CHANGE:Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

ATIS ★ 124.2 280.5
CLNC DEL
123.3 235.0
GND CON
118.5 275.8
TOWER
134.1 315.8
NAHA DEP CON
119.1 335.8 (NW)
126.5 258.3 (SE)

TUCOF TWO DEPARTURE

Rwy	Knots	60	120	180	240	300	360
23L	V/V(fpm)	491	982	1473	1964	2455	2946
23R	V/V(fpm)	499	998	1497	1996	2495	2994

ATC Climb Rate to 2700 at 6.4 DME



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF Rwy 23L/23R: Climb on KAD R-235 to 10,000, cross SNUUP at or above 2700 and TUCOF at or below 10,000 or altitude specified by ATC.

CHANGE: Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

EKOLU ONE DEPARTURE



STANDARD DEPARTURE CHART -INSTRUMENT

RODN / KADENA

CUNЕК THREE DEPARTURE(RNAV1)

ATIS ★ 124.2 280.5
CLNC DEL
123.3 235.0
GND CON
118.5 275.8
TOWER
134.1 315.8
NAHA DEP CON
119.1 335.8 (NW)
126.5 258.3 (SE)

Rwy	Knots	60	120	180	240	300	360
23L	V/V(fpm)	546	1092	1638	2184	2730	3276

ATC Climb Rate to 2200



RNAV 1

GPS REQUIRED

DME/DME RNP - 0.3 NA

RADAR REQUIRED

for Non-GPS Equipped Aircraft

TLv FL140
TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 23L: Climb direct CUNЕК. Cross CUNЕК at or above 2200, not to exceed 10,000, then track 236° to TUCOF, cross TUCOF at or above 2200 not to exceed 10,000, or altitude assigned by ATC.

CHANGE:Update

NOTE: REPRINTING DOD FLIP

RODN / KADENA

ATIS ★ 124.2 280.5
 CLNC DEL
 123.3 235.0
 GND CON
 118.5 275.8
 TOWER
 134.1 315.8
 NAHA DEP CON
 119.1 335.8 (NW)
 126.5 258.3 (SE)

$$\begin{array}{r} \text{HIVAS} \\ 5 \\ \hline 10,000 \\ 2800 \end{array}$$

MINIMUMS:

700 Å

055° (4.4)

CAMDA

10,000

072° (9.1)

RADAR REQUIRED

TLv FL140
TA 14,000

TAKE-OFF RWY 05R: Climb direct CAMDA, then track 072° to HIVAS. Cross HIVAS at or above 2800 not to exceed 10,000, or altitude assigned by ATC.

CHANGE: Update

Civil Aviation Bureau, Japan (EFF:4 NOV 2021)

4/11/21

INTENTIONALLY LEFT BLANK


RODN / KADENA

CHANGE: Update.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RODN / KADENA

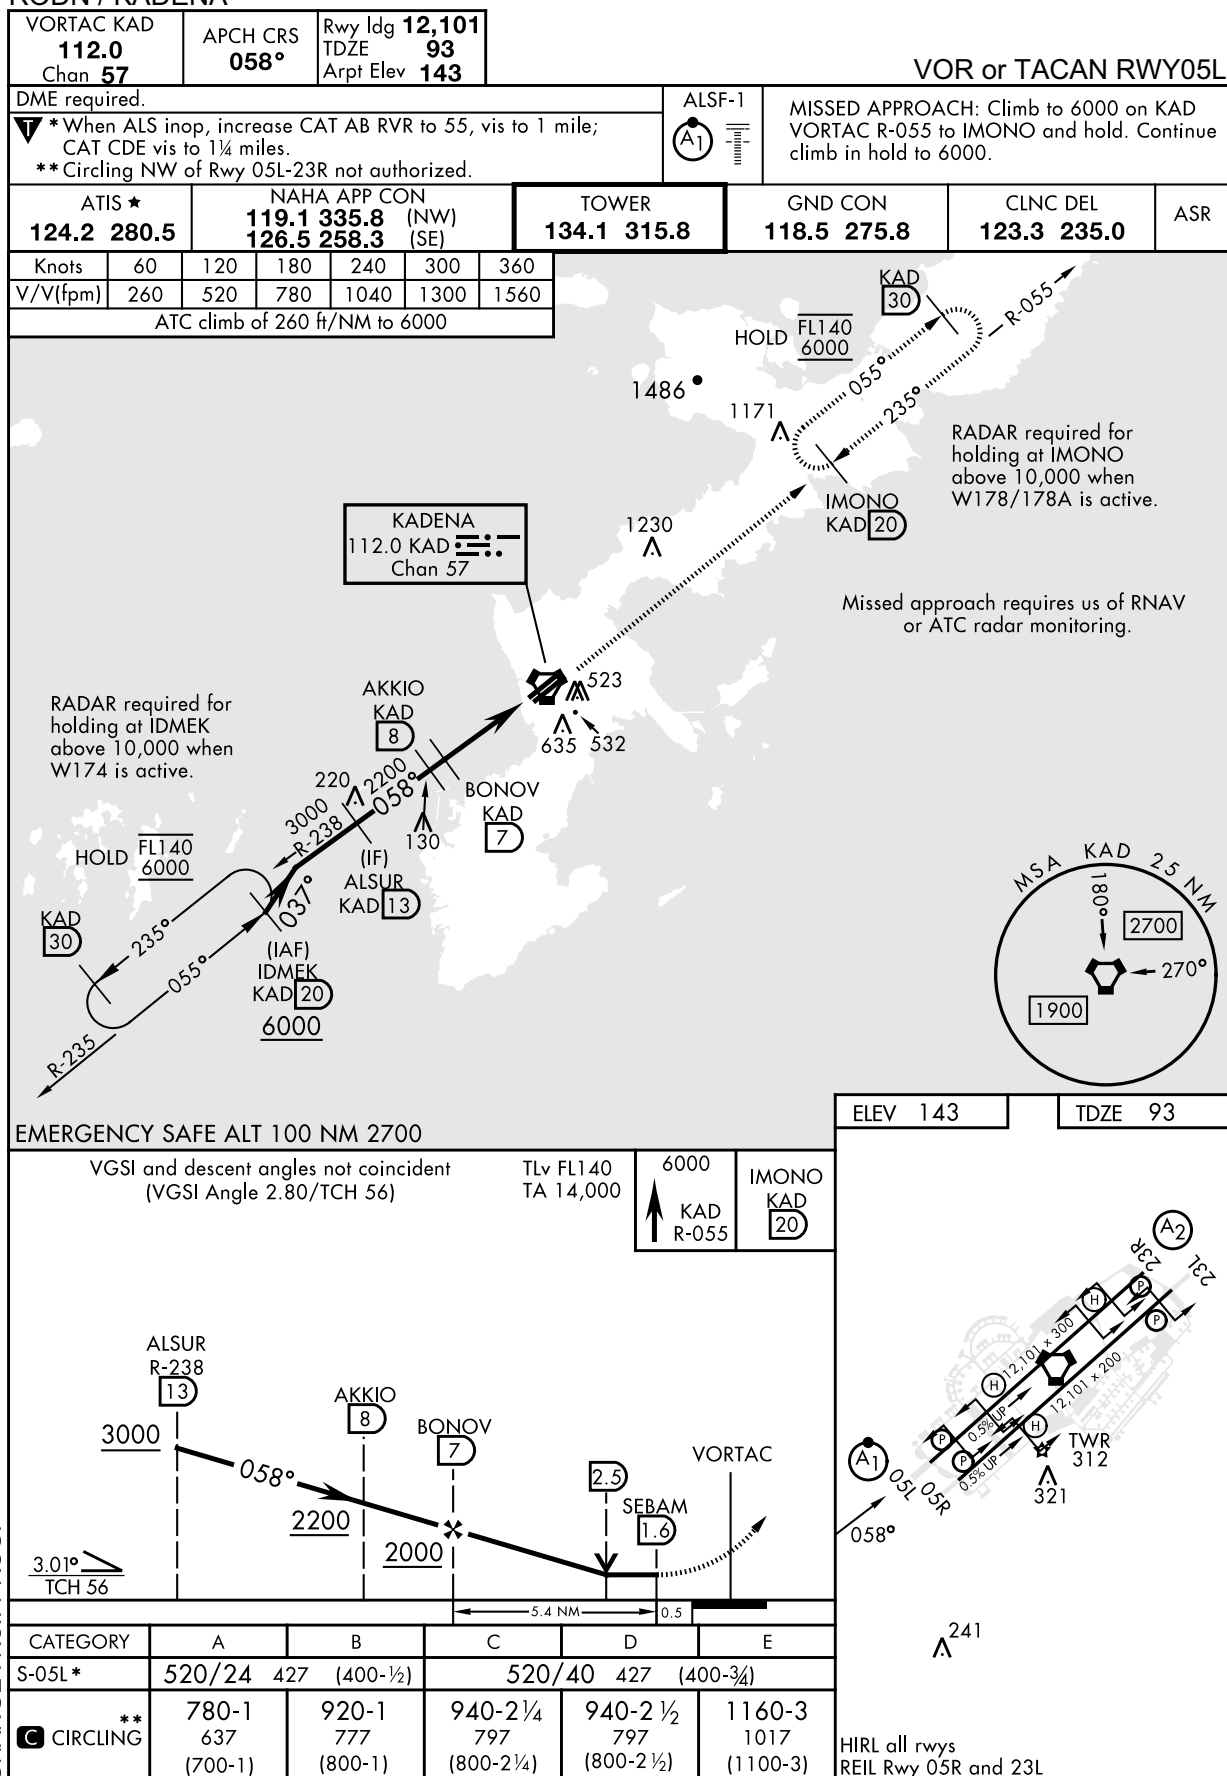

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RODN / KADENA

VORTAC KAD 112.0 Chan 57	APCH CRS 050°	Rwy ldg 12,101 TDZE 106 Arpt Elev 143
--	-------------------------	--

VOR or TACAN RWY05R

DME required.


*Circling NW of Rwy 05L-23R not authorized.

MISSED APPROACH: Climb to 6000 on KAD VORTAC R-055 to IMONO and hold. Continue climb in hold to 6000.


ATIS ★ 124.2 280.5	NAHA APP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
------------------------------	--	-----------------------------	-------------------------------	--------------------------------	-----

Knots	60	120	180	240	300	360
V/V(fpm)	260	520	780	1040	1300	1560


ATC climb of 260 ft/NM to 6000

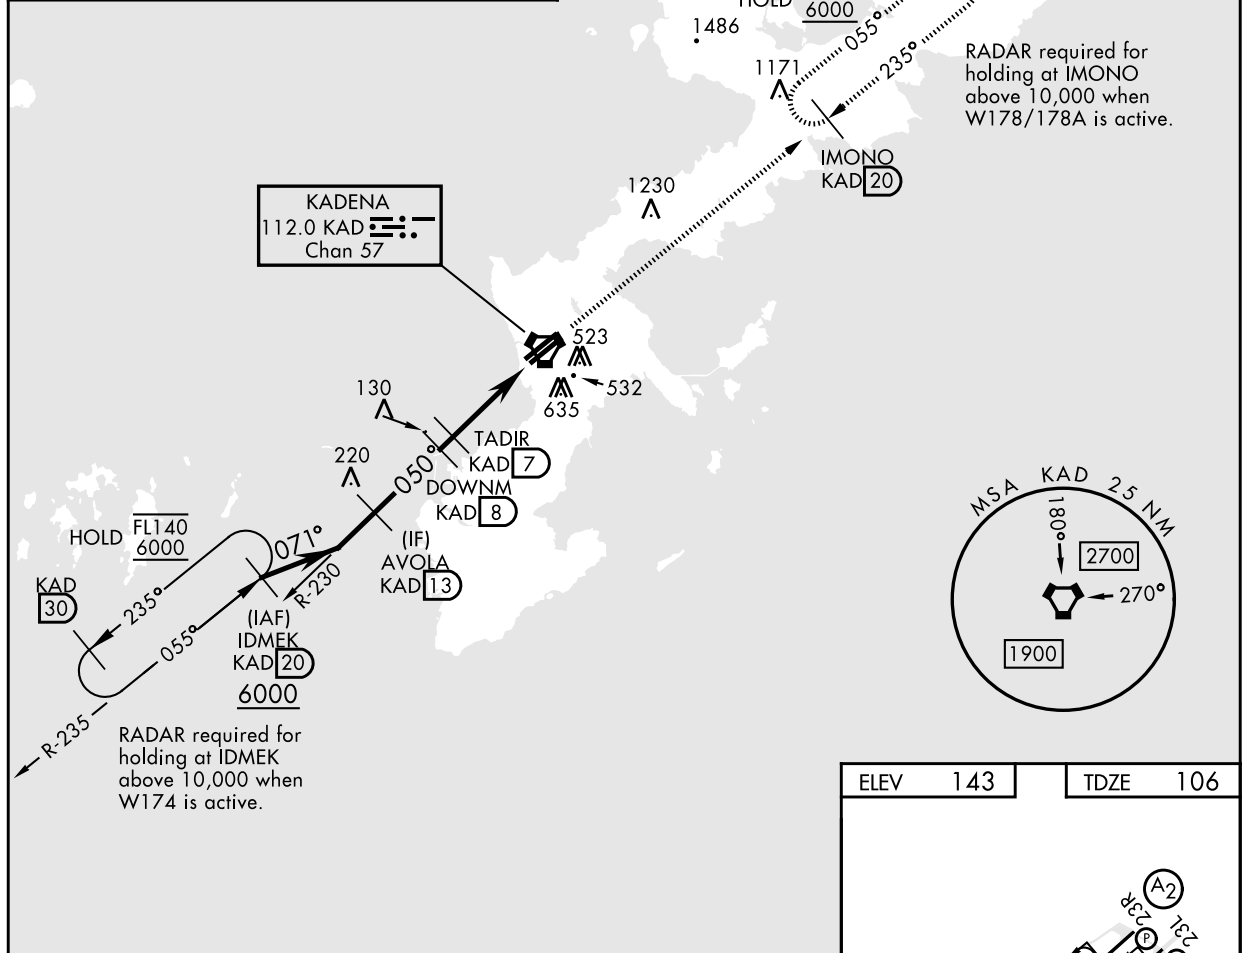

EMERGENCY SAFE ALT 100 NM 2700

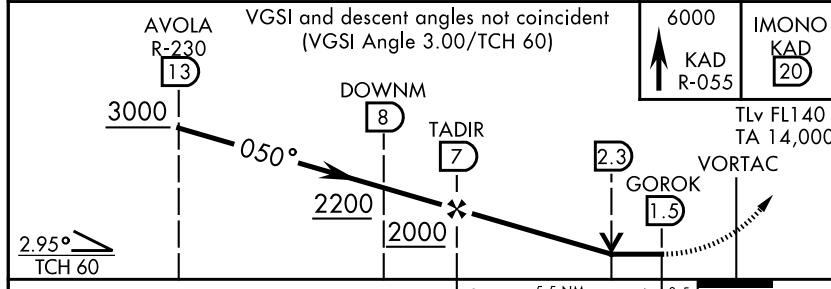

CATEGORY	A	B	C	D	E
S-05R	520/55 414 (400-1)	520/60 414 (400-1½)	520/60 414 (400-1½)	520/60 414 (400-1½)	520/60 414 (400-1½)
CIRCLING*	780-1 637 (700-1)	920-1 777 (800-1)	940-2¼ 797 (800-2¼)	940-2½ 797 (800-2½)	1160-3 1017 (1100-3)

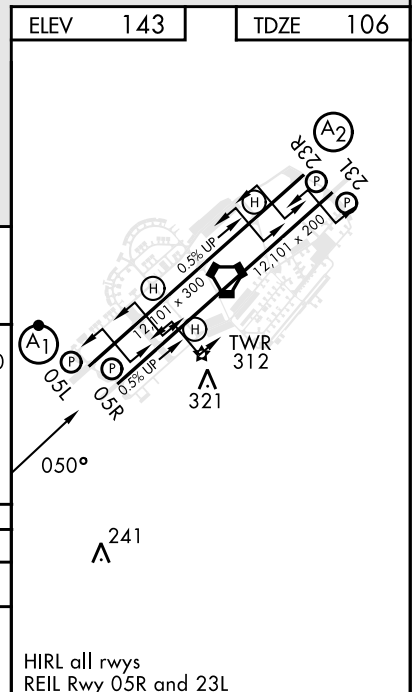


CHANGE: New PROC.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RODN / KADENA

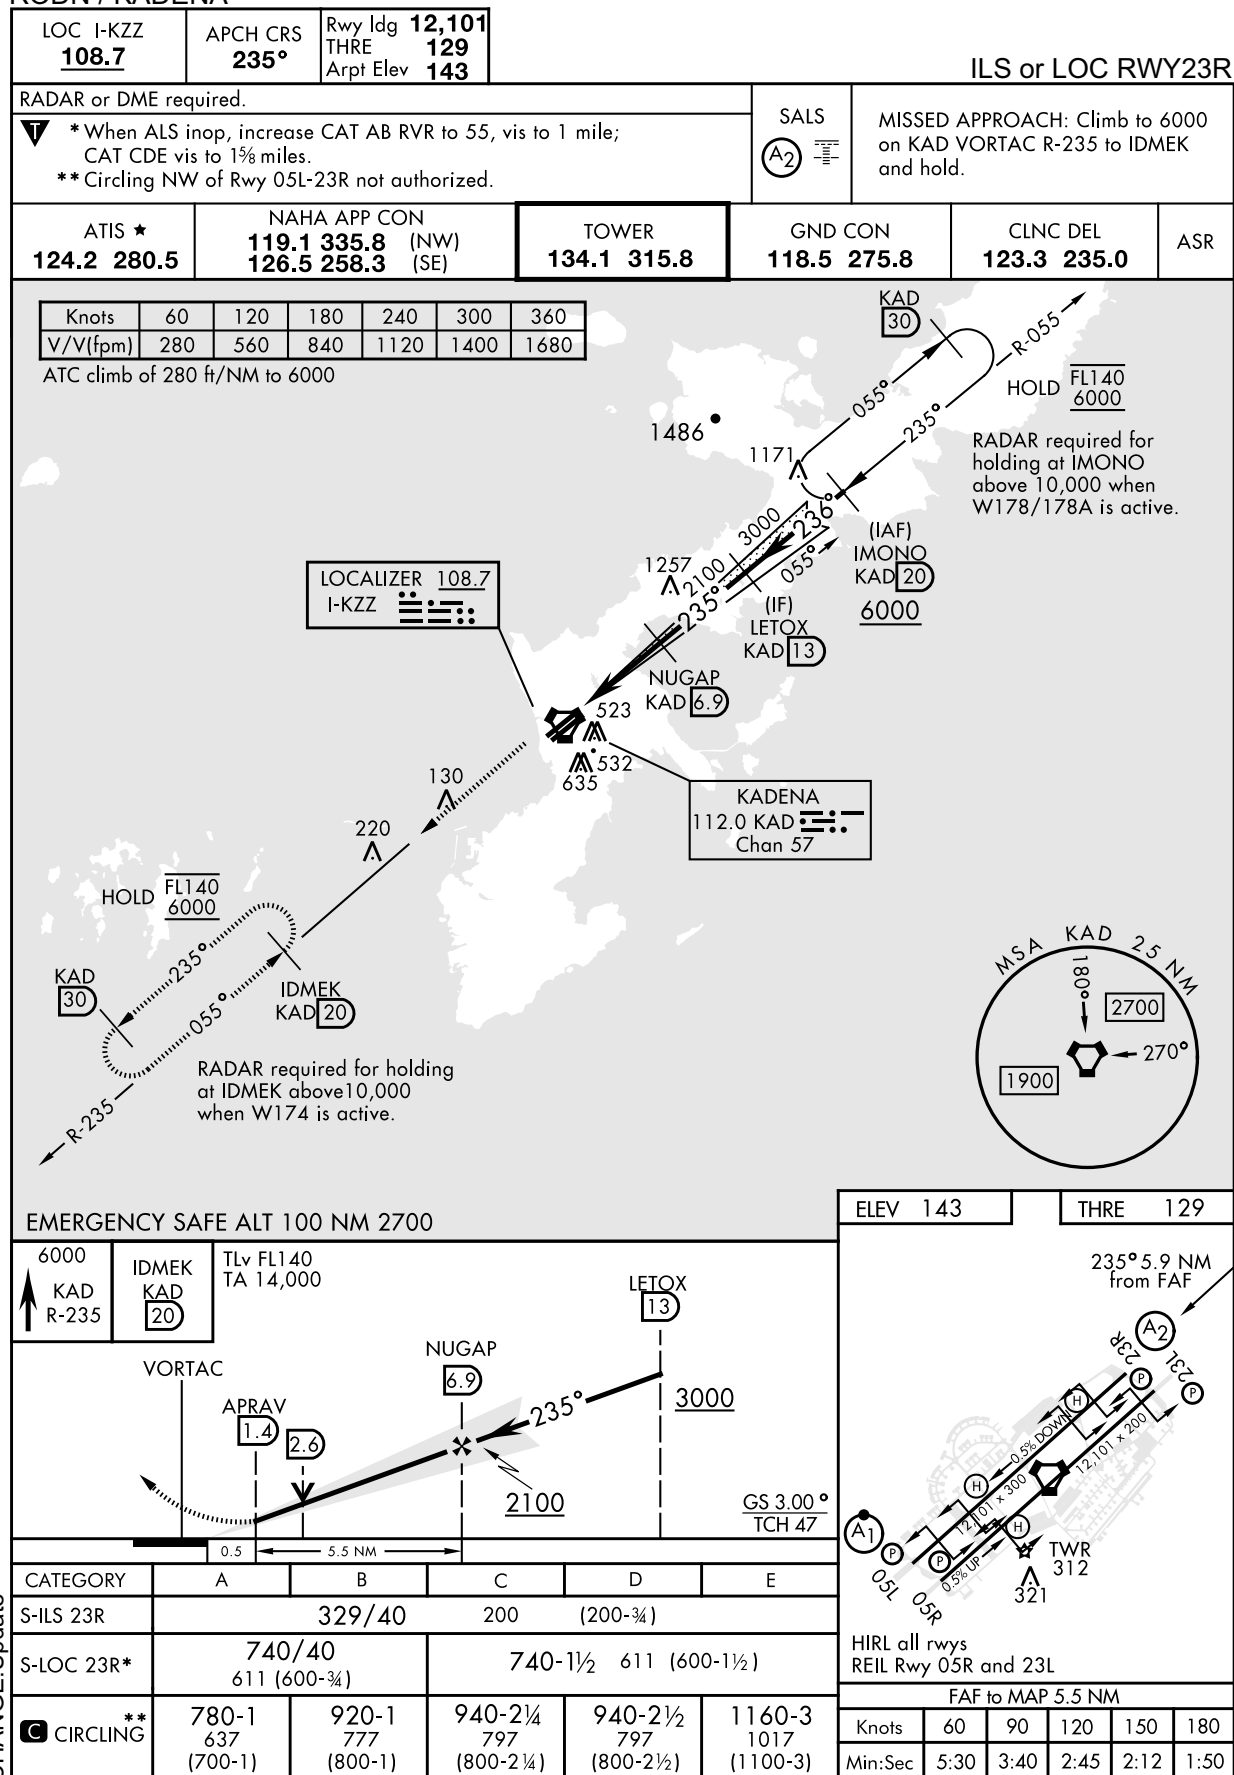

INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS	Rwy Idg	12,101
056°	TDZE	93
	Arpt Elev	143

RNAV(GPS) RWY05L

RNP APCH - GPS

RADAR required. DME/DME RNP - 0.3 NA.

▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile,
CAT CDE RVR to 60, vis to 1 1/8 miles.

ALSIF-1




MISSED APPROACH: Climbing right turn to 6000 direct BYYRD and hold. Continue climb-in-hold to 6000.

ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
----------------------	--	----------------------	------------------------	-------------------------	-----


** Circling NW of Rwy
05L-23R not authorized

RADAR required for holding
at ADYEK above 10,000
when W174 is active.

RADAR required for holding
at BYYRD above 10,000
when W178/178A is active.

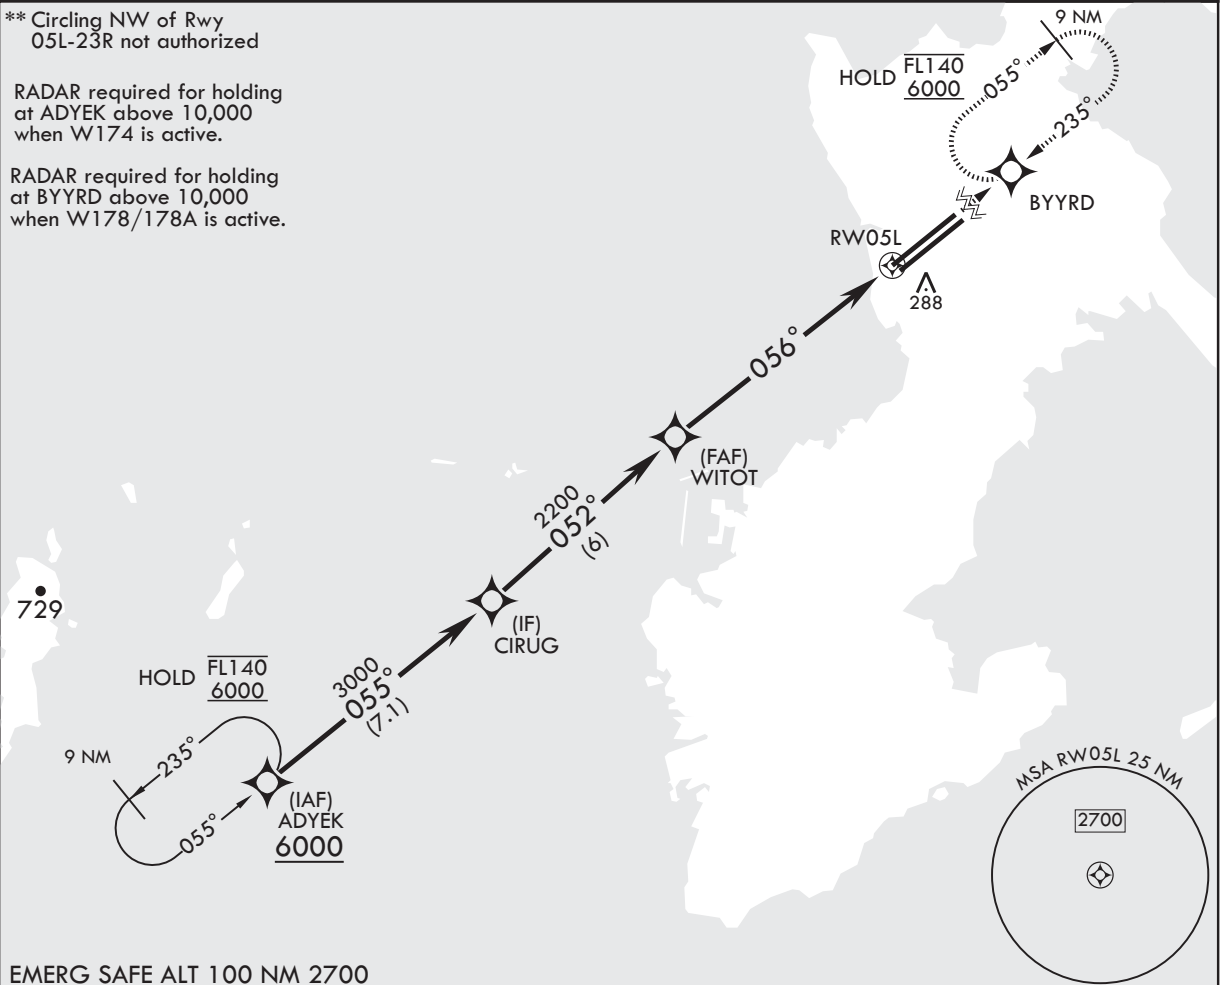

EMERG SAFE ALT 100 NM 2700

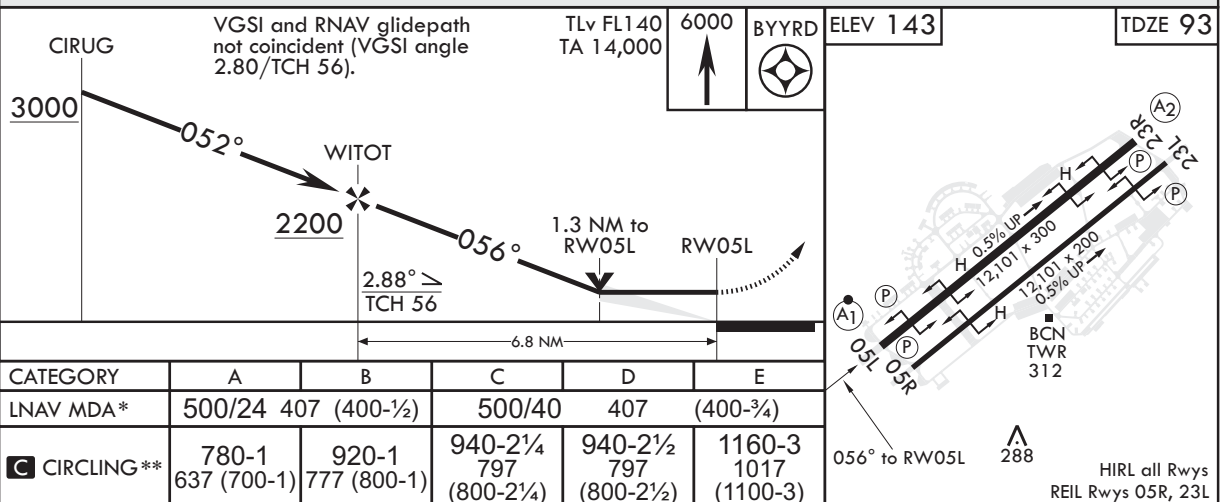

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS 055°	Rwy Idg 12,101
	TDZE 106
	Arpt Elev 143

RNAV(GPS) RWY05R


RNP APCH - GPS

RADAR required. DME/DME RNP - 0.3 NA.

* Circling not authorized NW of Rwy 05L-23R.

MISSED APPROACH: Climb to 6000 direct BYYRD and hold. Continue climb in hold to 6000.

ATIS★	NAHA APP CON/DEP CON	TOWER	GND CON	CLNC DEL	ASR
124.2 280.5	119.1 335.8 (NW) 126.5 258.3 (SE)	134.1 315.8	118.5 275.8	123.3 235.0	

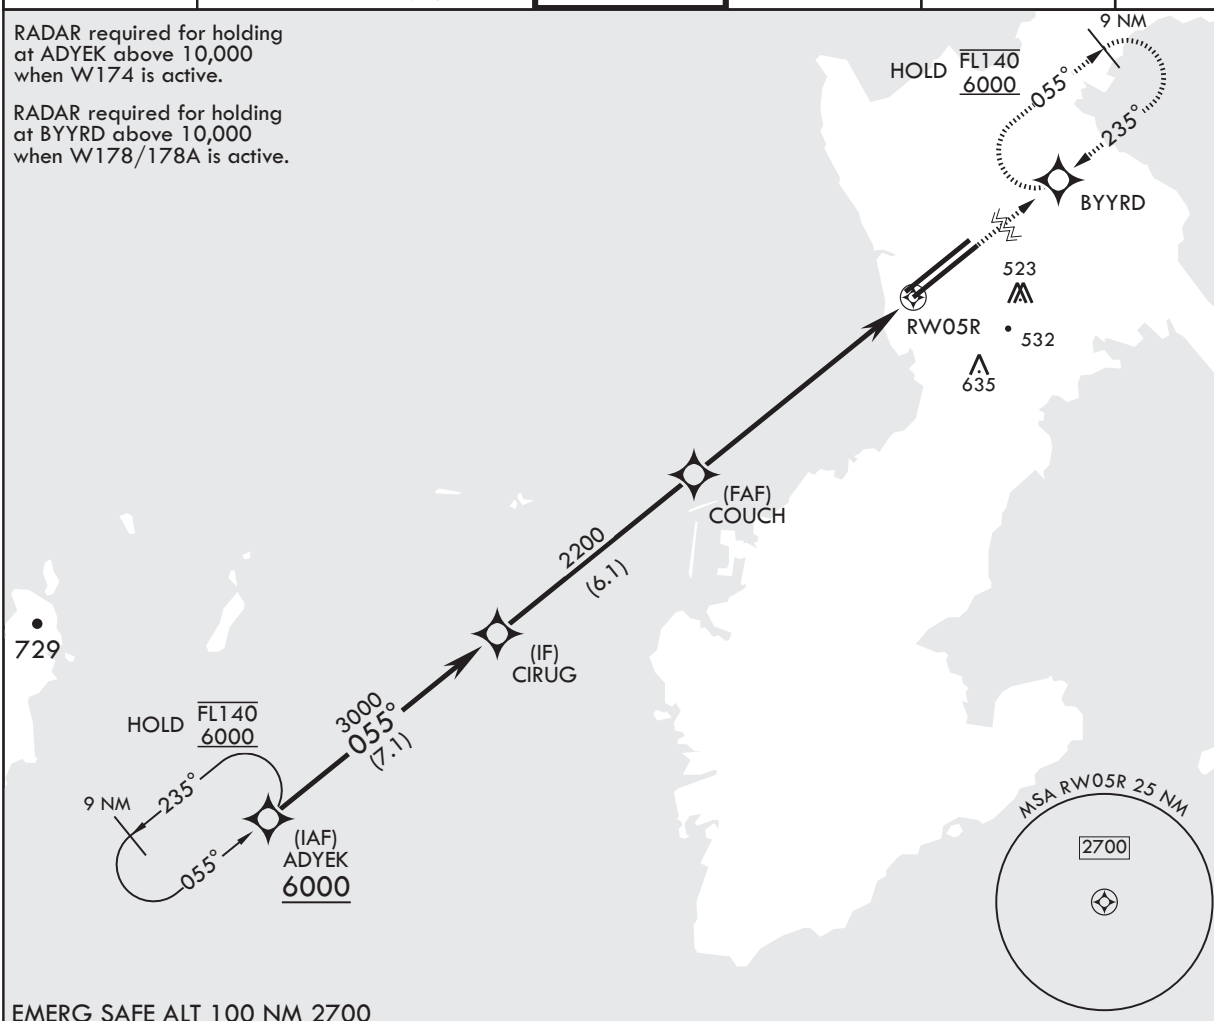RADAR required for holding
at ADYEK above 10,000
when W174 is active.RADAR required for holding
at BYYRD above 10,000
when W178/178A is active.

EMERG SAFE ALT 100 NM 2700



CHANGE: Update

RODN / KADENA

RNAV(GPS) RWY23L

ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
----------------------	--	----------------------	------------------------	-------------------------	-----

RADAR required for holding at ADYEK above 10,000 when W174 is active.

RADAR required for holding at BYYRD above 10,000 when W178/178A is active.

1405

HOLD FL140
6000

9 NM

055°

235°

3500

235° (5.2)

(IAF) BYYRD 6000

(IF) CITIK

2200 (6)

(FAF) CEBIT

598

CANAG

RW23L

532

HOLD FL140
6000

9 NM

235°

055°

ADYEK

EMERG SAFE ALT 100 NM 2700

MSA RW23L 25 NM

2700

Diagram illustrating the CEBIT approach path. The path starts at RW23L, proceeds horizontally for 3.1 NM, then turns 235° to a heading of 1020. The distance to the CEBIT intersection is 3.9 NM. The turn at CEBIT is 2.71° (TCH 55). The distance from the start of the turn to CEBIT is 1.7 NM to RW23L. The distance from CEBIT to the next point is 2200. The distance from the start of the turn to the next point is 1020.

Diagram illustrating the HIRL (High Intensity Runway Lighting) and REIL (Runway End Identifier Lighting) systems for Runway 23L. The diagram shows two parallel runway segments, labeled 12,101 x 300 and 12,101 x 200, with a 0.5% DOWN slope. The diagram includes various lighting symbols: A1, A2, P, H, and B/CN TWR. The runway segments are labeled 05L, 05R, and 23L. The diagram also shows a 235° to RW23L heading and a 23L runway designation.

CHANGE: Update

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RODN / KADENA

APCH CRS 235°	Rwy Idg 12,101
TDZE 129	Arprt Elev 143

RNAV(GPS) RWY23R

RNP APCH - GPS

RADAR required. DME/DME RNP - 0.3 NA.


* When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/4 miles.



MISSED APPROACH: Climbing left turn to 6000 direct ADYEK and hold. Continue climb-in-hold to 6000.

ATIS★ 124.2 280.5	NAHA APP CON/DEP CON 119.1 335.8 (NW) 126.5 258.3 (SE)	TOWER 134.1 315.8	GND CON 118.5 275.8	CLNC DEL 123.3 235.0	ASR
-----------------------------	--	-----------------------------	-------------------------------	--------------------------------	-----

** Circling NA NW of Rwy 05L-23R.

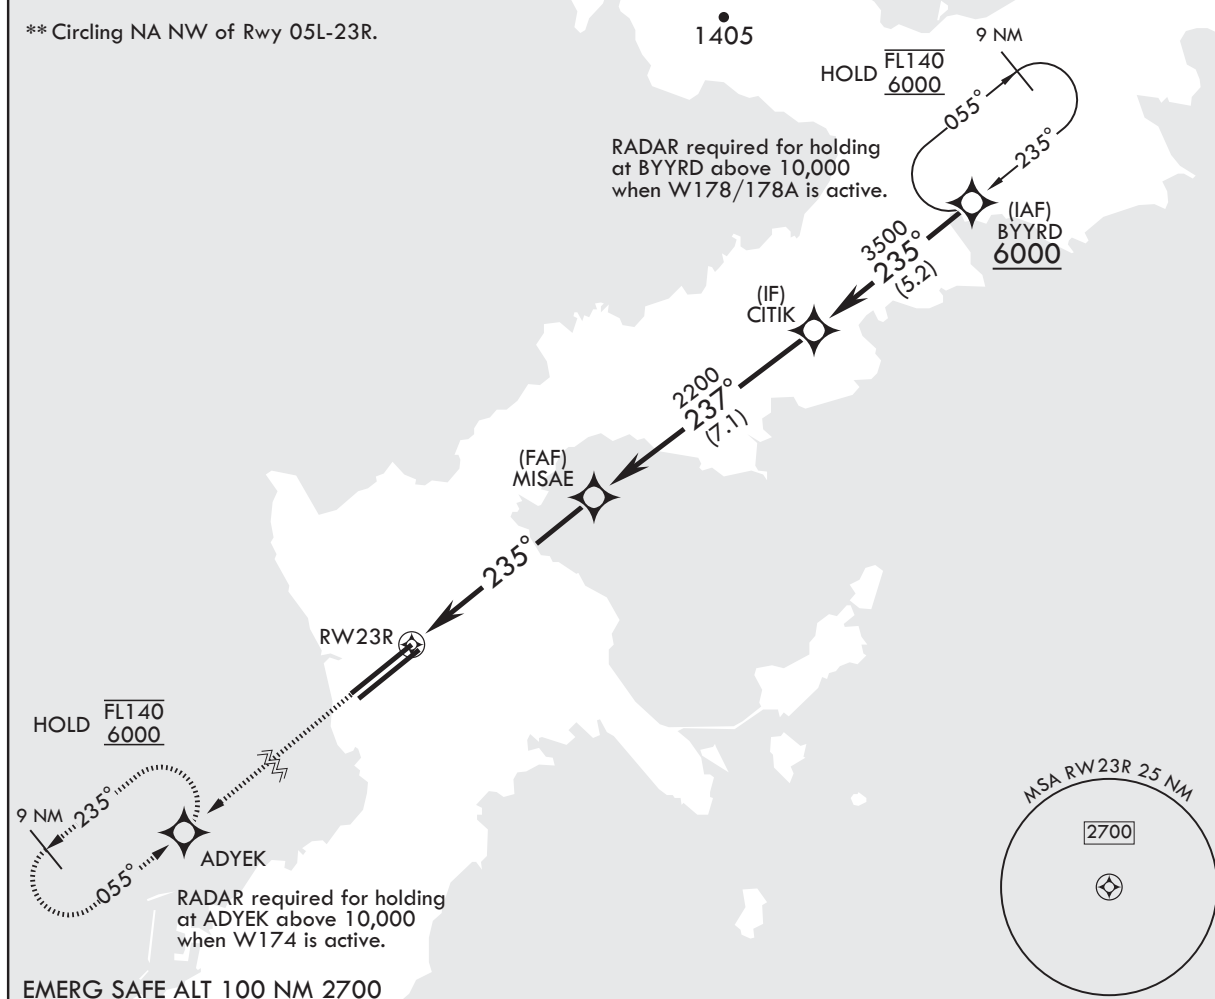

EMERG SAFE ALT 100 NM 2700



6000

TLv FL140
TA 14,000

CITIK

ELEV 143

TDZE 129

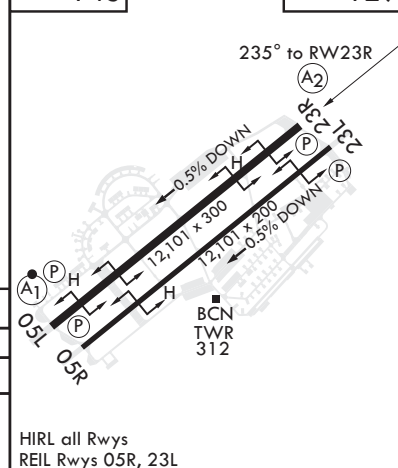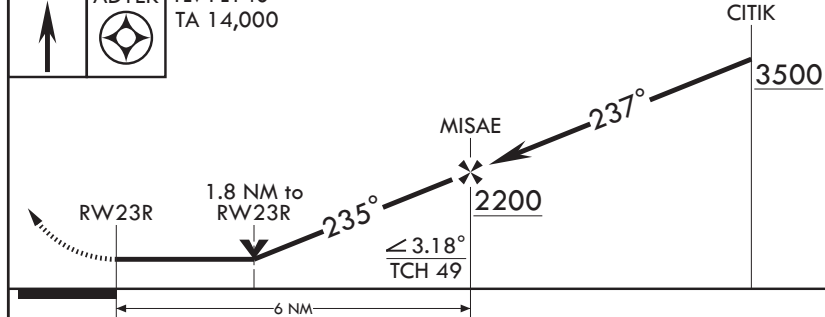

CHANGE: Update

CATEGORY	A	B	C	D	E
LNVA MDA*	740/40 611 (600-3/4)	740-1 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)	740-1 1/2 611 (600-1 1/2)
CIRCLING**	780-1 637 (700-1)	920-1 777 (800-1)	940-2 1/4 797 (800-2 1/4)	940-2 1/2 797 (800-2 1/2)	1160-3 1017 (1100-3)

HIRL all Rwy
REIL Rwy 05R, 23L

NOTE: REPRINTING DOD FLIP