

AD 2 AERODROMES

RJFR AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJFR - KITAKYUSHU

RJFR AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

| | | |
|---|--|--|
| 1 | ARP coordinates and site at AD | 335044N/1310206E 170° / 1.25km from RWY 18 THR |
| 2 | Direction and distance from (city) | 8NM(15km) SE from Kokura Station |
| 3 | Elevation/ Reference temperature | 21ft / - |
| 4 | Geoid undulation at AD ELEV PSN | 107ft |
| 5 | MAG VAR/ Annual change | 8° W (2022) / 5.4'W |
| 6 | AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses | KITAKYUSHU AIRPORT OFFICE (CIVIL AVIATION BUREAU) 6 Kukokitamachi, Kokuraminami-ward, Kitakyushu-city, Fukuoka Pref. 800-0306 Japan Tel: 093-473-1089, Fax:093-473-9417 |
| 7 | Types of traffic permitted (IFR/VFR) | IFR/VFR |
| 8 | Remarks | Nil |

RJFR AD 2.3 OPERATIONAL HOURS

| | | |
|----|---------------------------|---|
| 1 | AD Administration | H24 |
| 2 | Customs and immigration | Customs: H24 Immigration: INTL SKED FLT hours only |
| 3 | Health and sanitation | INTL SKED FLT hours only |
| 4 | AIS Briefing Office | H24 |
| 5 | ATS Reporting Office(ARO) | Nil |
| 6 | MET Briefing Office | H24 (FUKUOKA) |
| 7 | ATS | H24 Remarks: 1315-2245, AFIS provided by Fukuoka Airport Office. |
| 8 | Fuelling | H24 |
| 9 | Handling | H24 |
| 10 | Security | H24 |
| 11 | De-icing | Nil |
| 12 | Remarks | Nil |

RJFR AD 2.4 HANDLING SERVICES AND FACILITIES

| | | |
|---|---|---|
| 1 | Cargo-handling facilities | All the modern institutions that deal with the weight thing to A306 type freighter. |
| 2 | Fuel/ oil types | Fuel grades: Jet A1 Oil grades: All grades |
| 3 | Fuelling facilities/ capacity | Fuel truck refueling / Not limitation |
| 4 | De-icing facilities | Nil |
| 5 | Hangar space for visiting aircraft | Nil |
| 6 | Repair facilities for visiting aircraft | Nil |
| 7 | Remarks | Nil |

RJFR AD 2.5 PASSENGER FACILITIES

| | | |
|---|----------------------|--|
| 1 | Hotels | At Kitakyushu city |
| 2 | Restaurants | At Airport |
| 3 | Transportation | Buses and Taxi |
| 4 | Medical facilities | First aid treatment, ambulance:Hospital in Kitakyushu city 4km |
| 5 | Bank and Post Office | At Kitakyushu city |
| 6 | Tourist Office | At Kitakyushu city |
| 7 | Remarks | Nil |

RJFR AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

| | | |
|---|---|--|
| 1 | AD category for fire fighting | CAT 9 |
| 2 | Rescue equipment | Chemical fire fighting truck × 3 Water-supply truck × 1 Lighting power supply truck × 1 Emergency medical equipments conveyance truck × 1 |
| 3 | Capability for removal of disabled aircraft | Nil |
| 4 | Remarks | Nil |

RJFR AD 2.7 SEASONAL AVAILABILITY-CLEARING

| | | |
|---|-----------------------------|---|
| 1 | Types of clearing equipment | Snow remove equipments: Motor grader × 4 |
| 2 | Clearance priorities | 1) RWY18/36 TWY T1, T6, P1, P2, P3, P4, P5 2) TWY T2, T5 3) North Apron, South Apron (Small Aircraft Apron) |
| 3 | Remarks | Snow removal will be commenced, if the RWY are covered with a depth of 3cm snow or more. |

RJFR AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

| | | |
|---|-------------------------------------|--|
| 1 | Apron surface and strength | North Apron: Surface: cement-concrete, Strength: PCR 1132/R/B/W/T South Apron (Small Aircraft Apron): Surface: asphalt-concrete, Strength: PCR 158/F/C/X/T |
| 2 | Taxiway width, surface and strength | TWY T1, T6 Width: 32m, Surface: asphalt-concrete, Strength: PCR 994/F/C/X/T TWY T2, T3, T4, T5 Width: 34m, Surface: asphalt-concrete, Strength: PCR 994/F/C/X/T TWY P1, P2, P3, P5 Width: 30m, Surface: asphalt-concrete, Strength: PCR 994/F/C/X/T TWY P4 Width: 30m, Surface: cement-concrete, Strength: PCR 1132/R/B/W/T |
| 3 | ACL and elevation | Location: North Apron Elevation: 19ft |
| 4 | VOR checkpoints | Not available |
| 5 | INS checkpoints | Spot NR 0 : 335028.75N 1310155.57E 1 : 335026.94N 1310155.93E 2 : 335025.34N 1310156.26E 3 : 335023.23N 1310156.69E 4 : 335021.12N 1310157.12E 5 : 335019.21N 1310157.51E 6 : 335016.67N 1310158.00E 7 : 335015.38N 1310158.26E 90 : 335033.13N 1310154.17E 91 : 335030.82N 1310155.06E |
| 6 | Remarks | Nil |

RJFR AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

| | | |
|---|--|---|
| 1 | Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands | ACFT stand identification signs: NR 2-4 TWY guide line: Nil Visual docking guidance system: Nil |
| 2 | RWY and TWY markings and LGT | RWY: RWY 18/36 (Marking): RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT): REDL, RCLL, RTZL, RTHL, RENL, WBAR TWY: T1 - T6 (Marking): TWY CL, RWY HLDG PSN, TWY side stripe, Mandatory instruction marking (LGT): TWY edge LGT, TWY CL LGT, Taxiing guidance sign, RWY guard LGT TWY: P1 - P5 (Marking): TWY CL, TWY side stripe (LGT): TWY edge LGT, TWY CL LGT |
| 3 | Stop bars | Stop Bar Lights: T1 - T6 Stop Bar Lights operations 1) Stop Bar Lights are installed at each RWY holding position associated with RWY 18/36. 2) Stop Bar Lights will be operated during operating hours of ATC Service. 3) Stop Bar Lights will be operated when the visibility or the lowest RVR of the RWY 18/36 is at or less than 600m. 4) Stop Bar Lights on TWY T1 and T6 are controlled individually by ATC. 5) Stop Bar Lights on TWY T2 through T5 are not controlled individually by ATC. 6) During the period Stop Bar Lights operated, TWY T2 through T5 are not available for departure aircraft. |
| 4 | Remarks | (Marking): Overrun area, ACFT parking position and Aircraft stand taxi lane. (LGT): Apron flood LGT |

RJFR AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

Other Obstacles

| OBST ID/designation | Obstacle type | Coordinates | Elevation | Markings/ LGT | Remarks |
|---------------------|---------------|------------------|-----------|---------------|----------------------|
| RJFR 1 | Bridge | 334921N/1310117E | 168ft | -/LIL | Under horizontal SFC |

In Area3 To be developed

RJFR AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

| | | |
|----|--|--|
| 1 | Associated MET Office | FUKUOKA |
| 2 | Hours of service MET Office outside hours | H24 (FUKUOKA) |
| 3 | Office responsible for TAF preparation Periods of validity | FUKUOKA 30 Hours |
| 4 | Trend forecast Interval of issuance | Nil |
| 5 | Briefing/ consultation provided | Briefing is available upon inquiry at FUKUOKA |
| 6 | Flight documentation Language(s) used | C En |
| 7 | Charts and other information available for briefing or consultation | S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} , (domestic), U ₂ /T _r , E, C, W _E , W _F , W _G , W _I , W, N |
| 8 | Supplementary equipment available for providing information | Nil |
| 9 | ATS units provided with information | TWR / RADIO |
| 10 | Additional information (limitation of service, etc.) | Nil |

RJFR AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations RWY NR | TRUE BRG | Dimensions of RWY(M) | Strength(PCR) and surface of RWY | THR coordinates THR geoid undulation | THR elevation and highest elevation of TDZ of precision APP RWY |
|------------------------|----------|-------------------------|-------------------------------------|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 18 | 170.35° | 2500×60 | PCR 994/F/C/X/T Asphalt-Concrete | 335123.92N 1310157.83E 107ft | THR ELEV: 22ft TDZ ELEV: 22ft |
| 36 | 350.35° | 2500×60 | PCR 994/F/C/X/T Asphalt-Concrete | 335004.08N 1310214.17E 107ft | THR ELEV: 23ft |

| Slope of RWY | Strip Dimensions (M) | RESA (Overrun) Dimensions(M) | Remarks |
|-----------------|----------------------------|---|---------------------------|
| 7 | 10 | 11 | 14 |
| See Below Chart | 2620×300 | 189 × (MNM:120 MAX:300)* | RWY grooving: 2500m × 40m |
| See Below Chart | 2620×300 | 42 × (MNM:221 MAX:300)* *For detail, ask airport administrator | RWY grooving: 2500m × 40m |

Slope of RWY

RWY18

RWY36

22ft

22ft

21ft

21ft

23ft

0.20%

0.70%

0m

1240m1380m

2280m

2500m

RJFR AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA (m) | TODA (m) | ASDA (m) | LDA (m) | Remarks |
|----------------|-------------|-------------|-------------|------------|---------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| 18 | 2500 | 2500 | 2500 | 2500 | Nil |
| 36 | 2500 | 2500 | 2500 | 2500 | Nil |

RJFR AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator | APCH LGT type LEN INTST | RTHL Color WBAR | PAPI (VASIS) Angle DIST FM THR MEHT | RTZL LEN | RCLL LEN Spacing Color INTST | REDL LEN Spacing Color INTST | RENL Color WBAR | STWL LEN Color |
|--|-------------------------------------|-----------------------|--|-------------|--|---|-----------------------|----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 18 | PALS (CAT I) 900m LIH | Green Green | PAPI 3.0°/LEFT 419m 66ft | 900m | 2,500m 30m Coded color (White/Red) LIH | 2,500m 60m Coded color (White/Yellow) LIH | Red | Nil (*2) |
| 36 | SALS (*1) 420m LIH | Green - | PAPI 3.0°/LEFT 476m 74ft | - | 2,500m 30m Coded color (White/Red) LIH | 2,500m 60m Coded color (White/Yellow) LIH | Red | Nil (*2) |
| Remarks | | | | | | | | |
| 10 | | | | | | | | |
| SALS with APCH LGT beacon(LEN: 480m)(*1) Overrun area edge LGT(LEN:60m Color: Red)(*2) CGL for RWY 18/36 | | | | | | | | |

RJFR AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

| | | |
|---|--|--|
| 1 | ABN/IBN location, characteristics and hours of operation | ABN: 335039N/1310139E, White/Green EV4.3sec, HO |
| 2 | LDI location and LGT Anemometer location and LGT | LDI: Nil Anemometer: 571m FM RWY18 THR/LGTD 247m FM RWY36 THR/LGTD |
| 3 | TWY edge and centerline lighting | TWY edge and center line lights installed, see AD2.9 |
| 4 | Secondary power supply / switch-over time | Within 1 sec : REDL, RENL, RTHL, WBAR, RCLL, Overrun area edge LGT, Stop bar LGT Within 15 sec : Other LGT |
| 5 | Remarks | WDI LGT |

RJFR AD 2.16 HELICOPTER LANDING AREA

| |
|-----|
| Nil |
|-----|

RJFR AD 2.17 ATS AIRSPACE

| Designation and lateral limits | | Vertical limits (ft) | Airspace classification | ATS unit call sign Language | Remarks |
|--------------------------------|--|----------------------|-------------------------|--|---------------|
| 1 | | 2 | 3 | 4 | 6 |
| Kitakyushu CTR | Area within a radius of 5nm of Kitakyushu ARP (33° 51'N131° 02'E), excluding the area of TSUIKI CTR. | 3000 or below | D | KITAKYUSHU TWR KITAKYUSHU RADIO (1) En | (1):1315-2245 |


RJFR AD 2.18 ATS COMMUNICATION FACILITIES

| Service designation | Call sign | Frequency | Hours of operation | Remarks |
|---------------------|------------------|---|--------------------|------------------------------------|
| 1 | 2 | 3 | 4 | 5 |
| TWR | Kitakyushu Tower | 118.85 MHz(1) 126.2MHz 121.5MHz(E) 243.0MHz(E) | 2245-1315(*) | (1)Primary |
| AFIS | Kitakyushu Radio | 118.85 MHz | 1315-2245(*) | Operated by Fukuoka Airport Office |

*Depending on air traffic situation, ATC service will be provided from 2230 to 2245 and from 1315 to 1330.

RJFR AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid (VOR declina- tion) | ID | Frequency | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks |
|---------------------------------------|-----|---------------------|-----------------------|---|--|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| VOR (7° W/2019) | SWE | 113.85MHz | H24 | 335123.82N 1310145.84E | | VOR Unusable: 230°-250° beyond 30nm BLW 5000ft. 250°-260° beyond 35nm BLW 5000ft. 270°-280° beyond 25nm BLW 5000ft. 280°-310° beyond 30nm BLW 5000ft. |
| DME | SWE | 1046MHz (CH-85Y) | H24 | 335123.82N 1310145.84E | 62.3ft | DME Unusable: 090°-110° beyond 35nm BLW 3000ft. 220°-230° beyond 35nm BLW 5000ft. 230°-240° beyond 30nm BLW 5000ft. 240°-250° beyond 25nm BLW 5000ft. 250°-260° beyond 30nm BLW 5000ft. 260°-270° beyond 35nm BLW 5000ft. 270°-280° beyond 20nm BLW 5000ft. 280°-290° beyond 15nm BLW 5000ft. 290°-300° beyond 20nm BLW 5000ft. 300°-310° beyond 15nm BLW 5000ft. |
| ILS-LOC 18 (CAT- I) | IKQ | 109.15MHz | H24 | 334956.84N 1310215.91E | | BRG(MAG) 178.21° 235m(771ft) away FM RWY36 THR |
| ILS-GP 18 | | 331.25MHz | H24 | 335114.44N 1310204.11E | | GP angle 3.0° HGT of ILS Ref datum 16.5m(54ft). 315m(1033ft) inside FM RWY18 THR 110m(361ft) E of RCL |
| ILS-DME 18 | IKQ | 1115MHz (CH-28Y) | H24 | 335114.13N 1310203.98E | 33.4ft | 324m(1063ft) inside FM RWY18 THR 105m(344ft) E of RCL |
| MSAS | | 1575.42MHz | H24 | | | Transmitting antennas are satellite based |

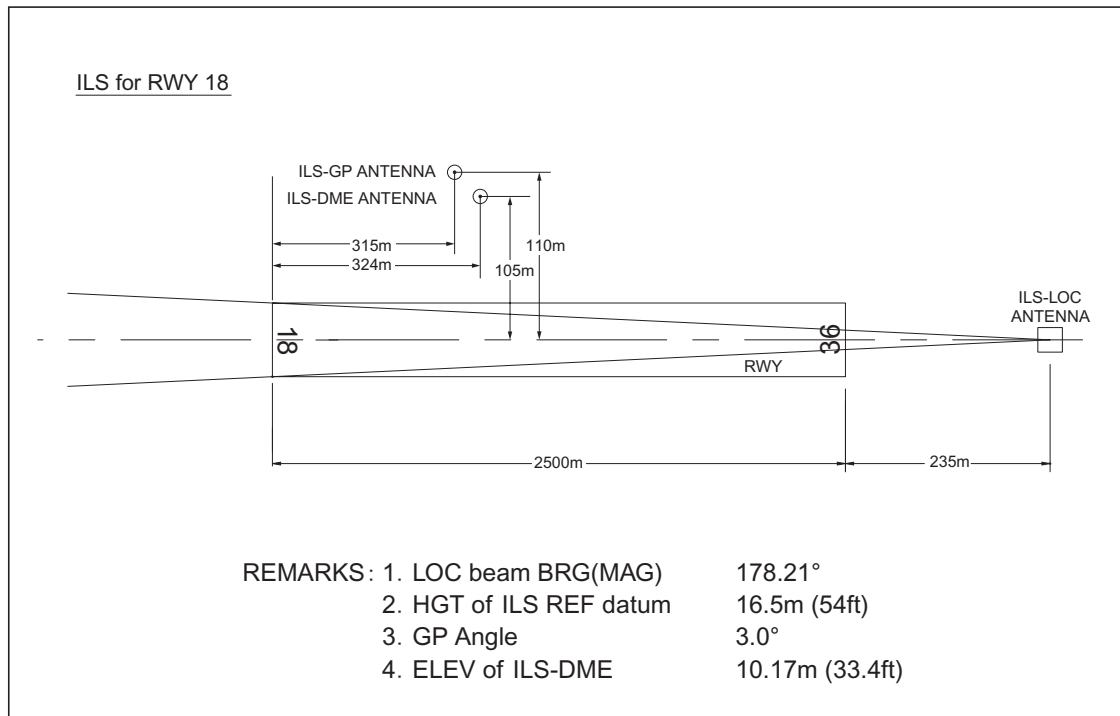

RJFR AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

1.1 Prior notification should be required with AD Administration when using the Airport.

空港を使用する場合は、あらかじめ北九州空港事務所へ調整すること。

1.2 Prior notification should be required with AD Administration for the purpose of getting the permission when crossing Kitakyushu CTR from 1315UTC to 2245UTC.

For further information (0000UTC-0800UTC MON-FRI EXC HOL)

Air Traffic Controller Office, Kitakyushu Airport Office

TEL: 093-475-9086

22時15分から07時45分までの間、北九州管制圏を通過する場合は、当該通過の許可を得るためにあらかじめ北九州空港事務所へ調整すること。

問い合わせ先

北九州空港事務所管制官事務室

(月曜日から金曜日までのうち、9時00分から17時00分までの間。ただし休日を除く。)

TEL: 093-475-9086

2. Special notice to B747-8F operators

B747-8Fに係る運用について

1) Runway

滑走路

B747-8F which land on RWY18/36 should equip and activate Digital Avionics to maintain the precise path during approach. In case of using RWY18/36 by B747-8F, the aircraft with Wing Span 56.4m or larger is not permitted to use TWY P1-P5 simultaneously.

滑走路18/36に着陸するB747-8Fは、正確な進路を維持するためデジタル・アビオニクスを備えかつ作動させること。

B747-8Fが滑走路を使用する場合に、全幅56.4m以上の航空機が誘導路P1-P5を同時使用することを制限する。

2) Taxiways

誘導路

In case of taxiing on TWY P1-P5 by B747-8F, the aircraft with Wing Span 56.4m or larger is not permitted to use runway simultaneously.

B747-8Fが誘導路P1-P5を走行する場合に、全幅56.4m以上の航空機が滑走路を同時使用することを制限する。

3) Parking stand

駐機場

Available aircraft parking stand for B747-8F is NR.0 and NR.90.

駐機可能なスポットは、NR.0及びNR.90である。

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

1. Wing tip clearance at the TWY intersection (REF. AD1.1.6.8)

誘導路交差点の翼端クリアランス (AD1.1.6.8 参照)

Wing tip clearance at the TWY intersection between the aircraft holding at the stop marking on the TWY and the other aircraft taxiing behind it are as follows.

誘導路上の停止位置に待機中の航空機と後方の誘導路を走行する航空機の翼端クリアランスは以下のとおりである。

When B744 holding at the stop marking on TWY T2, T3, T4 and T5

| | | | |
|---|-----------|------------------|-----------|
| Wing Span (WS) of aircraft taxiing on TWY | WS=<6.12m | 6.12m<WS=<23.12m | WS>23.12m |
| Wing tip clearance | *A | *B | *C |

Legend:

*A:wing tip clearance >= 15m

*B:6.5m =< wing tip clearance < 15m

*C:wing tip clearance < 6.5m

When B738 holding at the stop marking on TWY T2, T3, T4 and T5

| | |
|---|------------|
| Wing Span (WS) of aircraft taxiing on TWY | WS=<86.12m |
| Wing tip clearance | *A |

When A320 holding at the stop marking on TWY T2, T3, T4 and T5

| | |
|---|------------|
| Wing Span (WS) of aircraft taxiing on TWY | WS=<87.78m |
| Wing tip clearance | *A |

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJFR AD 2.21 NOISE ABATEMENT PROCEDURES

1. 騒音軽減運航方式

すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。

(1) 離陸について

- i) ONGHA DEPARTURE
SWE を可能な限り高い高度で通過すること
- ii) ASARI DEPARTURE(RWY36)
速やかに右旋回を行うこと

(2) 着陸について（滑走路 18/36）

ディレイド・フラップ進入方式及び低フラップ角着陸方式とする

(3) 進入および優先飛行経路について

- i) 周回進入を行う場合および計器飛行方式を取り下げた場合について
 - a) 空港島の西側および空港北西部の陸域を飛行しないこと（別図参照）
 - b) 場周経路については、可能な限りファイナル・アプローチを短くすること
- ii) VOR RWY18
 - a) 最終進入経路上において進入灯または滑走路を視認した場合であっても空港北西部の陸域を避けて飛行すること（別図参照）
- iii) LOC Y RWY18
 - a) 脚下げは海上で行うこと
 - b) ディレイド・フラップ進入方式
1500 フィート通過後、最終フラップ角とすること
- iv) ILS Z or LOC Z RWY18
 - a) 基礎旋回については騒音軽減のため可能な限り空港北部の住宅地域に配慮した旋回を行うこと
 - b) 2500 フィート通過後、脚下げを行うこと
 - c) ディレイド・フラップ進入方式
1500 フィート通過後、最終フラップ角とすること
- v) ILS Y RWY18
 - a) 2500 フィート通過後、脚下げを行うこと
 - b) ディレイド・フラップ進入方式
1500 フィート通過後、最終フラップ角とすること

2. 優先滑走路方式

なし

3. 優先飛行経路

上記、「1 騒音軽減運航方式 (3) 進入および優先飛行経路について」を参照のこと

4. リバース・スラスト使用について

22 時以降翌朝 6 時までの間、運航の安全に支障のない範囲で、リバース・スラストについてはアイドルまでに制限する。

1. Noise Abatement Operating Procedures

(See AIP AD1.1 6.5)

For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations.

(1) For take-off

- i) ONGHA DEPARTURE
Cross SWE at practically high altitude.
- ii) ASARI DEPARTURE(RWY36)
Commence right turn as soon as practical.

(2) For landing(RWY18/36)

Execute Delayed Flap Approach Procedure and Reduced Flap Setting Procedure.

(3) Approach Procedures and Noise Preferential Routes

- i) Circling approach and in case of canceling IFR
 - a) Do not fly over the west side of Kitakyushu Airport Island and the land areas located northwest side of the airport (See map).
 - b) In traffic pattern, shorten the final approach course as much as possible (See map).
- ii) VOR RWY18
 - a) Even if the approach lights and/or the runway are in sight on final approach, do not fly over land areas northwest side of the airport (See map).
- iii) LOC Y RWY18
 - a) Perform gear down over the sea.
 - b) Delayed Flap Approach Procedure
Set final flap after passing 1500feet
- iv) ILS Z or LOC Z RWY18
 - a) In taking base turn, take notice of reducing the aircraft noise impact on residential areas located north side of the airport.
 - b) Make gear down after passing 2500feet.
 - c) Delayed Flap Approach Procedure
Set final flap after passing 1500feet
- v) ILS Y RWY18
 - a) Make gear down after passing 2500feet.
 - b) Delayed Flap Approach Procedure
Set final flap after passing 1500feet

2. Preferential Runways Procedures

Nil

3. Noise Preferential Routes

See upper item 1 Noise Abatement Operating Procedures (3).

4. Reverse Thrust

Between 1300UTC(2200JST) and 2100UTC(0600JST), the use of reverse thrust is limited to idle except for safety reasons

5. 計器進入方式の使用について

- (1) 計器進入方式については原則として空港の気象状態により管制機関から指定される。

(2) 6時から22時まで

- i) 以下の順位で指定される
第1順位 VOR A または VOR B
第2順位 ILS Z or LOC Z RWY18 または ILS Y RWY18

- ii) VOR RWY18 および LOC Y RWY18 については、この時間帯は指定されない

(3) 22 時以降翌朝 6 時まで

空港の気象状態に加え、空港周辺および空港北部の住宅地域における航空機騒音を軽減するため、以下の順位で指定される

- 第1順位 VOR A または VOR B
第2順位 VOR RWY18
第3順位 LOC Y RWY18
第4順位 ILS Z or LOC Z RWY18 または ILS Y RWY18

注：RNP AR 進入を行う航空機については、(1)～(3)は適用されない。

5. The use of Instrument Approach Procedures(IAPs)

- (1) In principle, IAPs are assigned by ATC according to the airport weather condition.

(2) Between 2100UTC(0600JST) and 1300UTC(2200JST)

- i) According to the airport weather condition, IAPs are assigned in following order.

No1. VOR A or VOR B

No2. ILS Z or LOC Z RWY18 or ILS Y RWY18

- ii) VOR RWY18 and LOC Y RWY18 are not assigned in this time period.


(3) Between 1300UTC (2200JST) and 2100UTC (0600JST)

In order to avoid aircraft noise impact in the vicinity of airport and residential areas located north side of the airport, IAPs are assigned in following order according to the airport weather condition.

- No1. VOR A or VOR B
No2. VOR RWY18
No3. LOC Y RWY18
No4. ILS Z or LOC Z RWY18 or ILS Y RWY18

NOTE: (1)-(3) are not applicable to RNP AR approach.

Noise Abatement Operating Procedures

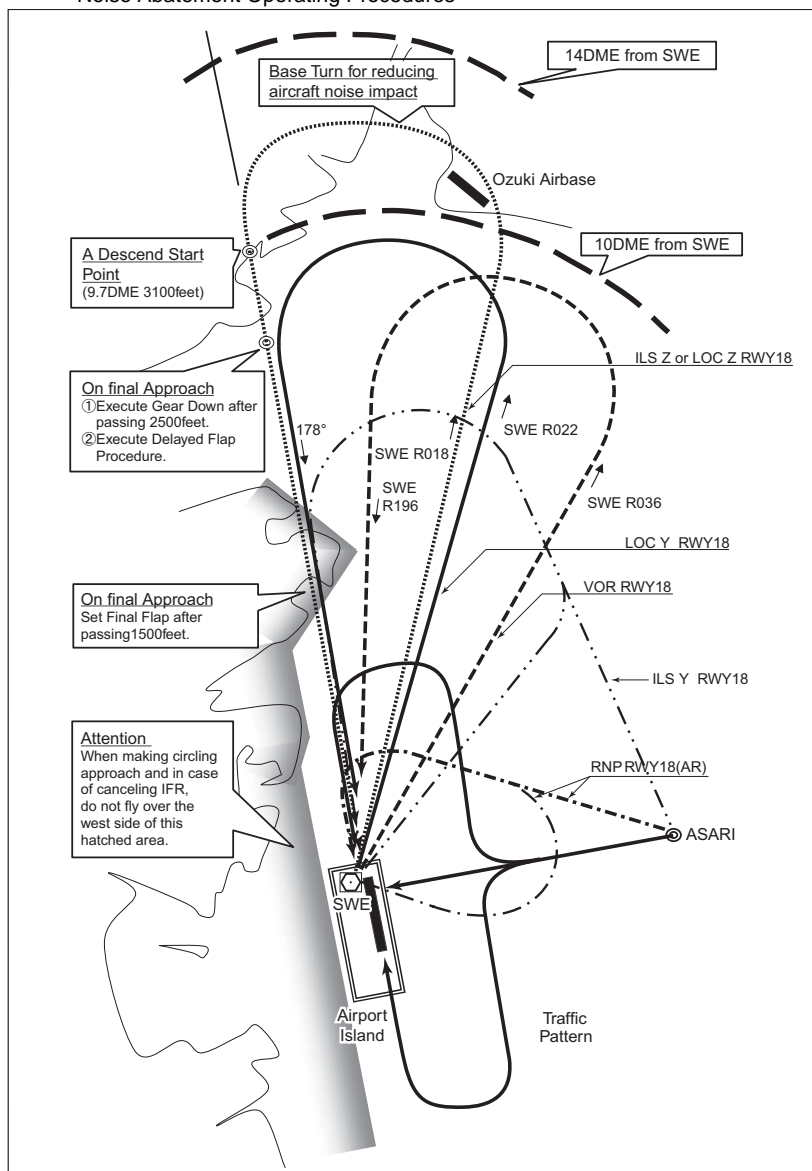

RJFR AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA

| | RWY | ACFT CAT | REDL & RCLL | | REDL or RCLL or RCL marking | | NIL (DAYTIME ONLY) | |
|---|-----|-------------|-----------------|------|--------------------------------|------|-----------------------|------|
| | | | RVR | VIS | RVR | VIS | RVR | VIS |
| Multi-Engine ACFT with TKOF ALTN AP FILED | 18 | A,B,C,D | 400m | 400m | 400m | 400m | - | 500m |
| | 36 | A,B,C,D | - | 400m | - | 400m | - | 500m |
| OTHER | 18 | A,B,C,D | AVBL LDG MINIMA | | | | | |
| | 36 | | | | | | | |

2. Lost communication procedures for arrival aircraft under radar navigational guidance

If radio communications with TSUIKI Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and ;

- (I) 1. Contact Kitakyushu Tower / Kitakyushu Radio.
2. If unable, proceed in accordance with Visual Flight Rules.
3. If unable, proceed to SWE VOR last assigned altitude or 5,000 feet whichever is higher, and execute VOR B approach.
- (II) Procedures other than above will be issued when situation required.

3. Automated Radar Terminal System(ARTS)

Aircraft flying under control of TSUIKI approach control in the approach control area will be instructed to reply with discrete code on Mode A/3 and Mode C.

If an aircraft with non-discrete code capability is instructed to reply with the discrete code, it shall report a controller accordingly.

築城ターミナル管制所の指示のもとに、当該進入管制区を飛行する航空機は、モード A/3 の二次レーダー個別コード及びモード C による応答を指示される。

二次レーダー個別コードを搭載していない航空機が当該コードによる応答を指示された場合は、管制官に対し、その旨通報すること。

4. Use of Instrument Approach Procedure (IAP)

Between 0600JST (2100UTC) and 2200JST (1300UTC), in principle ILS Z or LOC Z RWY 18 and ILS Y RWY18 would be applied only when weather condition is below WX MINIMA of VOR A and VOR B.

計器進入方式の使用

6 : 00 ~ 22 : 00 の間、北九州空港の気象状態が VOR A 及び VOR B 進入方式の着陸の最低気象条件未満である場合を除き、原則として ILS Z or LOC Z RWY18 及び ILS Y RWY18 進入方式は許可されない。

5. Use of Simulated Instrument Approach

Simulated approach would not be applied other than VOR A and VOR B.

模擬計器進入

北九州空港における模擬計器進入は VOR A 及び VOR B 進入方式以外は許可されない。

RJFR AD 2.23 ADDITIONAL INFORMATION

1. Vessel will be pass in the vicinity of the airport. (See LDG CHART)

空港周辺を船舶が通過する。 (See LDG CHART)

2. Helicopter Landing Area

Location:

North HELIPAD: On the intersection of PARL TWY and TWY T3

South HELIPAD: On PARL TWY P5

Lighting: Nil

(See AD CHART)

位置:

ノースヘリパッド: 平行誘導路と誘導路 T3 の交差部

サウスヘリパッド: 平行誘導路 P5 上

灯火: 無し

(See AD CHART)

RJFR AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart

Aerodrome Obstacle chart type A (RWY18/36)

Aerodrome Obstacle chart type B

Standard Departure Chart - Instrument (ASARI)

Standard Departure Chart - Instrument (ONGHA)

Standard Departure Chart - Instrument (KOHEI-RNAV)

Instrument Approach Chart (ILS Z or LOC Z RWY18)*

Instrument Approach Chart (ILS Y RWY18)

Instrument Approach Chart (LOC Y RWY18)*

Instrument Approach Chart (VOR RWY18)*

Instrument Approach Chart (VOR A)*

Instrument Approach Chart (VOR B)*

Instrument Approach Chart (RNP RWY18(AR))

Instrument Approach Chart (RNP RWY36(AR))

Other Chart (Visual REP)

Other Chart (LDG CHART)

Other Chart (MVA CHART)

*: Designed in accordance with provisional standards for FLIGHT PROCEDURE DESIGN.

[illegible]


AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

MAGNETIC VARIATION 8°W - JUN 2025


KITAKYUSHU AIRPORT
RWY : 18/36

| DECLARED DISTANCES | | |
|--------------------|------------------------------------|-------|
| RWY 18 | | RWY36 |
| 2500m | TAKE OFF RUN AVAILABLE | 2500m |
| 2500m | TAKE OFF DISTANCE AVAILABLE | 2500m |
| 2500m | ACCELERATE STOP DISTANCE AVAILABLE | 2500m |
| 2500m | LANDING DISTANCE AVAILABLE | 2500m |

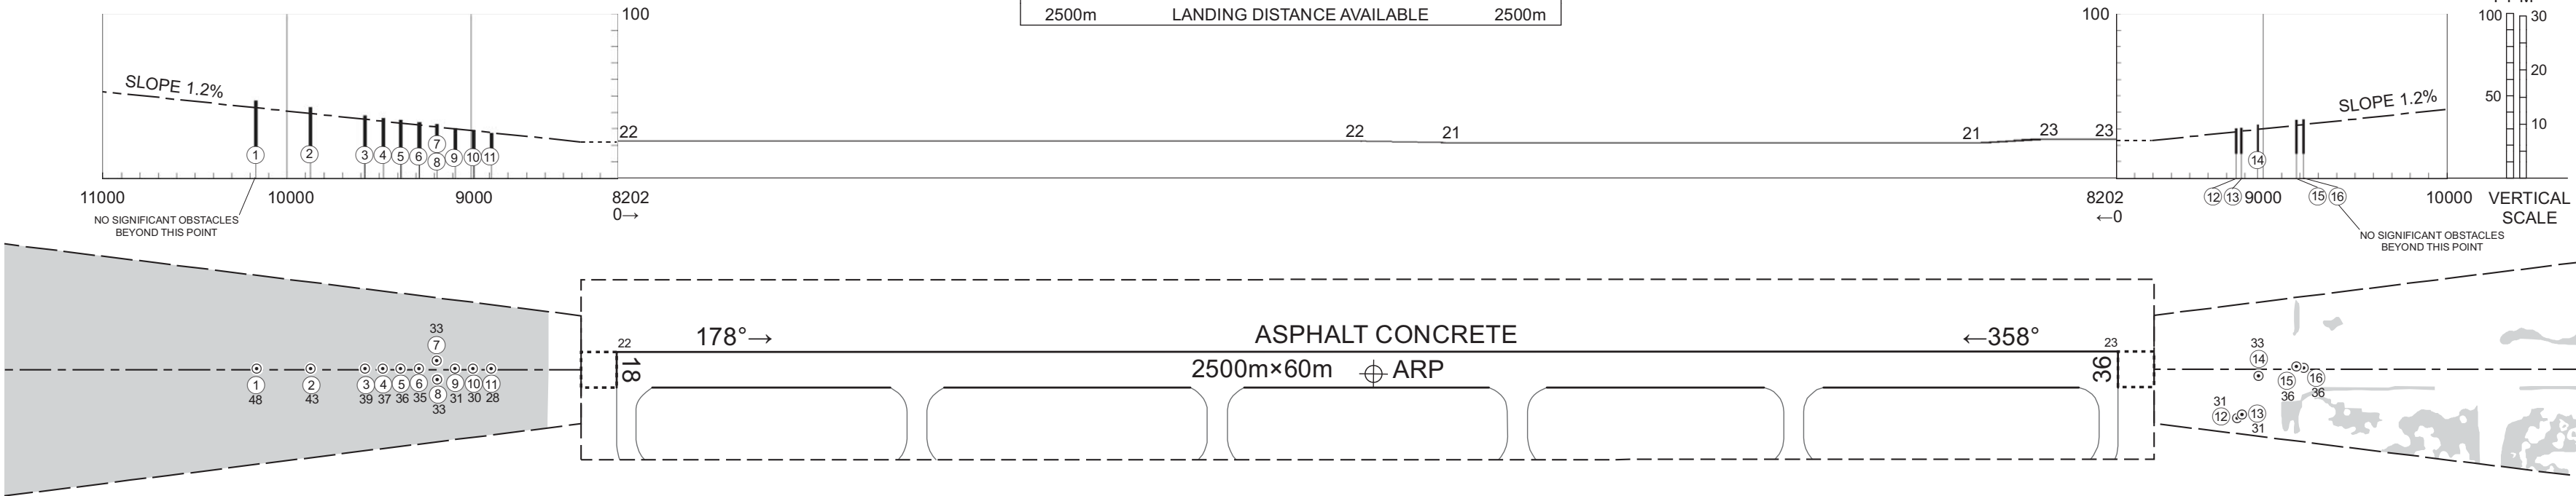

HORIZONTAL SCALE

FEET

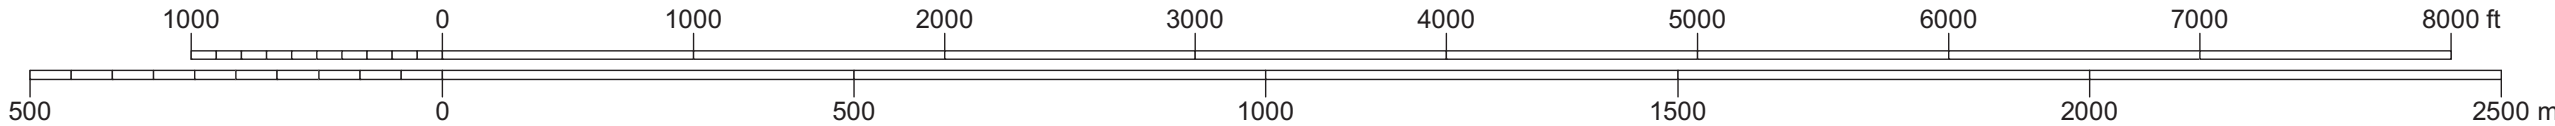

METRES

LEGEND

- ① IDENTIFICATION NUMBER
- ⊙ POLE, TOWER, SPIRE, ANTENNA, ETC.
- * TREE
- HYDROGRAPHY
- BUILDING OR LARGE STRUCTURE
- ≡ TERRAIN CONTOUR (ft)
- TERRAIN PENETRATING OBSTACLE PLANE (ft)

AMENDMENT RECORD


| Nr | DATE | ENTERED BY |
|----|------|------------|
| | | |

測量法に基づく国土地理院長承認(使用) R 6JHs 299

CHANGE: Update.

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE B

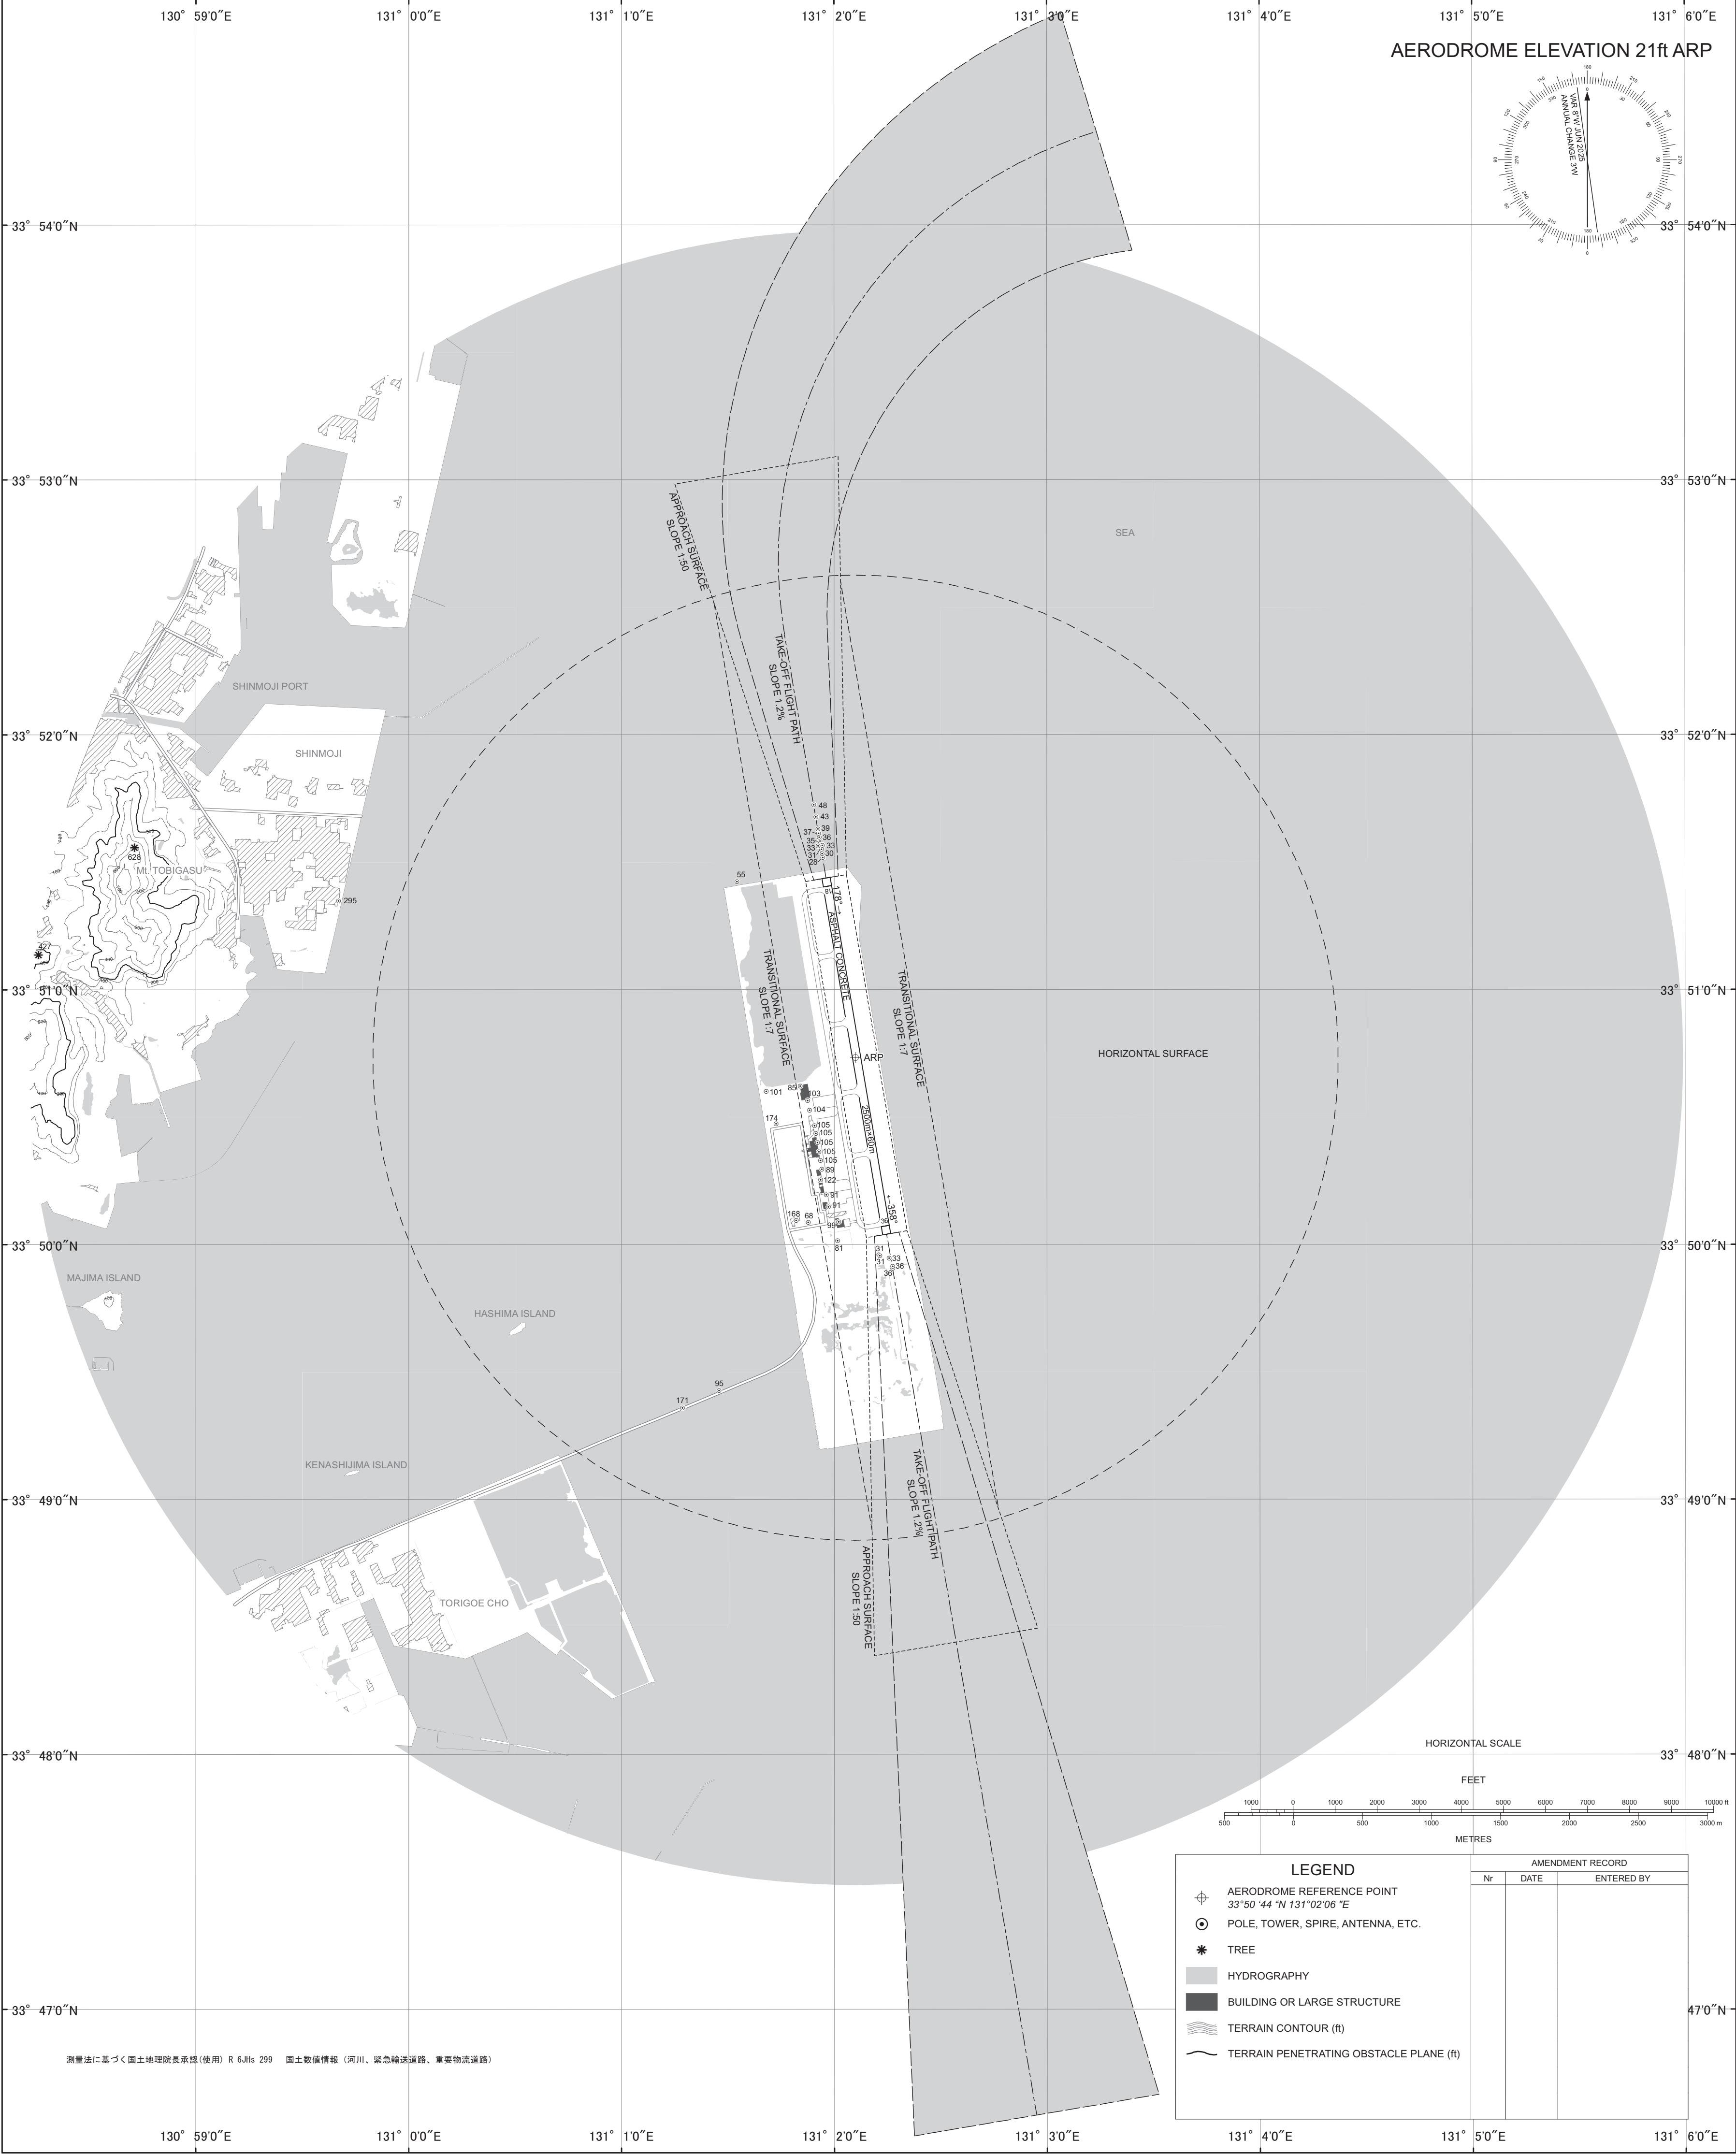

STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

SID

ASARI THREE DEPARTURE

RWY 18 : Climb RWY HDG to 500FT, turn left HDG039° ,...


RWY 36 : Climb RWY HDG to 500FT, turn right HDG129° , ...

...to intercept and proceed via SWE R084 to ASARI.

Cross SWE 8.0DME at or above 3000FT.

Note RWY18 : 5.8% climb gradient required up to 500FT due to airspace restrictions only.

RWY36 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

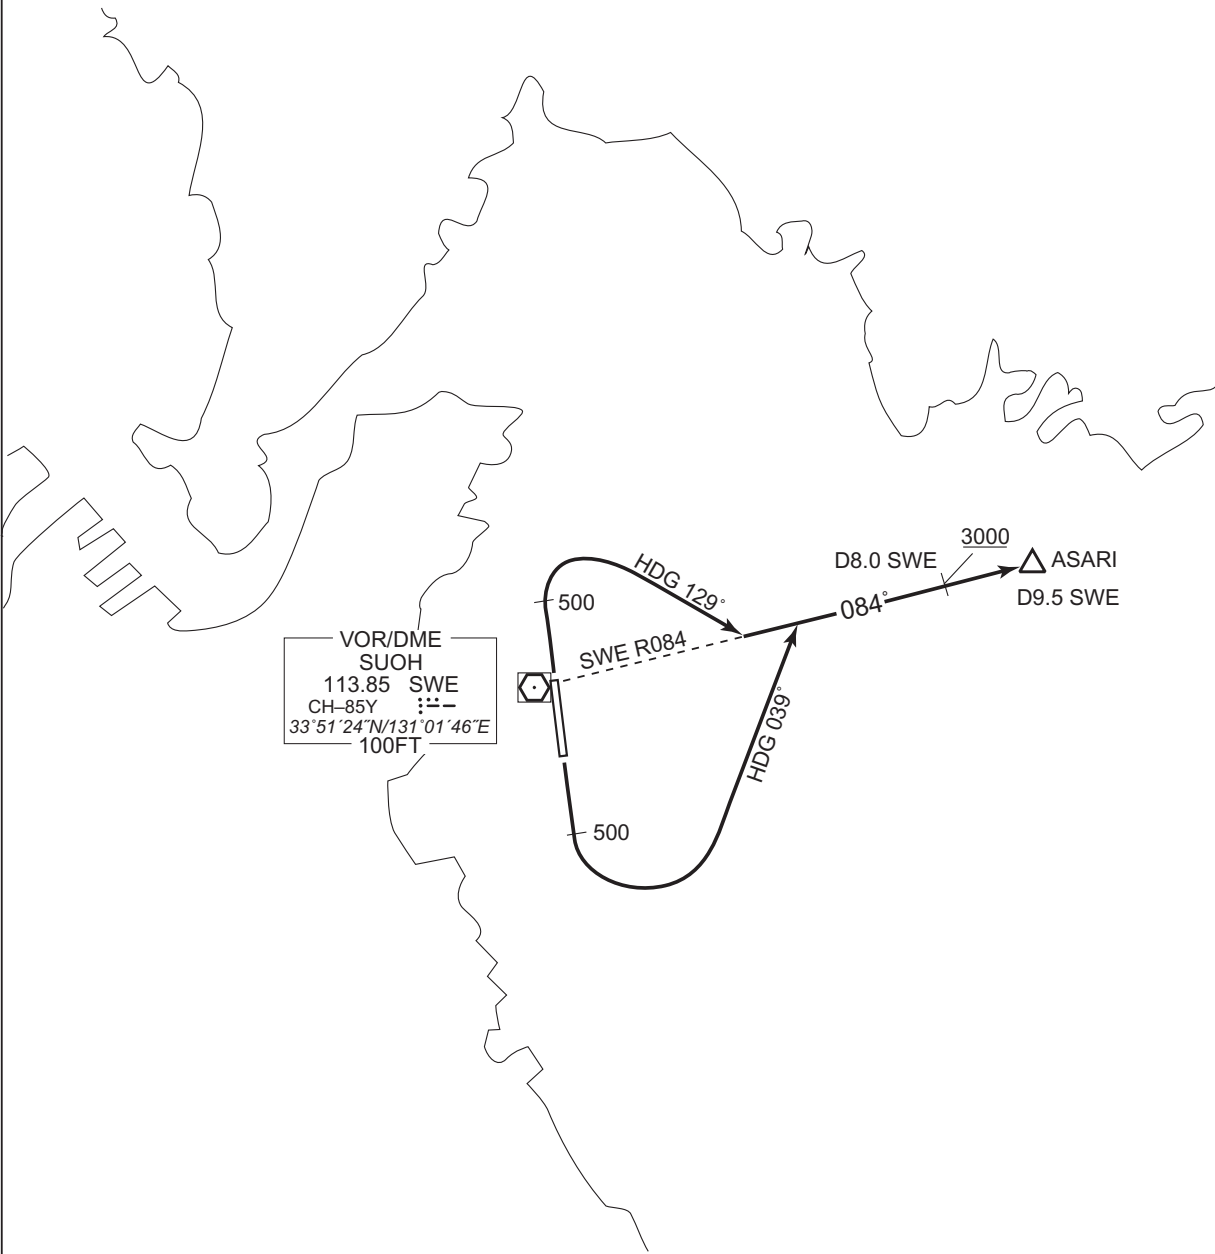

CHANGE : Description of PROC name.


STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

TRANSITION

MATSUYAMA TRANSITION

From over ASARI, via SWE R084 to intercept and proceed via UBE R133 to HIMEH, via UBE R133 to intercept and proceed via MYE R257 to MYE VOR/DME.

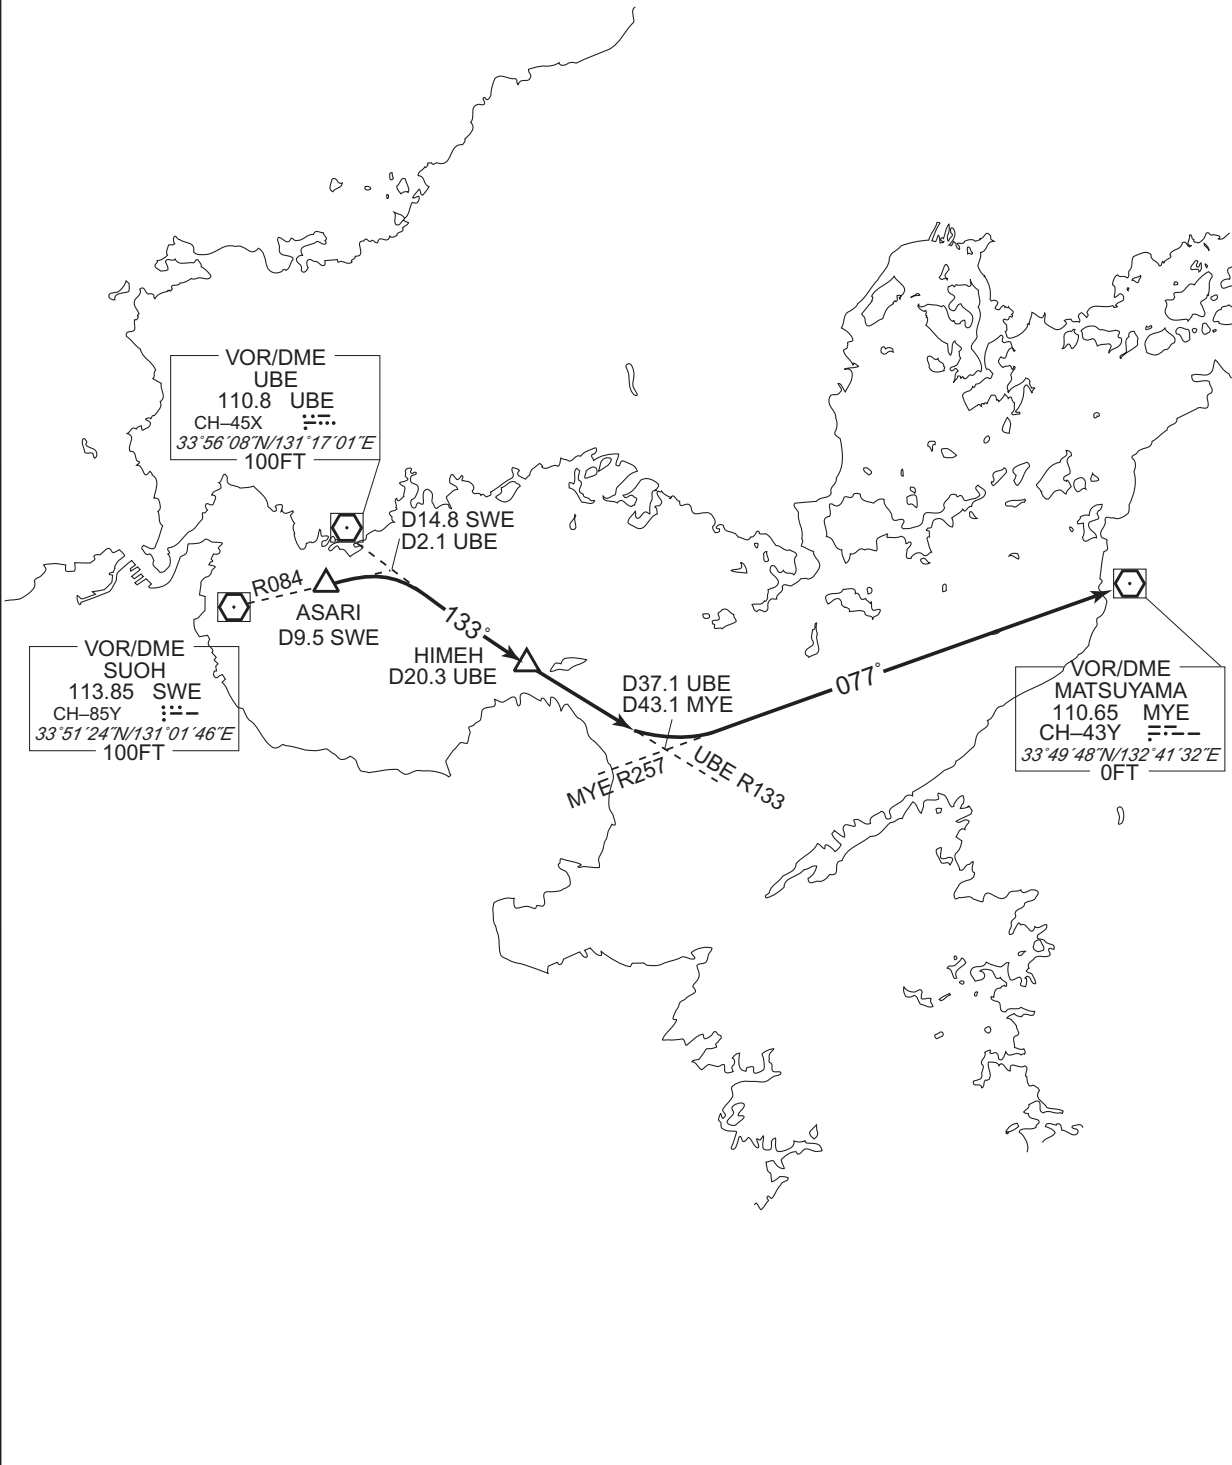

CHANGE : Description of PROC name.


STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

TRANSITION

MUSASHI TRANSITION

From over ASARI, via SWE R084 to intercept and proceed via UBE R133 to HIMEH, via TFE R346 to TFE VOR/DME.

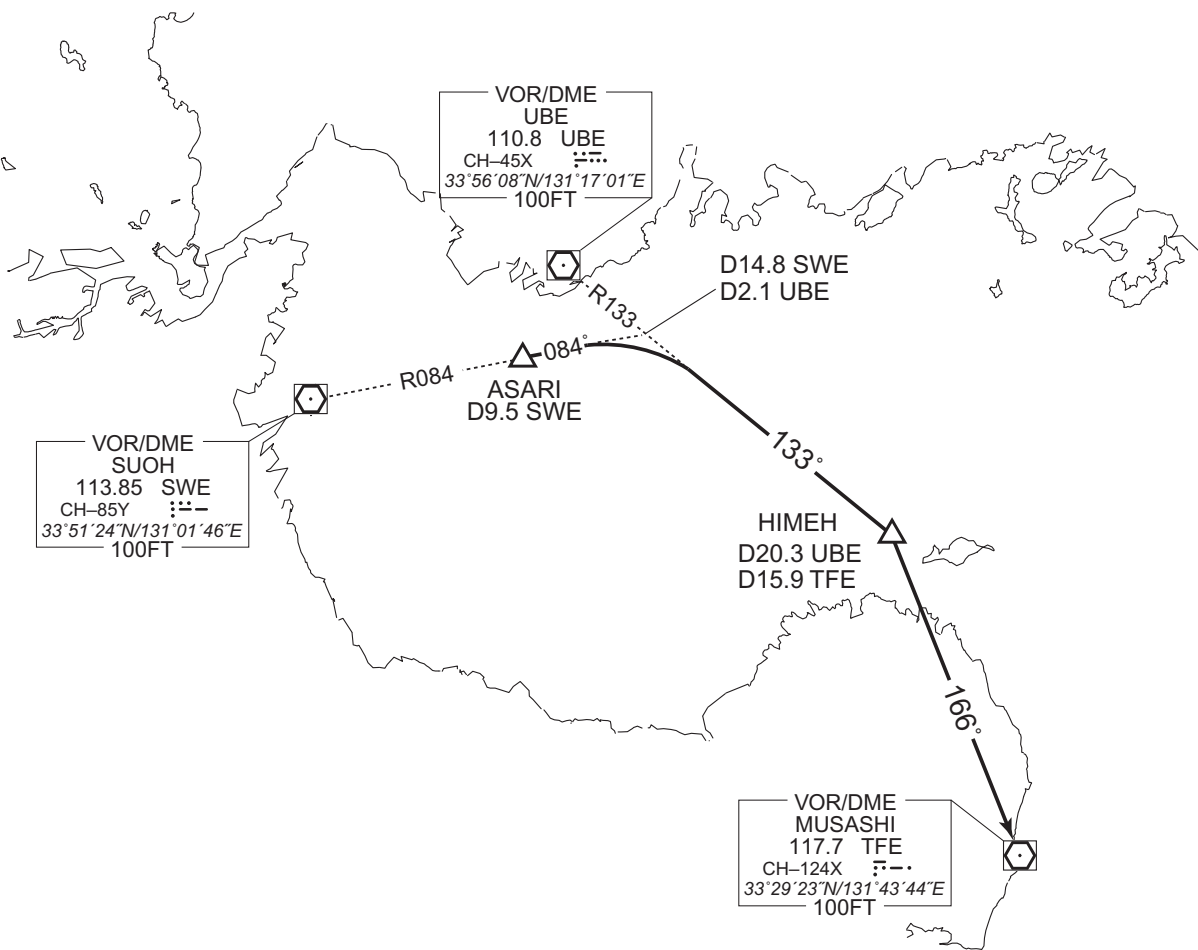

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFR / KITAKYUSHU

SID

ONGHA TWO DEPARTURE

RWY 18 : Climb RWY HDG to 500FT, turn left,...


RWY 36 : Climb RWY HDG to 500FT, turn right,...

...direct to SWE VOR/DME, proceed via SWE R259 to ONGHA.

Cross SWE VOR/DME at or above 3000FT.

Note RWY18 : 5.8% climb gradient required up to 500FT due to airspace restrictions only.

RWY36 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

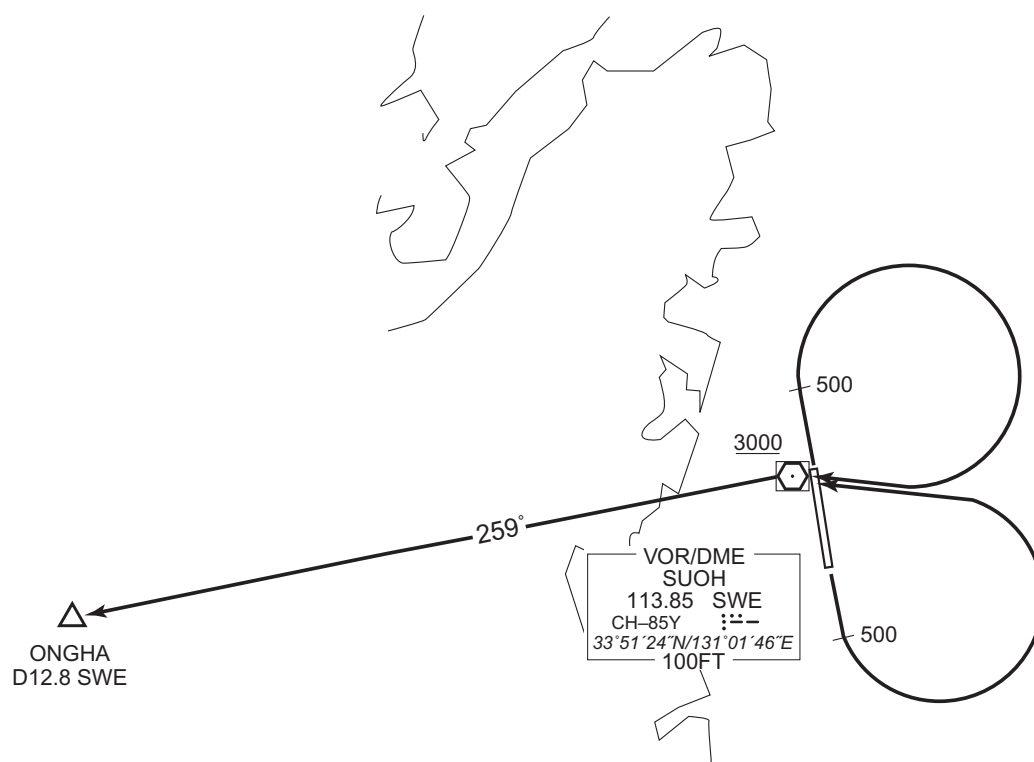


CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFR / KITAKYUSHU

RNAV SID and TRANSITION

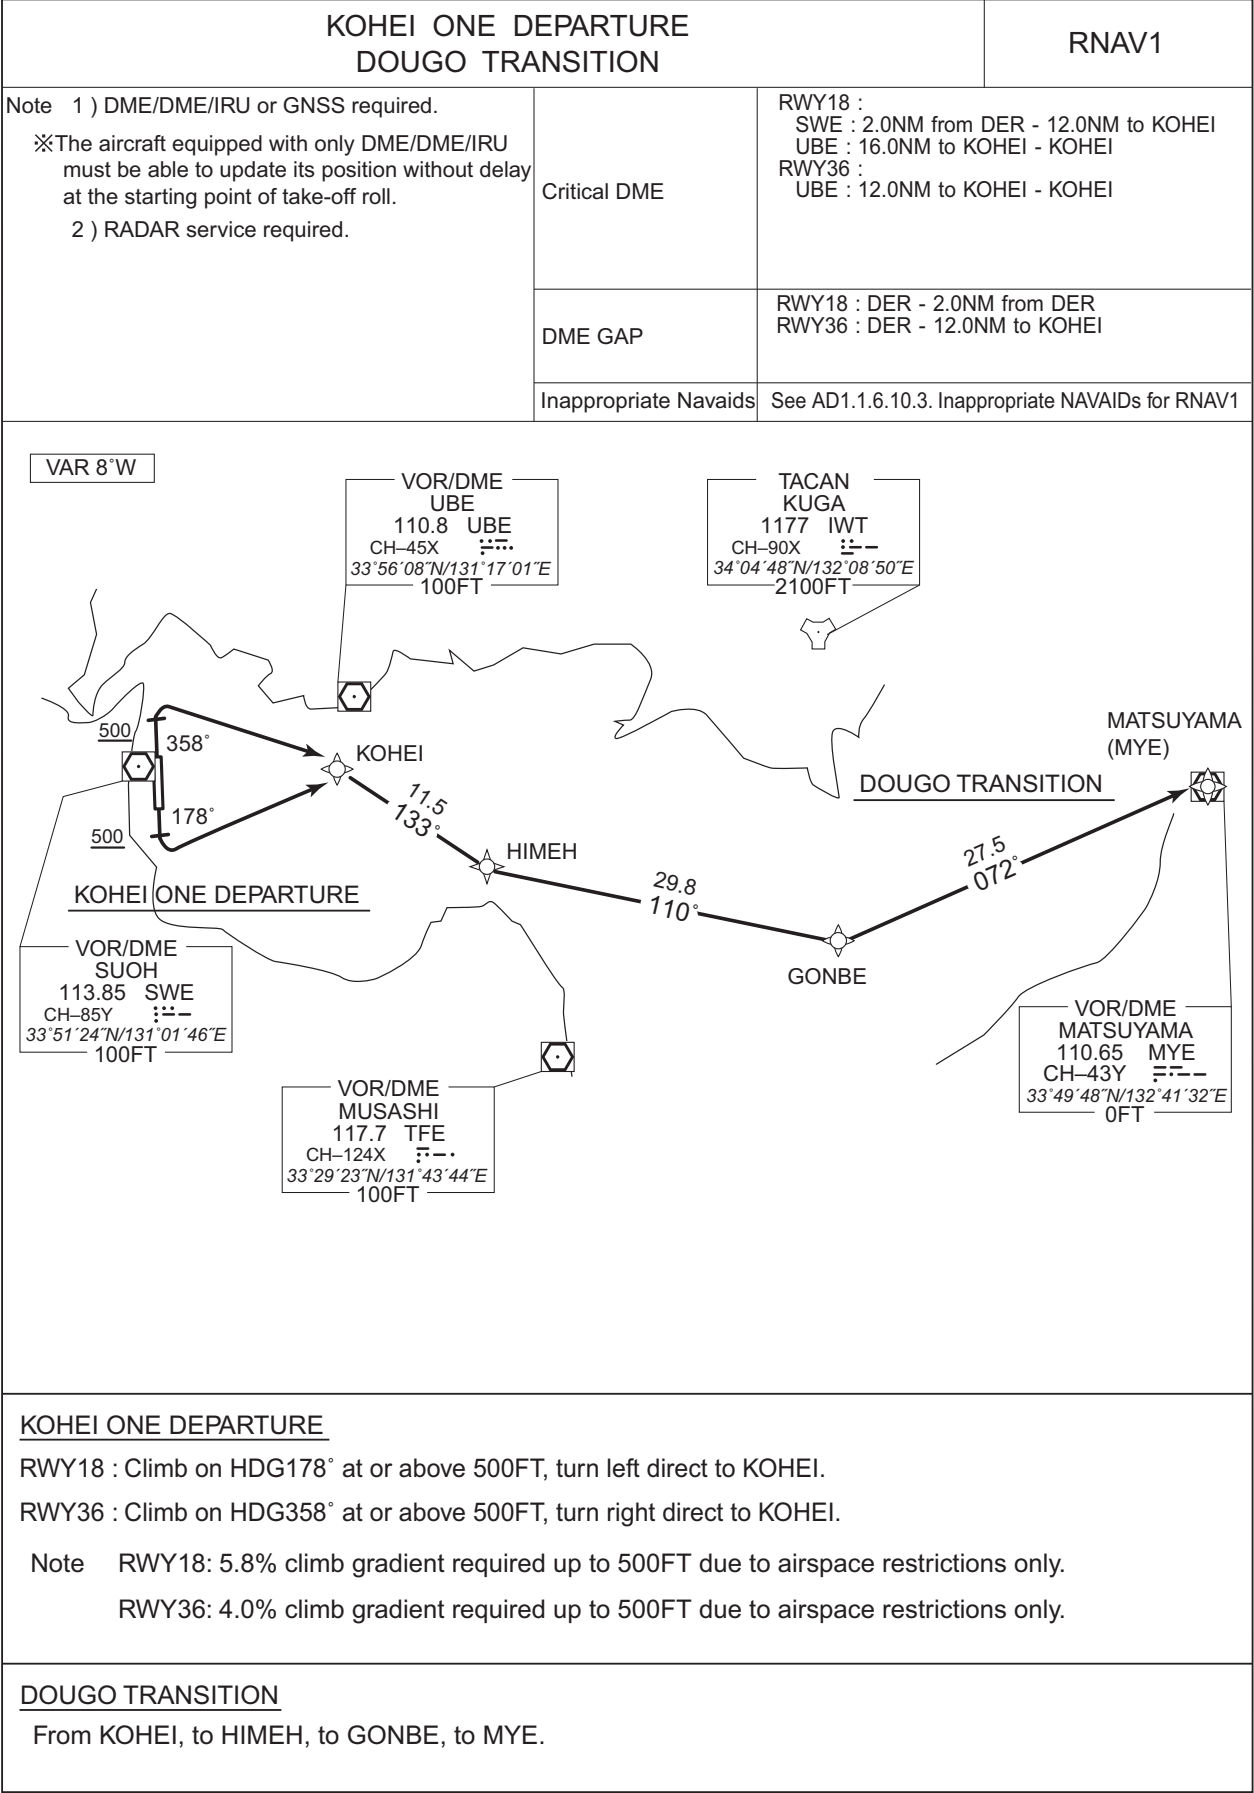

CHANGE : Latitude and longitude(KOHEI, HIMEH, GONBE, MATSUYAMA(MYE)) deleted.

STANDARD DEPARTURE CHART-INSTRUMENT

RJFR / KITAKYUSHU

RNAV SID and TRANSITION

KOHEI ONE DEPARTURE

RWY18

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 178 (170.4) | -7.5 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | KOHEI | — | — | -7.5 | — | L | — | — | — | RNAV1 |

RWY36

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | VA | — | — | 358 (350.4) | -7.5 | — | — | +500 | — | — | RNAV1 |
| 002 | DF | KOHEI | — | — | -7.5 | — | R | — | — | — | RNAV1 |

DOUGO TRANSITION


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
|---------------|-----------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| 001 | IF | KOHEI | — | — | -7.5 | — | — | — | — | — | RNAV1 |
| 002 | TF | HIMEH | — | 133 (125.8) | -7.5 | 11.5 | — | — | — | — | RNAV1 |
| 003 | TF | GONBE | — | 110 (102.2) | -7.5 | 29.8 | — | — | — | — | RNAV1 |
| 004 | TF | MYE | — | 072 (064.1) | -7.5 | 27.5 | — | — | — | — | RNAV1 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates |
|---------------------|------------------------|
| KOHEI | 335057.9N / 1312540.0E |
| HIMEH | 334414.9N / 1313651.2E |
| GONBE | 333752.3N / 1321148.8E |
| MYE | 334948.4N / 1324132.0E |

CHANGE : Waypoint Coordinates added.

STANDARD DEPARTURE CHART-INSTRUMENT

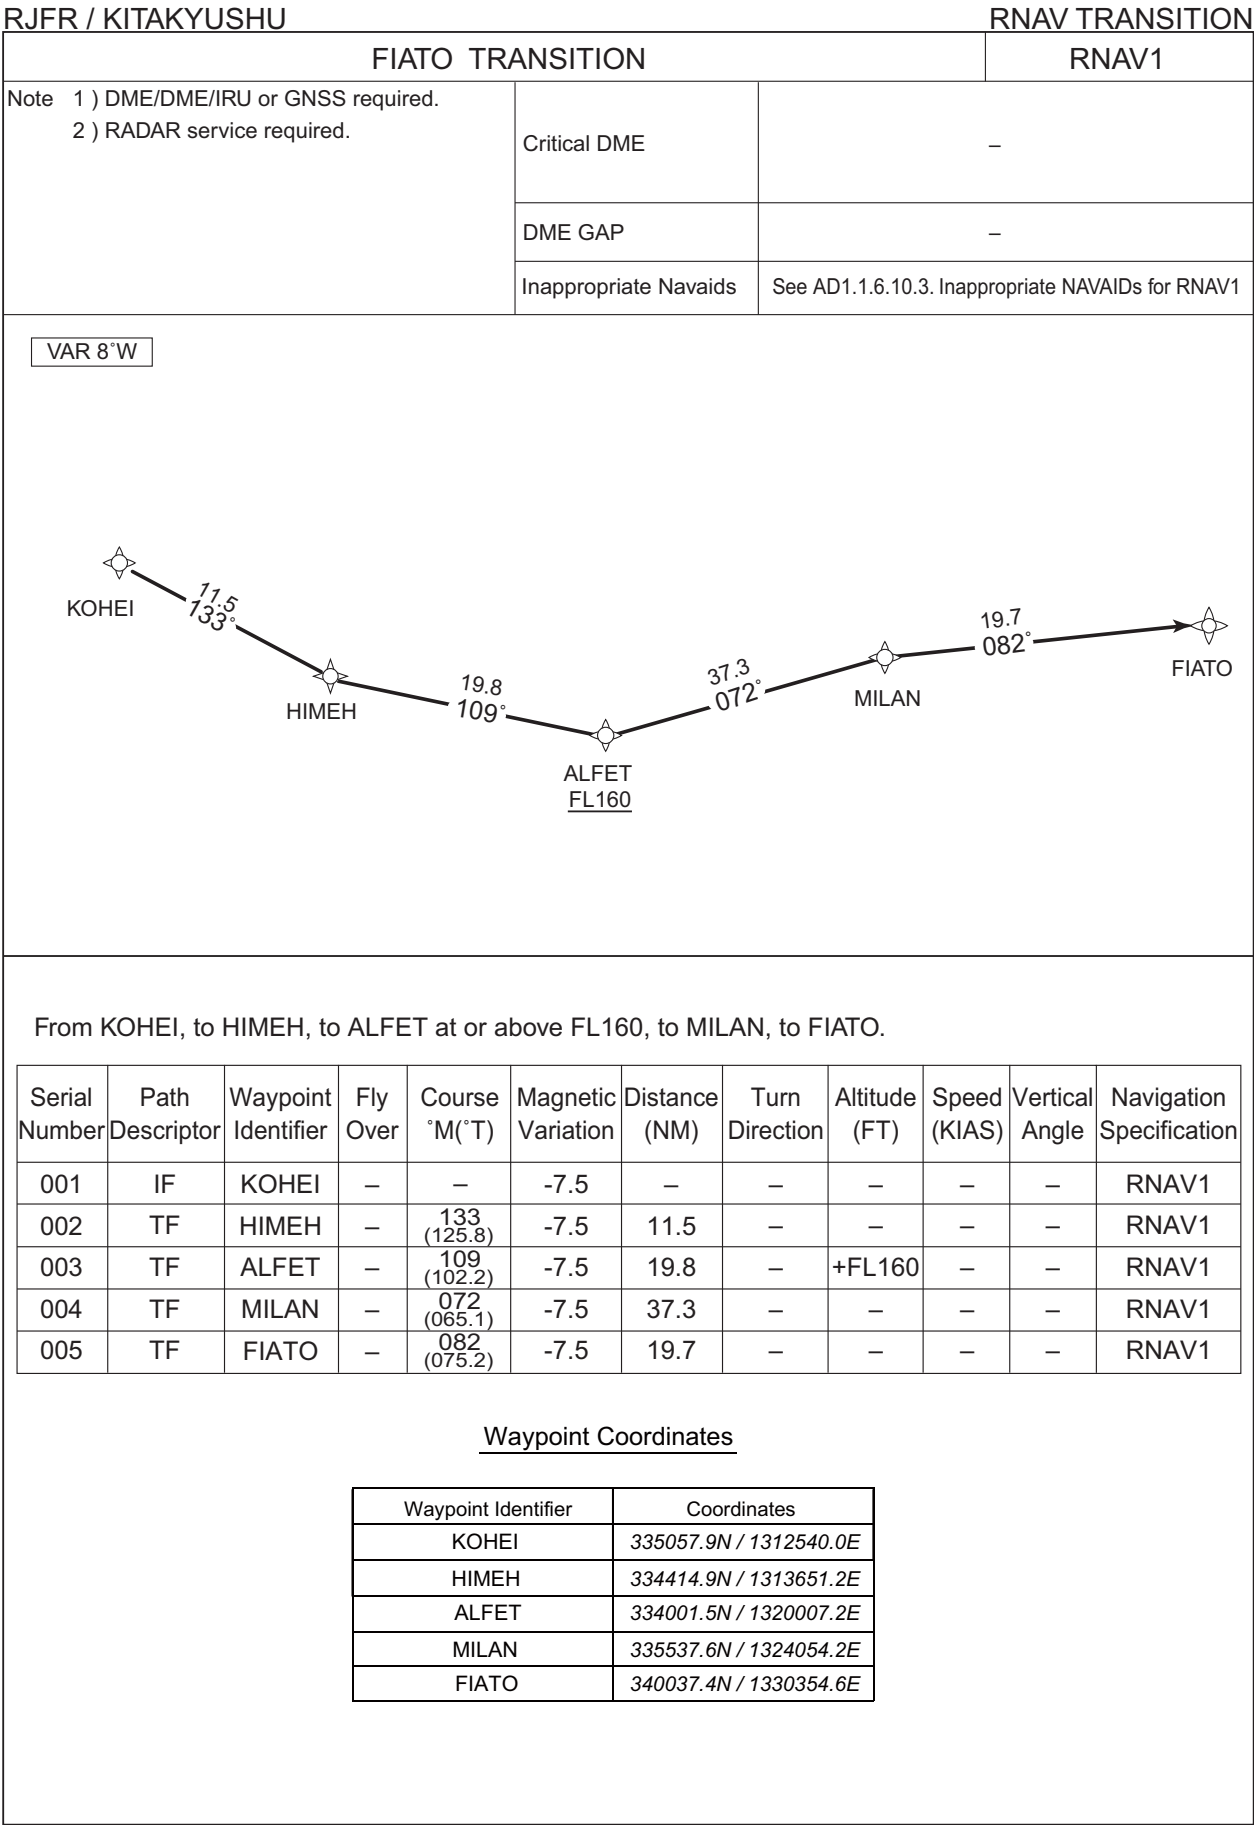


CHANGE : Waypoint Coordinates added.

INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

ILS Z or LOC Z RWY 18

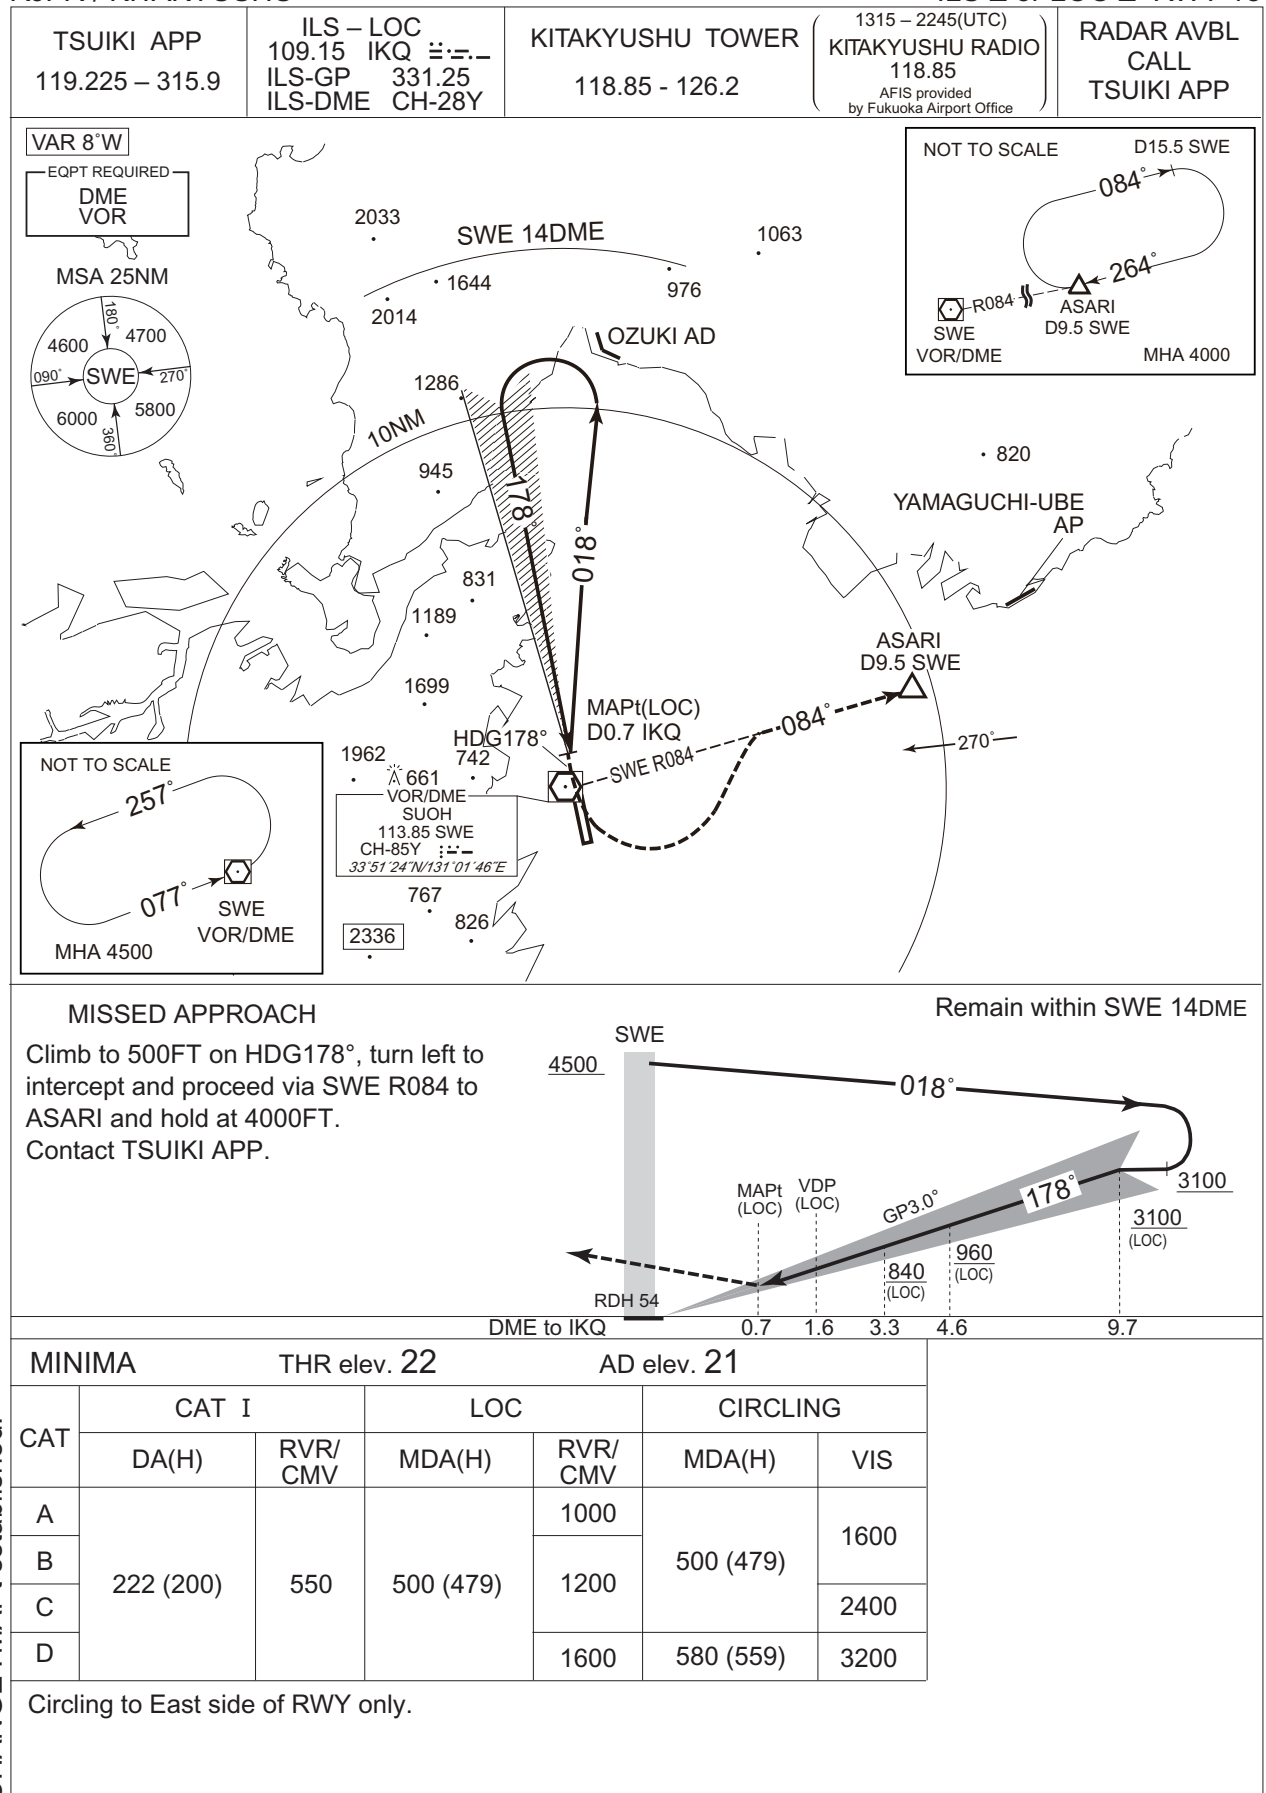


CHANGE : MAPt established.

INSTRUMENT APPROACH CHART


RJFR / KITAKYUSHU

ILS Y RWY18

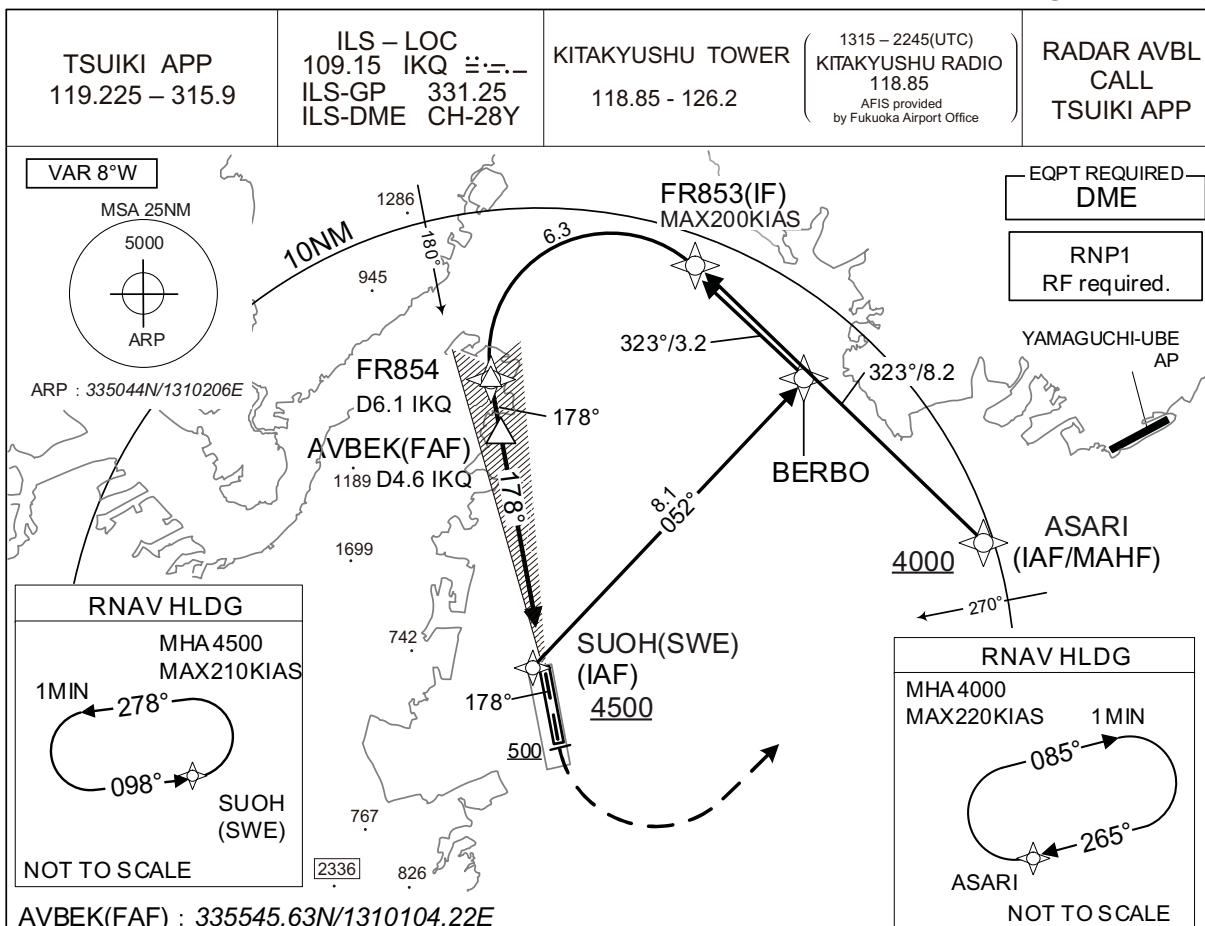

MISSED APPROACH

Climb on course 178°, at or above 500FT turn left, direct to ASARI and hold at 4000FT. Contact TSUIKI APP.

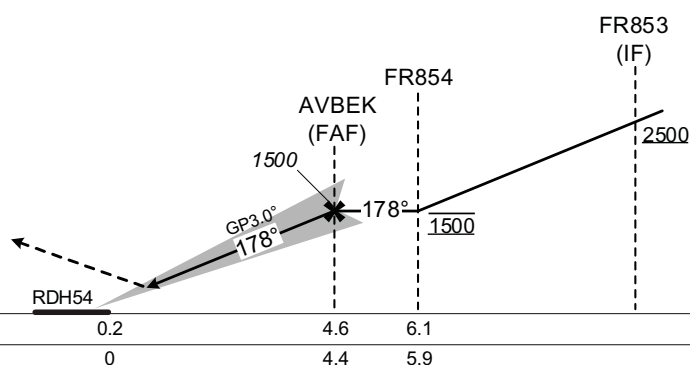

Missed APCH climb gradient MNM 5.0%

| MINIMA | | THR elev. 22 | AD elev. 21 | |
|--------|----------|--------------|-------------|------|
| CAT | CAT I | | CIRCLING | |
| | DA(H) | RVR/CMV | MDA(H) | VIS |
| A | 222(200) | 550 | 500(479) | 1600 |
| B | | | | 2400 |
| C | | | 580(559) | 3200 |
| D | | | | |

Circling to EAST side of RWY only.

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : RNAV HLDG at ASARI.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

ILS Y RWY18

| Coding Table | | | | | | | | | | | |
|---------------|---------------------------|---------------------|----------|---------------|--------------------|---------------|----------------|---------------|--------------|----------------|--------------------------|
| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | Vertical Angle | Navigation Specification |
| 001 | IF | ASARI | - | - | -8.0 | - | - | +4000 | - | - | RNP1 |
| 002 | TF | FR853 | - | 323 (314.8) | -8.0 | 8.2 | - | +2500 | -200 | - | RNP1 |
| 001 | IF | SWE | - | - | -8.0 | - | - | +4500 | - | - | RNP1 |
| 002 | TF | BERBO | - | 052 (044.5) | -8.0 | 8.1 | - | - | - | - | RNP1 |
| 003 | TF | FR853 | - | 323 (314.8) | -8.0 | 3.2 | - | +2500 | -200 | - | RNP1 |
| 001 | IF | FR853 | - | - | -8.0 | - | - | +2500 | -200 | - | RNP1 |
| 002 | RF Center: FRRF3 r=2.50NM | FR854 | - | - | -8.0 | 6.3 | L | 1500 | - | - | RNP1 |
| 001 | CA | - | - | 178 (170.4) | -8.0 | - | - | +500 | - | - | RNP1 |
| 002 | DF | ASARI | - | - | -8.0 | - | L | 4000 | - | - | RNP1 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | Navigation Specification |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|---------------|--------------------------|
| Hold | ASARI | 265 (256.4) | -8.1 | 1.0 (-14000) | R | 4000 | FL140 | -220 (-14000) | RNP1 |
| Hold | SWE | 098 (090.0) | -8.0 | 1.0 (-14000) | L | 4500 | FL140 | -210 (-14000) | RNP1 |


| Waypoint Coordinates | | | |
|----------------------|--------------------------|--------------------------|--------------------------|
| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
| ASARI | 335338.98N / 1311252.32E | FRRF3 | 335739.78N / 1310343.74E |
| BERBO | 335710.25N / 1310836.17E | | |
| FR853 | 335926.70N / 1310550.48E | | |
| FR854 | 335714.50N / 1310045.99E | | |
| SUOH(SWE) | 335123.82N / 1310145.84E | | |

CHANGE : PROC course at ASARI. VAR. Speed at ASARI.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU


LOC Y RWY 18

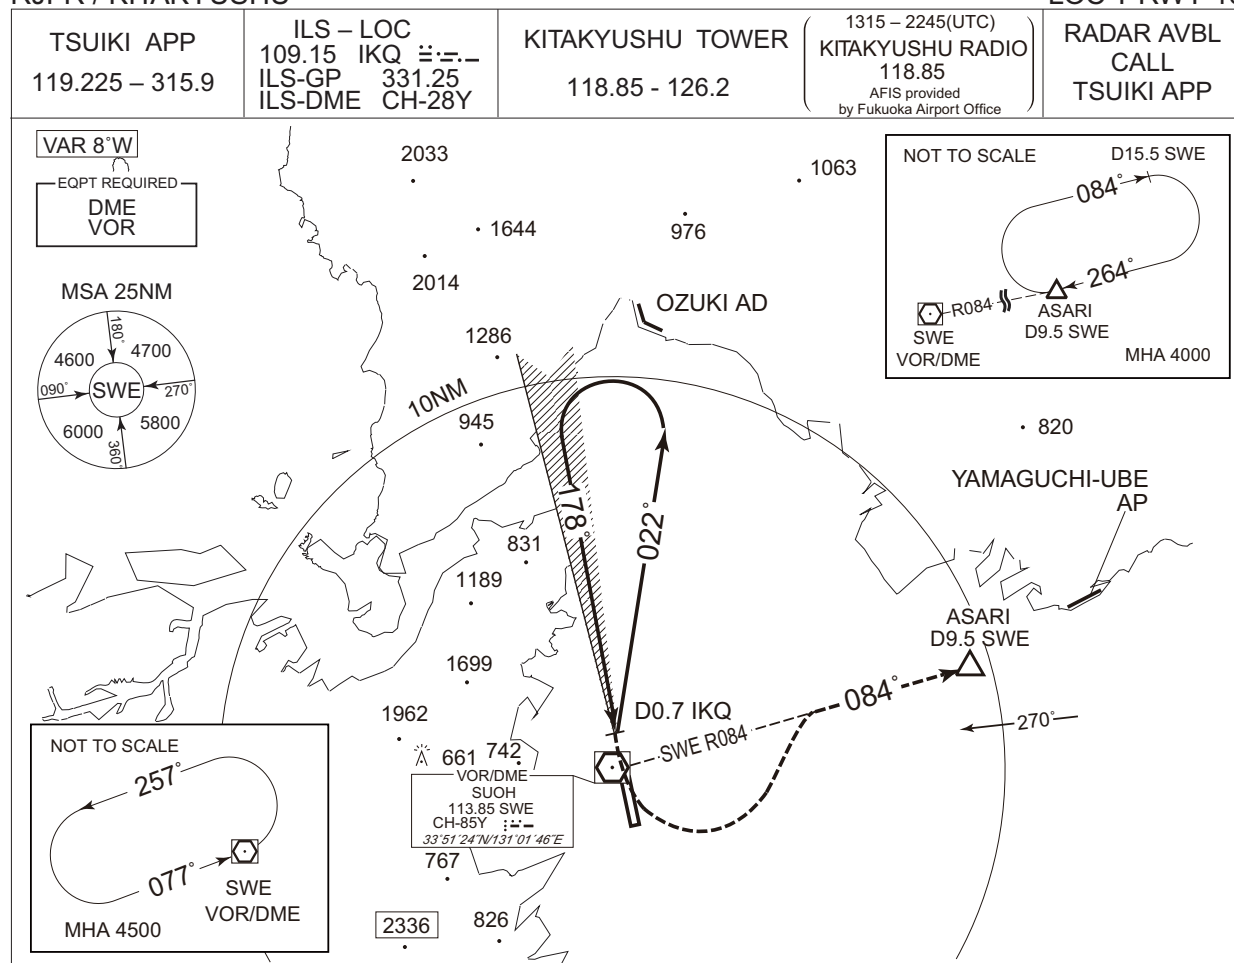

MISSED APPROACH

At IKQ 0.7DME, turn left and climb to 4000FT via SWE R084 to ASARI and hold.
Contact TSUIKI APP.

Remain within SWE 10DME

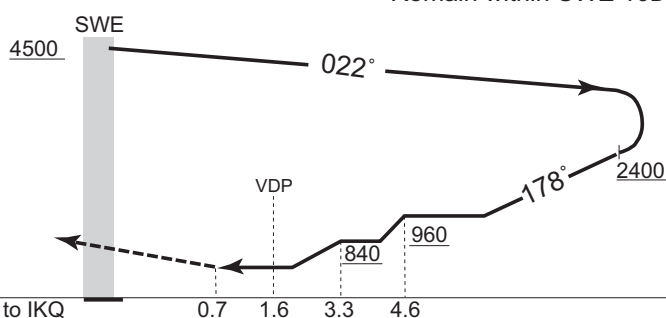


| MINIMA | | THR elev. 22 | AD elev. 21 | |
|--------|-----------|--------------|-------------|------|
| CAT | | | CIRCLING | |
| | MDA(H) | RVR/ CMV | MDA(H) | VIS |
| A | 500 (479) | 1000 | 500 (479) | 1600 |
| B | | 1200 | | |
| C | | | | 2400 |
| D | | 1600 | 580 (559) | 3200 |

Circling to East side of RWY only.

CHANGE : Description of HLDG.


INSTRUMENT APPROACH CHART

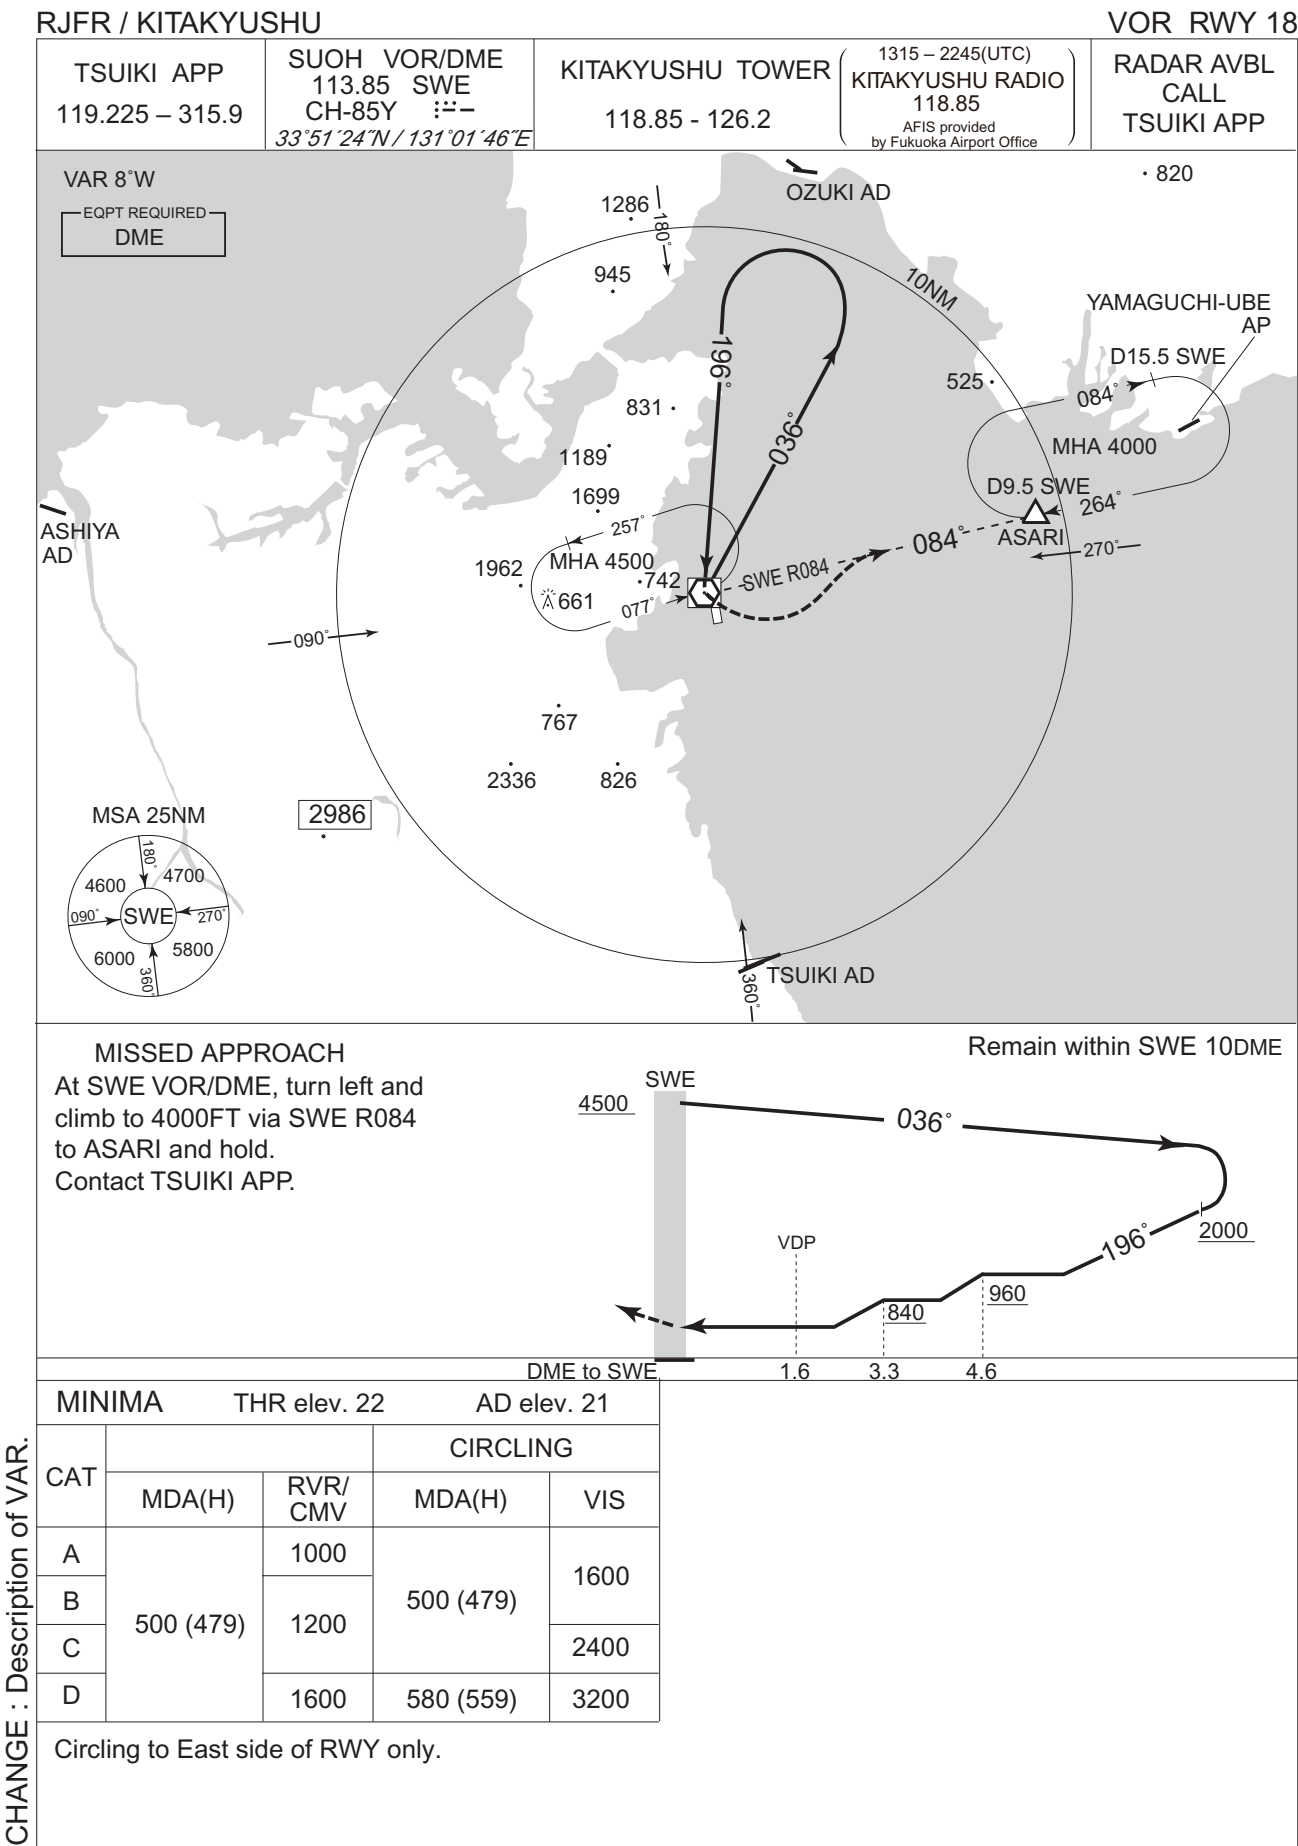

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

VOR A

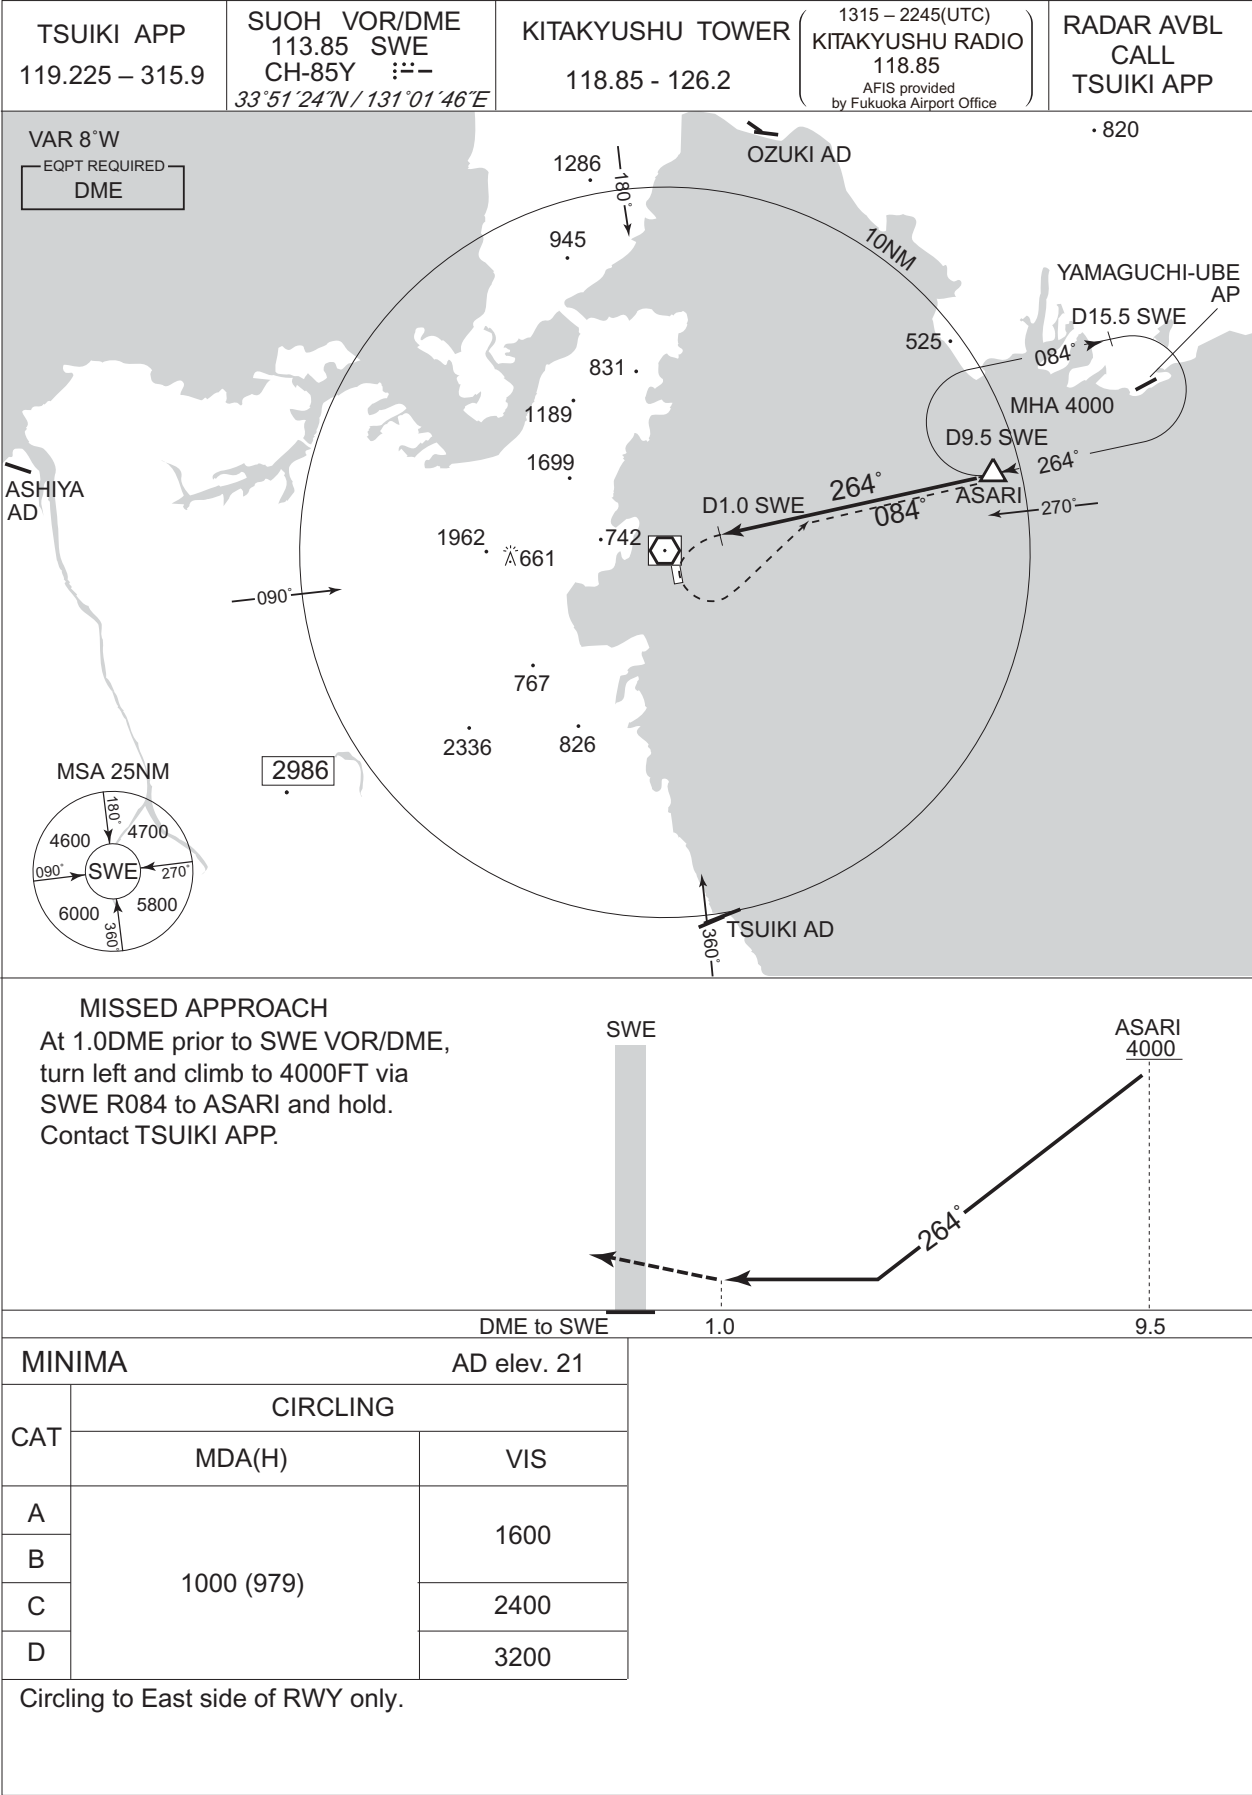


CHANGE : Description of VAR.


INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

VOR B

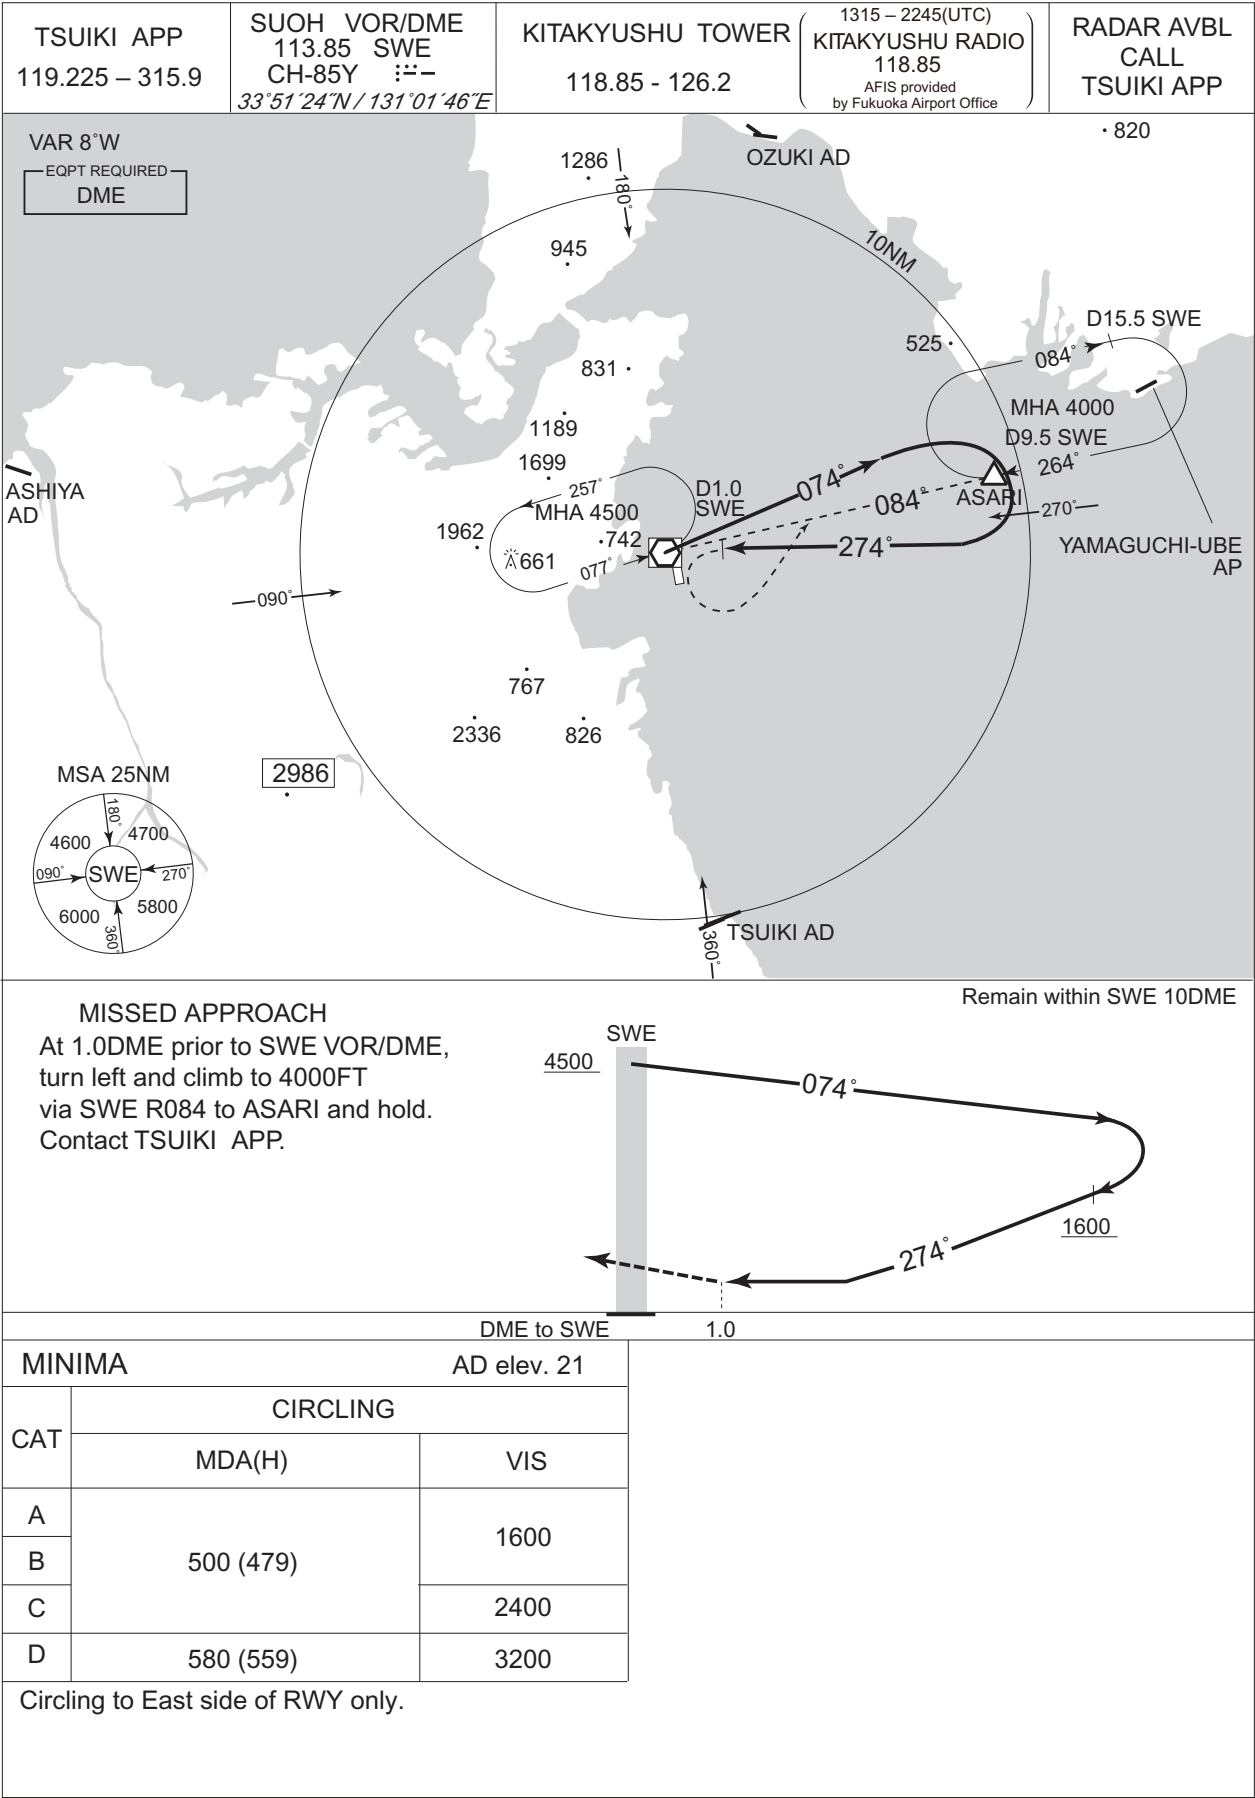

INSTRUMENT APPROACH CHART

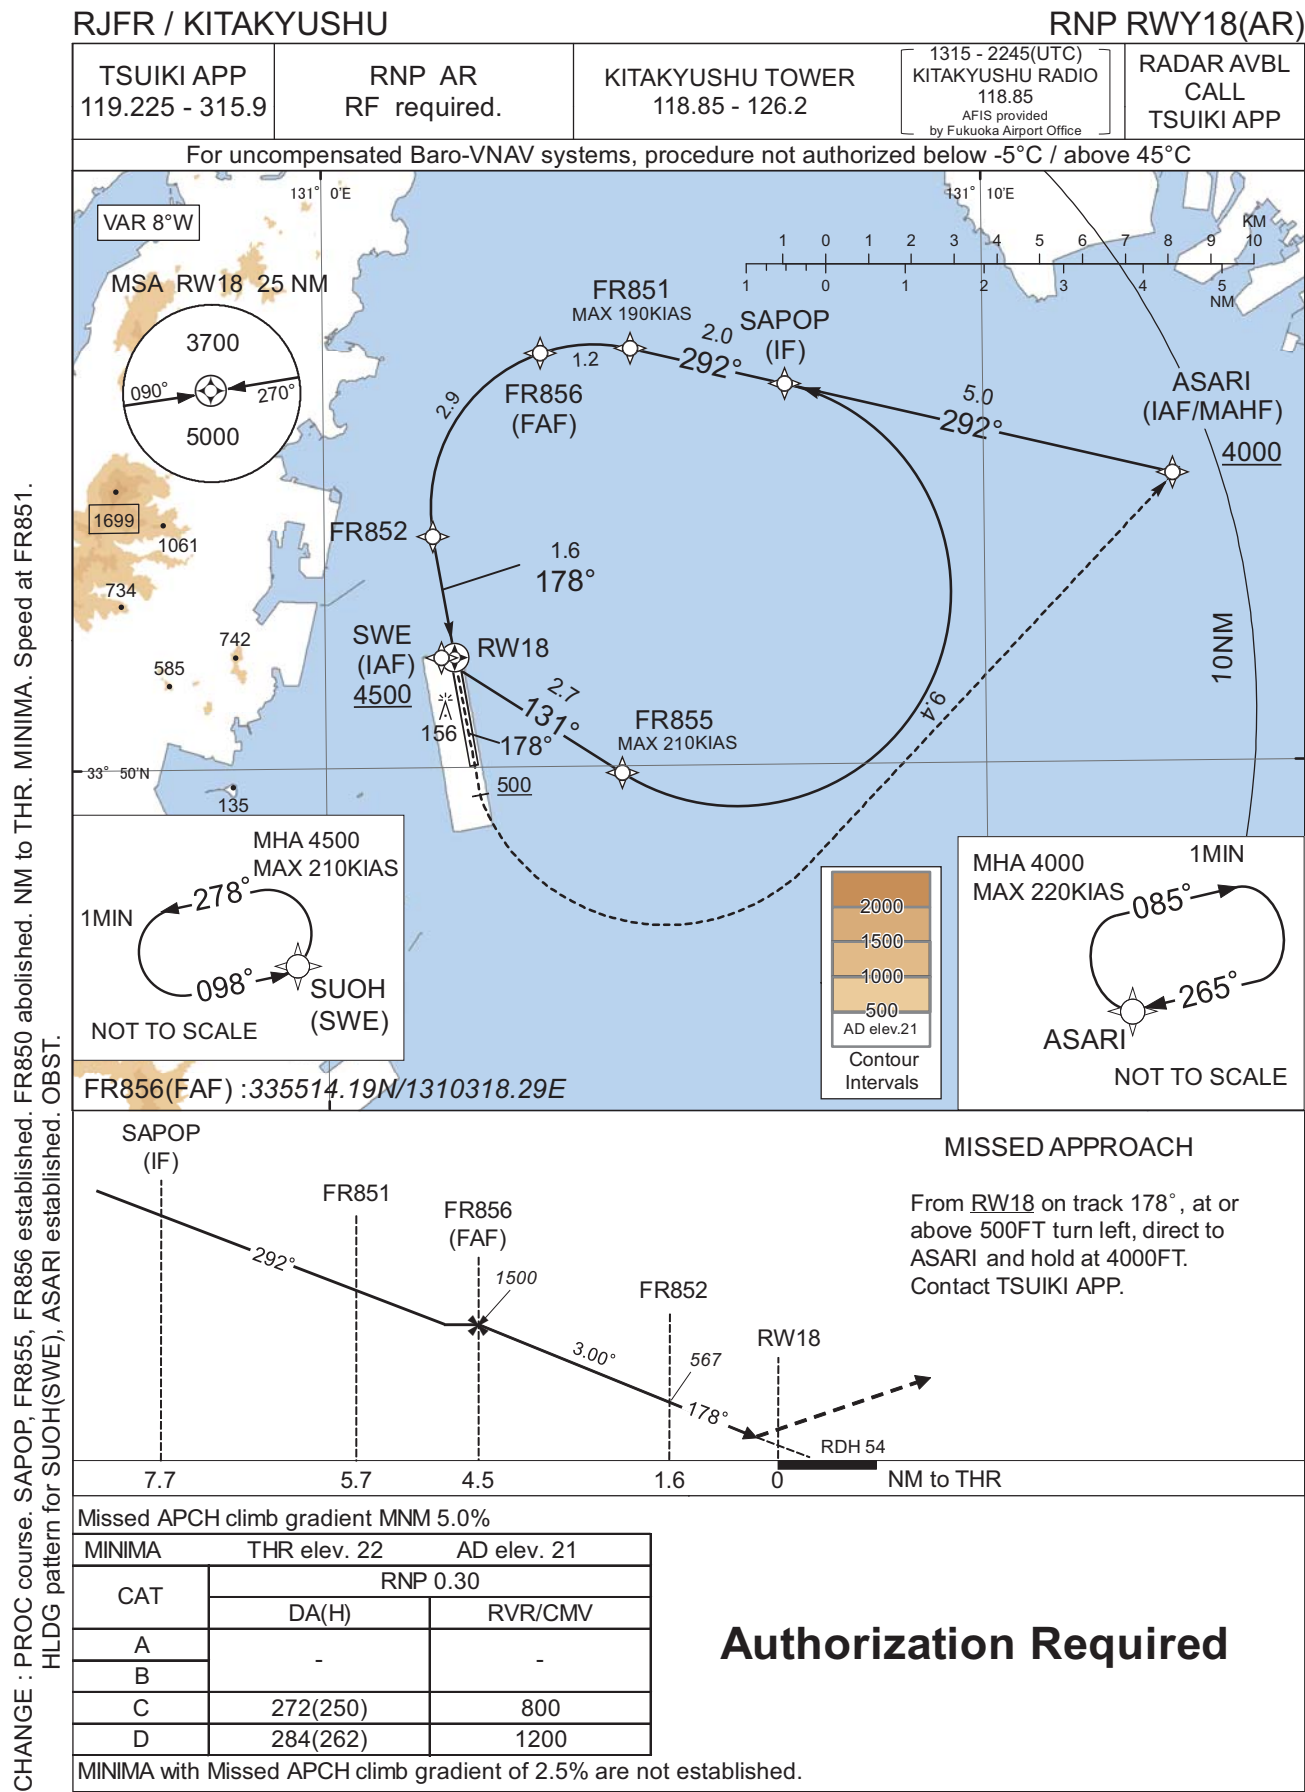

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

RNP RWY18(AR)

CHANGE : SAPOP, FR855, FR856 established. FR850 abolished. PROC course. VAR. ALT restriction. Hold at ASARI, SWE, Waypoint Coordinates established.

Coding Table


| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001 | IF | ASARI | - | - | -8.1 | - | - | +4000 | - | - | - |
| 002 | TF | SAPOP | - | 292 (283.6) | -8.1 | 5.0 | - | - | - | - | 0.3 |
| 001 | IF | SWE | - | - | -8.1 | - | - | +4500 | - | - | - |
| 002 | TF | FR855 | - | 131 (123.1) | -8.1 | 2.7 | - | - | -210 | - | 0.3 |
| 003 | RF Center: FRRF4 r=2.70NM | SAPOP | - | - | -8.1 | 9.4 | L | - | - | - | 0.3 |
| 001 | IF | SAPOP | - | - | -8.1 | - | - | - | - | - | - |
| 002 | TF | FR851 | - | 292 (283.5) | -8.1 | 2.0 | - | - | -190 | - | 0.3 |
| 003 | RF Center: FRRF1 r=2.06NM | FR856 | - | - | -8.1 | 1.2 | L | 1500 | - | -3.00 | 0.3 |
| 004 | RF Center: FRRF1 r=2.06NM | FR852 | - | - | -8.1 | 2.9 | L | 567 | - | -3.00 | 0.3 |
| 005 | TF | RW18 | Y | 178 (170.4) | -8.1 | 1.6 | - | 76 | - | -3.00/54 | 0.3 |
| 006 | FA | - | - | 178 (170.4) | -8.1 | - | - | +500 | - | - | 1.0 |
| 007 | DF | ASARI | - | - | -8.1 | - | L | 4000 | - | - | 1.0 |

| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|------------------|-----------|
| Hold | ASARI | 265 (256.4) | -8.1 | 1.0 (-14000) | R | 4000 | FL140 | -220 (-14000) | 1.0 |
| Hold | SWE | 098 (090.0) | -8.1 | 1.0 (-14000) | L | 4500 | FL140 | -210 (-14000) | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| ASARI | 335338.98N / 1311252.32E | FRRF4 | 335211.48N / 1310615.14E |
| SUOH(SWE) | 335123.82N / 1310145.84E | FRRF1 | 335316.61N / 1310405.62E |
| FR855 | 334955.38N / 1310429.24E | | |
| SAPOP | 335449.30N / 1310700.39E | | |
| FR851 | 335517.24N / 1310440.15E | | |
| FR856 | 335514.19N / 1310318.29E | | |
| FR852 | 335255.76N / 1310139.03E | | |
| RW18 | 335123.92N / 1310157.83E | | |

INSTRUMENT APPROACH CHART

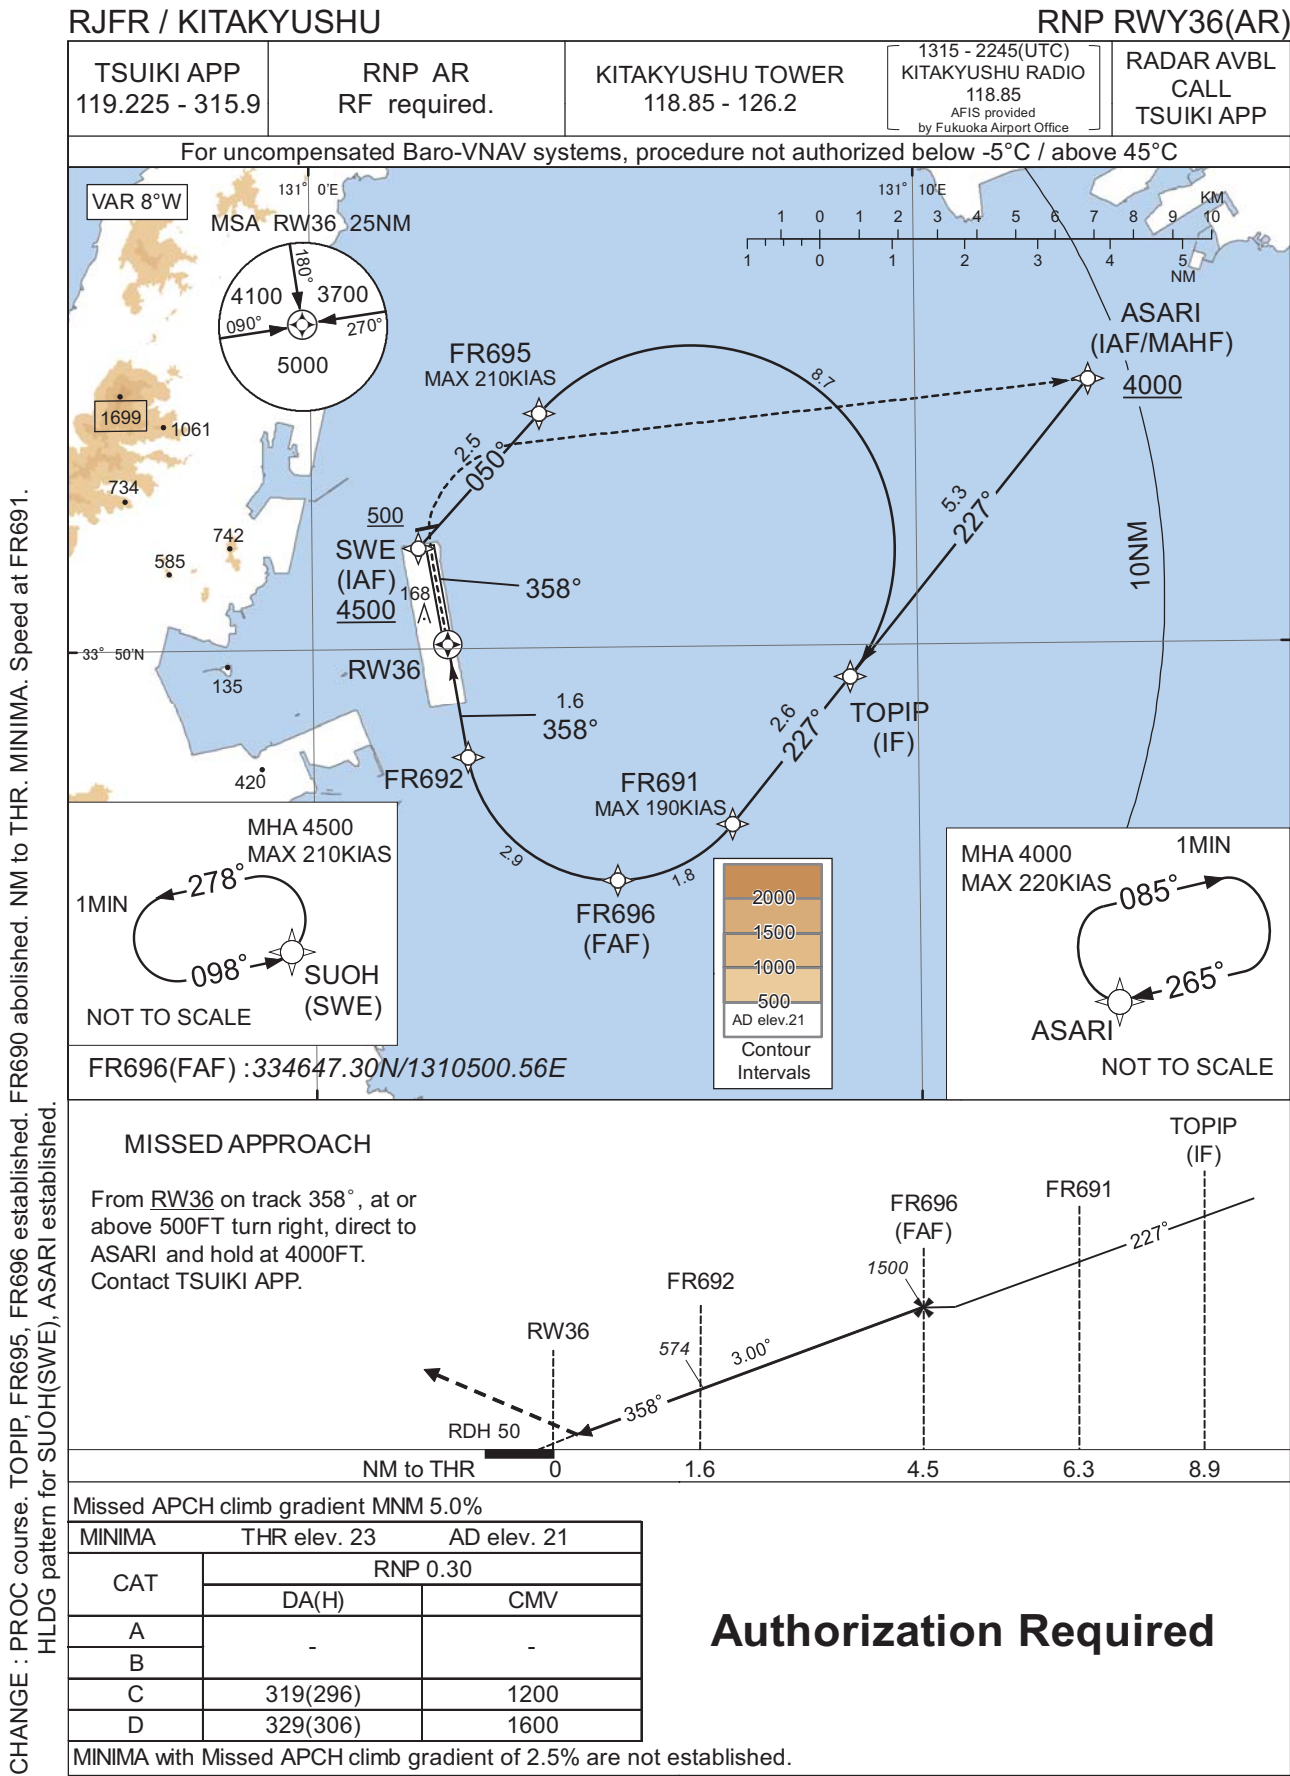

CHANGE : PROC course. TOPIP, FR695, FR696 established. FR690 abolished. NM to THR. MINIMA. Speed at FR691. HLDG pattern for SUOH(SWE), ASARI established.

INSTRUMENT APPROACH CHART

RJFR / KITAKYUSHU

RNP RWY36(AR)

CHANGE : TOPIP, FR695, FR696 established. FR690 abolished. PROC course. VAR. ALT restriction. Hold at ASARI, SWE, Waypoint Coordinates established.

Coding Table

| Serial Number | Path Descriptor | Waypoint Identifier | Fly Over | Course °M(°T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed (KIAS) | VPA/ RDH (°/FT) | RNP Value |
|---------------|------------------------------------|---------------------|----------|----------------|--------------------|---------------|----------------|---------------|--------------|-----------------|-----------|
| 001 | IF | ASARI | - | - | -8.1 | - | - | +4000 | - | - | - |
| 002 | TF | TOPIP | - | 227 (219.1) | -8.1 | 5.3 | - | - | - | - | 0.3 |
| 001 | IF | SWE | - | - | -8.1 | - | - | +4500 | - | - | - |
| 002 | TF | FR695 | - | 050 (042.2) | -8.1 | 2.5 | - | - | -210 | - | 0.3 |
| 003 | RF Center: FRRF5 r=2.81NM | TOPIP | - | - | -8.1 | 8.7 | R | - | - | - | 0.3 |
| 001 | IF | TOPIP | - | - | -8.1 | - | - | - | - | - | - |
| 002 | TF | FR691 | - | 227 (219.0) | -8.1 | 2.6 | - | - | -190 | - | 0.3 |
| 003 | RF Center: FRRF2 r=2.06NM | FR696 | - | - | -8.1 | 1.8 | R | 1500 | - | -3.00 | 0.3 |
| 004 | RF Center: FRRF2 r=2.06NM | FR692 | - | - | -8.1 | 2.9 | R | 574 | - | -3.00 | 0.3 |
| 005 | TF | RW36 | Y | 358 (350.4) | -8.1 | 1.6 | - | 73 | - | -3.00/50 | 0.3 |
| 006 | FA | - | - | 358 (350.4) | -8.1 | - | - | +500 | - | - | 1.0 |
| 007 | DF | ASARI | - | - | -8.1 | - | R | 4000 | - | - | 1.0 |


| Path | Waypoint Identifier | Inbound Course °M(°T) | Magnetic Variation | Outbound Time (MIN) | Turn Direction | Minimum Altitude (FT) | Maximum Altitude (FT) | Speed (KIAS) | RNP Value |
|------|---------------------|-----------------------|--------------------|---------------------|----------------|-----------------------|-----------------------|------------------|-----------|
| Hold | ASARI | 265 (256.4) | -8.1 | 1.0 (-14000) | R | 4000 | FL140 | -220 (-14000) | 1.0 |
| Hold | SWE | 098 (090.0) | -8.1 | 1.0 (-14000) | L | 4500 | FL140 | -210 (-14000) | 1.0 |

Waypoint Coordinates

| Waypoint Identifier | Coordinates | RF Arc Center Identifier | Coordinates |
|---------------------|--------------------------|--------------------------|--------------------------|
| ASARI | 335338.98N / 1311252.32E | FRRF5 | 335120.78N / 1310616.38E |
| SUOH(SWE) | 335123.82N / 1310145.84E | FRRF2 | 334851.32N / 1310459.78E |
| FR695 | 335314.57N / 1310346.97E | | |
| TOPIP | 334934.23N / 1310853.21E | | |
| FR691 | 334733.05N / 1310655.02E | | |
| FR696 | 334647.30N / 1310500.56E | | |
| FR692 | 334830.46N / 1310233.32E | | |
| RW36 | 335004.08N / 1310214.17E | | |

RJFR / KITAKYUSHU

Visual REP

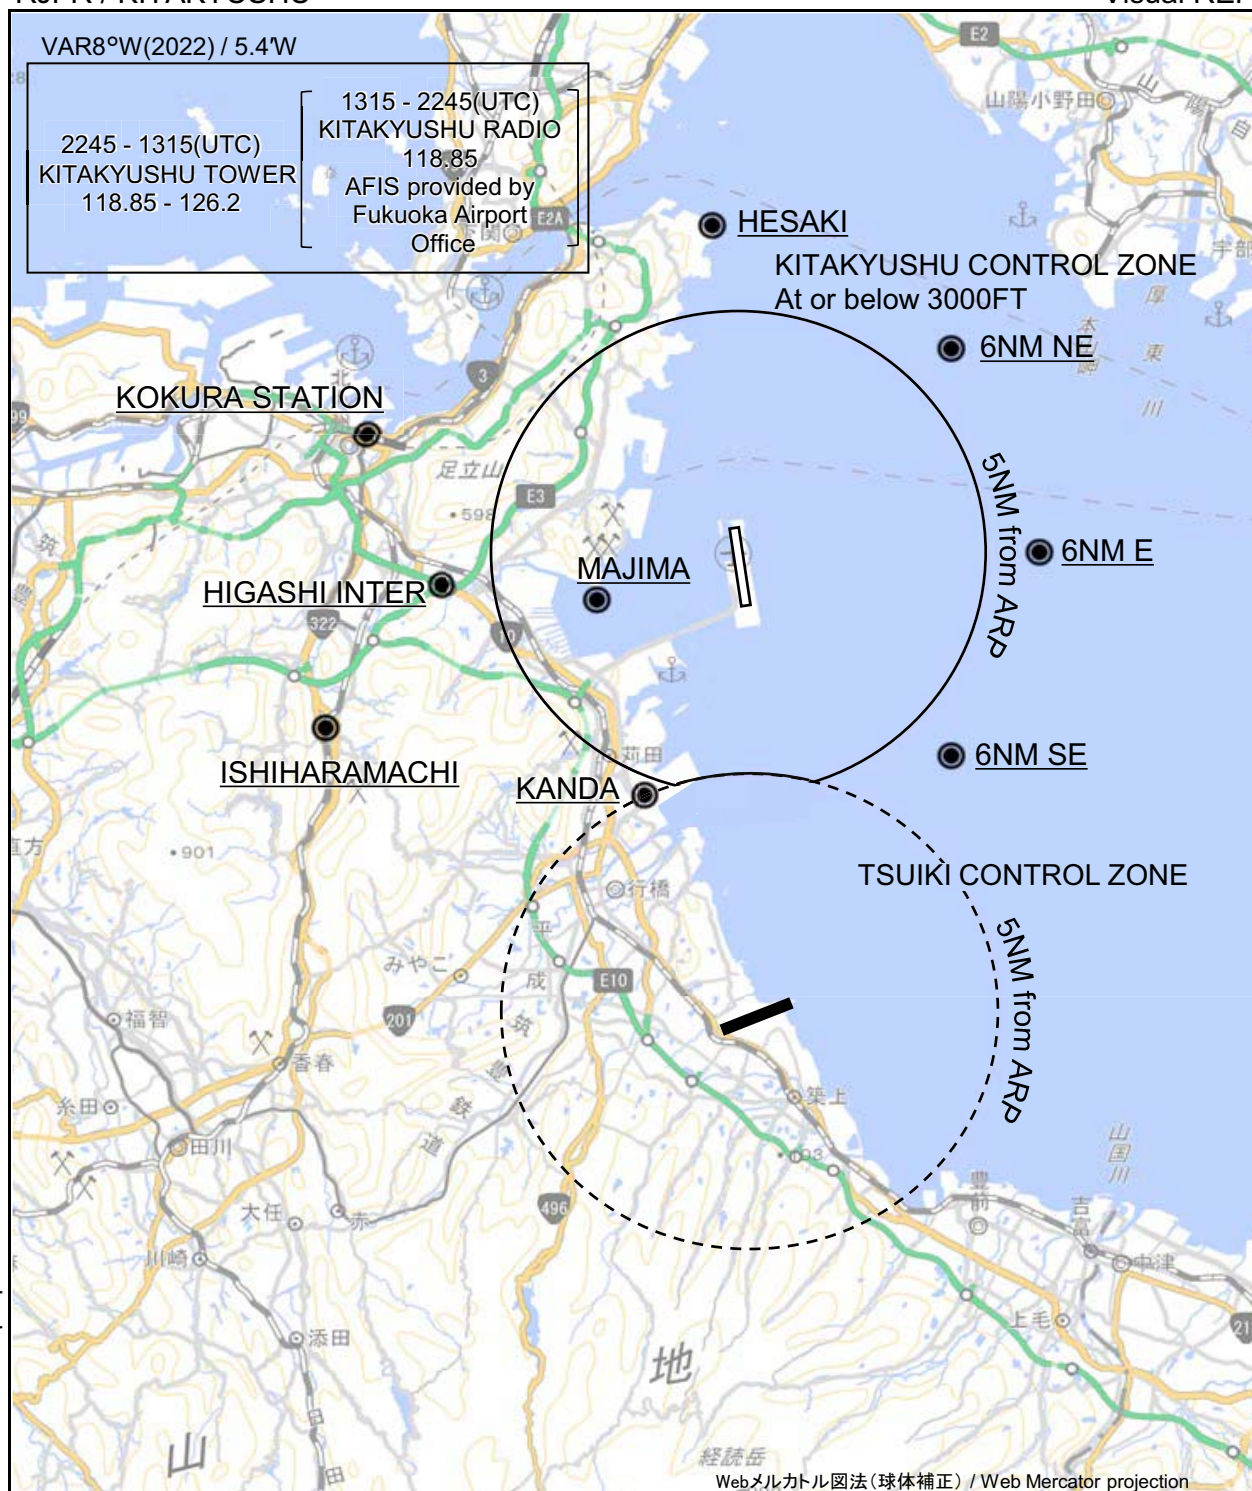


※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

RJFR / KITAKYUSHU

Visual REP

| Call sign | BRG / DIST from ARP | Remarks |
|----------------------------|---------------------|---|
| 部崎 Hesaki | 355°T / 6.8NM | 灯台 Lighthouse |
| 6NM NE | 045°T / 6.0NM | 海上 Over the sea |
| 6NM E | 090°T / 6.0NM | 海上 Over the sea |
| 6NM SE | 135°T / 6.0NM | 海上 Over the sea |
| 苅田 Kanda | 202°T / 5.5NM | 日産自動車九州工場 Automobile manufacturing plant |
| 石原町 Ishiharamachi | 247°T / 9.2NM | JR石原町駅 Station |
| 間島 Majima | 252°T / 3.1NM | 島 Island |
| 東インター Higashi Inter | 263°T / 6.2NM | 小倉東I.C.(九州自動車道) Interchange |
| 小倉ステーション Kokura Station | 288°T / 8.0NM | JR小倉駅 Station |


CHANGE : BRG/DIST from ARP. Remarks(Kanda).

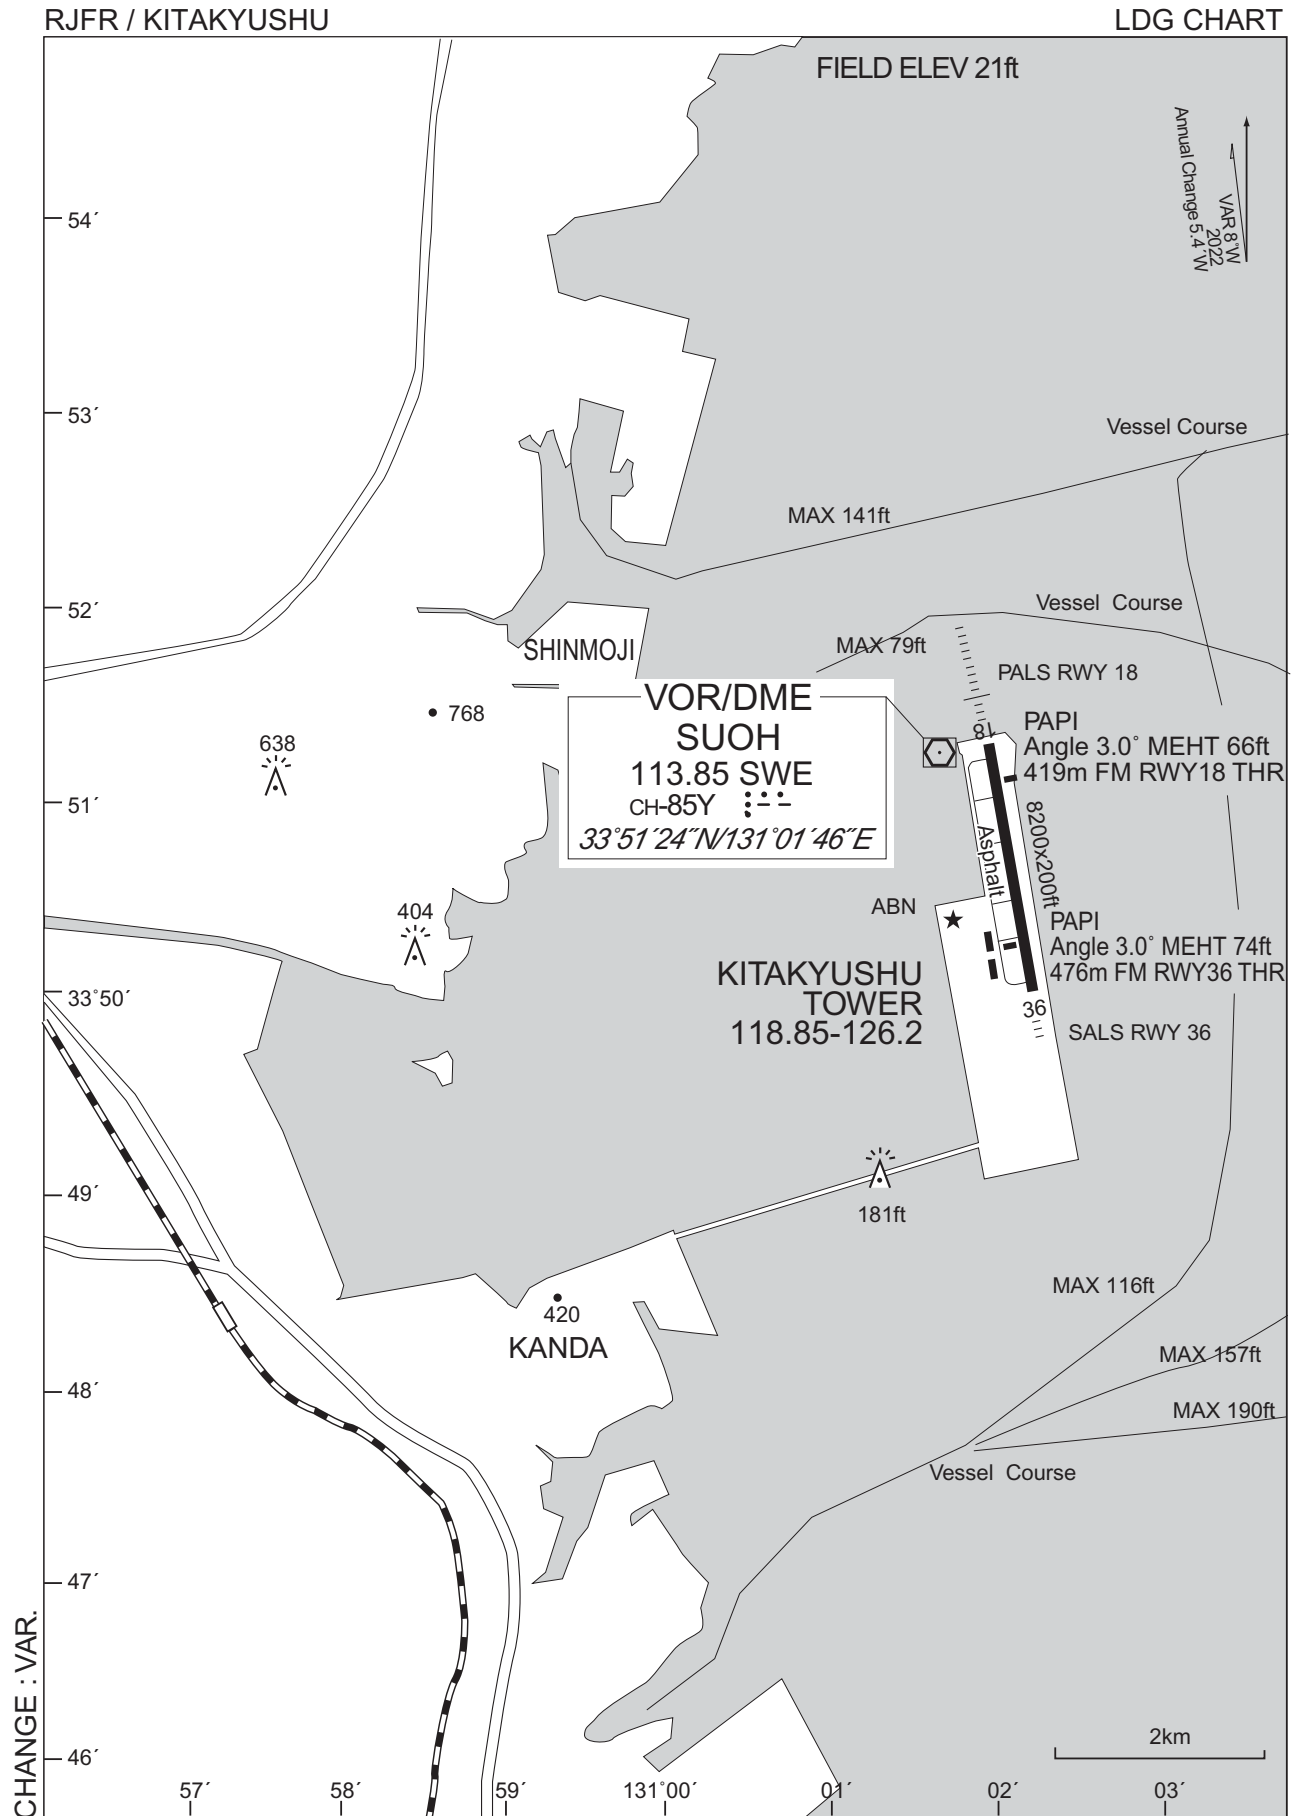

RJFR / KITAKYUSHU

Minimum Vectoring Altitude CHART

VAR 8°W (2022)

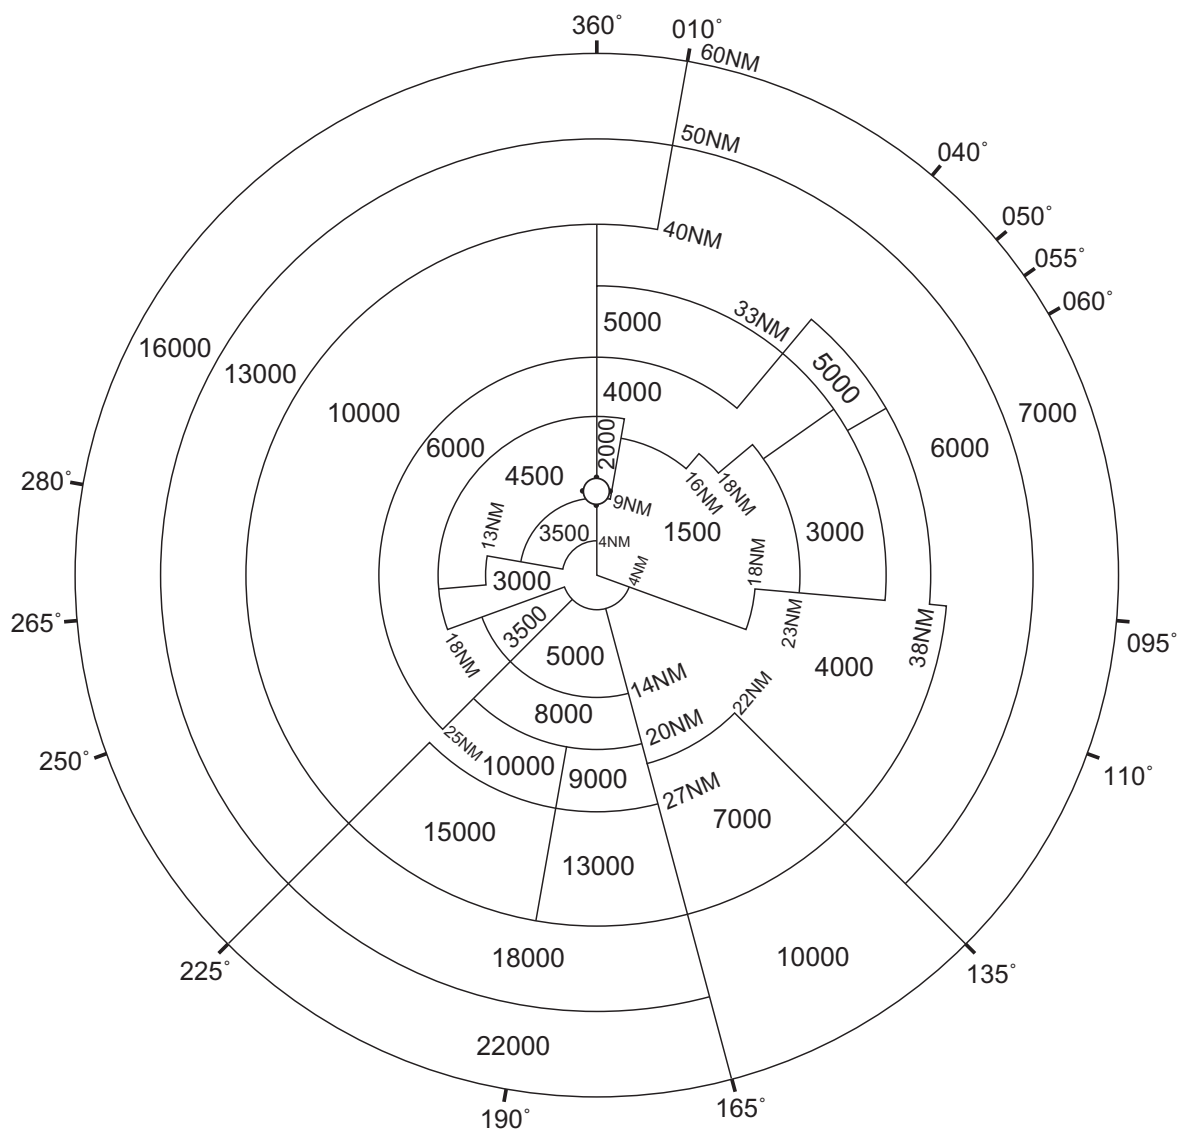

CENTER : 334041N/1310204E (RJFZ RADAR SITE)

CHANGE : VAR.