

STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EAST REVERSAL TWO DEPARTURE

RWY08R : Climb via JAT R083 to 4000FT or above within 13NM

from RWY end(JAT 14DME), then turn right proceed to JAT TACAN.

RWY26L : Not established.

Note:

- 1 Following climb gradient should be maintained until passing 2000FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a 229FT MSL height group of trees at 0.76NM E from ARP.
- b 1934FT MSL height mountain at 10.8NM ESE from ARP.

CHANGE : PROC renamed. NDB (JA) deleted. Radial FM JAT (SHIBUSHI PETROLEUM COMBINAT).



STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

WEST REVERSAL TWO DEPARTURE

RWY08R : Not established.

RWY26L : Climb via JAT R270 to 4000FT or above within 13NM from RWY end
(JAT 13DME), then turn left proceed to JAT TACAN.

Note:

- 1 Following climb gradient should be maintained until passing 600FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 Obstructions exist,

- a 582FT MSL height hill at 1NM SW from ARP.
- b 630FT MSL height antenna tower at 1.1NM SW from ARP.
- c 493FT MSL height antenna tower at 1.8NM W from ARP.
- d 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : SID (RWY26L). Note:2 Obstructions. NDB (JA) deleted.



STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

EKORU ONE DEPARTURE

RWY08R : Climb via JAT R084 to EKORU.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT
or above, turn left proceed to JAT TACAN, via JAT R084 to EKORU.

Note:

- 1 Following climb gradient should be maintained,
 - a until passing 2000FT when take off RWY08R.
 - b until passing 1600FT when take off RWY26L.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a when take off RWY08R,
 - (a)229FT MSL height group of trees at 0.76NM E from ARP.
 - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b when take off RWY26L,
 - (a)582FT MSL height hill at 1NM SW from ARP.
 - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
 - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
 - (d)555FT MSL height hill at 2.2NM W from ARP.
 - (e)814FT MSL height mountain at 3.0NM SW from ARP.
 - (f)837FT MSL height mountain at 3.2NM SW from ARP.
 - (g)1378FT MSL height mountain at 3.5NM S from ARP.
 - (h)1582FT MSL height mountain at 3.9NM S from ARP.

CHANGE : New PROC



STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

MAKRA THREE DEPARTURE

RWY08R : Not established.

RWY26L : Climb RWY HDG until 1NM from RWY end (JAT 1.0DME), climb via
JAT R263 to MAKRA.

Note:


- 1 Following climb gradient should be maintained until passing 600FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 Obstructions exist,

- a 493FT MSL height antenna tower at 1.8NM W from ARP.
b 555FT MSL height hill at 2.2NM W from ARP.

CHANGE : PROC renamed. NDB(JA) abolished.

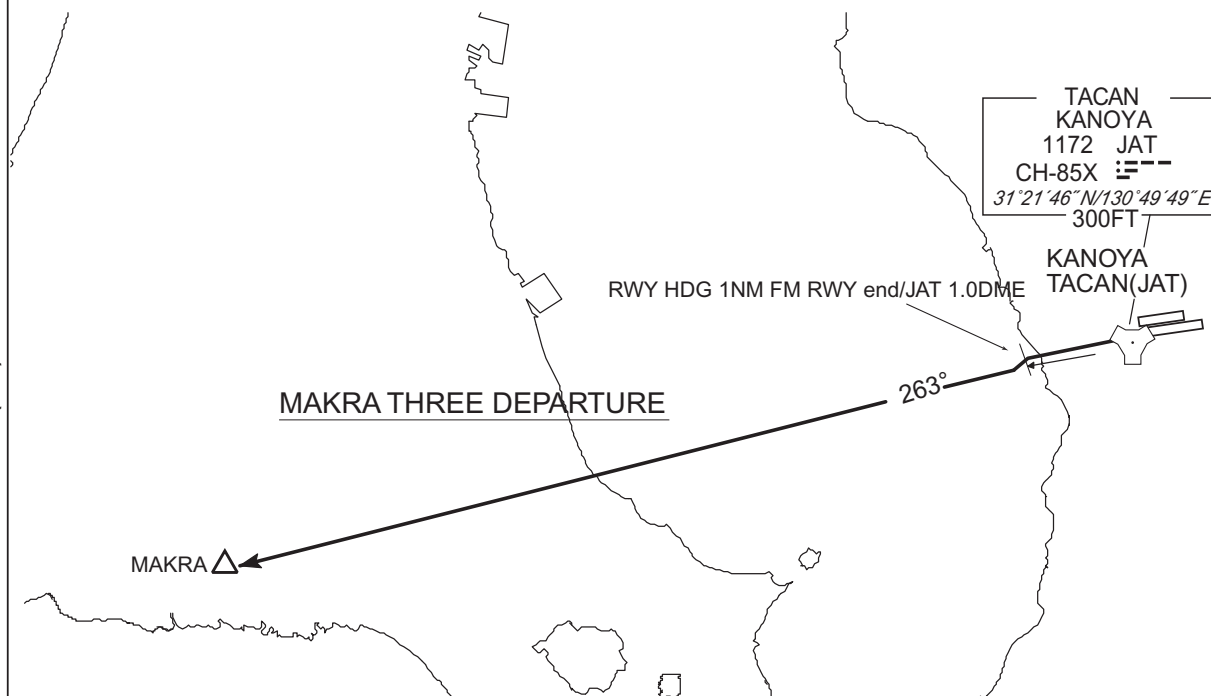

STANDARD DEPARTURE CHART - INSTRUMENT

RJFY / KANOYA

SID

QUEEN FOUR DEPARTURE

RWY08R : Climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

RWY26L : Climb RWY HDG until 3.5NM from RWY end (JAT 3.6DME) to 1000FT or above, turn left proceed to JAT TACAN then, climb via JAT R083 to intercept and proceed via HKC R127 to QUEEN.

Note:

- 1 Following climb gradient should be maintained,
 - a. until passing 2000FT when take off RWY08R.
 - b. until passing 3000FT when take off RWY26L.


Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

- 2 SHIBUSHI PETROLEUM COMBINAT at JAT R094 10DME.

- 3 Obstructions exist,

- a. when take off RWY08R,
 - (a)229FT MSL height group of trees at 0.76NM E from ARP.
 - (b)1934FT MSL height mountain at 10.8NM ESE from ARP.
- b. when take off RWY26L,
 - (a)582FT MSL height hill at 1NM SW from ARP.
 - (b)630FT MSL height antenna tower at 1.1NM SW from ARP.
 - (c)493FT MSL height antenna tower at 1.8NM W from ARP.
 - (d)555FT MSL height hill at 2.2NM W from ARP.
 - (e)814FT MSL height mountain at 3.0NM SW from ARP.
 - (f)837FT MSL height mountain at 3.2NM SW from ARP.
 - (g)1378FT MSL height mountain at 3.5NM S from ARP.
 - (h)1582FT MSL height mountain at 3.9NM S from ARP.
 - (i)2907FT MSL height mountain at 10NM SE from ARP.

CHANGE : PROC renamed. Radial FM HKC.

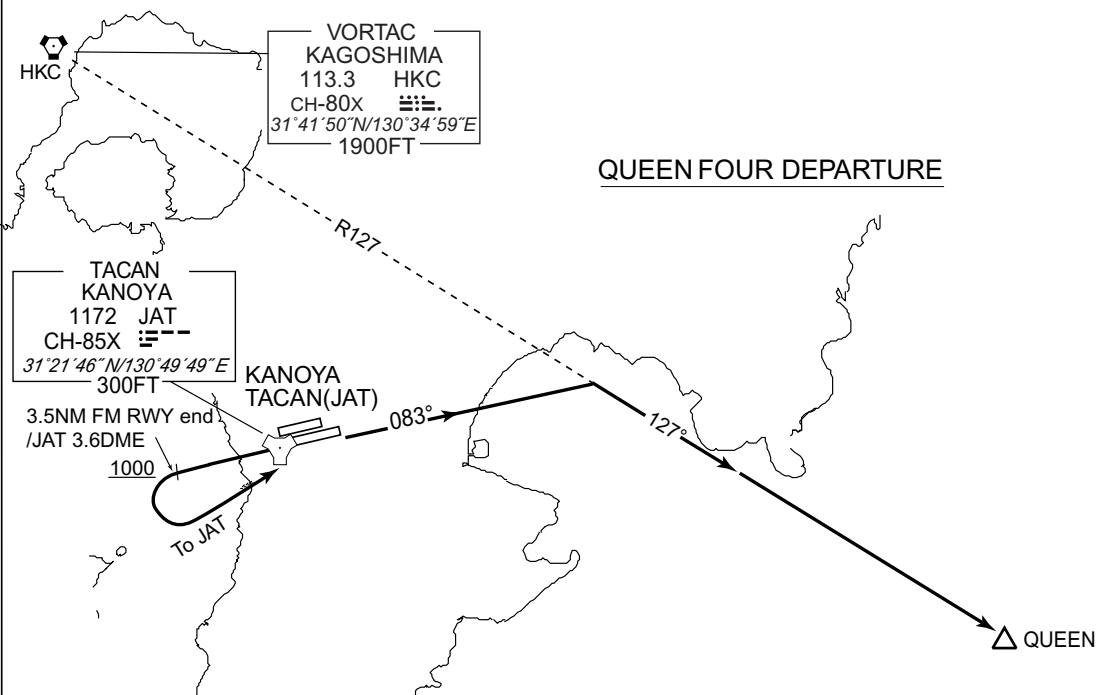

INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL CHART - INSTRUMENT

RJFY / KANOYA

STAR

AIRAH ARRIVAL

From over JAT TACAN, proceed via JAT R125 to AIRAH (JAT R125 16.0DME), maintain last assigned altitude until 2DME from JAT TACAN, cross AIRAH at or above 6000FT or specified altitude.



CHANGE : KANOYA ARRIVAL abolished.

INTENTIONALLY LEFT BLANK

RJFY / KANOYA

ILS Z or LOC Z RWY 26L


MINIMA		THR elev. 187	AD elev. 202			
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	450 (263)	800	680 (493)	1400	940 (738)	1600
B				1500		
C				1600	1380 (1178)	2400
D				1800		3200

23/2/23

INSTRUMENT APPROACH CHART

RJFY / KANOYA

ILS Y or LOC Y RWY 26L

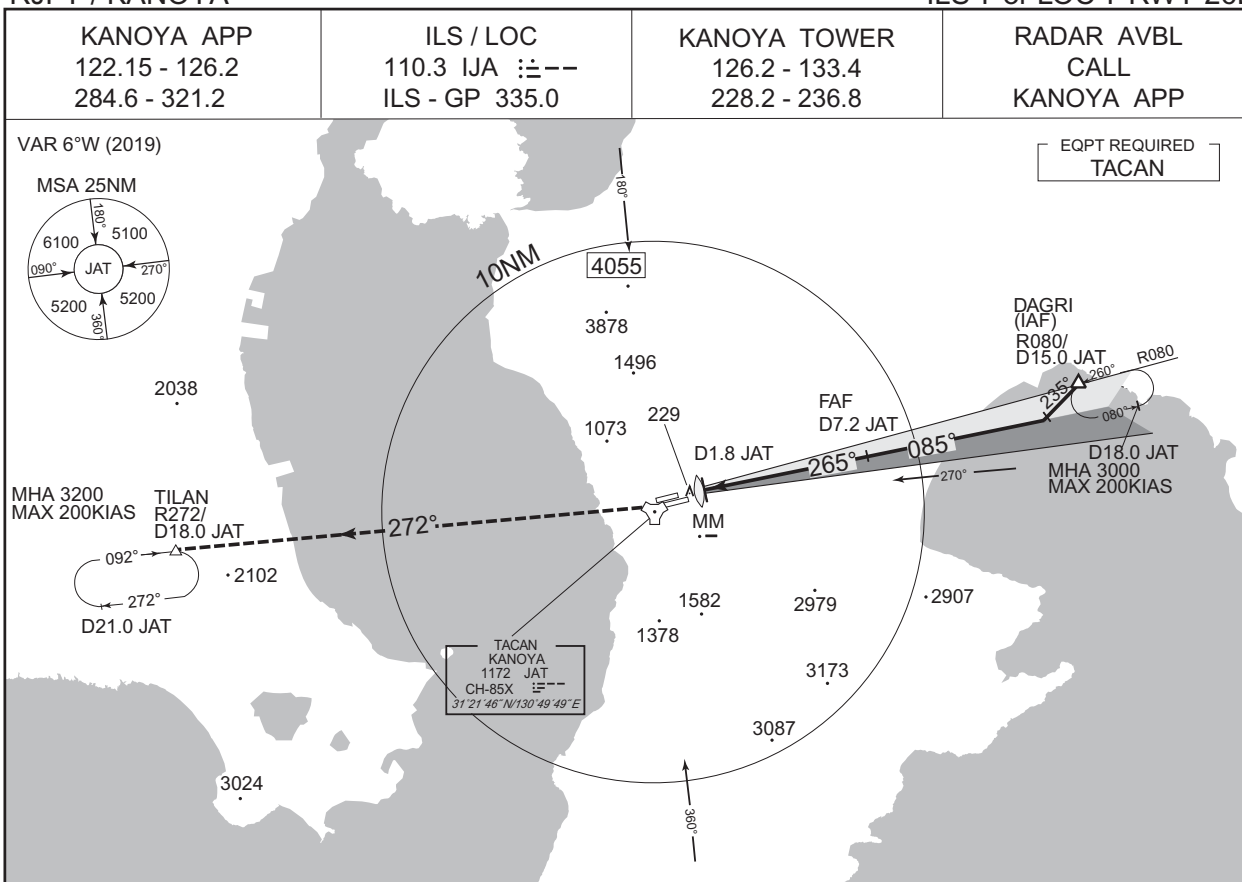

MISSED APPROACH

At DA, climb to 3200FT via JAT R272 to TILAN and hold.
Contact KANOYA APP.



MINIMA

THR elev. 187


AD elev. 202

CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	450 (263)	800	680 (493)	1400	940 (738)	1600
B				1500		
C				1600	1380 (1178)	2400
D				1800		3200


CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

RJFY / KANOYA

ILS X or LOC X RWY 26L



At DA, climb to 3200FT via JAT
R272 to TILAN and hold.
Contact KANOYA APP.

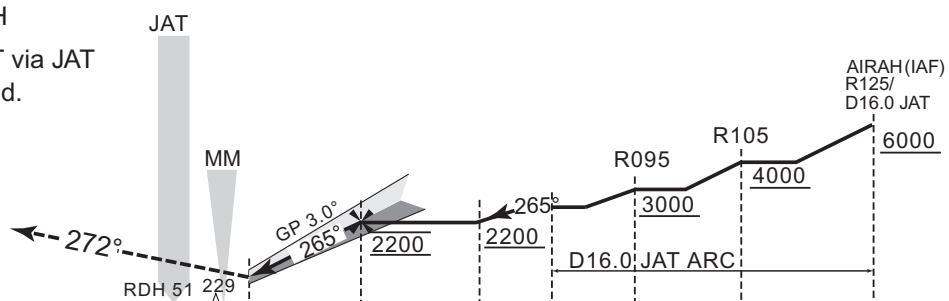

DME to JAT	1.8	7.2	14.0	16.0
NM to THR	0.7	6.1	12.9	14.9

MINIMA		THR elev. 187		AD elev. 202		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	450 (263)	800	680 (493)	1400	940 (738)	1600
B				1500		
C				1600	1380 (1178)	2400
D				1800		3200

INSTRUMENT APPROACH CHART


RJFY / KANOYA

TACAN Z RWY 26L



MISSED APPROACH

At 1.0DME prior to JAT TACAN,
climb to 3200FT via JAT R272
to TILAN and hold.
Contact KANOYA APP.

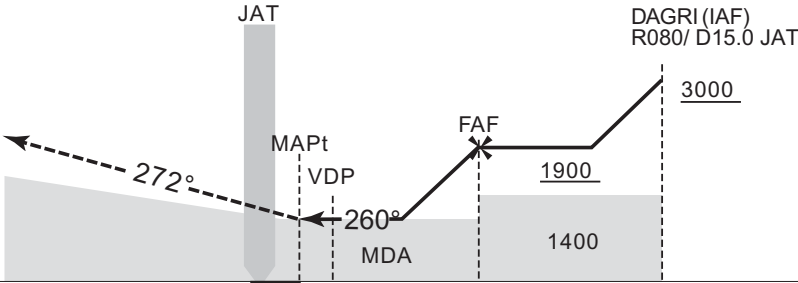

MINIMA		THR elev. 187	AD elev. 202	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	700 (513)	1400	940 (738)	1600
B		1500		
C		1600	1380 (1178)	2400
D		1800		

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

RJFY / KANOYA

TACAN Y RWY 26L

VAR 6°W (2019)

MSA 25NM

6100	5100
090°	270°
5200	5200
360°	

JAT

DAGRI R080/D15.0 JAT

AIRAH (IAF) R125/D16.0 JAT

TILAN R272/D18.0 JAT

MHA 3200 MAX 200KIAS

MHA 6000 MAX 200KIAS

MHA 3000 MAX 200KIAS

MAPt D1.0 JAT

FAF D8.0 JAT

R105

R125

R080

D18.0 JAT

D16.0 JAT ARC

D19.0 JAT

D21.0 JAT

D15.0 JAT

D16.0 JAT

D17.0 JAT

D18.0 JAT

D19.0 JAT

D20.0 JAT

D21.0 JAT

D22.0 JAT

D23.0 JAT

D24.0 JAT

D25.0 JAT

D26.0 JAT

D27.0 JAT

D28.0 JAT

D29.0 JAT

D30.0 JAT

D31.0 JAT

D32.0 JAT

D33.0 JAT

D34.0 JAT

D35.0 JAT

D36.0 JAT

D37.0 JAT

D38.0 JAT

D39.0 JAT

D40.0 JAT

D41.0 JAT

D42.0 JAT

D43.0 JAT

D44.0 JAT

D45.0 JAT

D46.0 JAT

D47.0 JAT

D48.0 JAT

D49.0 JAT

D50.0 JAT

D51.0 JAT

D52.0 JAT

D53.0 JAT

D54.0 JAT

D55.0 JAT

D56.0 JAT

D57.0 JAT

D58.0 JAT

D59.0 JAT

D60.0 JAT

D61.0 JAT

D62.0 JAT

D63.0 JAT

D64.0 JAT

D65.0 JAT

D66.0 JAT

D67.0 JAT

D68.0 JAT

D69.0 JAT

D70.0 JAT

D71.0 JAT

D72.0 JAT

D73.0 JAT

D74.0 JAT

D75.0 JAT

D76.0 JAT

D77.0 JAT

D78.0 JAT

D79.0 JAT

D80.0 JAT

D81.0 JAT

D82.0 JAT

D83.0 JAT

D84.0 JAT

D85.0 JAT

D86.0 JAT

D87.0 JAT

D88.0 JAT

D89.0 JAT

D90.0 JAT

D91.0 JAT

D92.0 JAT

D93.0 JAT

D94.0 JAT

D95.0 JAT

D96.0 JAT

D97.0 JAT

D98.0 JAT

D99.0 JAT

D100.0 JAT

D101.0 JAT

D102.0 JAT

D103.0 JAT

D104.0 JAT

D105.0 JAT

D106.0 JAT

D107.0 JAT

D108.0 JAT

D109.0 JAT

D110.0 JAT

D111.0 JAT

D112.0 JAT

D113.0 JAT

D114.0 JAT

D115.0 JAT

D116.0 JAT

D117.0 JAT

D118.0 JAT

D119.0 JAT

D120.0 JAT

D121.0 JAT

D122.0 JAT

D123.0 JAT

D124.0 JAT

D125.0 JAT

D126.0 JAT

D127.0 JAT

D128.0 JAT

D129.0 JAT

D130.0 JAT

D131.0 JAT

D132.0 JAT

D133.0 JAT

D134.0 JAT

D135.0 JAT

D136.0 JAT

D137.0 JAT

D138.0 JAT

D139.0 JAT

D140.0 JAT

D141.0 JAT

D142.0 JAT

D143.0 JAT

D144.0 JAT

D145.0 JAT

D146.0 JAT

D147.0 JAT

D148.0 JAT

D149.0 JAT

D150.0 JAT

D151.0 JAT

D152.0 JAT

D153.0 JAT

D154.0 JAT

D155.0 JAT

D156.0 JAT

D157.0 JAT

D158.0 JAT

D159.0 JAT

D160.0 JAT

D161.0 JAT

D162.0 JAT

D163.0 JAT

D164.0 JAT

D165.0 JAT

D166.0 JAT

D167.0 JAT

D168.0 JAT

D169.0 JAT

D170.0 JAT

D171.0 JAT

D172.0 JAT

D173.0 JAT

D174.0 JAT

D175.0 JAT

D176.0 JAT

D177.0 JAT

D178.0 JAT

D179.0 JAT

D180.0 JAT

D181.0 JAT

D182.0 JAT

D183.0 JAT

D184.0 JAT

D185.0 JAT

D186.0 JAT

D187.0 JAT

D188.0 JAT

D189.0 JAT

D190.0 JAT

D191.0 JAT

D192.0 JAT

D193.0 JAT

D194.0 JAT

D195.0 JAT

D196.0 JAT

D197.0 JAT

D198.0 JAT

D199.0 JAT

D200.0 JAT

D201.0 JAT

D202.0 JAT

D203.0 JAT

D204.0 JAT

D205.0 JAT

D206.0 JAT

D207.0 JAT

D208.0 JAT

D209.0 JAT

D210.0 JAT

D211.0 JAT

D212.0 JAT

D213.0 JAT

D214.0 JAT

D215.0 JAT

D216.0 JAT

D217.0 JAT

D218.0 JAT

D219.0 JAT

D220.0 JAT

D221.0 JAT

D222.0 JAT


D223.0 JAT

D224.0 JAT

D225.0 JAT

D226.0 JAT</

At 1.0DME prior to JAT TACAN,
climb to 3200FT via JAT R272
to TILAN and hold.
Contact KANOYA APP,

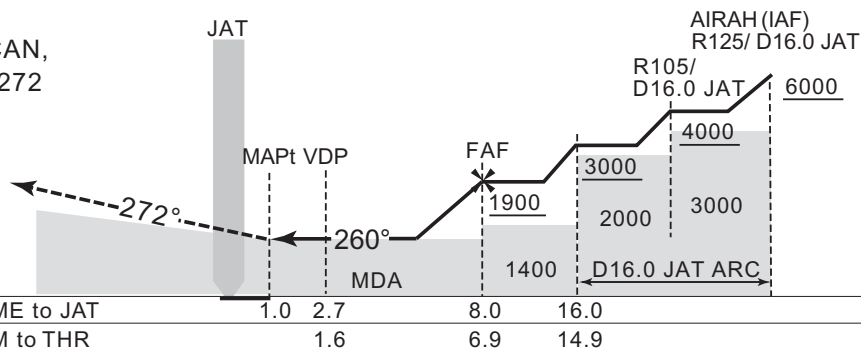

MINIMA		THR elev. 187	AD elev. 202	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	700 (513)	1400	940 (738)	1600
B		1500		
C		1600	1380 (1178)	2400
D		1800		3200

CHANGE : MDA(H) for circling. OBST HGT(1207→1073).

RJFY / KANOYA

KANOYA APP	KANOYA TACAN	KANOYA TOWER	RADAR AVBL
122.15 - 126.2	1172 JAT	126.2 - 133.4	CALL
284.6 - 321.2	CH-85X $\equiv --$	228.2 - 236.8	KANOYA APP
	$31^{\circ}21'46"N/130^{\circ}49'49"E$		

