

## RJCN / NAKASHIBETSU

## AD CHART



STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

SID

MASHU FIVE DEPARTURE

RWY08: Climb RWY HDG to 700FT, turn right HDG305° to intercept and proceed...

RWY26: Climb...

... via NSE R260 to MASHU.

Cross MASHU at or above 5000FT.

CHANGE : PROC renamed.Radial FM NSE .



STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

SID

NAKASHIBETSU REVERSAL FOUR DEPARTURE

RWY08: Climb via NSE R081 to NSE 7.0DME, turn right,...

RWY26: Climb via NSE R259 to NSE 7.0DME, turn left,...

... direct to NSE VOR/DME.

NAKASHIBETSU REVERSAL FOUR DEPARTURE



## STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

RNAV SID

## TSURUI ONE DEPARTURE

Basic RNP1

Note GNSS required.

TSURUI ONE DEPARTURE

RWY08 : Climb on HDG080° at or above 700FT, turn right direct to CN743, to CN744, to KSE at or above 10000FT.

RWY26 : Climb on HDG260° at or above 700FT, turn left direct to CN743, to CN744, to KSE at or above 10000FT.

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	080 (071.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	CN743	—	—	-8.9	—	R	—	—	—	Basic RNP1
003	TF	CN744	—	260 (250.8)	-8.9	8.8	—	—	—	—	Basic RNP1
004	TF	KSE	—	224 (214.8)	-8.9	30.0	—	+10000	—	—	Basic RNP1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	CN743	—	—	-8.9	—	L	—	—	—	Basic RNP1
003	TF	CN744	—	260 (250.8)	-8.9	8.8	—	—	—	—	Basic RNP1
004	TF	KSE	—	224 (214.8)	-8.9	30.0	—	+10000	—	—	Basic RNP1

## STANDARD DEPARTURE CHART-INSTRUMENT

RJCN / NAKASHIBETSU

RNAV SID

## KIRITAPPU ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W (2016)

VOR/DME  
NAKASHIBETSU  
111.45 NSE  
CH-51Y  
43°34'39"N/144°57'02"E  
300FT

VOR/DME  
KUSHIRO  
112.5 KSE  
CH-72X  
43°02'02"N/144°12'15"E  
300FT

KUSHIRO(KSE)  
430201.7N  
1441214.8E  
10000



## KIRITAPPU ONE DEPARTURE

BEKKA  
432343.1N  
1451158.6E

16.6  
188°

CN742  
430706.8N  
1451223.1E

44.3  
273°

## KIRITAPPU ONE DEPARTURE

RWY08 : Climb on HDG080° at or above 700FT, turn right direct to BEKKA, to CN742, to KSE at or above 10000FT.

RWY26 : Climb on HDG260° at or above 700FT, turn left direct to BEKKA, to CN742, to KSE at or above 10000FT.

## RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	080 (071.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	BEKKA	—	—	-8.9	—	R	—	—	—	Basic RNP1
003	TF	CN742	—	188 (179.0)	-8.9	16.6	—	—	—	—	Basic RNP1
004	TF	KSE	—	273 (263.7)	-8.9	44.3	—	+10000	—	—	Basic RNP1

## RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	Basic RNP1
002	DF	BEKKA	—	—	-8.9	—	L	—	—	—	Basic RNP1
003	TF	CN742	—	188 (179.0)	-8.9	16.6	—	—	—	—	Basic RNP1
004	TF	KSE	—	273 (263.7)	-8.9	44.3	—	+10000	—	—	Basic RNP1


CHANGE: Marginal note (Title)

## RJCN / NAKASHIBETSU

RNAV STAR

## Basic RNP1

VAR 9°W (2016)

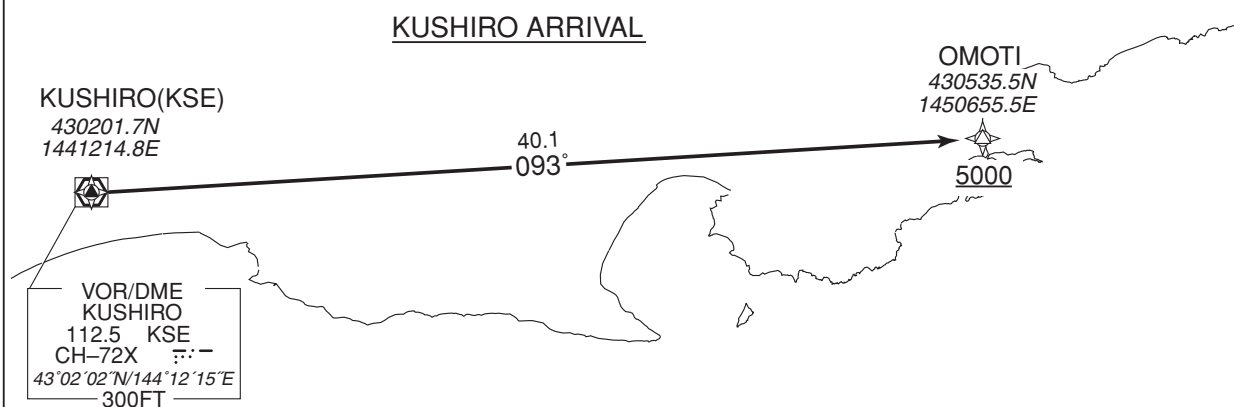


From KSE, to OMOTI at or above 5000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KSE	—	—	-8.9	—	—	—	—	—	Basic RNP1
002	TF	OMOTI	—	093 (084.6)	-8.9	40.1	—	+5000	—	—	Basic RNP1

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU


ILS Z or LOC Z RWY08

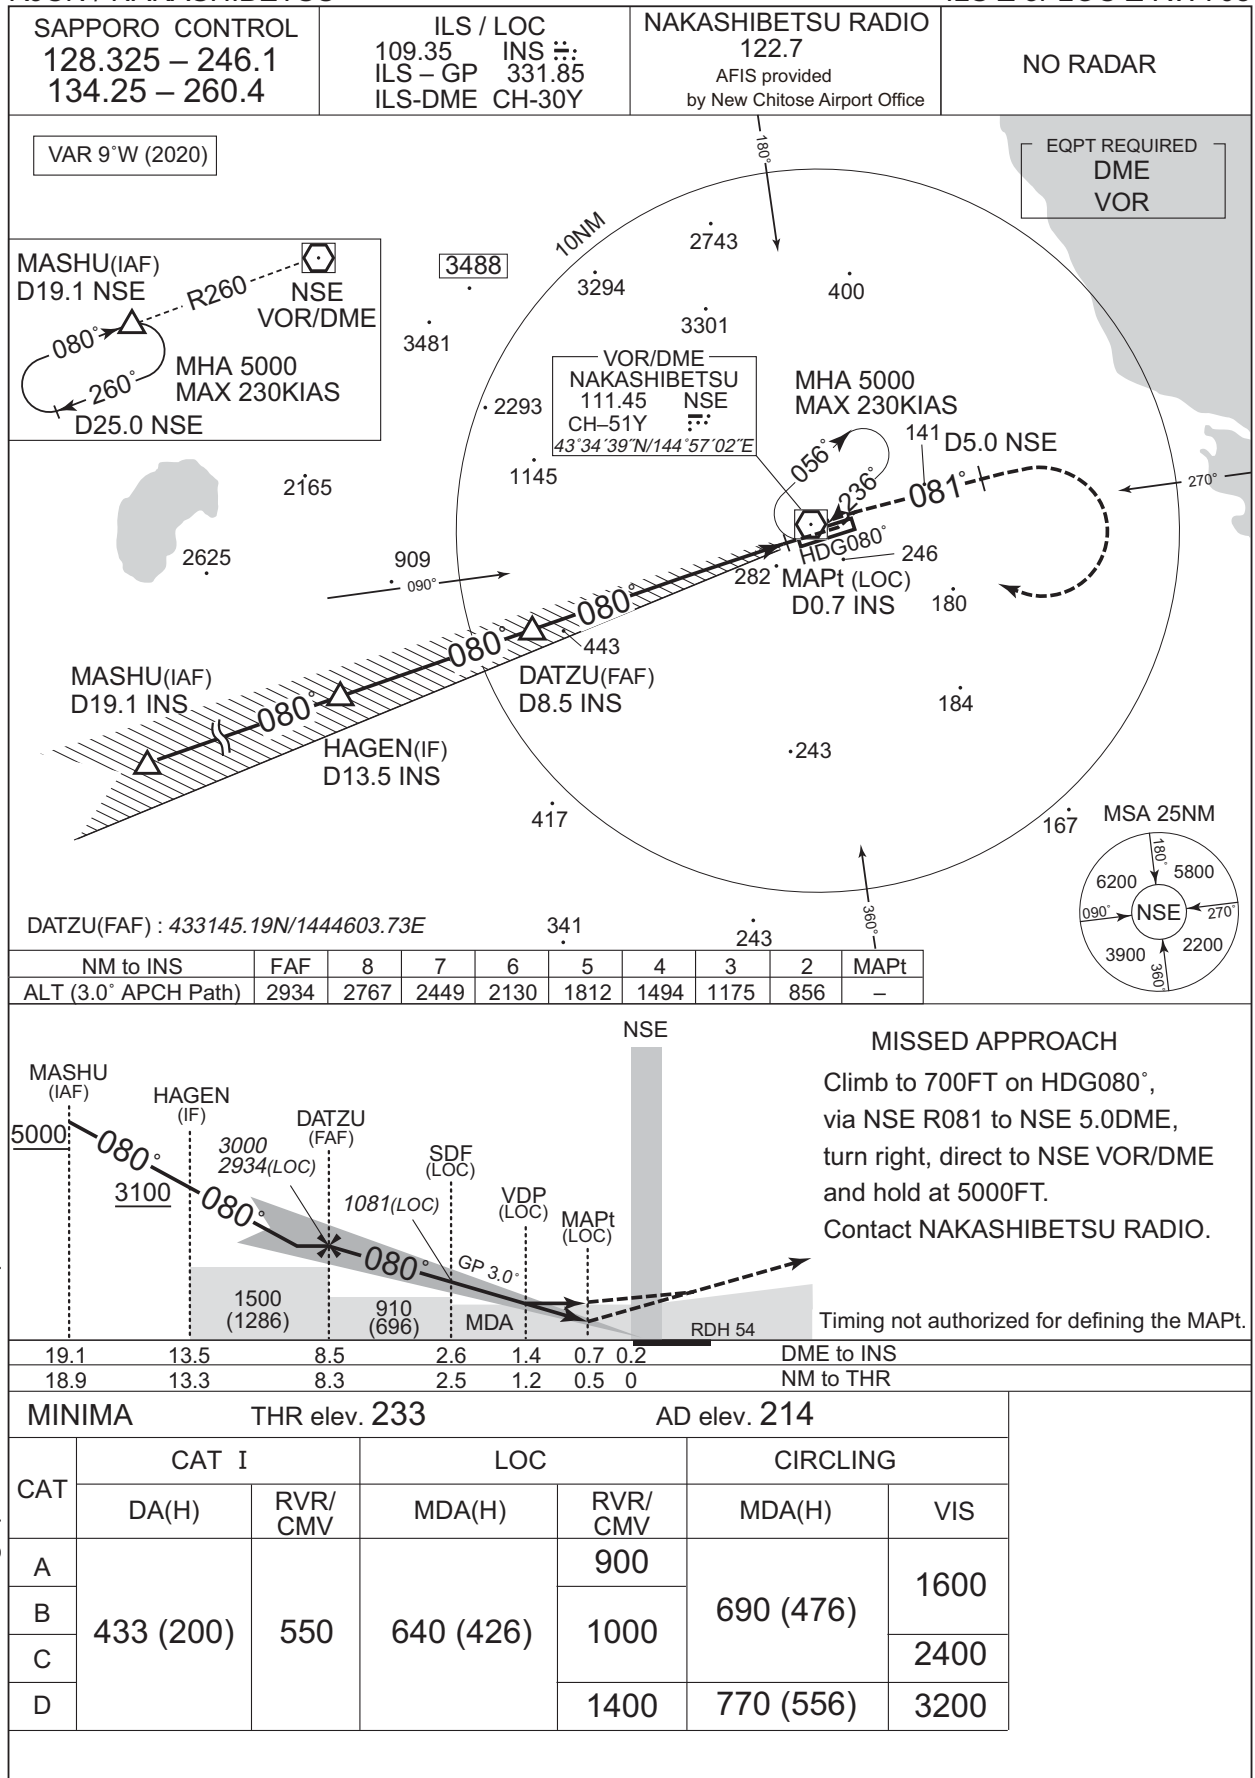


## INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

ILS Y or LOC Y RWY08

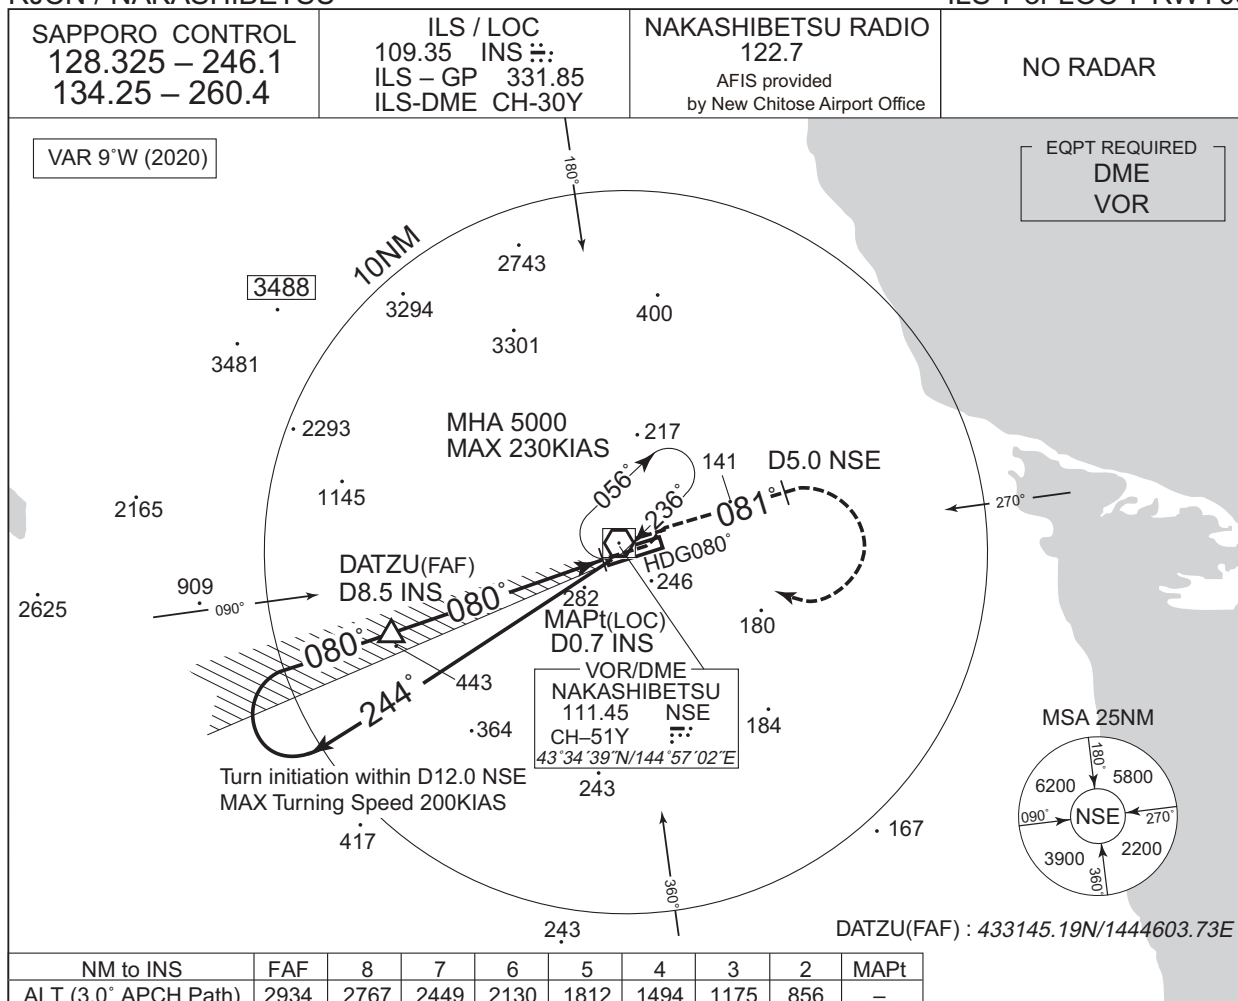

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

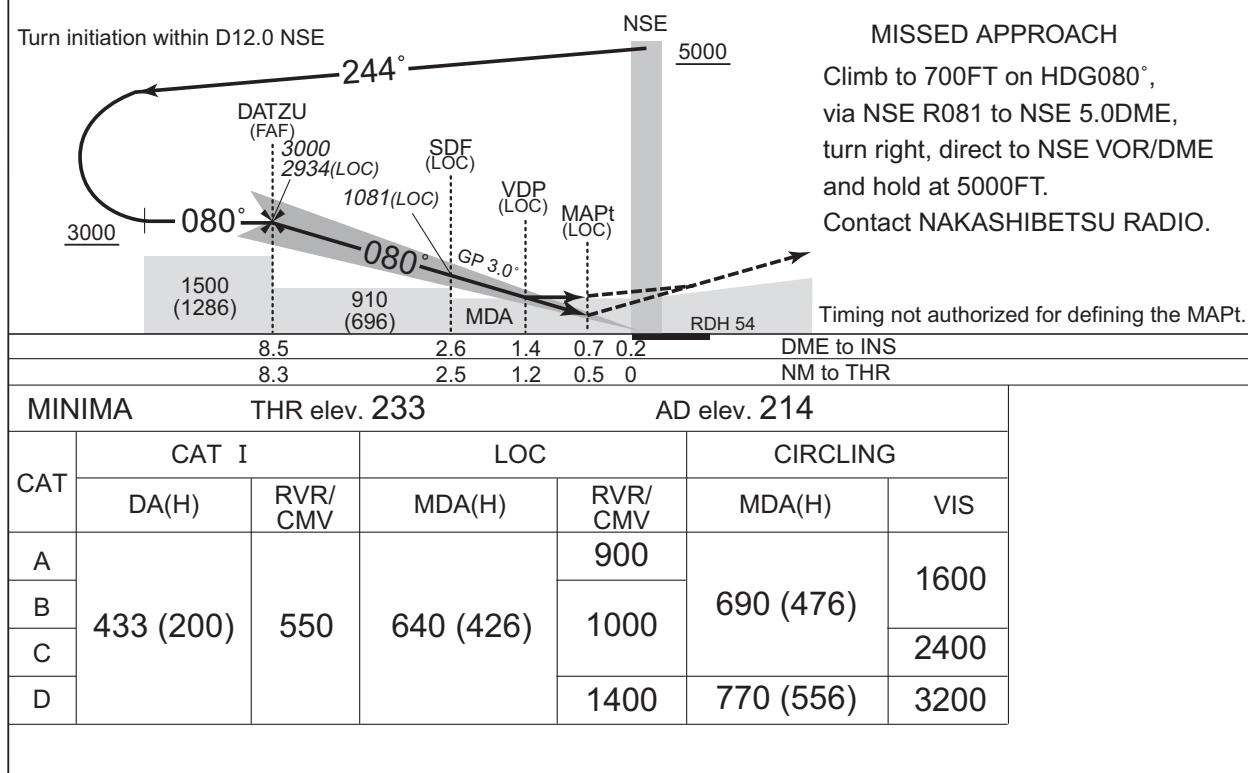




INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

VOR RWY08

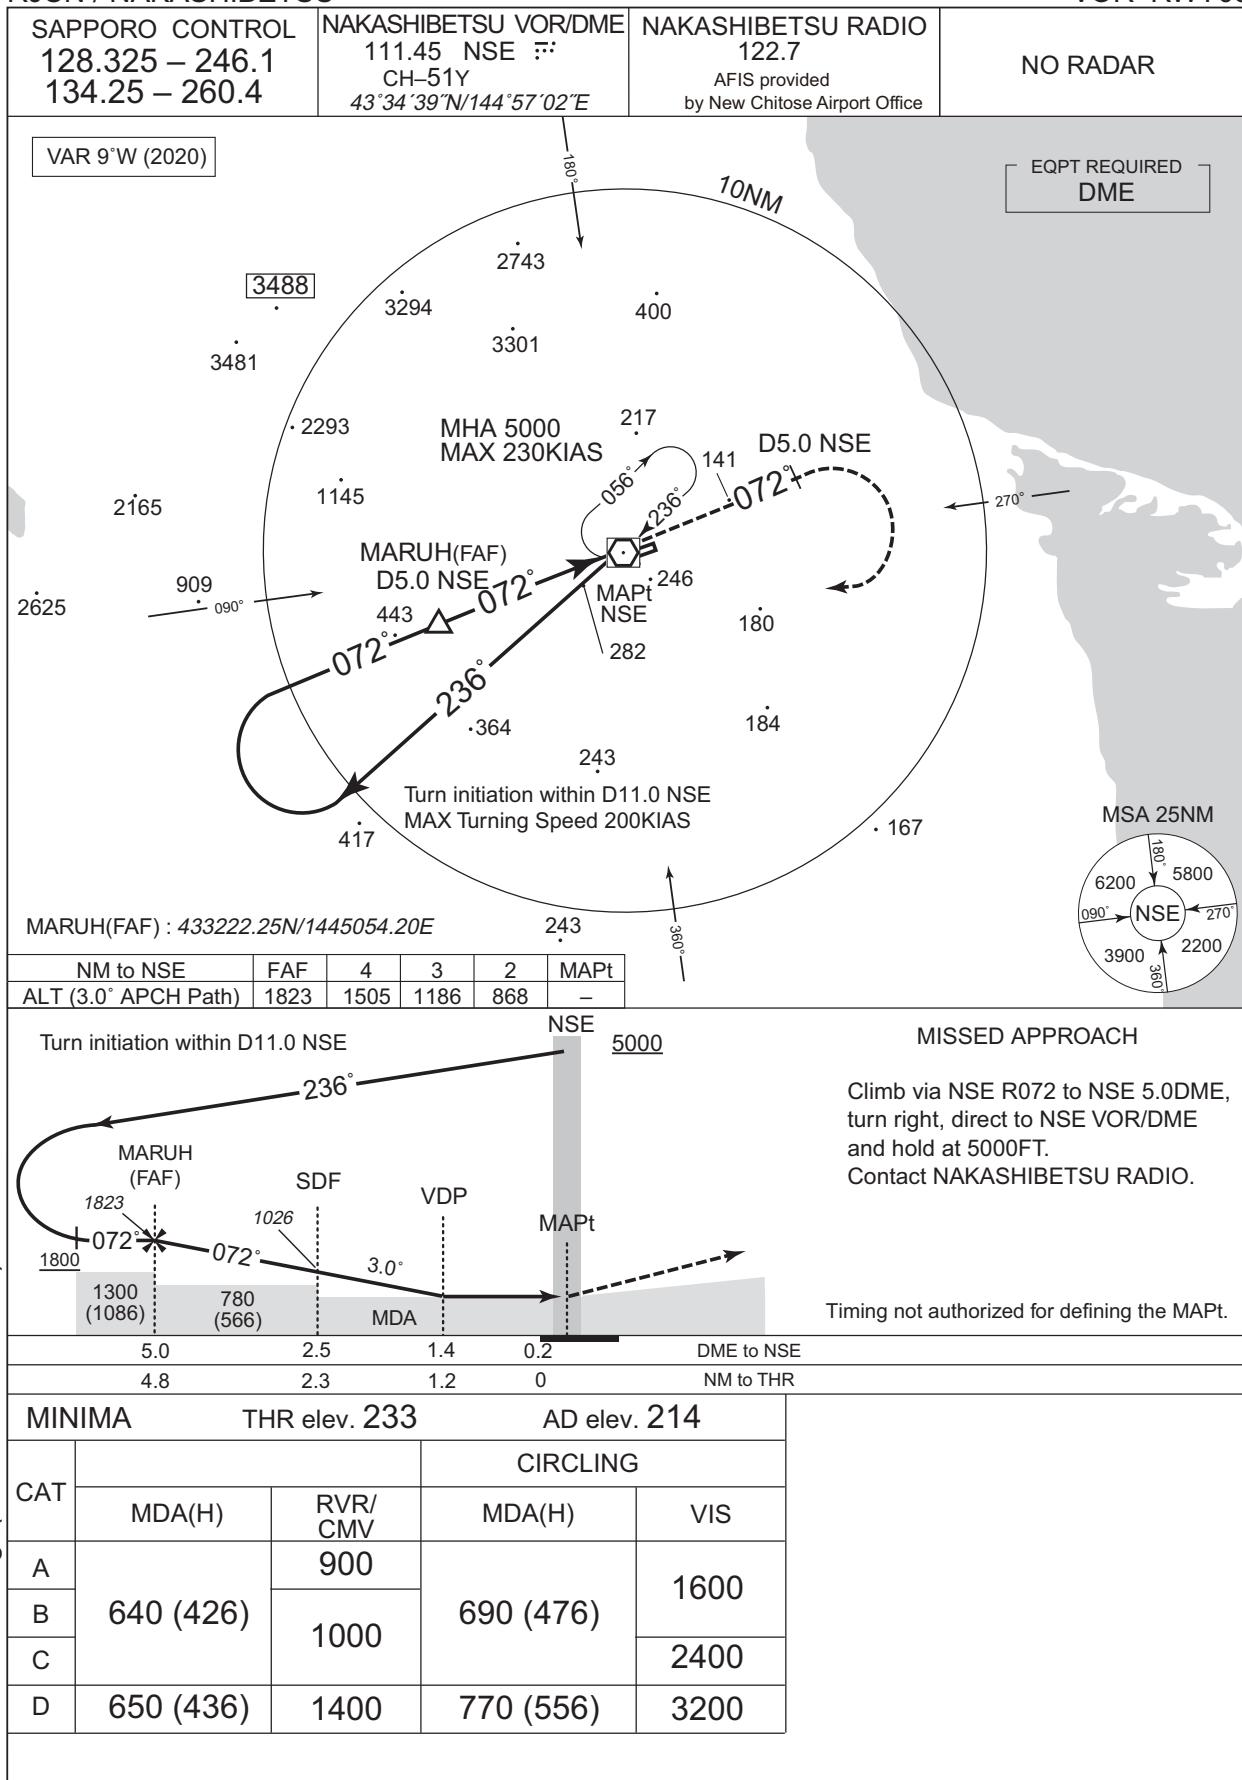

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

## RJCN / NAKASHIBETSU

VAR 9°W (2020)

EQPT REQUIRED  
DME

NAKASHIBETSU VOR/DME  
111.45 NSE  
CH-51Y  
43°34'39\"/>

NAKASHIBETSU RADIO  
122.7  
AFIS provided  
by New Chitose Airport Office

NO RADAR

MOJAO (FAF)  
D5.9 NSE

MAPt  
D0.9 NSE

MHA 5000  
MAX 230 KIAS

Turn initiation  
within D11.0 NSE  
MAX Turning Speed 200 KIAS

MSA 25NM


MOJAO (FAF) : 433608.06N/1450455.60E

NM to NSE	MAPt	2	3	4	5	FAF
ALT (3.0° APCH Path)	—	602	920	1239	1557	1853

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.


Climb via NSE R264 to NSE 5.0DME,  
turn left, direct to NSE VOR/DME and  
hold at 5000FT.  
Contact NAKASHIBETSU RADIO.

Timing not authorized for defining the MAPt.

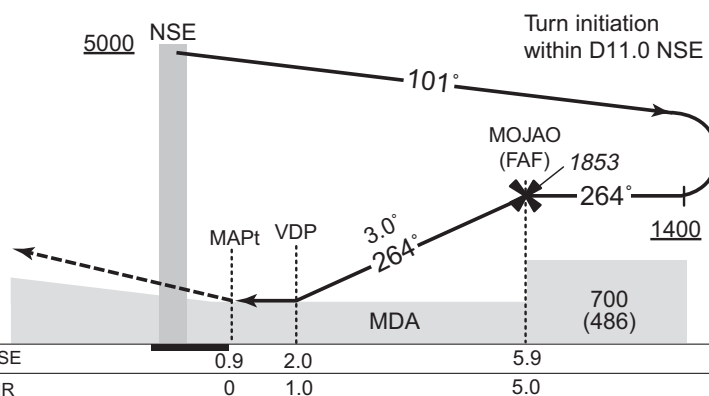

MINIMA		THR elev. 212	AD elev. 214	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	580 (366)	1200	690 (476)	1600
B		1300		
C		1400		2400
D		1600	770 (556)	3200

INSTRUMENT APPROACH CHART

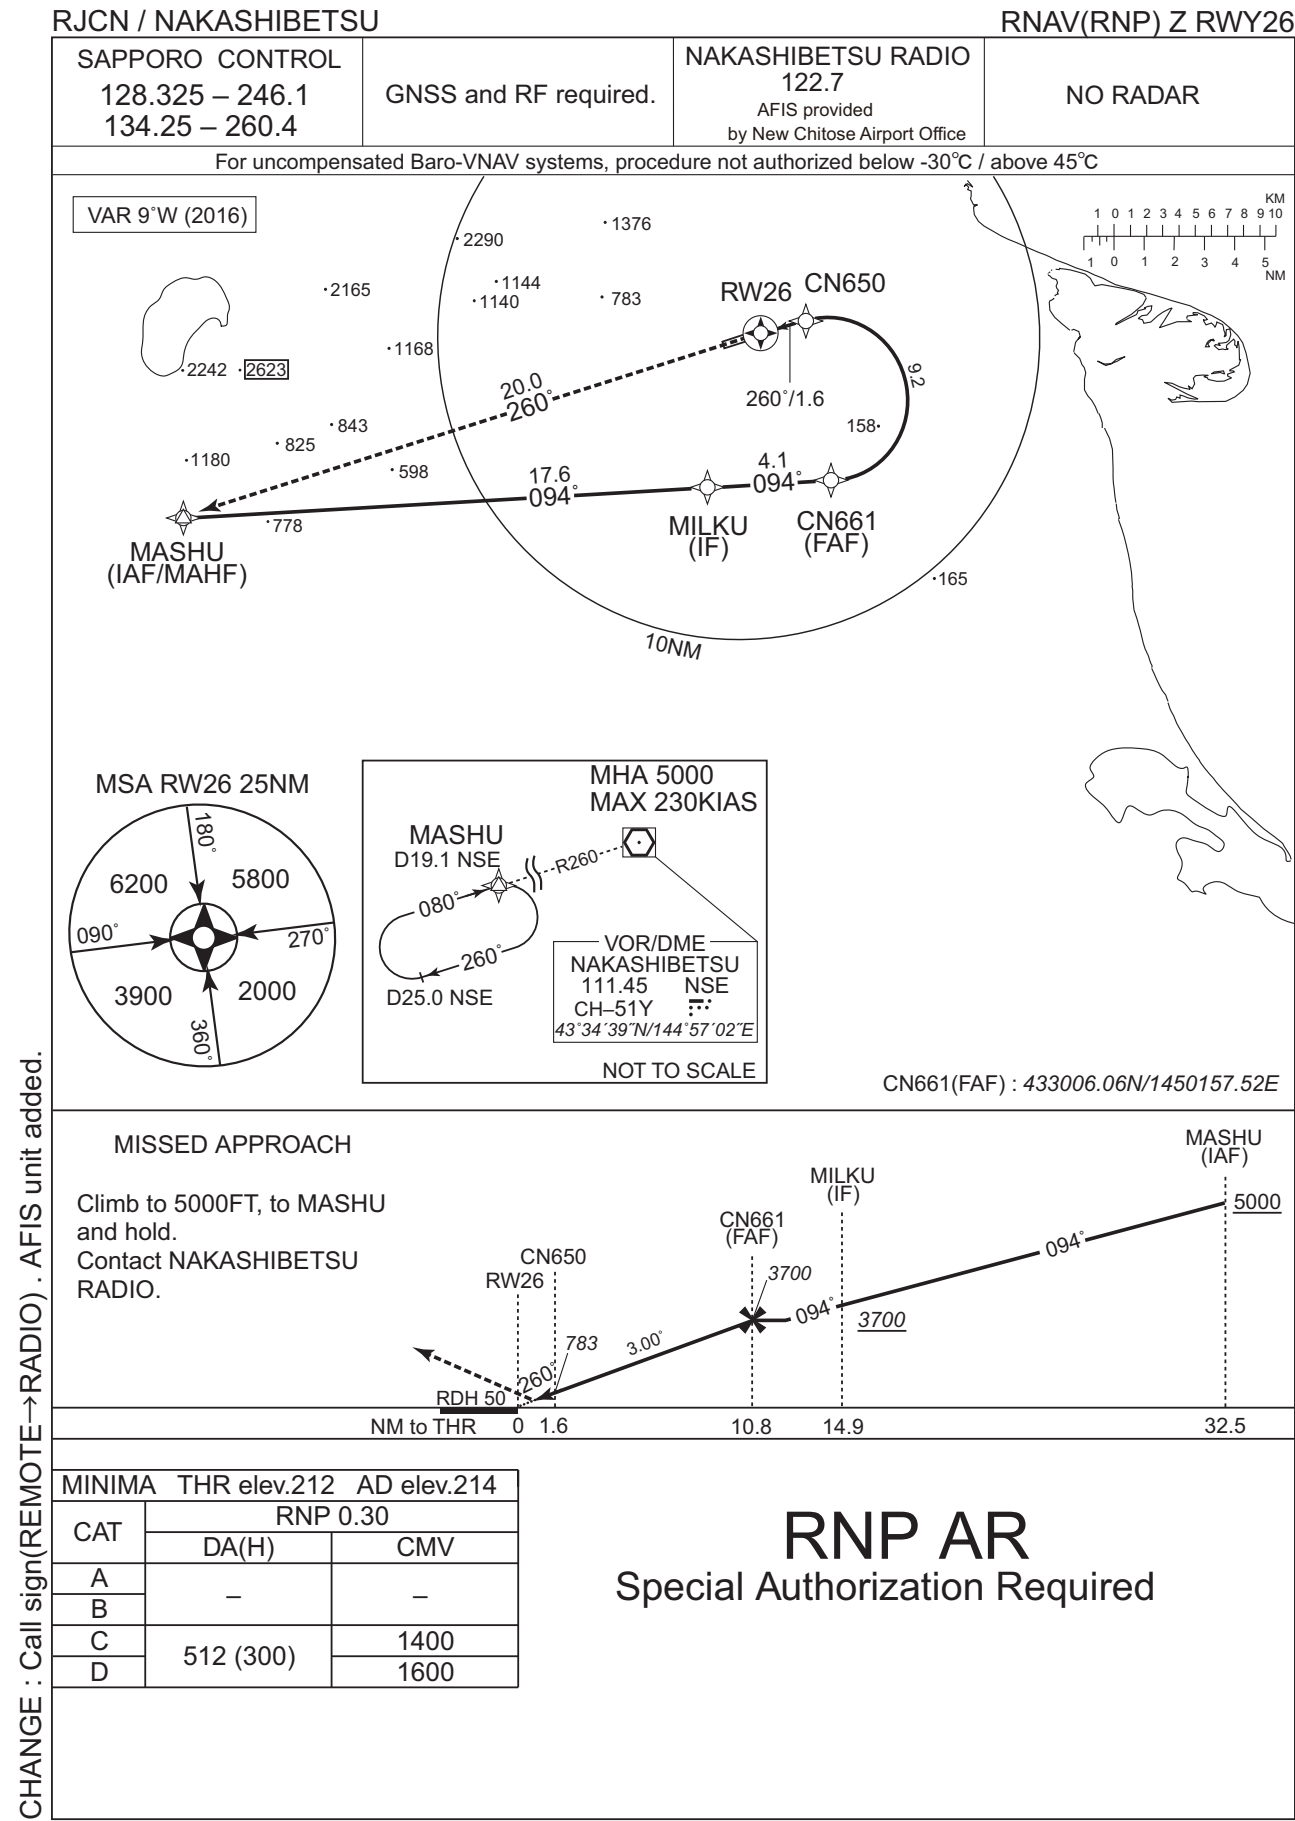

## INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNAV(RNP) Z RWY26


RNAV(RNP) Z RWY26Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MASHU	—	—	-8.9	—	—	+5000	—	—	—
002	TF	MILKU	—	094 (084.9)	-8.9	17.6	—	+3700	—	—	1.0
003	TF	CN661	—	094 (085.2)	-8.9	4.1	—	3700	—	—	1.0
004	RF Center: CNRF2 r=2.70NM	CN650	—	—	-8.9	9.2	L	783	—	-3.00	0.3
005	TF	RW26	Y	260 (251.0)	-8.9	1.6	—	262	—	-3.00/50	0.3
006	TF	MASHU	—	260 (251.0)	-8.9	20.0	—	5000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MASHU	432815.18N/1443214.49E	CNRF2	433247.93N/1450139.17E
MILKU	432945.72N/1445620.67E		
CN661	433006.06N/1450157.52E		
CN650	433521.30N/1450025.71E		
RW26	433449.27N/1445817.40E		

INSTRUMENT APPROACH CHART

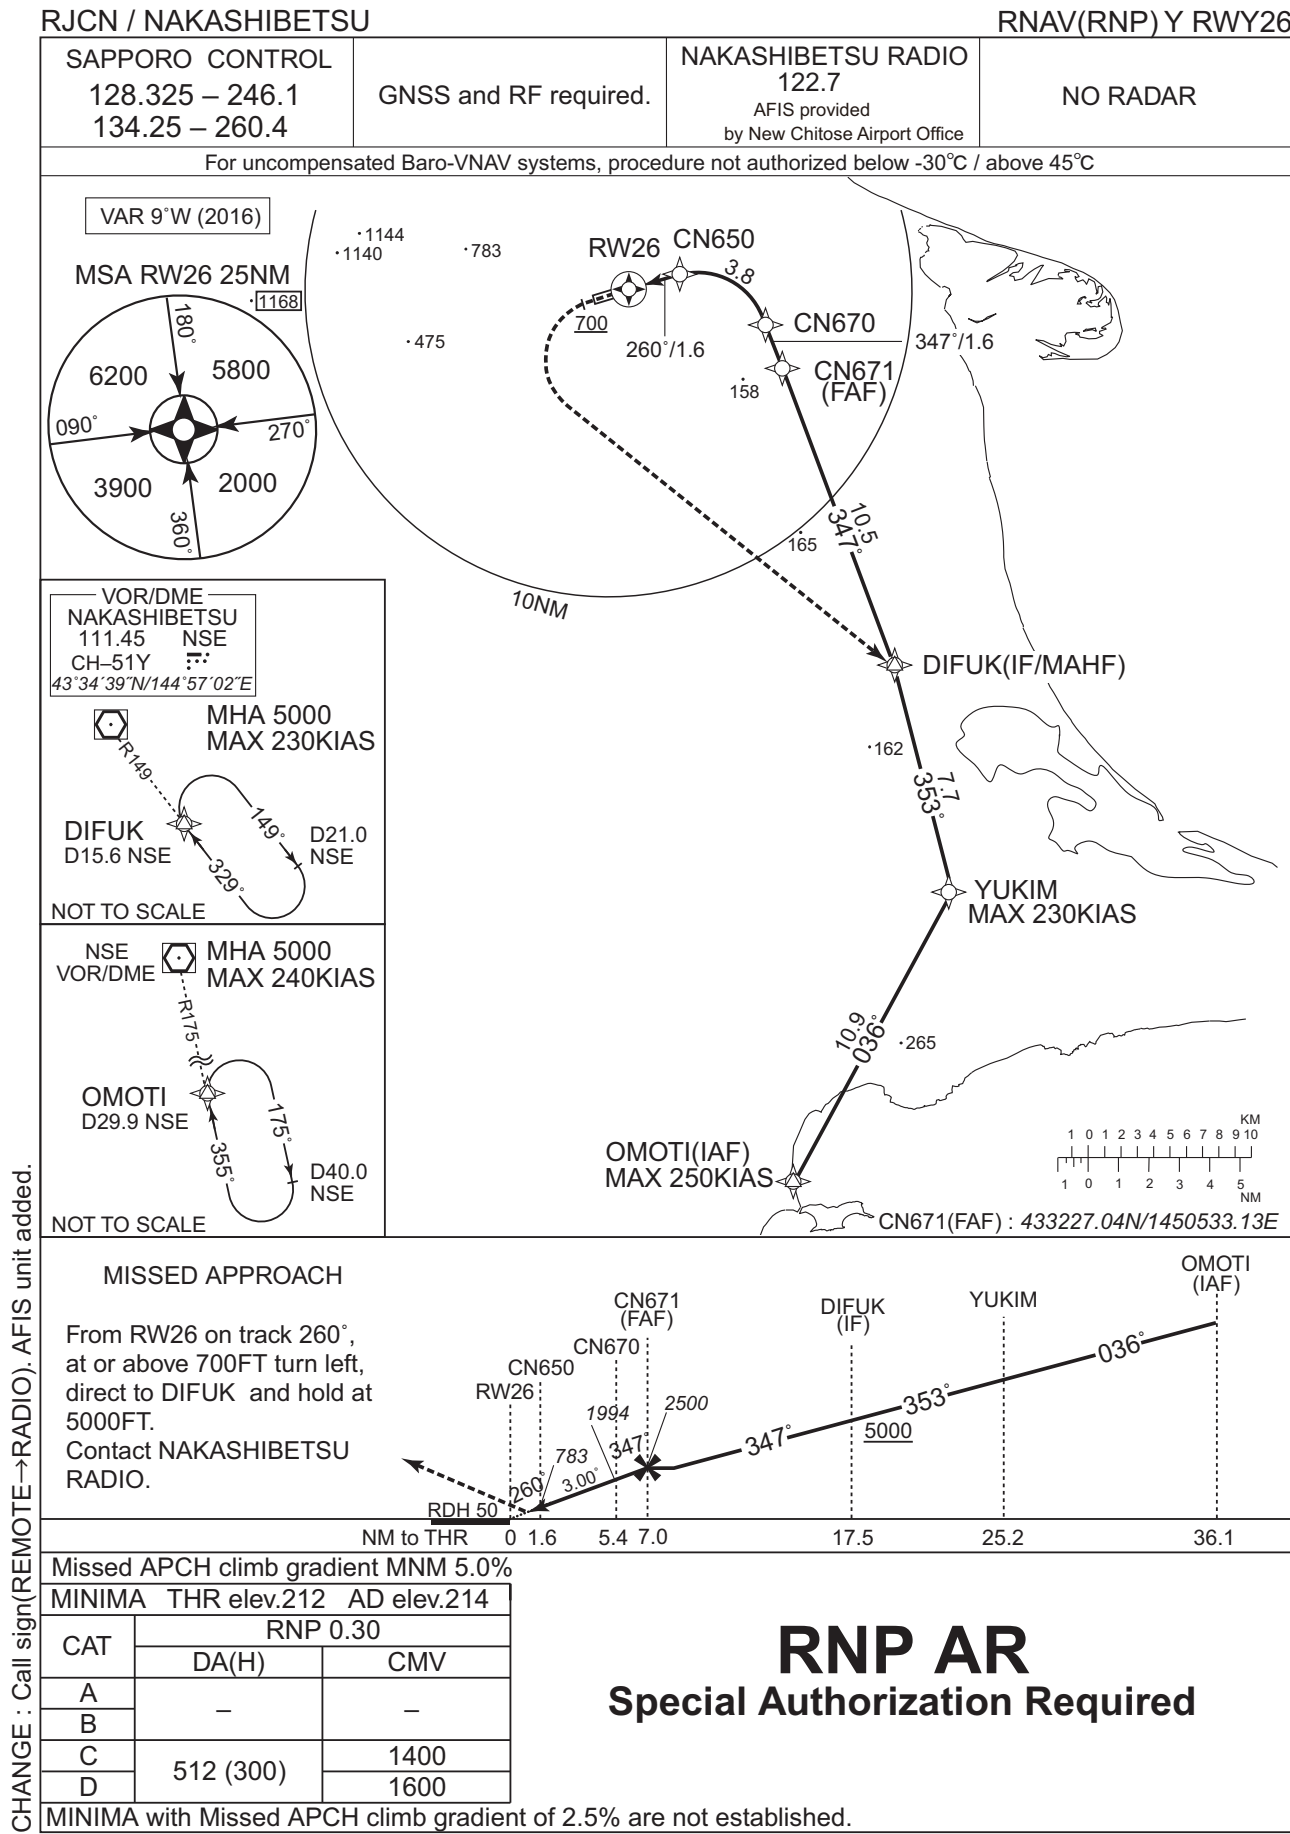

## INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNAV(RNP) Y RWY26

RNAV(RNP) Y RWY26Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	OMOTI	—	—	-8.9	—	—	+5000	-250	—	—
002	TF	YUKIM	—	036 (027.2)	-8.9	10.9	—	+5000	-230	—	1.0
003	TF	DIFUK	—	353 (344.3)	-8.9	7.7	—	+5000	—	—	1.0
004	TF	CN671	—	347 (338.4)	-8.9	10.5	—	2500	—	—	1.0
005	TF	CN670	—	347 (338.3)	-8.9	1.6	—	1994	—	-3.00	0.3
006	RF Center: CNRF1 r=2.50NM	CN650	—	—	-8.9	3.8	L	783	—	-3.00	0.3
007	TF	RW26	Y	260 (251.0)	-8.9	1.6	—	262	—	-3.00/50	0.3
008	FA	—	—	260 (251.0)	-8.9	—	—	+700	—	—	1.0
009	DF	DIFUK	—	—	-8.9	—	L	5000	—	—	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
OMOTI	430535.54N/1450655.47E	CNRF1	433259.00N/1450132.84E
YUKIM	431516.17N/1451345.84E		
DIFUK	432242.79N/1451052.79E		
CN671	433227.04N/1450533.13E		
CN670	433354.84N/1450444.93E		
CN650	433521.30N/1450025.71E		
RW26	433449.27N/1445817.40E		

RJCN / NAKASHIBETSU

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
標津 Shibetsu	055°T / 9.1NM	標津港 Harbor
川北 Kawakita	030°T / 5.6NM	市街地 Town
尾岱沼 Odaitou	093°T / 11.5NM	尾岱沼港 Harbor
計根別 Kenebetsu	231°T / 8.5NM	市街地 Town
中春別 Nakashunbetsu	145°T / 7.5NM	市街地 Town
虹別 Nijibetsu	242°T / 13.9NM	市街地 Town
別海 Bekkai	147°T / 13.1NM	市街地 Town

CHANGE : Call sign(REMOTE→RADIO).





RJCN / NAKASHIBETSU

Minimum Vectoring Altitude CHART

