

AD 2 AERODROMES

RJFM AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJFM - MIYAZAKI

RJFM AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	315238N/1312655E 090°/1.25km from RWY 09 THR
2	Direction and distance from (city)	3.2km SSE from MIYAZAKI CITY
3	Elevation/ Reference temperature	19ft / 31°C(2002-2006)
4	Geoid undulation at AD ELEV PSN	92.114FT
5	MAG VAR/ Annual change	7° W(2020) / 5°W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Miyazaki Airport Office(CAB) Akae, Miyazaki-shi, Miyazaki Pref, 880-0912 JAPAN TEL: 0985-51-3223 FAX: 0985-55-1239 AFS: RJFMYFYX
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Nil

RJFM AD 2.3 OPERATIONAL HOURS

1	AD Administration	2230 - 1230
2	Customs and immigration	Customs: 2330-0815 Immigration: INTL SKED FLT hours only
3	Health and sanitation	Quarantine(human): 2330-0815 Quarantine(animal, plant): INTL SKED FLT hours only
4	AIS Briefing Office	2230 - 1230
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (FUKUOKA)
7	ATS	2230 - 1230
8	Fuelling	2130 - 1200
9	Handling	2130 - 1230
10	Security	2200 - 1130
11	De-icing	Nil
12	Remarks	Nil

RJFM AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Except Freighter
2	Fuel/ oil types	Fuel grades: JET A-1, AVGAS 100 Oil grades: Piston:W80, W100 Turbo: MJO2
3	Fuelling facilities/ capacity	Fuel tank 500kl x 4(JET A-1) 100kl x 1(Octane) Tanker car x 10
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJFM AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotels in the city
2	Restaurants	At Airport
3	Transportation	Train, Buses and Taxi
4	Medical facilities	Hospital is the south side of airport
5	Bank and Post Office	Only ATM at airport
6	Tourist Office	Nil
7	Remarks	Nil

RJFM AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 9
2	Rescue equipment	Chemical fire fighting truck x 3 Water-supply truck Lighting power supply truck Emergency medical equipments conveyance truck
3	Capability for removal of disabled aircraft	Ask AD Administration
4	Remarks	Nil

RJFM AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	AVBL, Ask AD Administration for detail.
2	Clearance priorities	Nil
3	Remarks	Nil

RJFM AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	SPOT 1, 2, 3, 5, 6, 7, 8, 9 : Surface: Cement Concrete Strength: PCR 925/R/B/W/T SPOT 10, 11 : Surface: Cement Concrete Strength: PCR 1074/R/C/W/T SPOT 12-17 : Surface: Asphalt Concrete Strength: PCR 685/F/D/X/T
2	Taxiway width, surface and strength	S1 : 26.5m Asphalt Concrete PCR 756/F/B/X/T S2 : 28.5m Asphalt Concrete PCR 756/F/B/X/T S3, S4, S5 : 34m Asphalt Concrete PCR 756/F/B/X/T S6 : 30m Asphalt Concrete PCR 756/F/B/X/T S7 : 28.5m Asphalt Concrete PCR 756/F/B/X/T SP1 : 23m Asphalt Concrete PCR 756/F/B/X/T SP2, SP3 : 23m Cement Concrete PCR 1074/R/C/W/T SP4, SP5 : 23m Asphalt Concrete PCR 756/F/B/X/T SP6 : 23m Asphalt Concrete PCR 756/F/B/X/T N1 - N4 : 18m Asphalt Concrete 5,700kg/0.48MPa NP1 - NP3 : 18m Asphalt Concrete 5,700kg/0.48MPa
3	ACL and elevation	Not Available
4	VOR checkpoints	Not Available
5	INS checkpoints	Spot NR 1: 315225.14N, 1312642.38E 2: 315225.02N, 1312640.72E 3: 315225.55N, 1312639.35E 5: 315225.41N, 1312637.25E 6: 315224.75N, 1312634.45E 7: 315224.53N, 1312632.04E 8: 315224.31N, 1312629.39E 9: 315224.15N, 1312626.73E 10: 315224.01N, 1312624.07E 11: 315223.73N, 1312621.42E
6	Remarks	Nil

RJFM AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Signification ACFT stand ID signs : NR6 - NR11
2	RWY and TWY markings and LGT	<p>RWY: RWY09/27 (Marking): RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT): RCLL, REDL, RTHL, RENL, WBAR</p> <p>TWY:ALL TWY (Marking):TWY CL, TWY side stripe (LGT): TWY edge LGT</p> <p>TWY:TWY S1-S5, S6, S7, SP1-SP4, SP5, SP6, SP7 (LGT): TWY CL LGT</p> <p>TWY:TWY S1-S7 (Marking): RWY HLDG PSN, Mandatory instruction (LGT): RWY guard LGT, Taxiing guidance sign</p> <p>TWY:TWY N1-N4 (Marking): RWY HLDG PSN, Mandatory instruction (LGT): Taxiing guidance sign</p>
3	Stop bars	<p>Stop bar LGT: S1-S7 Stop bar LGT operations</p> <p>1) Stop bar LGT are installed at each RWY holding position associated with RWY 09/27.</p> <p>2) Stop bar LGT will be operated when the visibility or the lowest RVR of RWY 09/27 is at or less than 600m.</p> <p>3) Stop bar LGT on TWY S1, S7 are controlled individually by ATC.</p> <p>4) Stop bar LGT on TWY S2 through S6 are not controlled individually by ATC.</p> <p>5) During the period Stop bar LGT operated, TWY S2 through S6 are not available for departure aircraft.</p>
4	Remarks	<p>(Marking): Overrun area (LGT): Apron flood LGT</p>

RJFM AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

In Area3 To be developed

RJFM AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	FUKUOKA
2	Hours of service MET Office outside hours	H24 (FUKUOKA)
3	Office responsible for TAF preparation Periods of validity	FUKUOKA 30 Hours
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at FUKUOKA
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U ₂ /Tr, P _s , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	TWR, APP, ATIS
10	Additional information(limitation of service, etc.)	Nil

RJFM AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
09	085.18°	2500×45	PCR 756/F/B/X/T Asphalt Concrete	315234.26N 1312607.02E 92.52FT	THR ELEV:15FT TDZ ELEV:17FT
27	265.18°	2500×45	PCR 756/F/B/X/T Asphalt Concrete	315241.06N 1312741.80E 91.73FT	THR ELEV:20.7FT TDZ ELEV:20.7FT
Slope of RWY		Strip Dimensions(M)	RESA (Overrun) Dimensions (M)		Remarks
7		10	11		14
See AD CHART		2620×300	90×(MNM:90 MAX:291)*		RWY Grooving : 2500m x 30m
		2620×300	123×(MNM:139 MAX:249)* *For detail, ask airport administrator		

RJFM AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
09	2500	2500	2500	2500	Nil
27	2500	2500	2500	2500	Nil

RJFM AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
09	SALS (*1) 420m LIH	Green -	PAPI 3.0° /LEFT 445m 74.5ft	Nil	2500m 30m Coded color (White/Red) LIH	2500m 60m Coded color (White/Yellow) LIH	Red	Nil(*2)
27	Nil	Green Green	PAPI 3.0° /LEFT 420m 66ft	Nil	2500m 30m Coded color (White/Red) LIH	2500m 60m Coded color (White/Yellow) LIH	Red	Nil(*2)
Remarks								
10								
SALS with APCH LGT beacon(592m and 847m FM RWY THR)(*1) Overrun area edge LGT(LEN:60m Color:Red)(*2) CGL for RWY 09 RWY THR ID LGT for RWY 27 THR (Color: White)								

RJFM AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 315216N/1312617E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer: RWY09: 180m from RWY 09 THR, LGTD RWY27: 150m from RWY 27 THR, LGTD
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply/ switch-over time	Within 1sec: REDL, RENL, RTHL, WBAR, RCLL, Overrun area edge LGT, Stop bar LGT Within 15sec: Other LGT
5	Remarks	WDI LGT

RJFM AD 2.16 HELICOPTER LANDING AREA

1	Coordinates TLOF or THR of FATO Geoid undulation	S3-HELIPAD: 315232.01N/1312629.52E, Nil S4-HELIPAD: 315233.03N/1312645.14E, Nil
2	TLOF and/or FATO elevation	S3-HELIPAD: 16ft S4-HELIPAD: 19ft
3	TLOF and FATO area dimensions, surface, strength, marking	TLOF and FATO area dimensions: S3,S4-HELIPAD: 24m×20m Surface: S3,S4-HELIPAD: Asphalt Concrete Strength: S3,S4-HELIPAD: 23ton Marking: S3,S4-HELIPAD: TDZ
4	True BRG of FATO	S3,S4-HELIPAD: 083°/263°
5	Declared distance available	Nil
6	APCH and FATO lighting	Nil
7	Remarks	<ul style="list-style-type: none"> • MAX helicopter type: EC25 • daytime use only

RJFM AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
MIYAZAKI CTR	Area within a radius of 5nm of MIYAZAKI ARP	3,000 or below	D	MIYAZAKI TWR En	
MIYAZAKI PCA	See attached chart		C	KAGOSHIMA APP (1) MIYAZAKI TWR (2) En	(1) Primary (2) Secondary
KAGOSHIMA ACA	See RJFK attached chart		E	KAGOSHIMA APP KAGOSHIMA RADAR KAGOSHIMA DEP En	
KAGOSHIMA TCA	See RJFK attached chart		E	KAGOSHIMA TCA En	

宮崎特別管制区

Miyazaki Positive Control Area


NAME	LATERAL LIMITS	UPPER LIMIT (AMSL)	UNIT PROVIDING SERVICE	REMARKS
		LOWER LIMIT (AMSL) M(ft)		
1	2	3	4	5
宮崎 MIYAZAKI	下記に示される区域 The area shown below		Primary Kagoshima APP 121.4 120.9 362.3 Secondary Miyazaki TWR 118.3 261.2	当該空域を飛行しようとする航空機は、鹿児島アプローチ又は宮崎タワーに連絡し、コールサイン、現在位置、高度及び意図を通報し指示を受けること。 Pilot of aircraft operating in this area shall contact Kagoshima Approach or Miyazaki Tower for ATC instructions giving informations on aircraft identification, positions, altitude and pilot's intentions.

RJFM AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP/ASR	Kagoshima Approach or Kagoshima Radar	121.4MHz(1) 120.9MHz 362.3MHz(1) 261.2MHz 121.5MHz(E) 243.0MHz(E)	2230 - 1230	(1)Primary APP Service provided by KAGOSHIMA APP
DEP	Kagoshima Departure	120.1MHz(1) 121.4MHz 362.3MHz(1) 261.2MHz 121.5MHz(E) 243.0MHz(E)	2230 - 1230	
TWR	Miyazaki Tower	118.3MHz(1) 126.2MHz 123.6MHz 261.2MHz 121.5MHz(E) 243.0MHz(E)	2230 - 1230	
TCA	Kagoshima TCA	121.25MHz 256.1MHz	2330 - 1100	
GND	Miyazaki Ground	121.9MHz(1)	2230 - 1230	
ATIS	Miyazaki Airport	126.8MHz	2230 - 1230	

RJFM AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (6°W/2013)	MZE	112.4MHz	H24	315243.42N/ 1312614.88E		Unusable : 200°-210° beyond 30nm BLW 7000ft. 210°-230° beyond 35nm BLW 7000ft. 230°-250° beyond 25nm BLW 7000ft.
DME	MZE	1158MHz CH-71X	H24	315243.42N/ 1312614.88E	54ft	Unusable: 016° between 3nm and 9nm at 6000ft. 033° between 7nm and 10nm at 9000ft. 339° between 2nm and 11nm at 10000ft.
ILS-LOC 27	IMZ	108.9MHz	2230 - 1230	315233.66N/ 1312558.68E		LOC:220m(722ft) away FM RWY 09 THR.BRG(MAG)272°
ILS-GP 27	-	329.3MHz	2230 - 1230	315244.23N/ 1312729.39E		GP:316m(1037ft) inside FM RWY 27 THR. 125m(410ft) N of RCL. Angle 3.0° HGT of ILS Ref 16.5m(54ft)
ILS-DME 27	IMZ	987MHz	2230 - 1230	315244.44N/ 1312729.01E	31ft	DME:320m(1050ft) inside FM RWY 27 THR.135m(443ft) N of RCL.
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based

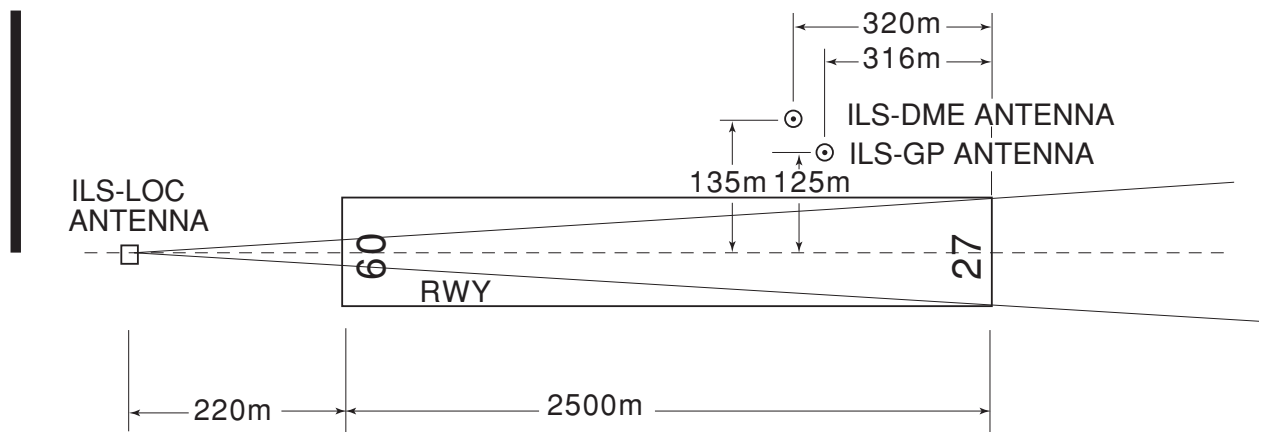

REMARKS:1.LOC beam BRG(MAG) 272°
2.HGT of ILS REF datum 16.5m(54ft)
3.GP Angle 3.0°
4.ELEV of ILS-DME 9.4m

RJFM AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Intersection departure

Separation for departure as in AD 1.1.6.3.2.2(2) will not be applied to aircraft departing from TWY S2 or N1.
Aircraft requiring separation in AD 1.1.6.3.2.2(2) shall advise MIYAZAKI GROUND/TOWER accordingly.


2. Taxiing to and from stands

他の航空機又は障害物とのクリアランスの確保、及びジェットブラストによる影響の回避のため、スポット 6 とスポット 10 における自走アウトは、次の方式に従うこと。ただし、別途空港管理者の承認を受けた場合を除く。

- a) 自走アウトは、導入線直線部からの水平距離がスポット 6 にあっては 25.5m、スポット 10 にあっては 30.5m の区域内での旋回が可能な航空機に限ること。
- b) スポットにおける地上移動は、ブラストの影響が出ないことを確認の上行うこと。
- c) 自走アウトの旋回は、旋回線の起点までに開始すること。
- d) 旋回完了後は導入線に会合し、導入線を導出線として利用すること。

In order to keep the clearance with other aircraft or obstacles and avoid jet blast damage, operators shall comply with the following power-out procedure on spot NR6 and NR10, although the case that approved by AD administration is excluded.

- a) Only the aircraft which is available to turn within the area whose horizontal distance from the straight part of the lead-in line is 25.5 meters on spot NR6 and 30.5 meters on spot NR10 is permitted to use this power-out procedure.
- b) Operators must confirm jet blast cause no damage when maneuvering on aircraft stands.
- c) Commence turning of the power-out procedure at or before the starting point of the turning line.
- d) After completing the turn, intercept the lead-in line and use the line as the lead-out line.

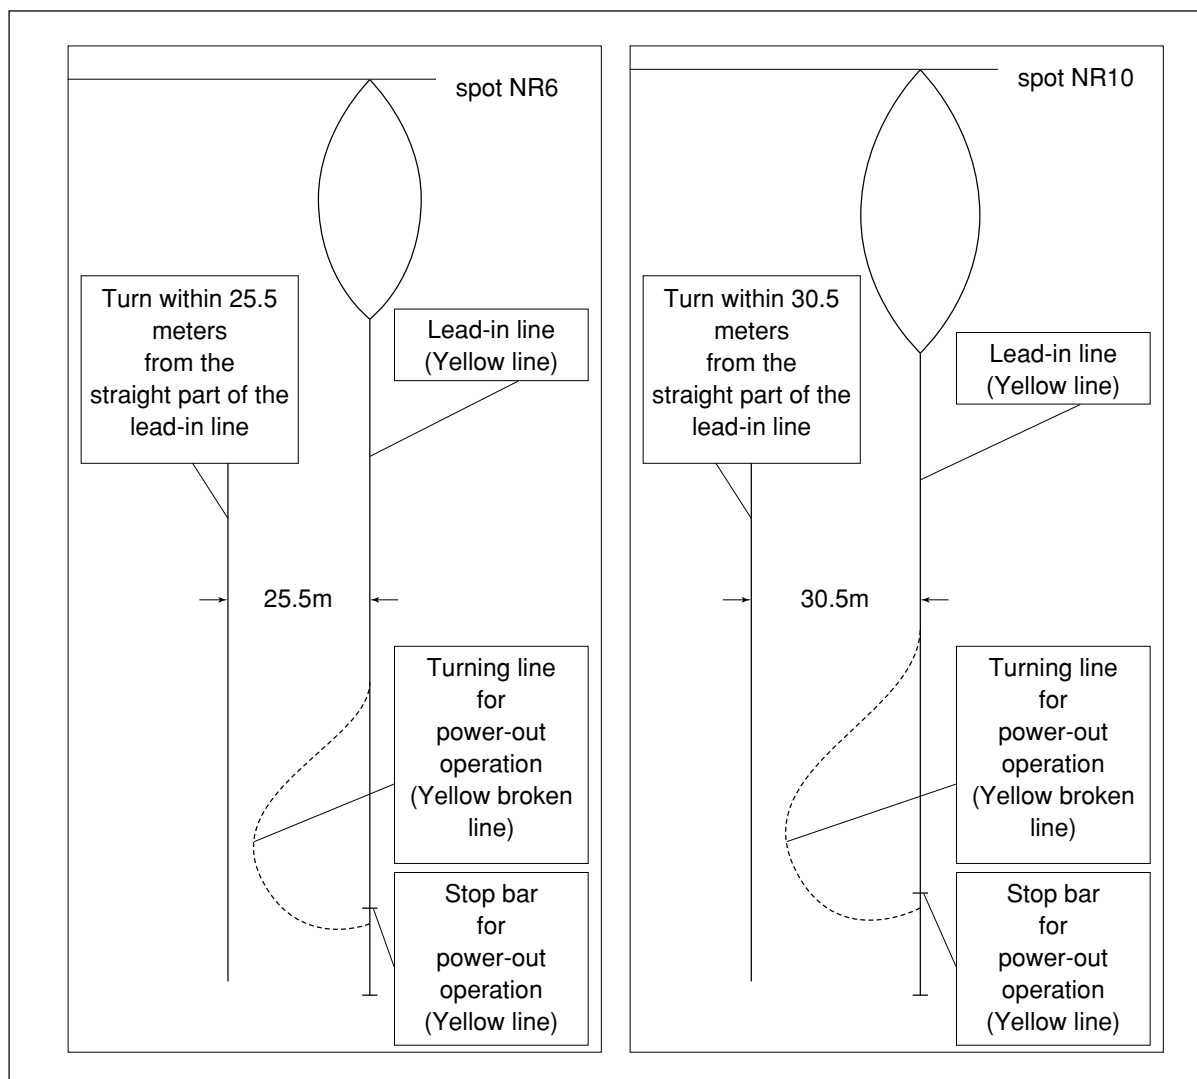

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJFM AD 2.21 NOISE ABATEMENT PROCEDURES

1. 騒音軽減運航方式

すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。ただし、これらの方式によることができない航空機は実効的にこれらと同等と認められる代替方式を実施するものとする。

- (1) 離陸について（滑走路 27）
急上昇方式
- (2) 着陸について（滑走路 09）
ディレイド・フラップ進入方式及び低フラップ
角着陸方式
- (3) リバース・スラストについて
なし
- 2. 優先滑走路方式
なし
- 3. 優先飛行経路
なし

1.Noise Abatement Operating Procedures

For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations. In case that the aircraft is unable to take these procedures, pilots should execute alternative procedures which are considered to be practically equivalent.

- 1) For take-off from RWY27
Steepest Climb Procedure
- 2) For landing to RWY09
Delayed Flap Approach Procedure and Reduced Flap
Setting Procedure
- 3) Reverse Thrust
Nil

2. Preferential Runways Procedures

Nil

3. Noise Preferential Routes

Nil

RJFM AD 2.22 FLIGHT PROCEDURES**1. TAKE OFF MINIMA**

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	09	A,B,C,D	-	400m	-	400m	-	500m
	27	A,B,C,D	400m	400m	400m	400m	-	500m
OTHER	09	A,B,C,D	AVBL LDG MINIMA					
	27	A,B,C,D						

2. Lost Communication Procedures for Arrival Aircraft under Radar Navigational Guidance.

If radio communications with Kagoshima Approach/Radar are lost for 30 seconds, squawk Mode A/3 Code 7600 and;

- I
 - 1) Contact Miyazaki Tower.
 - 2) If unable, proceed in accordance with Visual Flight Rules.
 - 3) If unable, proceed to Miyazaki VOR at last assigned altitude or 4500 feet whichever is higher and execute Instrument Approach.
- II Procedures other than above will be issued when situation required.

RJFM AD 2.23 ADDITIONAL INFORMATION


Nil

RJFM AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
 Aerodrome Obstacle Chart type A (RWY 09/27)
 Aerodrome Obstacle Chart type B
 Standard Departure Chart-Instrument (SIIBA, LALAG)
 Standard Departure Chart-Instrument (MIYAZAKI-REVERSAL, JACKY)
 Standard Departure Chart-Instrument (KIZAK-RNAV)
 Standard Departure Chart-Instrument (KIRISHIMA-RNAV)
 Standard Arrival Chart-Instrument (OTOHIME)
 Standard Arrival Chart-Instrument (RYUGU-RNAV)
 Standard Arrival Chart-Instrument (MELAR-RNAV)
 Standard Arrival Chart-Instrument (KARAH-RNAV)
 Instrument Approach Chart (ILS Z or LOC Z RWY27)
 Instrument Approach Chart (ILS Y or LOC Y RWY27)
 Instrument Approach Chart (VOR RWY27)
 Instrument Approach Chart (RNP Z RWY09(AR))
 Instrument Approach Chart (RNP Y RWY09(AR))
 Instrument Approach Chart (RNP X RWY09(AR))
 Instrument Approach Chart (RNP RWY27(AR))
 Other Chart (Visual REP)
 Other Chart (LDG CHART)
 Other Chart (MVA CHART)

RJFM / MIYAZAKI

AD CHART

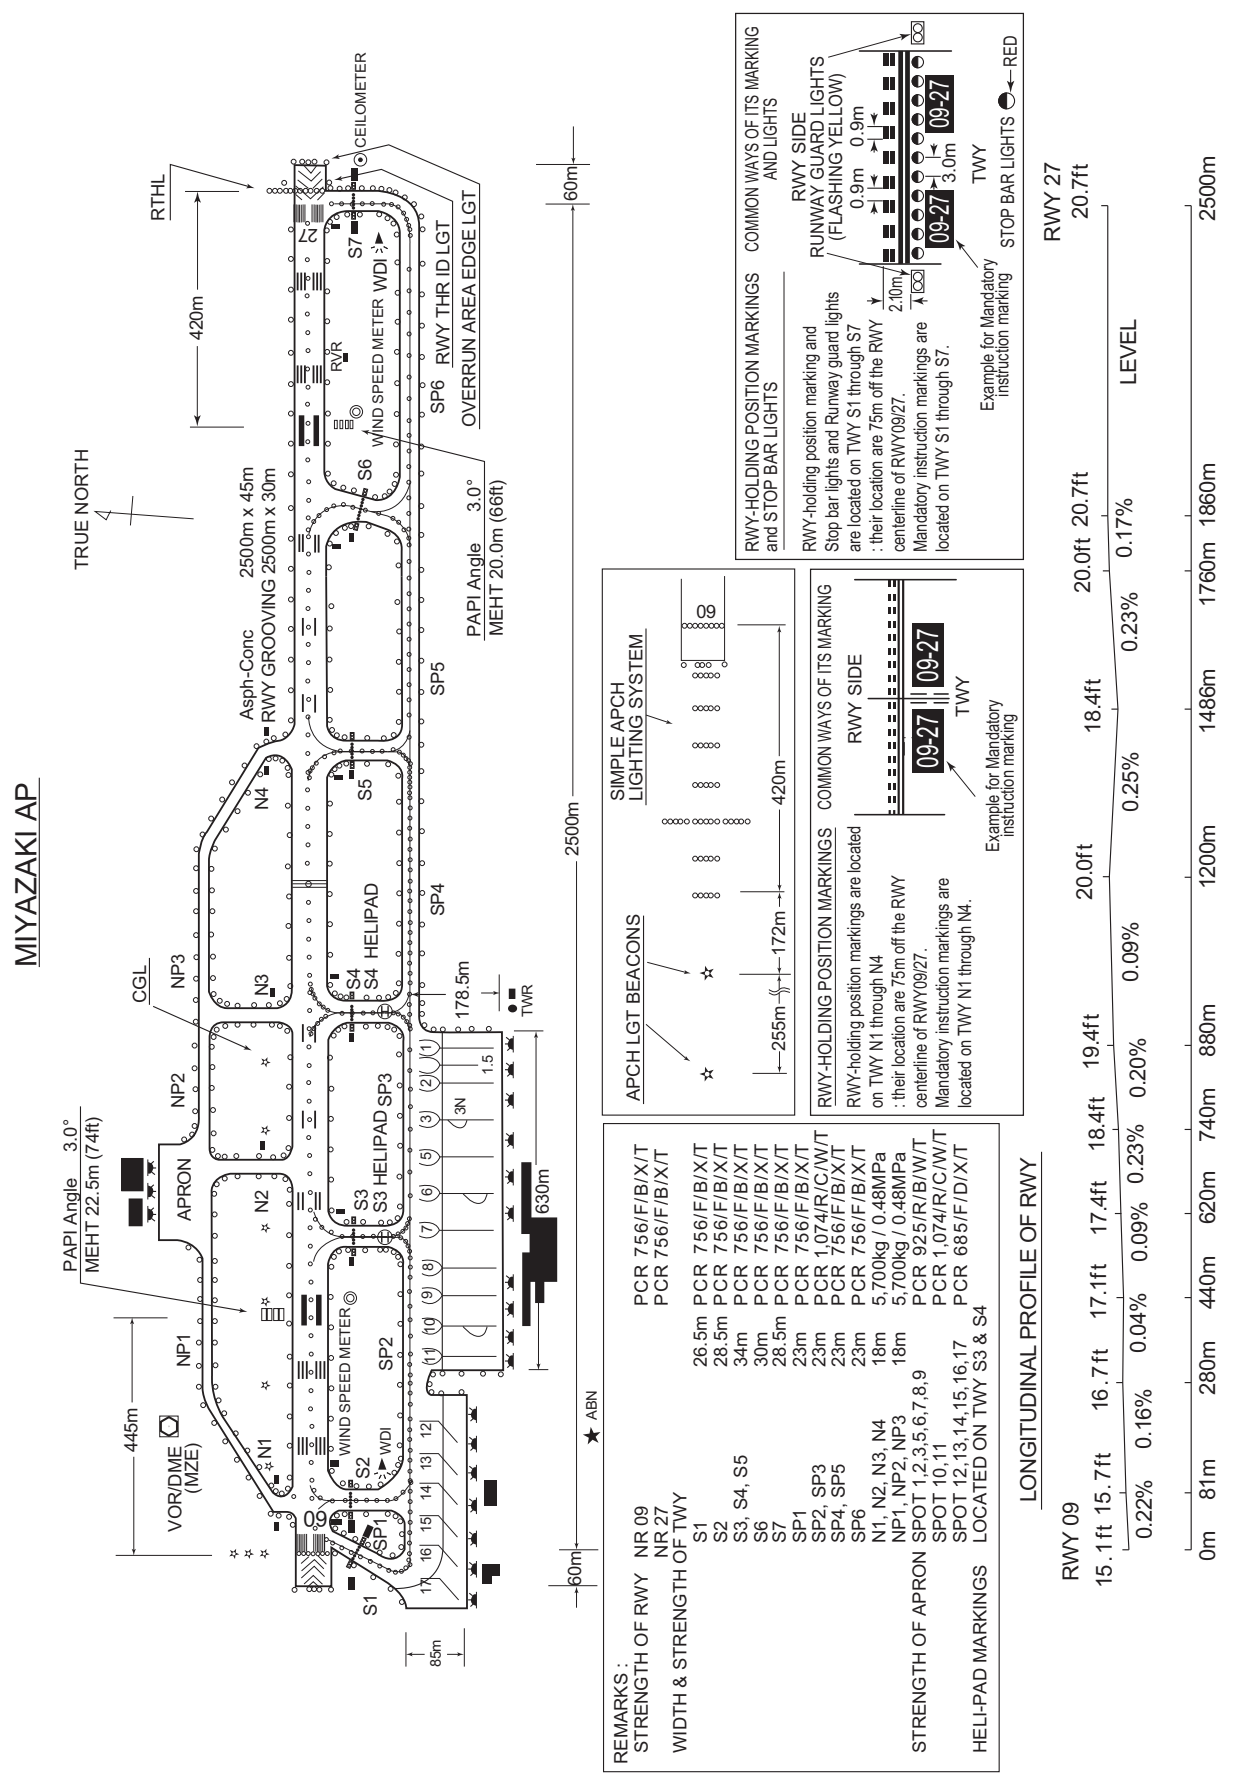


INTENTIONALLY LEFT BLANK

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC
Transverse Mercator Projection

AERODROME OBSTACLE CHART-ICAO
TYPE A (OPERATING LIMITATIONS)

MAGNETIC VARIATION 7°W - AUG 2025

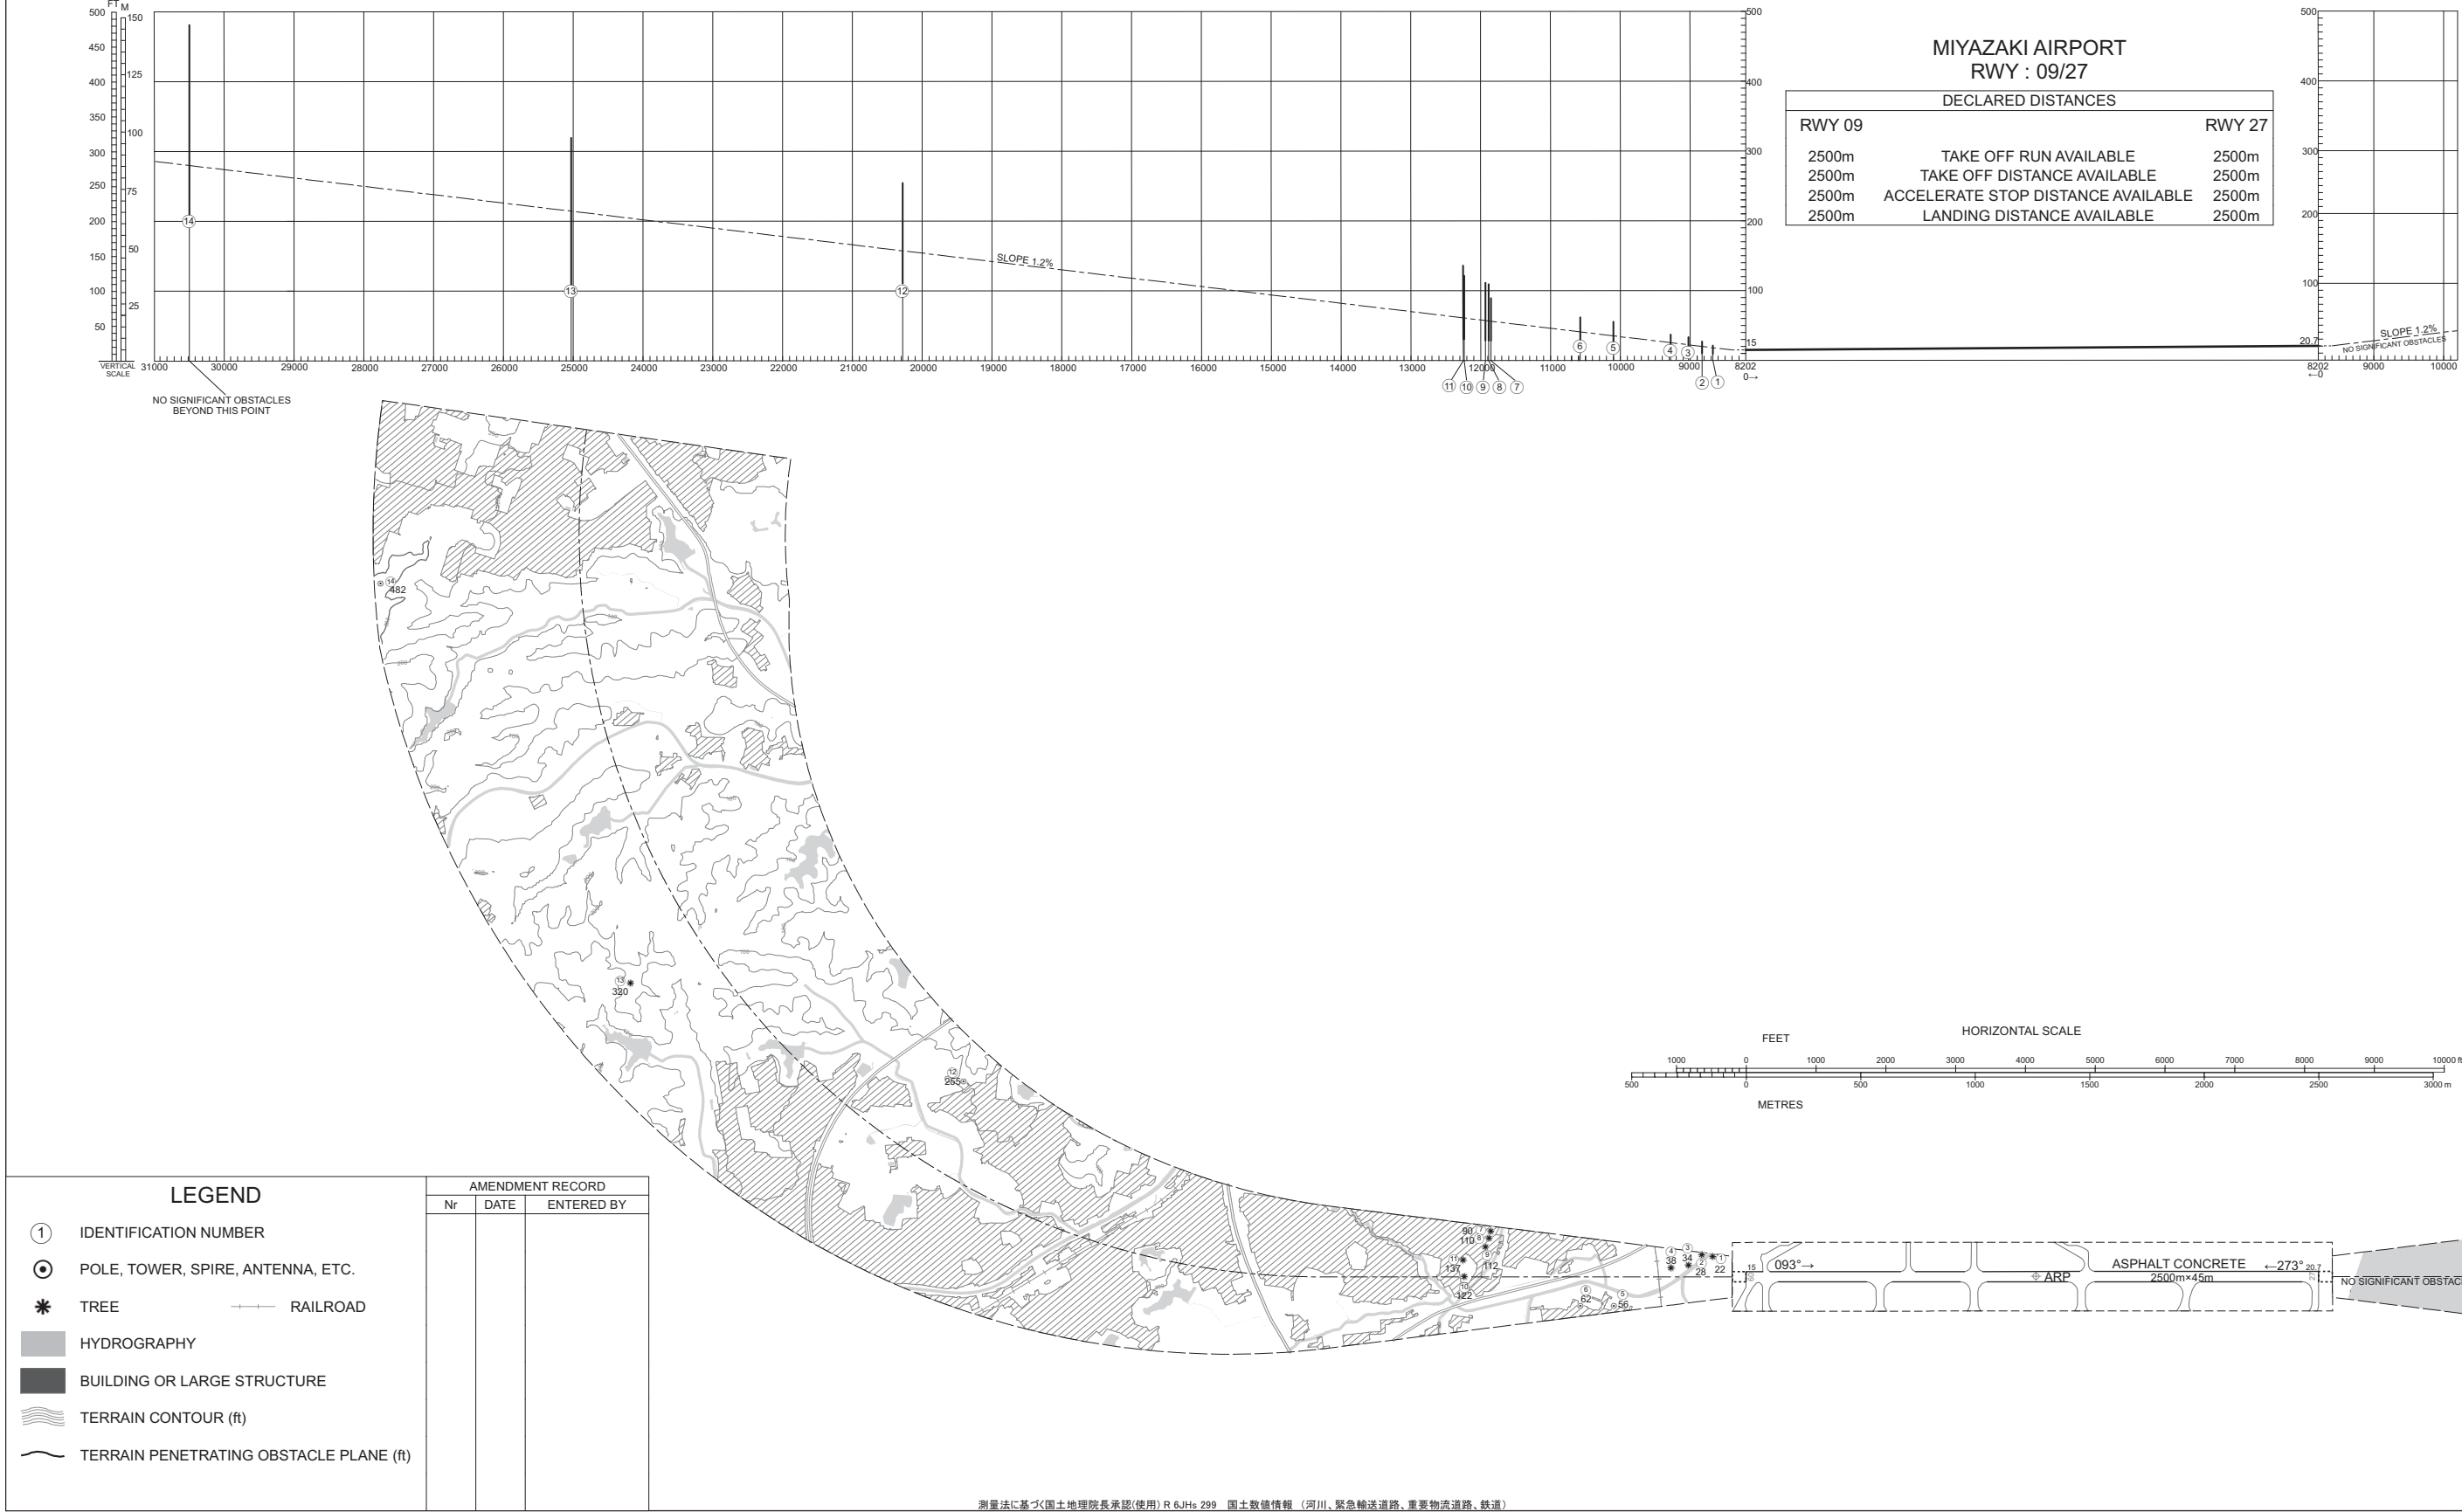


測量法に基づく国土地理院長承認(使用) R 6JHs 299 国土数値情報 (河川、緊急輸送道路、重要物流道路、鉄道)

CHANGE: Update.

AERODROME OBSTACLE CHART-ICAO
TYPE B

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC
Transverse Mercator Projection

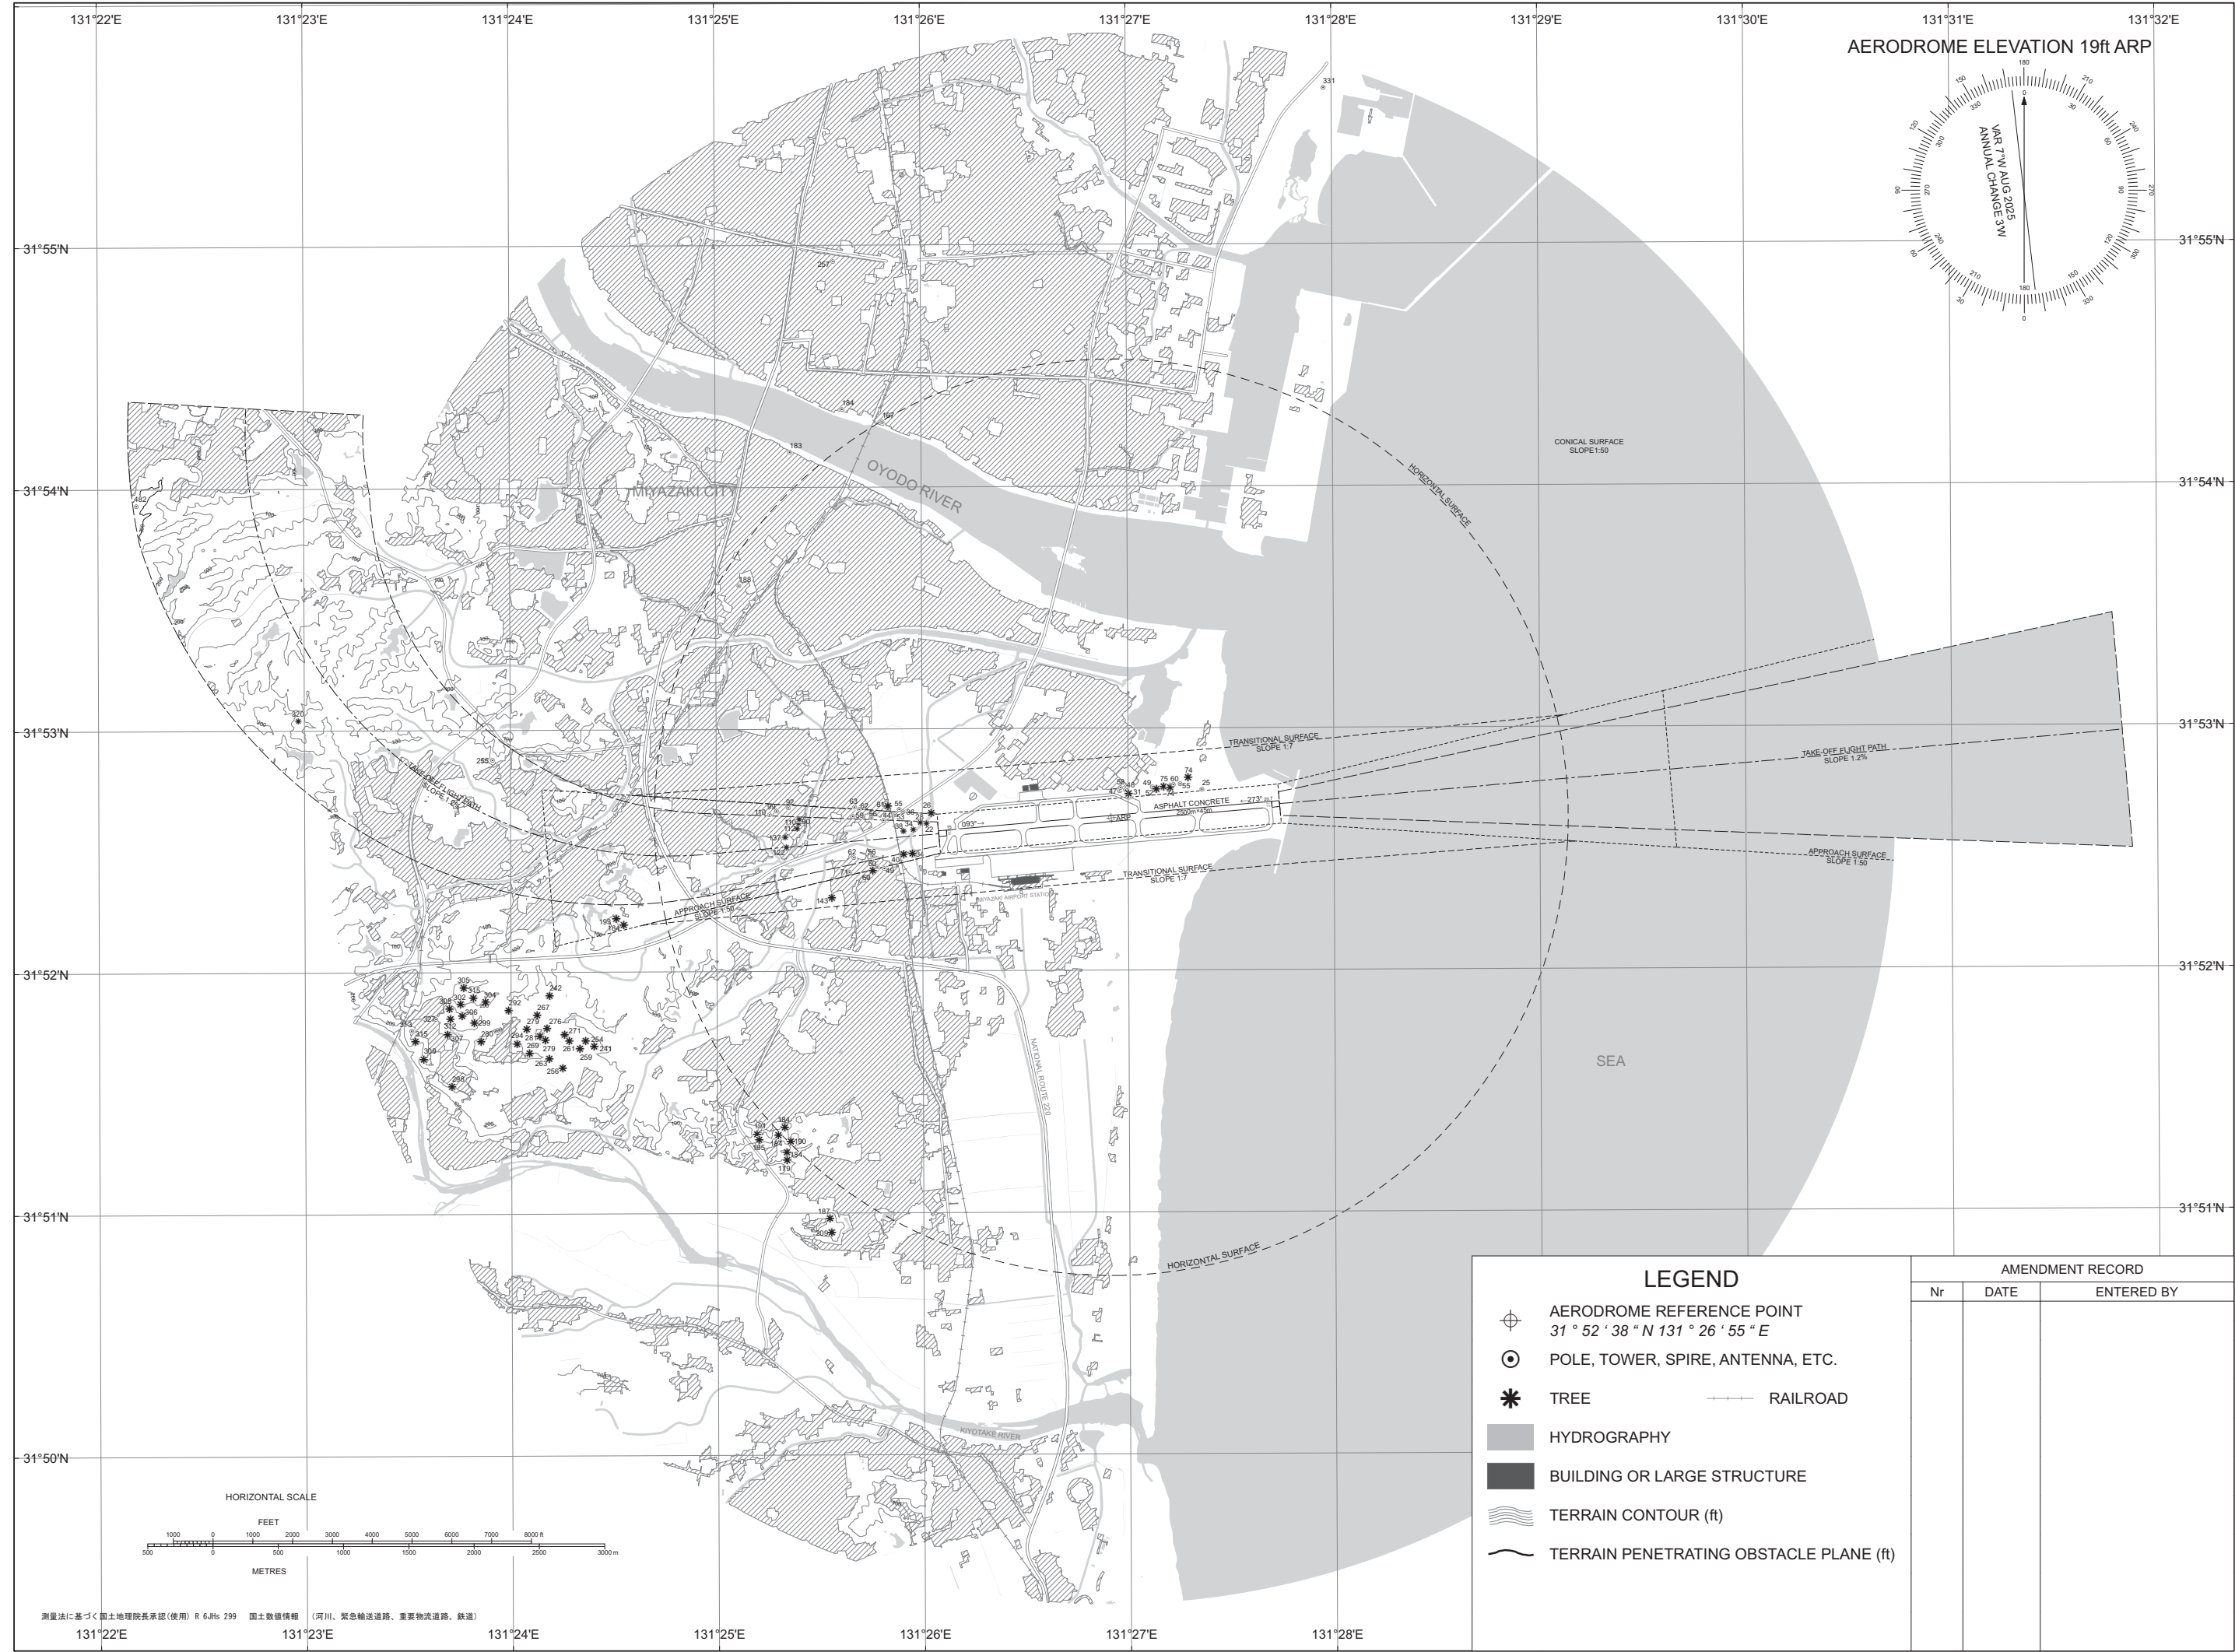

CHANGE: Update.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

SIIBA ONE DEPARTURE

RWY27 : Climb via MZE R275 to 6.0DME, turn right HDG060° to intercept and proceed via MZE R015 to SIIBA.

Cross MZE R345 at or above 6000FT.


RWY09 : Climb via MZE R091 to 8.0DME, turn left HDG330° to intercept and proceed via MZE R015 to SIIBA.

Cross MZE R040 at or above 6000FT.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 1637FT located at 8.3NM 285° FM end of RWY27.

CHANGE : Description of PROC name.

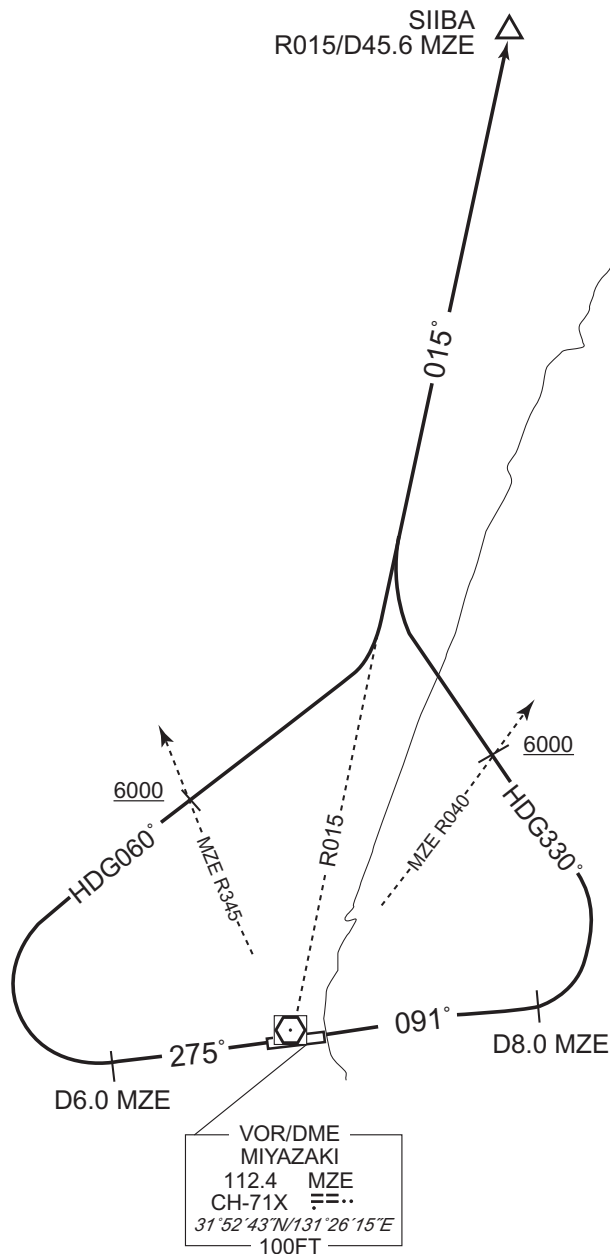

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

LALAG ONE DEPARTURE

RWY27 : Climb via MZE R275 to 10.0DME, turn right HDG350°...

RWY09 : Climb RWY HDG to 1000FT, turn left HDG275°...


...to intercept and proceed via MZE R305 to LALAG via TORIK.

Cross TORIK at assigned altitude.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 152FT located at 0.7NM 276° FM end of RWY27.

RWY09 : 5.0% climb gradient required up to 1000FT.

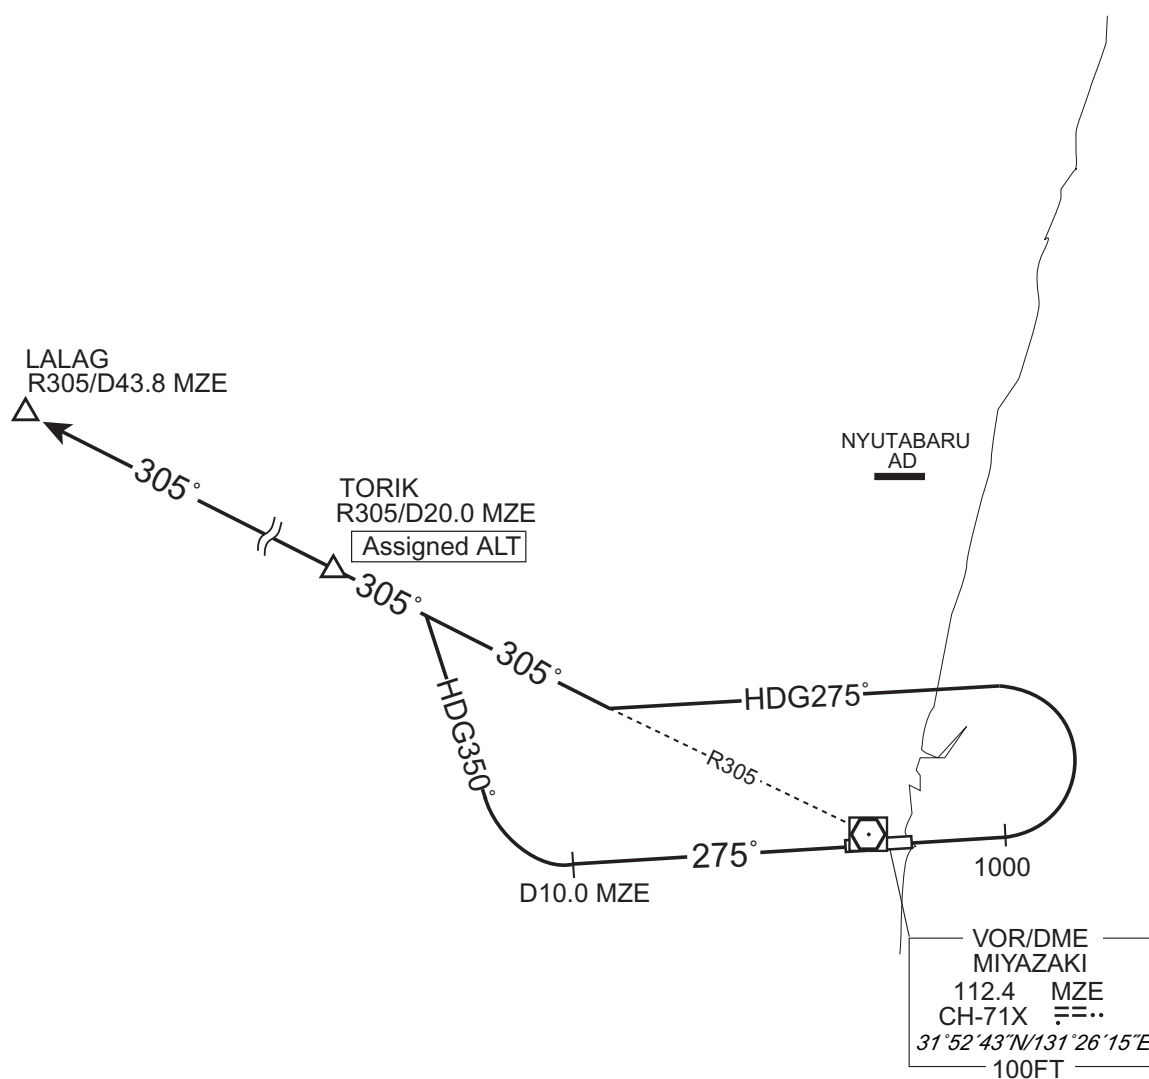

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

SID

MIYAZAKI REVERSAL ONE DEPARTURE

RWY 27 : Climb via MZE R275 to 10.0DME, turn right,...

RWY 09 : Turn right, climb via MZE R138 to 12.0DME, turn left,...
...direct to MZE VOR/DME.

Note RWY27 : 5.0% climb gradient required up to 5000FT.

OBST ALT 152FT located at 0.7NM 276° FM end of RWY27.

JACKY ONE DEPARTURE


RWY 27 : Climb RWY HDG to MZE 2.0DME, turn right, direct to MZE VOR/DME,...

RWY 09 : Turn right, climb...
...via MZE R138 to JACKY.

Note RWY27 : 5.0% climb gradient required up to 500FT.

OBST ALT 395FT located at 3.1NM 281° FM end of RWY27.

CHANGE : OBST(MIYAZAKI REVERSAL ONE DEPARTURE).

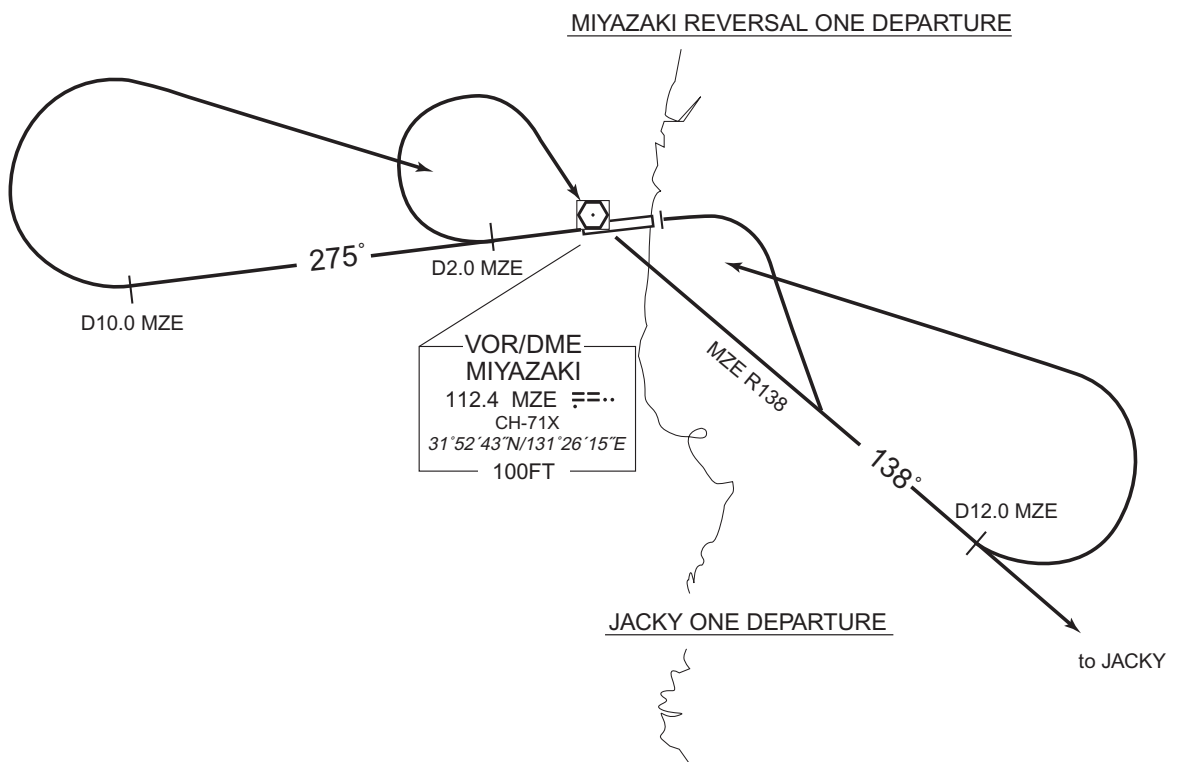

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

RNAV SID and TRANSITION

KIZAK THREE DEPARTURE MADOG TRANSITION		RNAV1
<div>Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.</div>	Critical DME	RWY27 TGE : 4.0NM to KIZAK - KIZAK
	DME GAP	RWY09 : DER - 4.0NM to KIZAK RWY27 : DER - 4.0NM to KIZAK
	Inappropriate Nav aids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1
<div><div>VAR 8° W</div><div><p>VOR/DME MIYAZAKI 112.4 MZE CH-71X 31°52'43"N/131°26'15"E 100FT</p><p><u>KIZAK THREE DEPARTURE</u></p><p><u>MADOG TRANSITION</u></p></div></div>		
<div><div><u>KIZAK THREE DEPARTURE</u> RWY09 : Climb on HDG093° at or above 500FT, direct to KIZAK. RWY27 : Climb on HDG273° at or above 500FT, direct to FM700, to FM701, to FM702, to KIZAK. Note RWY09: 5.0% climb gradient required up to 500FT. RWY27: 7.0% climb gradient required up to 900FT.</div><div><u>MADOG TRANSITION</u> From KIZAK, to HIROS at or above 11000FT, to MADOG.</div></div>		

CHANGE : PROC renamed. VAR. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM / MIYAZAKI

RNAV SID and TRANSITION

KIZAK THREE DEPARTURE

RWY09

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	093 (085.2)	-7.5	—	—	+500	—	—	RNAV1
002	DF	KIZAK	—	—	-7.5	—	R	—	—	—	RNAV1

RWY27

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	273 (265.2)	-7.5	—	—	+500	—	—	RNAV1
002	DF	FM700	—	—	-7.5	—	—	—	—	—	RNAV1
003	TF	FM701	—	003 (355.2)	-7.5	5.6	—	—	—	—	RNAV1
004	TF	FM702	—	093 (085.2)	-7.5	4.7	—	—	—	—	RNAV1
005	TF	KIZAK	—	152 (144.5)	-7.5	17.1	—	—	—	—	RNAV1

MADOG TRANSITION


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZAK	—	—	-7.5	—	—	—	—	—	RNAV1
002	TF	HIROS	—	076 (069.0)	-7.5	31.8	—	+11000	—	—	RNAV1
003	TF	MADOG	—	046 (038.4)	-7.5	15.4	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
FM700	315212.0N / 1312058.4E
FM701	315749.2N / 1312024.8E
FM702	315813.1N / 1312556.5E
KIZAK	314410.0N / 1313731.3E
HIROS	315530.2N / 1321230.5E
MADOG	320730.7N / 1322346.5E

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

STANDARD DEPARTURE CHART - INSTRUMENT

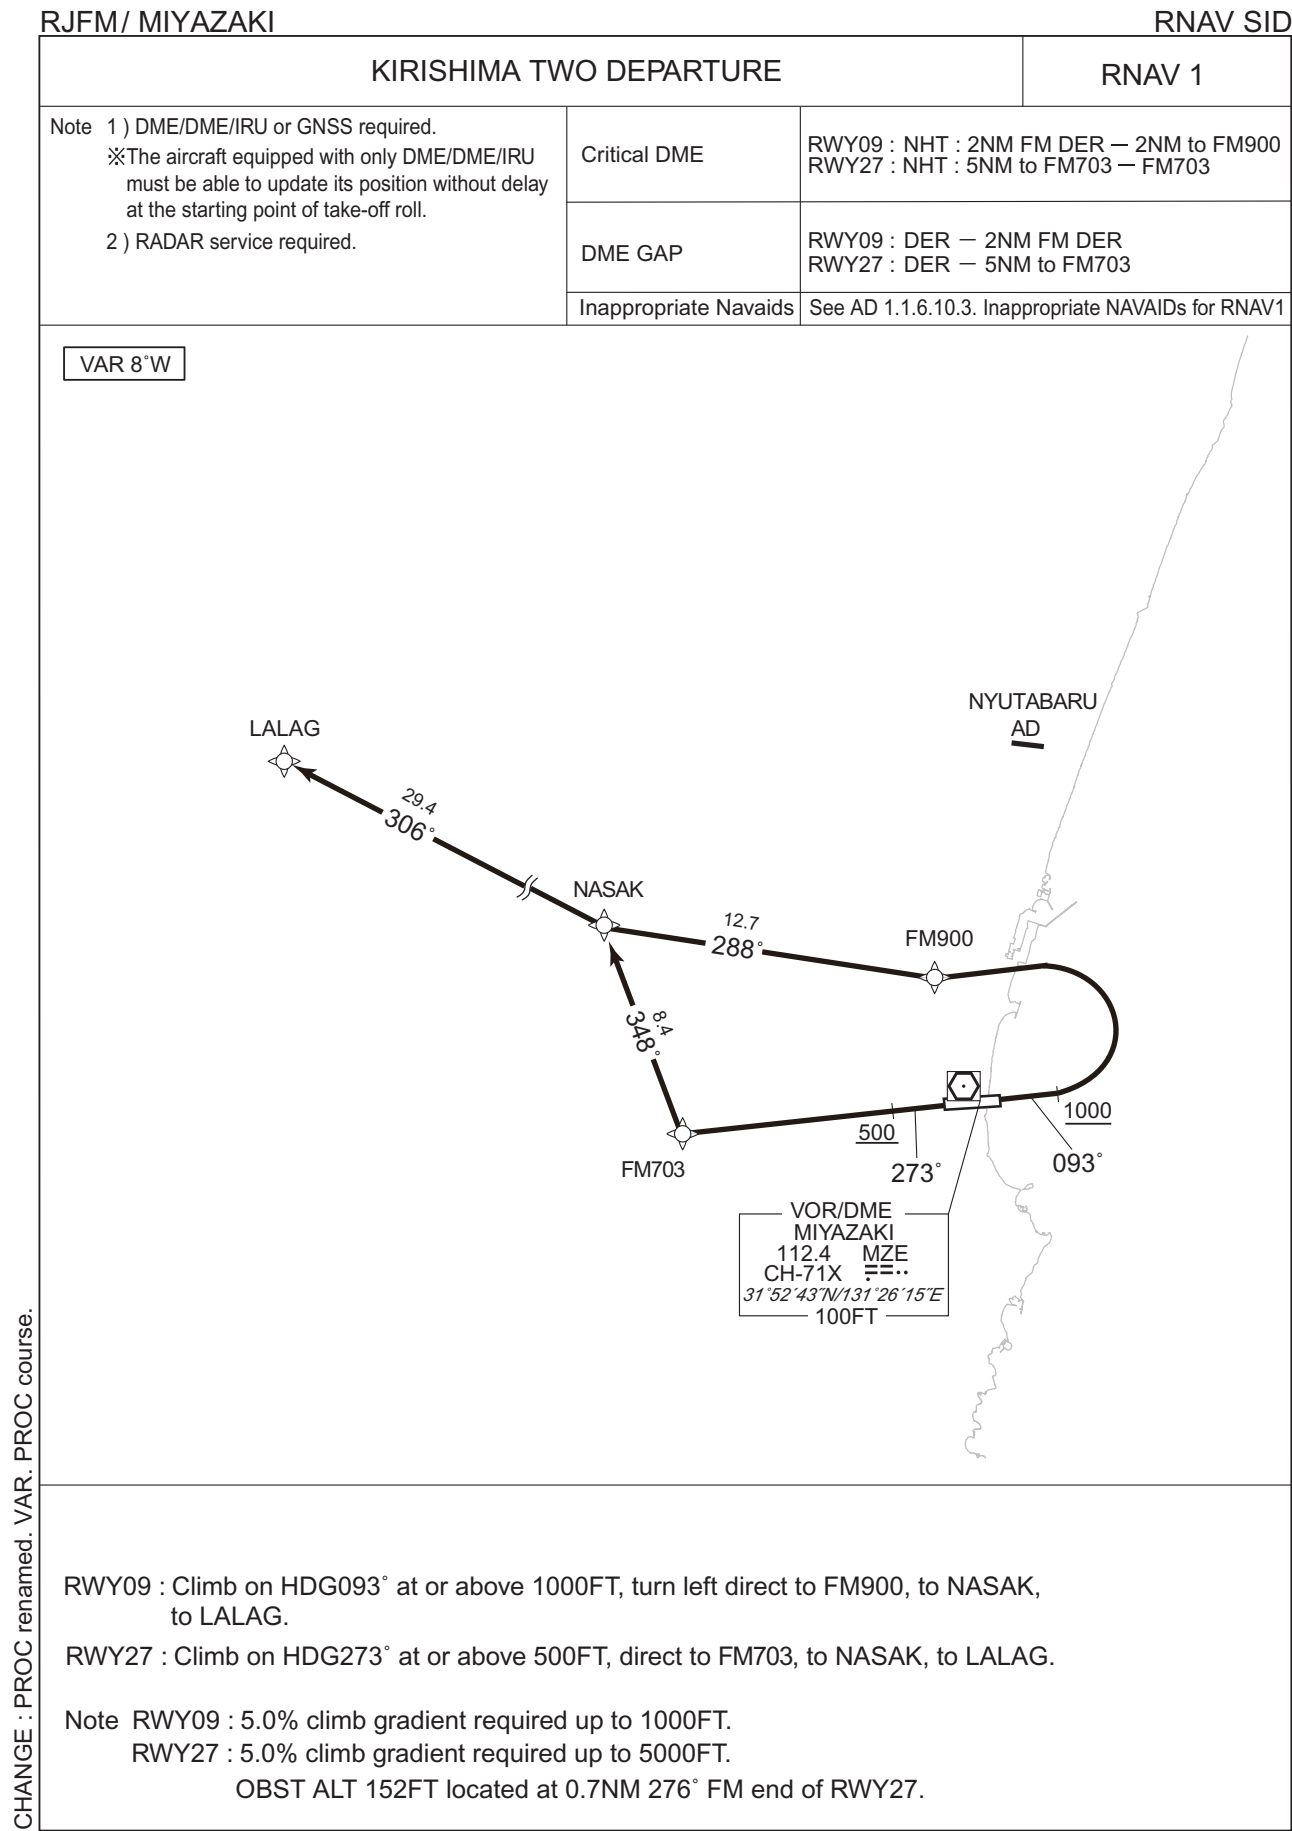

CHANGE : PROC renamed. VAR. PROC course.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFM /MIYAZAKI

RNAV SID

KIRISHIMA TWO DEPARTURE

RWY09

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	093 (085.2)	-7.5	—	—	+1000	—	—	RNAV1
002	DF	FM900	—	—	-7.5	—	L	—	—	—	RNAV1
003	TF	NASAK	—	288 (280.1)	-7.5	12.7	—	—	—	—	RNAV1
004	TF	LALAG	—	306 (298.6)	-7.5	29.4	—	—	—	—	RNAV1

RWY27

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	273 (265.2)	-7.5	—	—	+500	—	—	RNAV1
002	DF	FM703	—	—	-7.5	—	—	—	—	—	RNAV1
003	TF	NASAK	—	348 (340.6)	-7.5	8.4	—	—	—	—	RNAV1
004	TF	LALAG	—	306 (298.6)	-7.5	29.4	—	—	—	—	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates
FM900	315726.5N / 1312601.1E
FM703	315144.1N / 1311433.9E
NASAK	315939.9N / 1311116.4E
LALAG	321338.3N / 1304049.6E

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART - INSTRUMENT


RJFM / MIYAZAKI

STAR


OTOHIME ARRIVAL

From over RYUGU, via SUC R237 to CHAGA, via MZE R092 to OYODO.
Cross CHAGA at or above 5000FT, cross OYODO at or above 2000FT.

CHANGE : Description of PROC name.

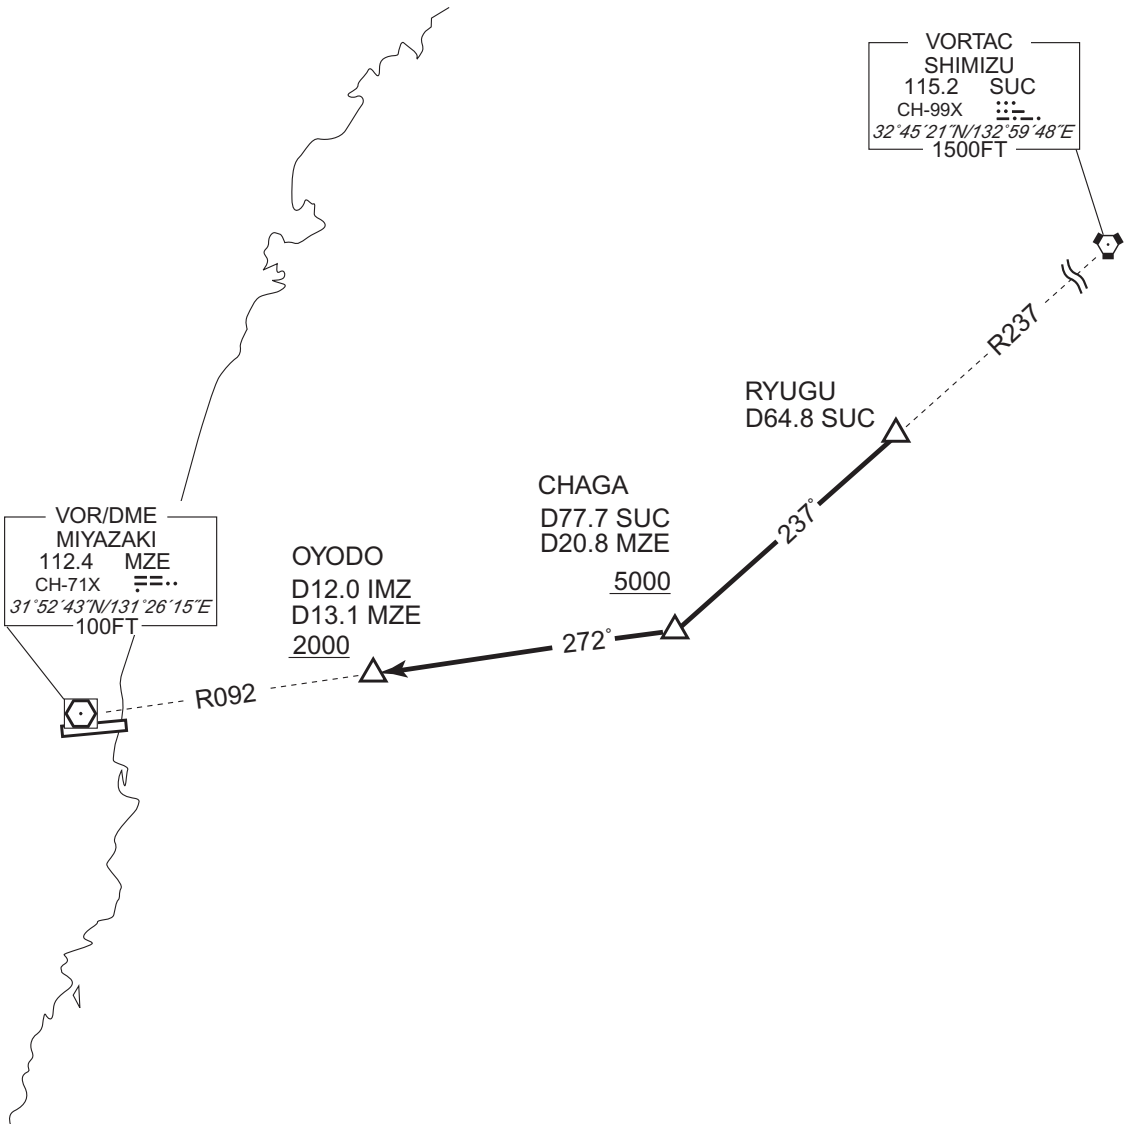


STANDARD ARRIVAL CHART - INSTRUMENT

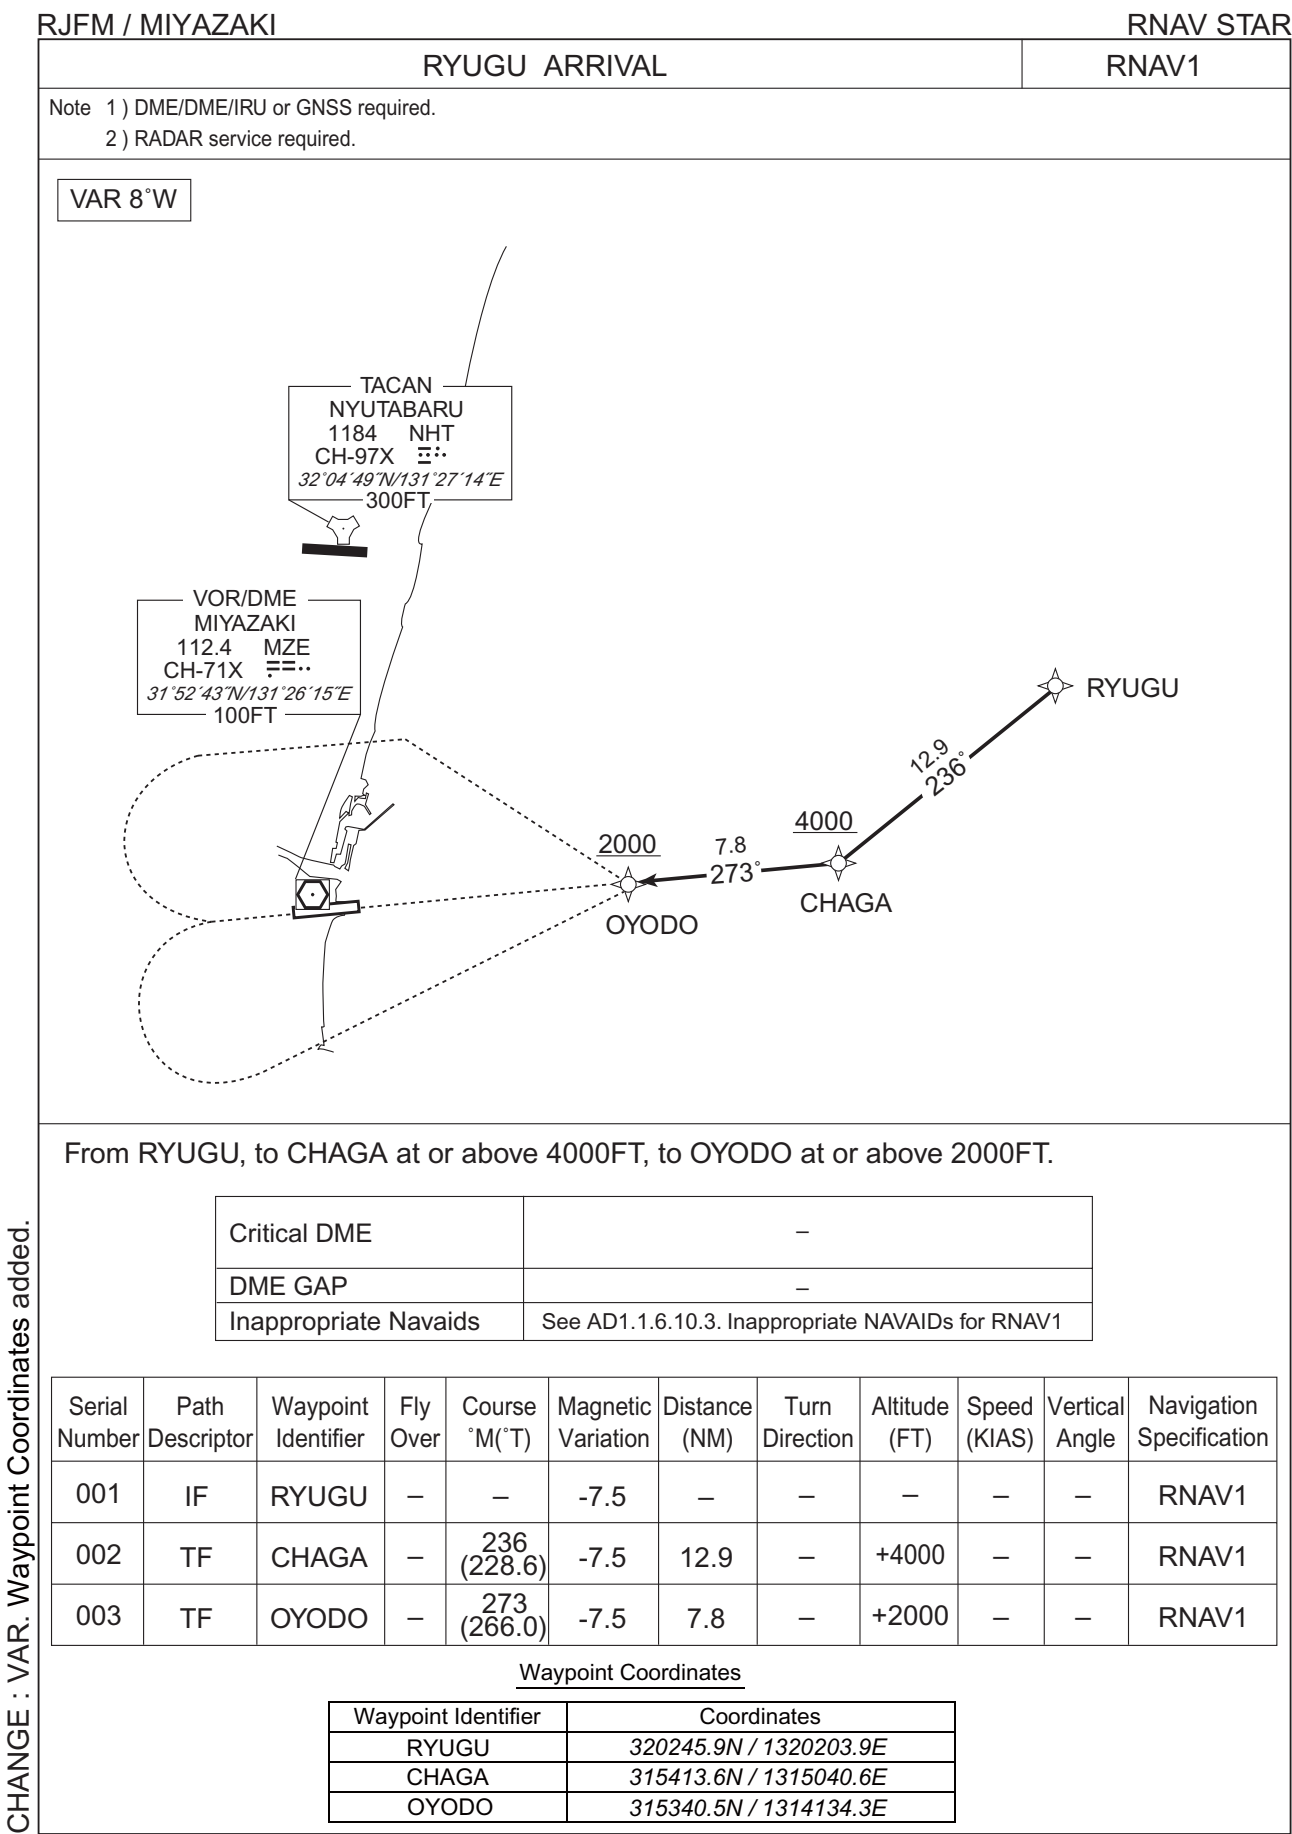

CHANGE : VAR. Waypoint Coordinates added.

STANDARD ARRIVAL CHART - INSTRUMENT

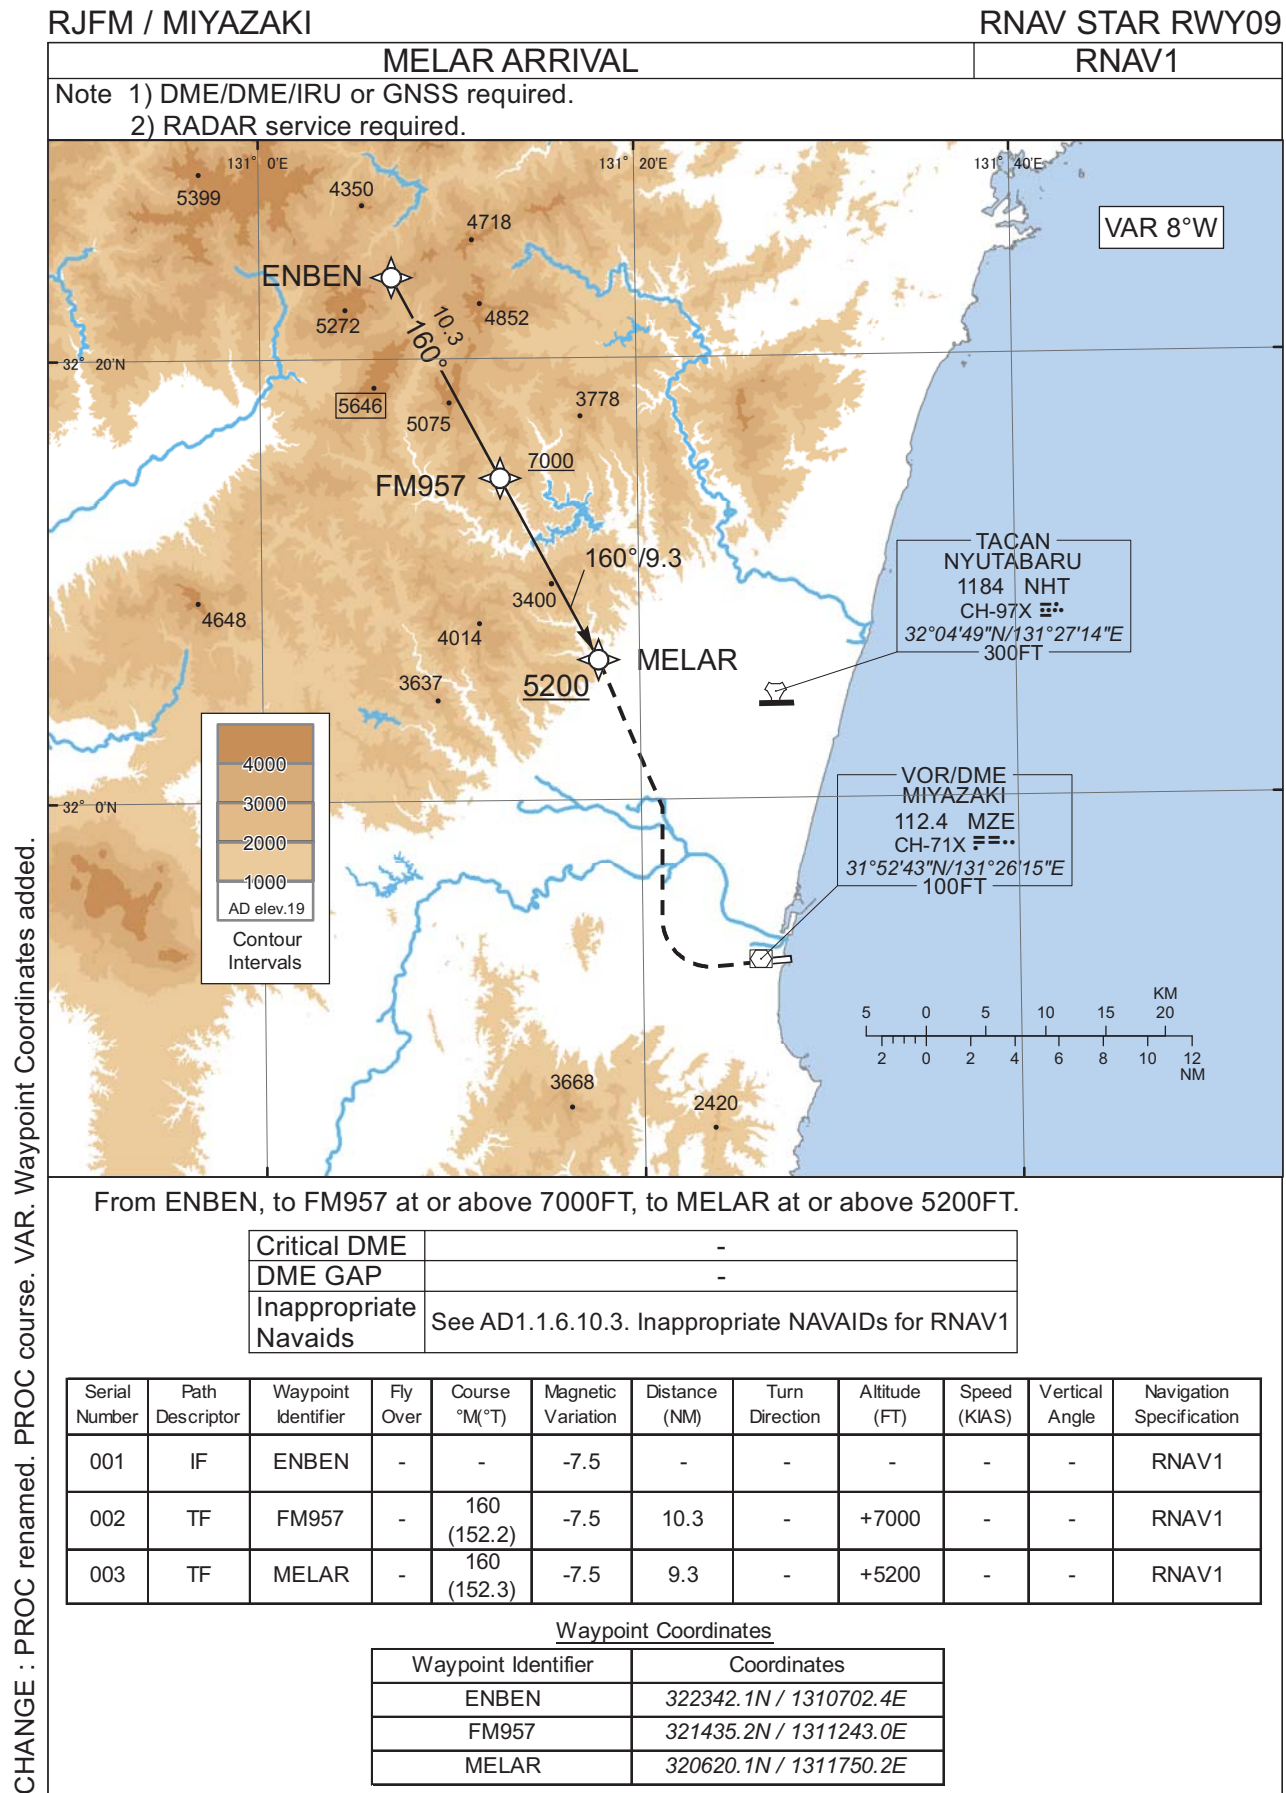

STANDARD ARRIVAL CHART - INSTRUMENT


RJFM / MIYAZAKI

RNAV STAR RWY27

KARAH ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

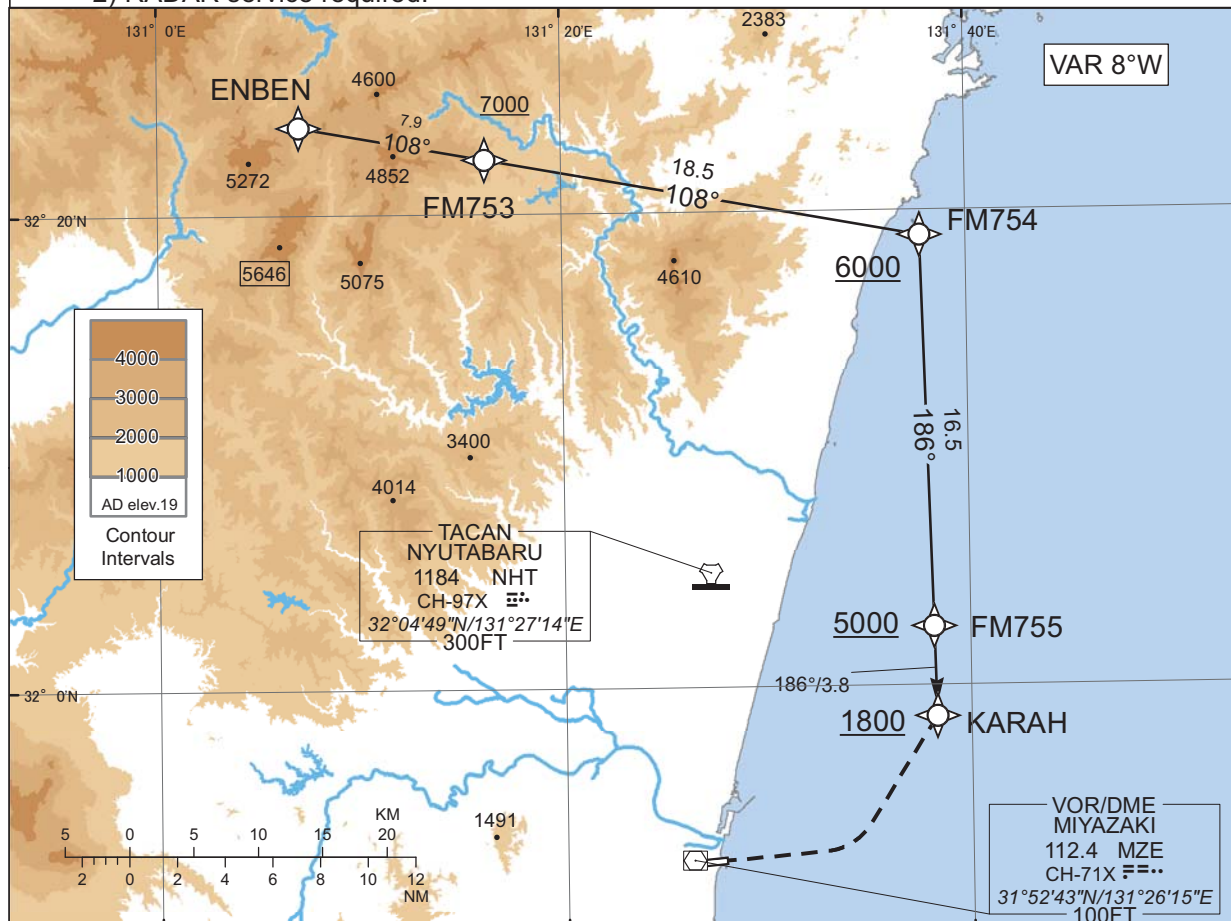

From ENBEN, to FM753 at or above 7000FT, to FM754 at or above 6000FT, to FM755 at or above 5000FT, to KARAH at or above 1800FT.

Critical DME	SUC : 15NM to FM754 - 10NM to FM755 MZE : 14NM to FM755 - 2NM to FM755 NHT : 5NM to FM755 - KARAH
DME GAP	-
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDS for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ENBEN	-	-	-7.5	-	-	-	-	-	RNAV1
002	TF	FM753	-	108 (100.3)	-7.5	7.9	-	+7000	-	-	RNAV1
003	TF	FM754	-	108 (100.3)	-7.5	18.5	-	+6000	-	-	RNAV1
004	TF	FM755	-	186 (178.6)	-7.5	16.5	-	+5000	-	-	RNAV1
005	TF	KARAH	-	186 (178.6)	-7.5	3.8	-	+1800	-	-	RNAV1

Waypoint Coordinates


Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ENBEN	322342.1N / 1310702.4E	FM755	320228.4N / 1313812.1E
FM753	322217.4N / 1311613.8E	KARAH	315841.4N / 1313818.6E
FM754	321856.5N / 1313743.8E		

CHANGE : PROC renamed. PROC course. VAR. Waypoint Coordinates added.

INSTRUMENT APPROACH CHART


RJFM / MIYAZAKI

ILS Z or LOC Z RWY27

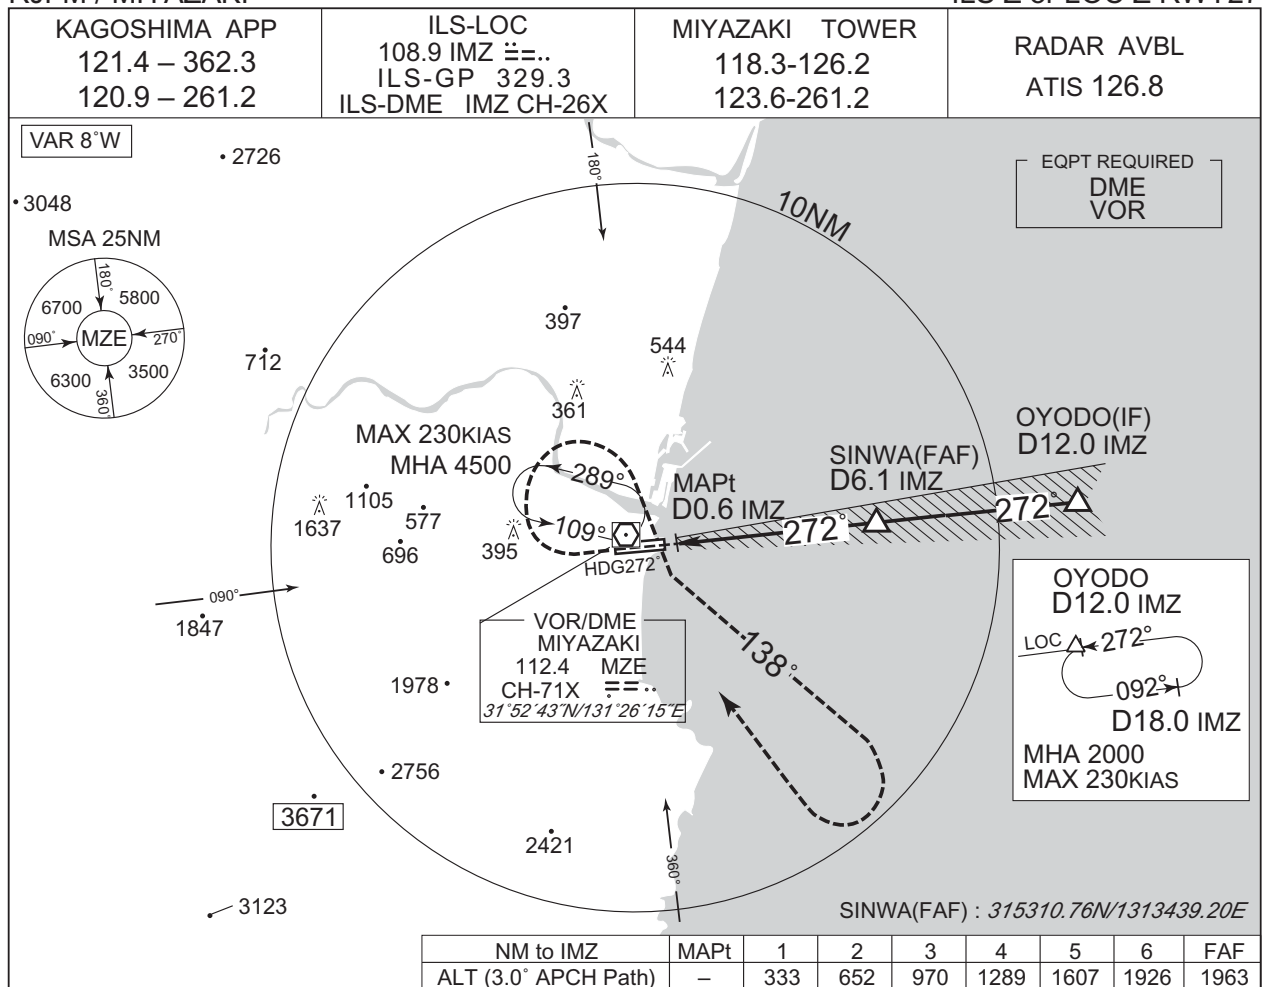

MISSED APPROACH
Climb to 500FT on HDG 272°, turn right, via MZE R138 to 4500FT, turn right, direct to MZE VOR/DME and hold.
Contact KAGOSHIMA APP.

Timing not authorized for defining the MAPt.

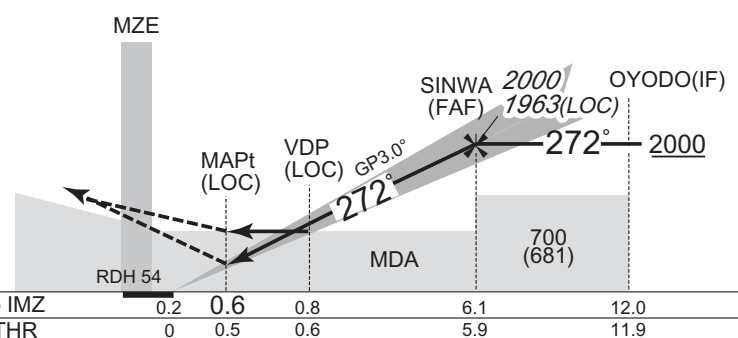


Missed APCH climb gradient MNM 4.0%

MINIMA THR elev. 21 AD elev. 19


CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	221 (200)	1000	270 (251)	1500	520 (501)	1600
B				650 (631)	2400	
C						1600
D						1800

MINIMA with Missed APCH climb gradient of 2.5% are not established.

INSTRUMENT APPROACH CHART

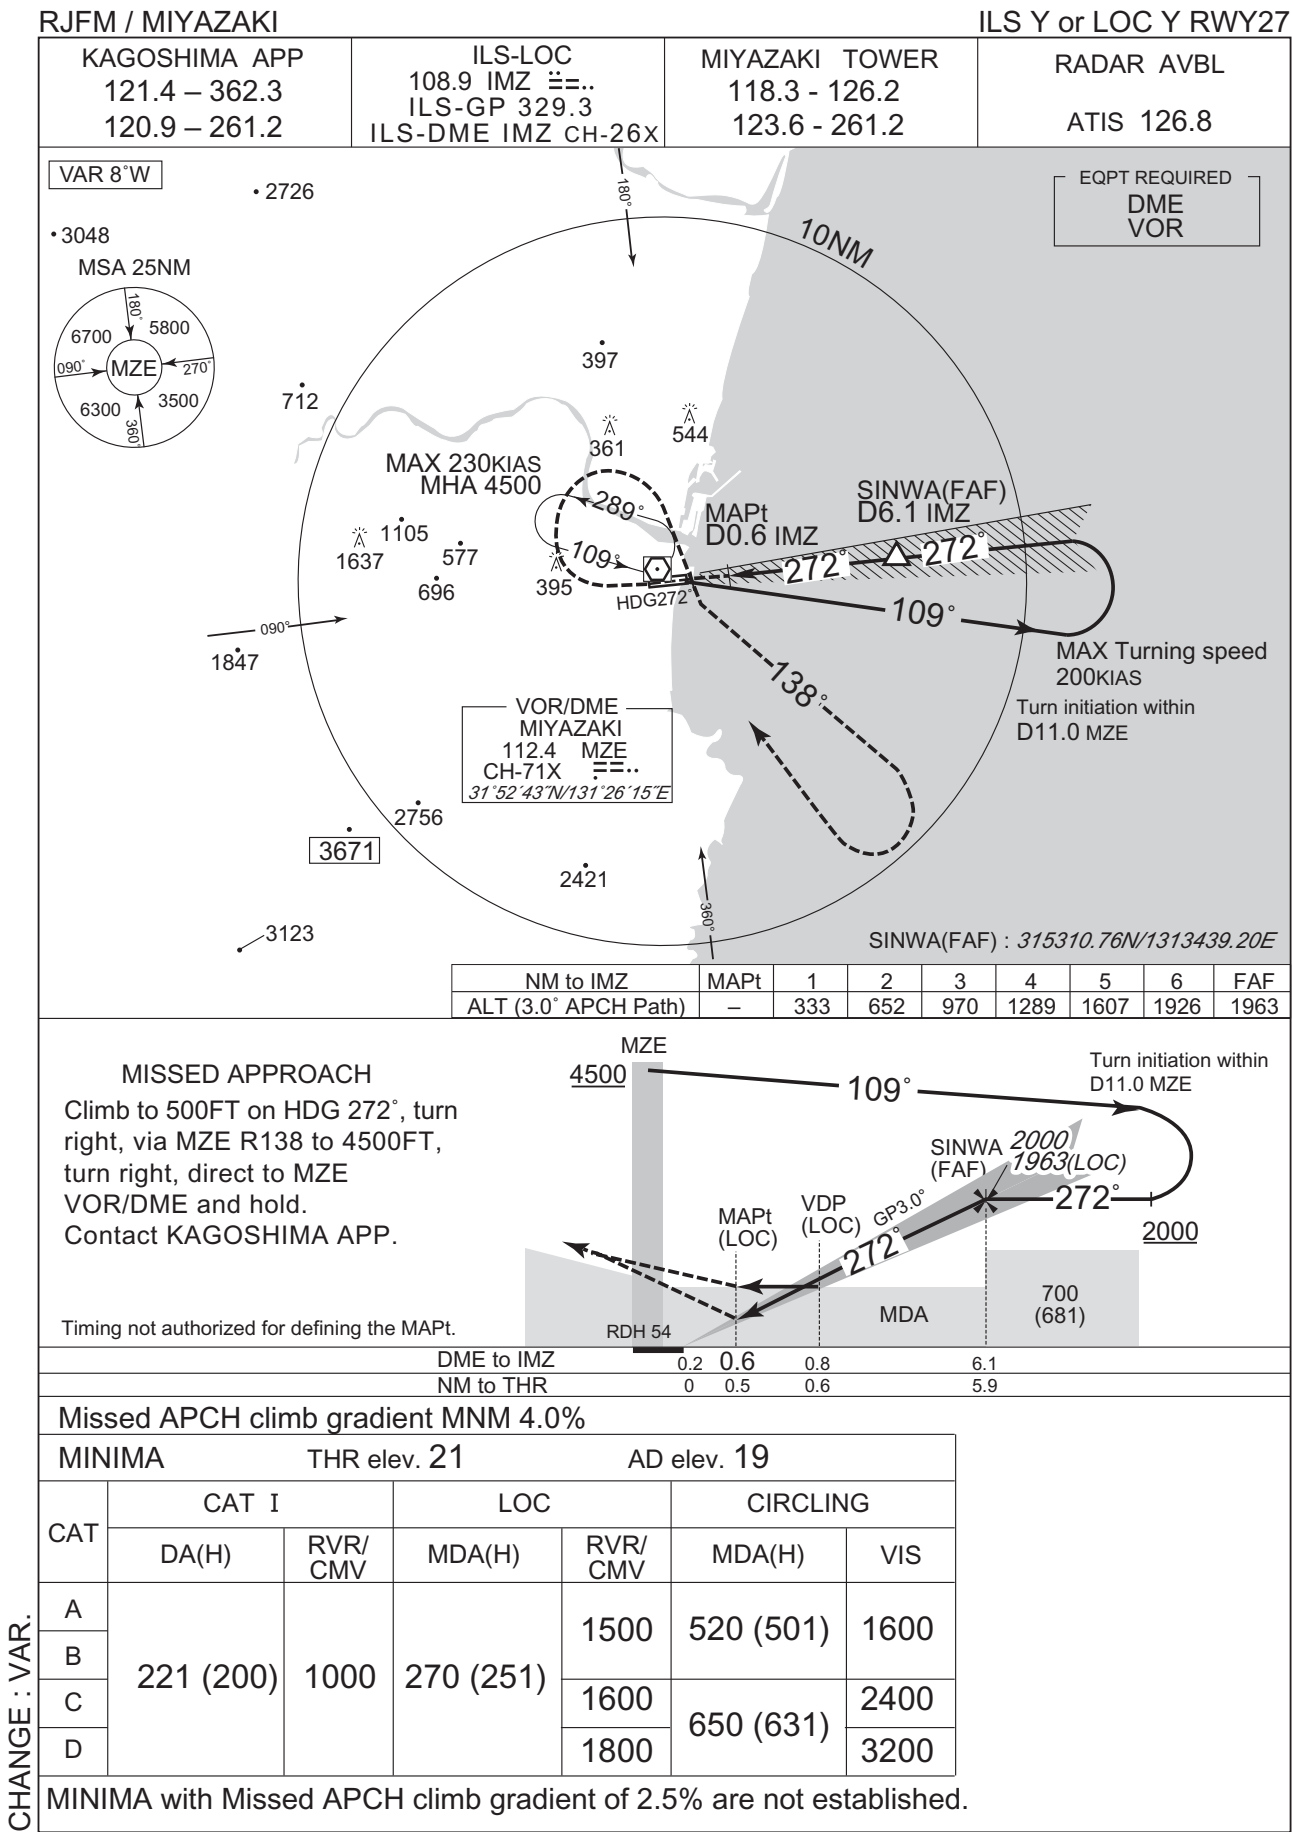

INSTRUMENT APPROACH CHART

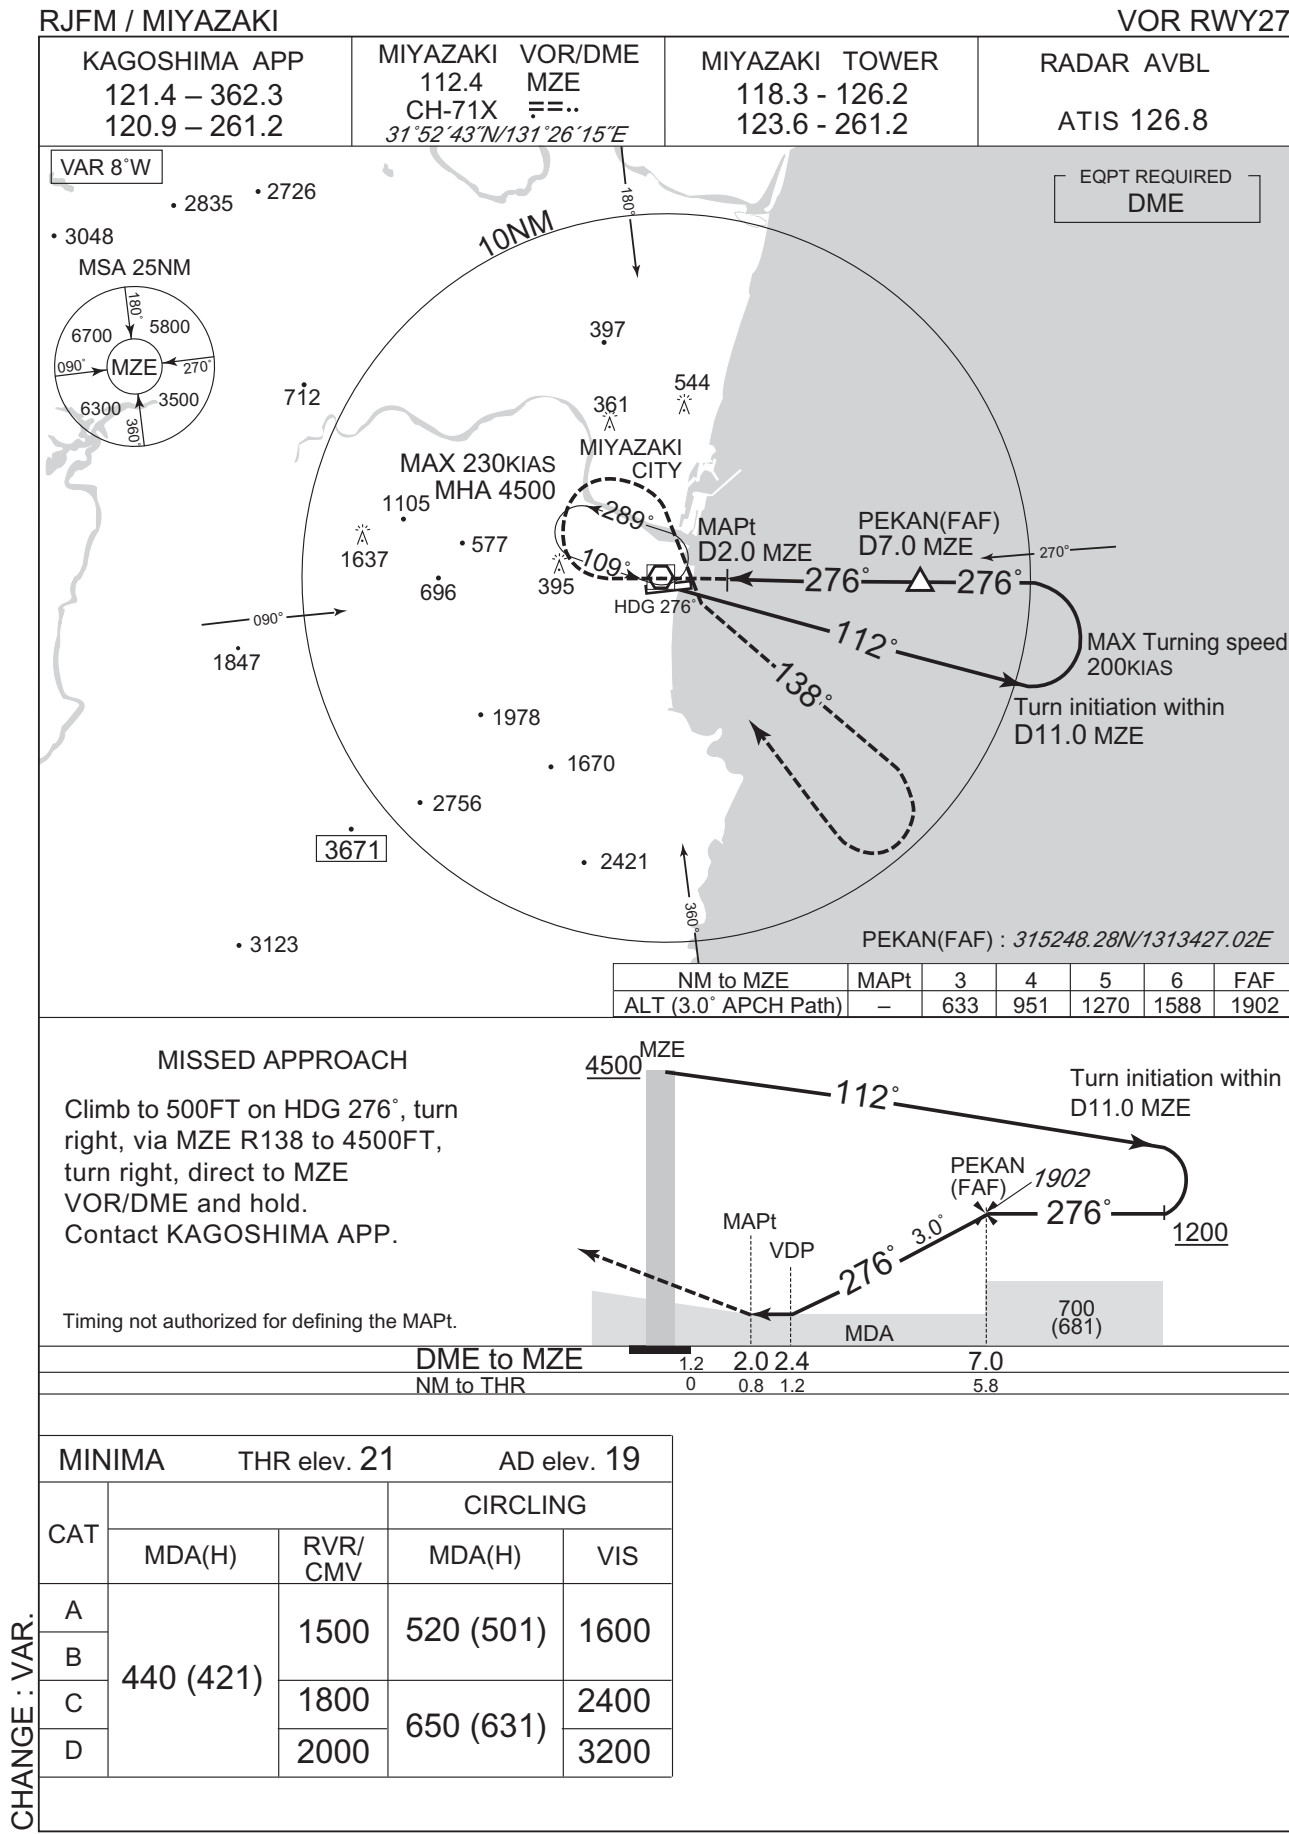

RJFM / MIYAZAKI

KAGOSHIMA APP 121.4 - 362.3 120.9 - 261.2	RNP AR RF required.	MIYAZAKI TOWER 118.3 -126.2 123.6 - 261.2	RADAR AVBL ATIS 126.8
---	------------------------	---	--------------------------

131° 20'E

VAR 8°W

131° 30'E

32° 0'N

31° 50'N

1978

FM950 (FAF) MAX165KIAS

FM951

FM952

RW09

HIMKA (IF)

OYODO (IAF/MAHF)

10NM

10NM

10NM

2.0

3.5

1.9

10.6

13.2

273°

273°

093°

297°

093°

093°

180°

270°

360°

090°

5800

6700

6300

3500

2000

1500

1000

500

AD elev.19

Contour Intervals

NOT TO SCALE

OYODO

273°

093°

1MIN

MHA 4000 / MAX 210KIAS

MSA RW09 25NM


1 0 1 2 3 4 5 6 7 8 9 10

1 0 1 2 3 4 5

KM

NM

FM950(FAF) : 315655.69N/1312544.90E

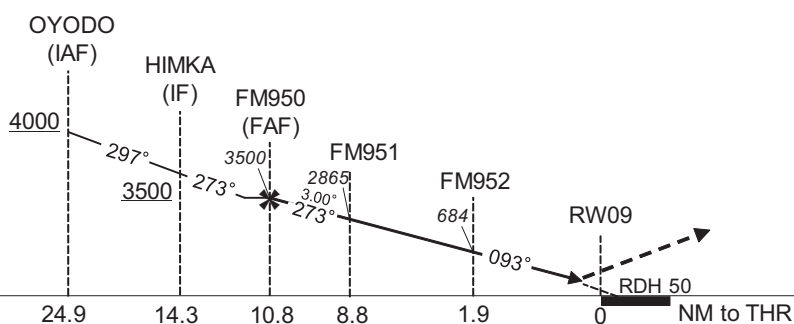

Contact KAGOSHIMA APP.

MINIMA	THR elev. 15	AD elev. 19
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B		
C	327(312)	1400
D		1600

Authorization Required

20/2/25

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Z RWY09(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	OYODO	-	-	-7.5	-	-	+4000	-	-	-
002	TF	HIMKA	-	297 (289.7)	-7.5	10.6	-	+3500	-	-	1.0
003	TF	FM950	-	273 (265.2)	-7.5	3.5	-	3500	-165	-	1.0
004	TF	FM951	-	273 (265.2)	-7.5	2.0	-	2865	-	-3.00	0.3
005	RF Center: FMRF1 r=2.18NM	FM952	-	-	-7.5	6.9	L	684	-	-3.00	0.3
006	TF	RW09	Y	093 (085.1)	-7.5	1.9	-	65	-	-3.00/50	0.3
007	TF	OYODO	-	093 (085.1)	-7.5	13.2	-	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OYODO	273 (265.9)	-7.5	1.0 (-14000)	L	4000	FL140	-210(-14000)	1.0

Waypoint Coordinates


Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
HIMKA	315713.28N / 1312950.79E	FMRF1	315435.02N / 1312337.63E
FM950	315655.69N / 1312544.90E		
FM951	315645.60N / 1312324.68E		
FM952	315224.44N / 1312350.57E		
RW09	315234.26N / 1312607.02E		
OYODO	315340.52N / 1314134.32E		

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.

RJFM / MIYAZAKI

RNP Y RWY09(AR)

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C



Authorization Required

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP Y RWY09(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	OYODO	-	-	-7.5	-	-	+4000	-	-	-
002	TF	SURFU	-	256 (248.8)	-7.5	10.3	-	+3500	-	-	1.0
003	TF	FM953	-	256 (248.7)	-7.5	3.5	-	3500	-165	-	1.0
004	TF	FM954	-	256 (248.7)	-7.5	1.4	-	3064	-	-3.00	0.3
005	RF Center: FMRF2 r=2.18NM	FM952	-	-	-7.5	7.5	R	684	-	-3.00	0.3
006	TF	RW09	Y	093 (085.1)	-7.5	1.9	-	65	-	-3.00/50	0.3
007	TF	OYODO	-	093 (085.1)	-7.5	13.2	-	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OYODO	273 (265.9)	-7.5	1.0 (-14000)	L	4000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
SURFU	314957.66N / 1313018.83E	FMRF2	315013.85N / 1312403.51E
FM953	314841.56N / 1312629.11E		
FM954	314811.70N / 1312459.11E		
FM952	315224.44N / 1312350.57E		
RW09	315234.26N / 1312607.02E		
OYODO	315340.52N / 1314134.32E		

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.


INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI


RNP X RWY09(AR)

KAGOSHIMA APP
121.4 - 362.3
120.9 - 261.2RNP AR
RF required.MIYAZAKI TOWER
118.3 - 126.2
123.6 - 261.2RADAR AVBL
ATIS 126.8

For uncompensated Baro-VNAV systems, procedure not authorized below -5°C / above 45°C

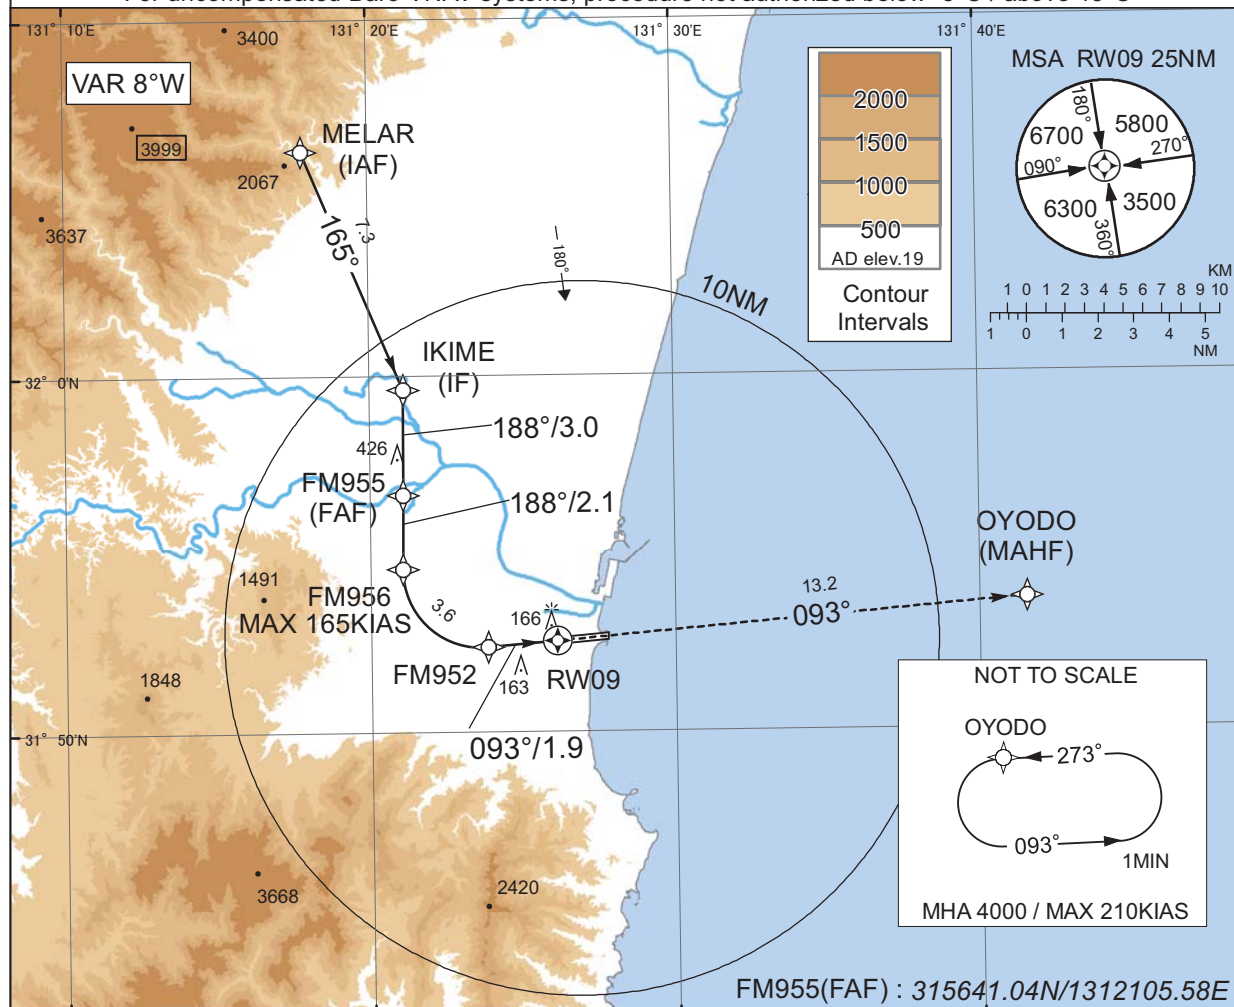

CHANGE : VAR. PROC course. HLDG pattern at OYODO.

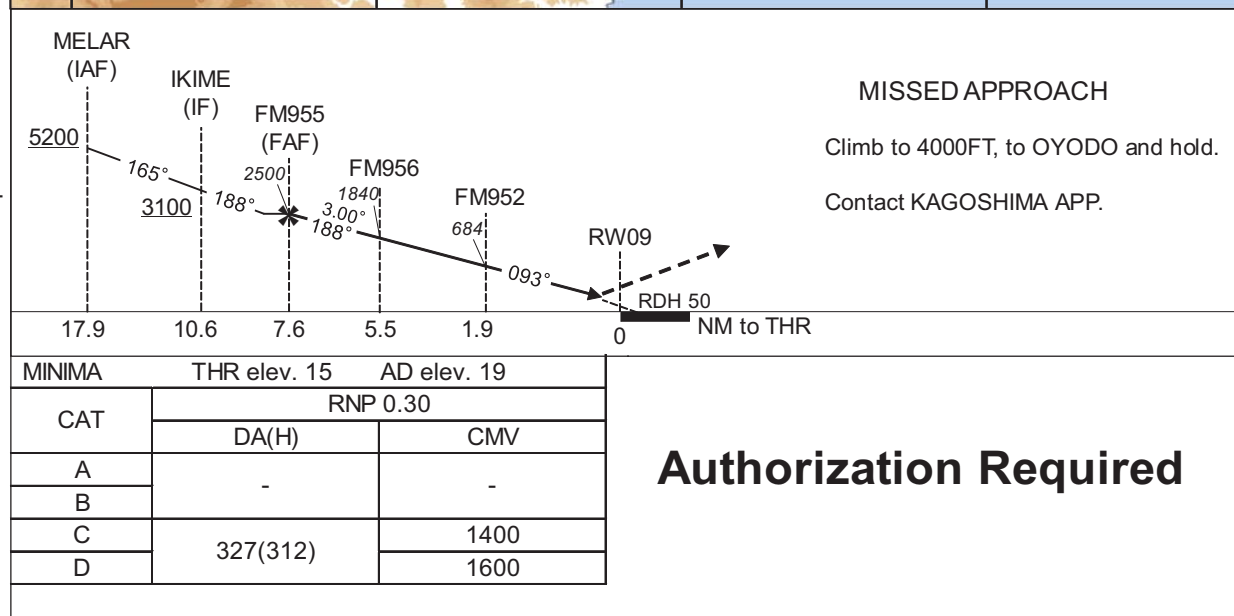

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI

RNP X RWY09(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	MELAR	-	-	-7.5	-	-	+5200	-	-	-
002	TF	IKIME	-	165 (157.4)	-7.5	7.3	-	+3100	-	-	0.3
003	TF	FM955	-	188 (180.6)	-7.5	3.0	-	2500	-	-	0.3
004	TF	FM956	-	188 (180.6)	-7.5	2.1	-	1840	-165	-3.00	0.3
005	RF Center: FMRF1 r=2.18NM	FM952	-	-	-7.5	3.6	L	684	-	-3.00	0.3
006	TF	RW09	Y	093 (085.1)	-7.5	1.9	-	65	-	-3.00/50	0.3
007	TF	OYODO	-	093 (085.1)	-7.5	13.2	-	4000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OYODO	273 (265.9)	-7.5	1.0 (-14000)	L	4000	FL140	-210(-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MELAR	320620.09N / 1311750.24E	FMRF1	315435.02N / 1312337.63E
IKIME	315938.25N / 1312107.83E		
FM955	315641.04N / 1312105.58E		
FM956	315436.46N / 1312104.01E		
FM952	315224.44N / 1312350.57E		
RW09	315234.26N / 1312607.02E		
OYODO	315340.52N / 1314134.32E		

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.

RJFM / MIYAZAKI

KAGOSHIMA APP 121.4 - 362.3 120.9 - 261.2	RNP AR RF required.	MIYAZAKI TOWER 118.3 - 126.2 123.6 - 261.2	RADAR AVBL ATIS 126.8
---	------------------------	--	--------------------------

VAR 8°W

2000
1500
1000
500
AD elev. 19

Contour Intervals

10NM

180°
270°
360°
5800
6300
3500

NOT TO SCALE

OYODO
273°
093°
1MIN

MHA 2000 / MAX 210KIAS

KARAH (IAF)

MENYA (IF)

FM750
MAX 185KIAS

OYODO (MAHF)

FM752

FM751 (FAF)

RW27

273°

220°

220°

273°

500

150

4.3

1.1

1.2

2.4

3.0

131° 20'E

131° 30'E

32° 0'N

31° 50'N

1160

1269

2228

1671

1686

1 0 1 2 3 4 5 6 7 8 9 10
1 0 1 2 3 4 5
KM
NM

FM751 (FAF) : 315322.32N/1313358.20E

The diagram illustrates a flight path profile. The horizontal axis represents distance in nautical miles (NM) from 0 to 12.0. The vertical axis represents altitude in feet. Key points and markers include:

- THR (Threshold):** Located at 0 NM.
- RW27 (Runway 27):** Indicated by a dashed line and an arrow pointing left.
- RDH 54 (Reference Datum Height):** Indicated by a dashed line and an arrow pointing left.
- FM752:** A point on the profile at 4.3 NM.
- FM751 (FAF): (Final Approach Fix):** A point on the profile at 5.4 NM.
- FM750:** A point on the profile at 6.6 NM.
- MENYA (IF): (Intermediate Fix):** A point on the profile at 9.0 NM.
- KARAH (IAF): (Initial Approach Fix):** A point on the profile at 12.0 NM.
- Altitude Markers:** 1453 feet and 1800 feet are marked on the profile.
- Angles:** The profile is defined by two segments with angles of 273° and 220° relative to the horizontal.

MINIMA	THR elev. 21	AD elev. 19
CAT	RNP 0.30	
	DA(H)	RVR/CMV
A	-	-
B		
C	321(300)	1800
D		2000

Authorization Required

20/2/25

INSTRUMENT APPROACH CHART

RJFM / MIYAZAKI


RNP RWY27(AR)

Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KARAH	-	-	-7.5	-	-	+1800	-	-	-
002	TF	MENYA	-	220 (212.3)	-7.5	3.0	-	-	-	-	0.3
003	TF	FM750	-	220 (212.3)	-7.5	2.4	-	-	-185	-	0.3
004	RF Center: FMRF3 r=2.43NM	FM751	-	-	-7.5	1.2	R	1800	-	-	0.3
005	RF Center: FMRF3 r=2.43NM	FM752	-	-	-7.5	1.1	R	1453	-	-3.00	0.3
006	TF	RW27	Y	273 (265.2)	-7.5	4.3	-	75	-	-3.00/54	0.3
007	FA	-	-	273 (265.2)	-7.5	-	-	+500	-	-	1.0
008	DF	OYODO	-	-	-7.5	-	R	2000	-	-	1.0


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	OYODO	273 (265.9)	-7.5	1.0 (-14000)	L	2000	FL140	-210(-14000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KARAH	315841.41N / 1313818.57E	FMRF3	315528.33N / 1313231.52E
MENYA	315609.28N / 1313625.03E		
FM750	315409.97N / 1313456.09E		
FM751	315322.32N / 1313358.20E		
FM752	315302.73N / 1313245.72E		
RW27	315241.06N / 1312741.80E		
OYODO	315340.52N / 1314134.32E		

CHANGE : PROC course. VAR. HLDG pattern at OYODO added.



Call sign	BRG / DIST from ARP	Remarks
有田 Arita	312°T / 6.5NM	東九州自動車道大淀川橋 Bridge
相生 Aioi	330°T / 5.5NM	宮崎西環状線相生橋 Bridge
塩路 Shioji	016°T / 5.6NM	一ツ葉有料道路一ツ葉PA Parking Area
一ツ葉 Hitotsuba	018°T / 3.4NM	サンビーチ 一ツ葉 Beach
加江田 Kaeda	175°T / 3.7NM	加江田川河口 River mouth
白浜 Shirahama	160°T / 5.8NM	戸崎鼻先端のホテル Hotel
田野 Tano	246°T / 8.2NM	宮崎自動車道田野IC Interchange

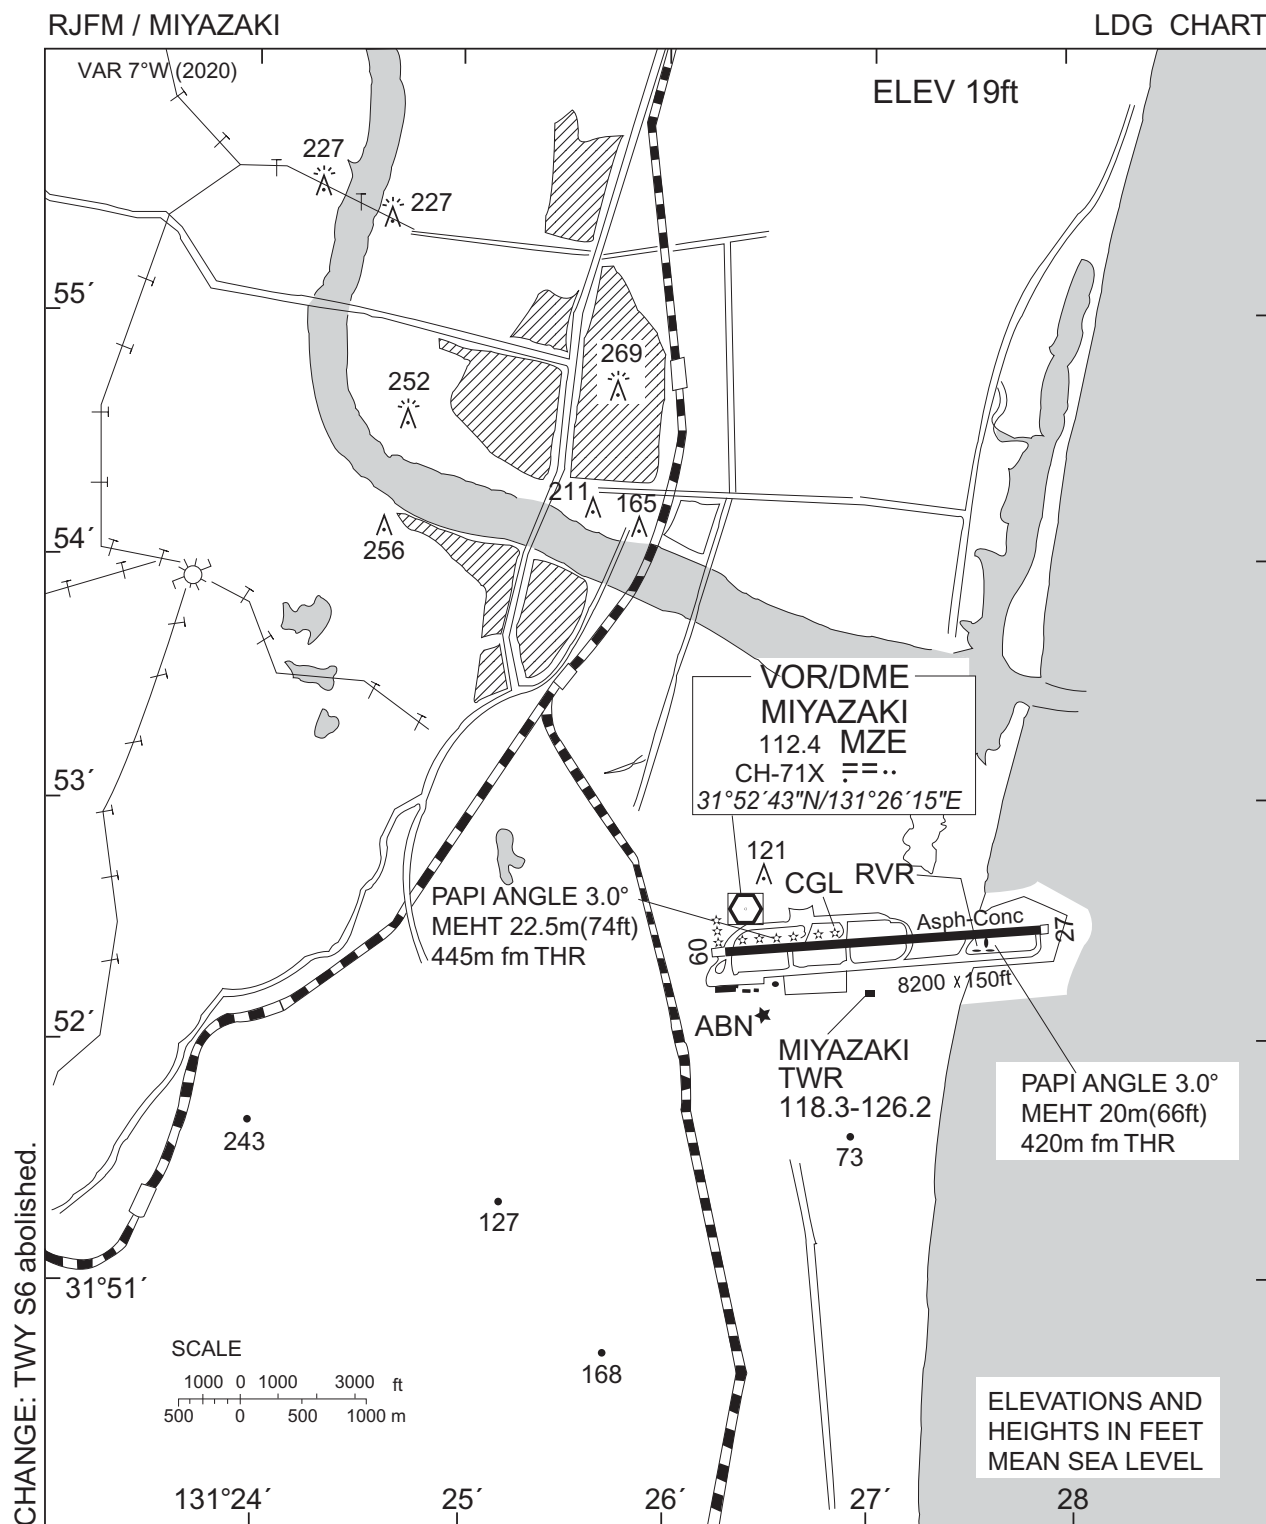


RJFM / MIYAZAKI

Minimum Vectoring Altitude CHART

VAR 7°W (2017)

CHANGE : Update(BTN 300° and 350°).

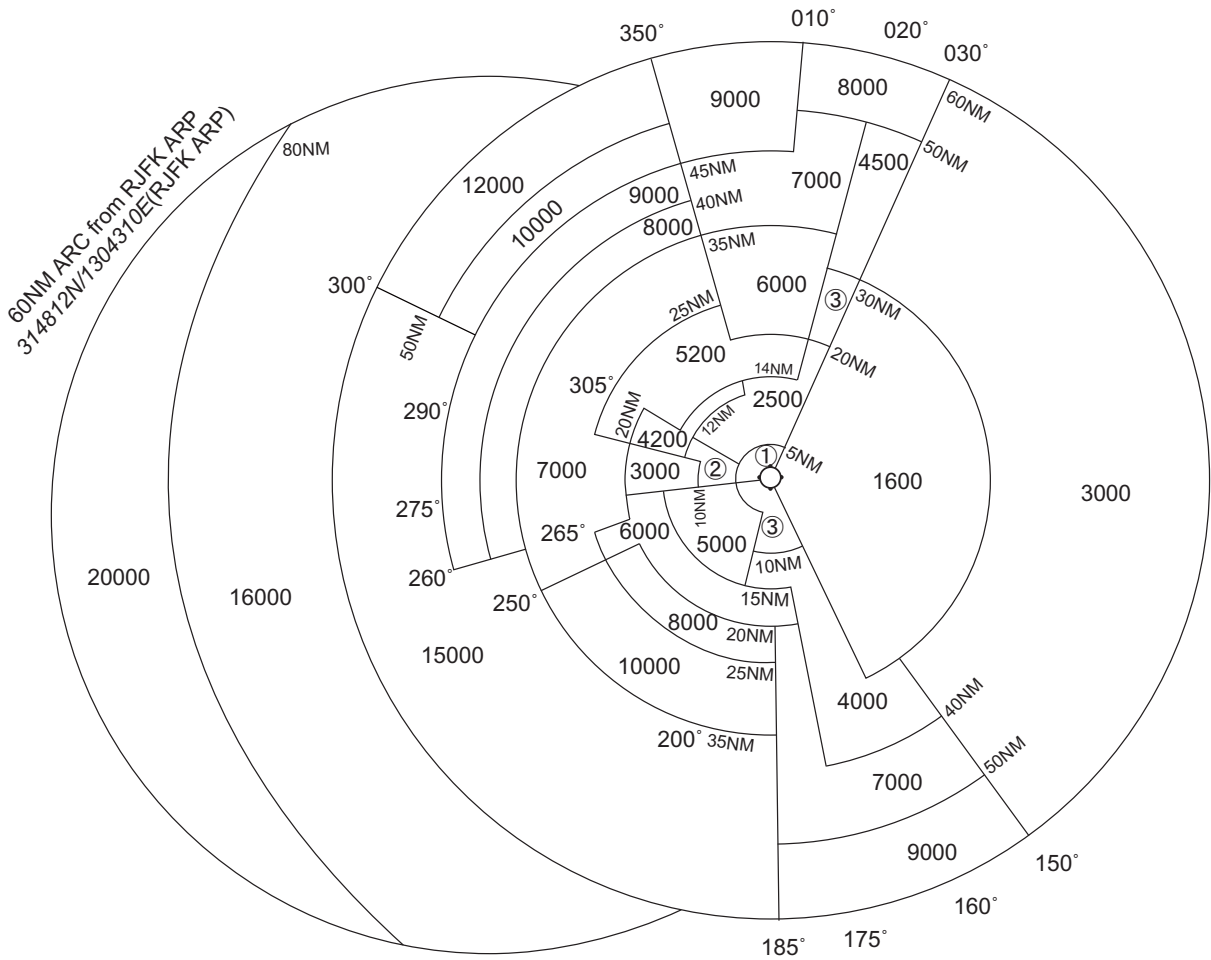

- ① 2000
- ② 2700
- ③ 3500

CENTER: 315238N/1312655E (RJFM ARP)