

AD CHART



RJOI / IWAKUNI

Aircraft Parking / Docking Chart



RJOI / IWAKUNI

ATIS ★	128.4	283.0
CLNC DEL ★	135.7	310.6
GND CON ★	121.3	360.2
TOWER ★	123.8	340.2
DEP CON ★	131.4	363.8

RNAV1-DME/DME/IRU, DME/DME, GNSS, or RNP 2.0

Rwy	Knots	60	120	180	240	300	360
* 02 @	V/V(fpm)	230	460	690	920	1150	1650
† 02/20 @	V/V(fpm)	330	660	990	1320	1650	1980
† 20 @	V/V(fpm)	204	408	612	816	1020	1224

* Minimum † ATC Climb Rate

Ⓐ to 2300

⑥ MALTA transtion to 15,000 from MYE to MALTA

(C) to 6000



NOTE: Chart not to scale

TA 14,000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 20: Climb heading 195° to 511, then on depicted route. Cross MATSUYAMA VOR/DME (MYE) at 6000 thence...

KOCHI TRANSITION: As depicted. Cross KOCHI (KRE) at FL150. Maintain FL150 or higher as assigned.

MALTA TRANSITION: As depicted. Cross MALTA at FL150, maintain FL150 or higher as assigned.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJOI / IWAKUNI

LOC/DME I-IJO 110.15 Chan 38(Y)	APCH CRS 014°	Rwy Idg 8006 TDZE 10 Arpt Elev 10
---	-------------------------	--

ILS RWY02

RADAR or MYE VOR/DME required.

▼ *When ALS inop, increase CAT ABCD vis to ¾ mile.
**When ALS inop, increase CAT AB vis to 1 mile,
CAT CD vis to 1½ miles.
*** Circling not authorized W of Rwy 02-20. CAT D
remain within 2.8 NM.

ALS-1




MISSED APPROACH: Climb on heading 014° to 700,
then climbing right turn to 6000 heading 144° direct
MYE VOR/DME and hold.

ATIS★ 128.4 283.0	APP CON★ 131.4 236.2	TOWER★ 123.8 340.2	GND CON★ 121.3 360.2	CLNC DEL★ 135.7 310.6	ASR/PAR
-----------------------------	--------------------------------	------------------------------	--------------------------------	---------------------------------	---------


Knots	60	120	180	240	300	360
V/V(fpm)	210	420	630	840	1050	1260
Min climb of 210 ft/NM to 2100 - Controlling Obstacle 1457						



EMERG SAFE ALT 100 NM 8500

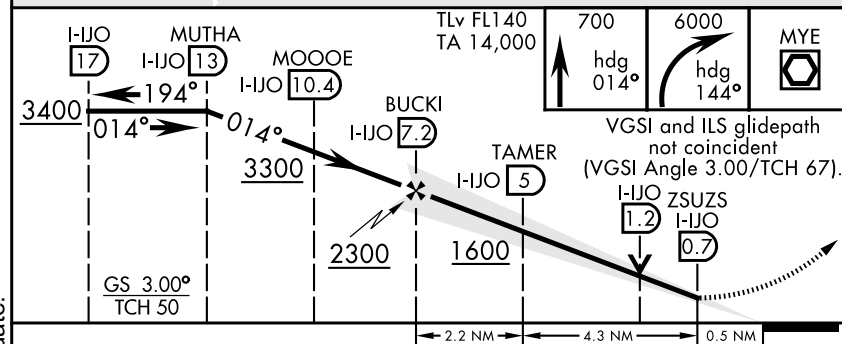

CATEGORY	A	B	C	D
S-ILS 02*	260-½	250	(300-½)	
S-LOC 02**	400-½	390 (400-½)	400-⅝	390 (400-⅝)
CIRCLING***	460-1	450 (500-1)	460-1½	560-2

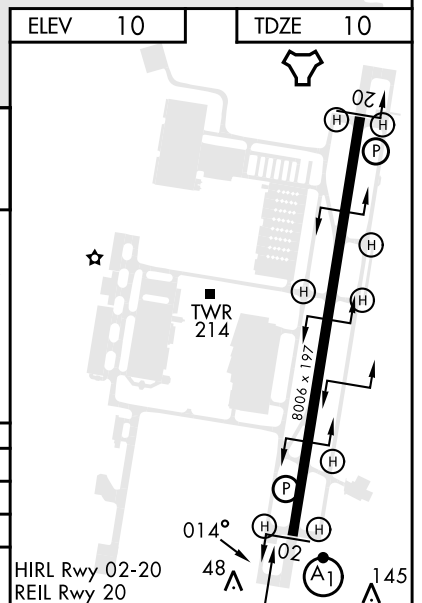

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJOI / IWAKUNI

APCH CRS	Rwy Idg	8006
015°	THRE	10
	Arpt Elev	10

RNAV(GPS) RWY02

RNP APCH


▼ * When ALS inop, increase vis to 7/8 mile.
 ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1 1/8 miles.
 *** Circling not authorized W of Rwy 02-20. CAT D circling remain within 2.8 NM.



MISSED APPROACH: Climb to 440 then climbing right turn to 6000 direct MYE and hold.


ATIS ★	APP CON ★	TOWER ★	GND CON ★	CLNC DEL ★	ASR/PAR
128.4 283.0	131.4 236.2	123.8 340.2	121.3 360.2	135.7 310.6	

Knots	60	120	180	240	300	360
V/V(fpm)	260	520	780	1040	1300	1560
Min climb of 260 ft/NM to 2100 - Controlling Obstacle 1457						

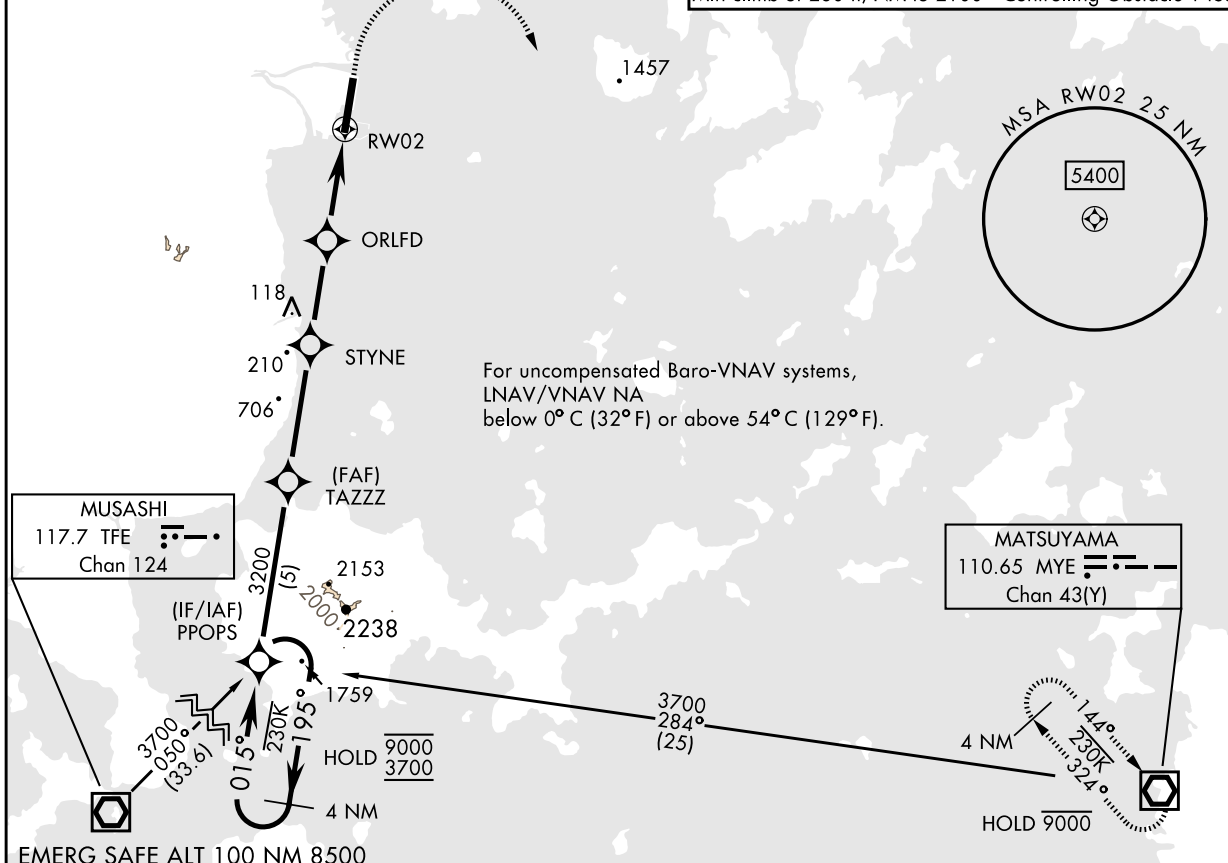

EMERG SAFE ALT 100 NM 8500


VGSI and glidepath not coincident
(VGSI Angle 3.00/TCH 67).




ELEV	10	THRE	10
------	----	------	----

4 NM
Holding Pattern
PPOPS

9000	195°	015°
3700	015°	015°
GP 3.00° TCH 55		

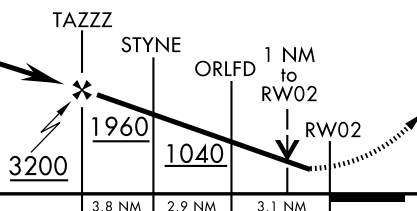

TLv FL140
TA 14,000

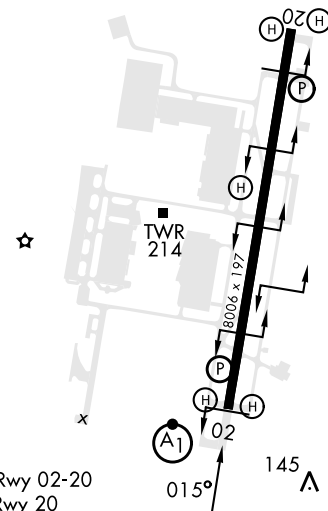

HIRL Rwy 02-20
REIL Rwy 20

CHANGE : Update.


CATEGORY	A	B	C	D
LNAV/ * VNAV DA	276-1/2 266 (300-1/2)	287-1/2 277 (300-1/2)	295-1/2 285 (300-1/2)	306-1/2 296 (300-1/2)
LNAV MDA**	400-1/2 390 (400-1/2)	390 (400-1/2)	400-5/8 390 (400-5/8)	390 (400-5/8)
CIRCLING ***	460-1 450 (500-1)	450 (500-1)	460-1 1/2 450 (500-1 1/2)	560-2 550 (600-2)

NOTE: REPRINTING DOD FLIP

RJOI / IWAKUNI

LDG CHART

SEALANE PATTERNS & VFR ARR PATTERNS

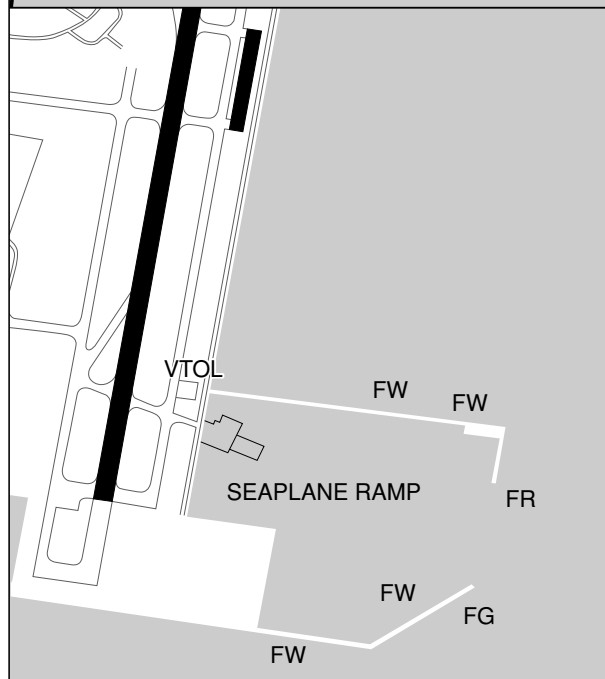

IWAKUNI SEALANE(TOWER) :
122.0 - 123.1x - 228.2 - 319.0

IWAKUNI APP : WEST
131.4 - 236.2
EAST 128.0 - 250.6

IWAKUNI TWR :
123.8 - 340.2

RJOI / IWAKUNI

Minimum Vectoring Altitude CHART

Altitude MSL
S1 – 7400 ft
S2 – 5500 ft
S3 – 2300 ft
S4 – 4100 ft
S5 – 3400 ft
S6 – 2800 ft
S7 – 2700 ft
S8 – 2600 ft

- Centered on NEU (Iwakuni TACAN)
- Radials from NEU



CHANGE : Update.