

## AD 2 AERODROMES

## RJBE AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJBE - KOBE

## RJBE AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	343758N/1351326E 091°/1.25km from RWY 09 THR
2	Direction and distance from (city)	8Km(4.3nm) S from Sannomiya Station
3	Elevation/ Reference temperature	18ft / 31°C (2009-2013)
4	Geoid undulation at AD ELEV PSN	121ft
5	MAG VAR/ Annual change	8°W (2022) / 5' W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Kansai Airports Kobe 1, Kobekuko, Chuo-ku, Kobe city, Hyogo pref., 650-0048 Japan Tel: 078-306-4195 Fax: 078-306-4196 E-mail: ukb-ops@kobe.kansai-airports.co.jp Web: <a href="http://www.kansai-airports.co.jp/">http://www.kansai-airports.co.jp/</a>
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Kobe Airport Branch(CAB) 1, Kobekuko, Chuo-ku, Kobe city, Hyogo pref., 650-0048 Japan Tel: 078-304-3800 Fax: 078-304-3806

## RJBE AD 2.3 OPERATIONAL HOURS

1	AD Administration	2200-1400
2	Customs and immigration	On request Customs: 078-333-3010 Immigration: 078-391-6377
3	Health and sanitation	On request Quarantine(human): 078-672-9653 Quarantine(animal): 078-222-8990 Quarantine(plant): 078-331-2386
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (KANSAI)
7	ATS	2200-1400
8	Fuelling	2200-1400
9	Handling	2200-1400
10	Security	2200-1400
11	De-icing	Nil
12	Remarks	Nil

**RJBE AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Fuel grades: Jet A1
3	Fuelling facilities/ capacity	Fuel truck refueling / Ask AD Administration
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

**RJBE AD 2.5 PASSENGER FACILITIES**

1	Hotels	Hotels in Kobe city
2	Restaurants	At Airport
3	Transportation	Railways, Buses and Taxi
4	Medical facilities	Hospital in Kobe city 4km
5	Bank and Post Office	Bank in Kobe city / Post Office in Kobe city
6	Tourist Office	Tourist office in Kobe city
7	Remarks	Nil

**RJBE AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	Fire protection: Scale of protection ICAO required: CAT 9 Available: CAT 9
2	Rescue equipment	Chemical fire fighting truck x 3 Water-supply truck Emergency medical equipments conveyance truck
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

**RJBE AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Snow remove equipments:None
2	Clearance priorities	Nil
3	Remarks	Seasonal availability: All seasons Snow removal will be commenced, if the RWY and TWY are covered with a depth of 3cm snow or more.

## RJBE AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Apron: Spot NR1 - 10 Surface: cement-concrete, Strength: PCR 1132/R/B/W/T Apron: Spot NR11 - 15 Surface: cement-concrete, Strength: PCR 1026/R/B/W/T
2	Taxiway width, surface and strength	TWY P1 - P3, P5 Width:30m, Surface: asphalt-concrete, Strength: PCR 1039/F/B/X/T TWY P4 Width:30m, Surface: cement-concrete, Strength: PCR 1132/R/B/W/T TWY T1, T6 Width:32m, Surface: asphalt-concrete, Strength: PCR 1039/F/B/X/T TWY T2 - T5 Width:34m, Surface: asphalt-concrete, Strength: PCR 852/F/B/X/T TWY W1 Width:9m, Surface: asphalt-concrete, Strength: PCR 190/F/B/X/T TWY W2 Width:18m, Surface: asphalt-concrete, Strength: PCR 417/F/B/X/T TWY W3 Width:23m, Surface: asphalt-concrete, Strength: PCR 513/F/B/X/T
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Spot NR 1 : 343811.41N 1351353.34E                      7 : 343810.19N 1351337.71E 2 : 343811.22N 1351351.00E                      7L : 343809.72N 1351337.60E 2R : 343810.72N 1351351.82E                      8 : 343810.10N 1351335.65E 2L : 343810.60N 1351350.24E                      9 : 343809.96N 1351333.89E 3 : 343810.92N 1351348.47E                      10 : 343808.89N 1351332.85E 4 : 343810.71N 1351345.73E                      11 : 343809.64N 1351329.78E 4R : 343810.26N 1351346.95E                      12 : 343809.48N 1351327.70E 4L : 343809.97N 1351345.38E                      13 : 343809.12N 1351325.37E 5 : 343810.50N 1351342.99E                      14 : 343808.39N 1351322.40E 6 : 343810.28N 1351340.26E                      15 : 343808.21N 1351320.05E 6R : 343810.42N 1351340.72E 6L : 343809.49N 1351339.22E
6	Remarks	Nil

## RJBE AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Aircraft stand identification sign: Spot NR 3 - 7, 11 - 13
2	RWY and TWY markings and LGT	RWY: RWY 09/27 (Marking) RWY designation, RWY CL, RWY THR, RWY middle point, Aiming point, TDZ, RWY side stripe (LGT) RCLL, REDL, RTHL, RENL, RTZL(RWY09), WBAR(RWY09)  TWY: All (Marking) TWY CL, TWY side stripe (LGT) TWY edge LGT  TWY: T1 - T6, P1 - P5 (LGT) TWY CL LGT  TWY: T1 - T6 (Marking) RWY HLDG PSN (LGT) RWY guard LGT, Taxiing guidance sign  TWY: P2 (LGT) Taxiing guidance sign
3	Stop bars	Nil
4	Remarks	(Marking) Overrun, ACFT parking position, Apron TWY CL (LGT) Apron flood LGT

## RJBE AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

The following obstacles in Obstacle data (Area2) shift locations.

OBST ID	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
28001789 28001790					
28001794 28001795 28001796 28001797 28001798 28001799 28001800 28001801 28001802 28001803 28001804 28001806 28006558 28006559 28006560	Cranes	See Remarks	420ft	Marking/LIM	Above horizontal SFC 19 cranes exist in the area bounded by straight lines connecting following points: a) 343906N/1351440E b) 343927N/1351341E c) 343943N/1351331E d) 343950N/1351352E e) 343940N/1351420E

In Area3 To be developed

## RJBE AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	KANSAI
2	Hours of service MET Office outside hours	H24 (KANSAI)
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at KANSAI
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> , P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	TWR, ATIS
10	Additional information(limitation of service, etc.)	Nil

## RJBE AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
09	084.61°	2500 x60	PCR 1039/F/B/X/T Asphalt Concrete	343753.91N 1351237.12E 121ft	THR ELEV: 21.2ft TDZ ELEV: 21.2ft
27	264.61°	2500 x60	PCR 1039/F/B/X/T Asphalt Concrete	343801.53N 1351414.84E 122ft	THR ELEV: 20.8ft
Slope of RWY	Strip Dimensions(M)		RESA (Overrun) Dimensions(M)		Remarks
7	10		11		14
See AD2.24 AD Chart	2620x300		200 x (MNM:180 MAX:300)*		RWY grooving:2500mX40m
See AD2.24 AD Chart	2620x300		40 x 300 *For detail, ask airport administrator		RWY grooving:2500mX40m

## RJBE AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
09	2500	2500	2500	2500	Nil
TWY:T2	1985	1985	1985		
27	2500	2500	2500	2500	Nil
TWY:T5	1985	1985	1985		

TORA, TODA and ASDA for TWY indicate distances BTN the point where TWY CL meets RWY CL and RWY THR.

## RJBE AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
09	PALS (CAT I) 900m LIH	Green Green	PAPI 3.0°/Left 431m 66ft	900m	2500m 30m Coded color LIH	2500m 60m Coded color LIH	Red	Nil (*2)
27	SALS (*1) 420m LIH	Green -	PAPI 3.0°/Left 491m 74ft	-	2500m 30m Coded color LIH	2500m 60m Coded color LIH	Red	Nil (*2)
Remarks								
10								
SALS with APCH LGT BCN(600m and 900m FM RWY 27 THR)(*1) Overrun area LGT(LEN:60m Color:Red)(*2) CGL for RWY 27								

**RJBE AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY**


1	ABN/IBN location, characteristics and hours of operation	ABN: 343819N/1351357E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer: 417m FM RWY09 THR, LGTD 414m FM RWY27 THR, LGTD
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply/ switch-over time	Within 1 sec: REDL, RENL, RTHL, WBAR, RCLL and Overrun area edge LGT Within 15 sec: Other Lights
5	Remarks	WDI LGT

**RJBE AD 2.16 HELICOPTER LANDING AREA**

1	Coordinates TLOF or THR of FATO Geoid undulation	W-HELIPAD: 343802.10N/1351305.32E C-HELIPAD: 343802.90N/1351315.52E E-HELIPAD: 343805.95N/1351354.61E
2	TLOF and/or FATO elevation	W-HELIPAD: 13ft C-HELIPAD, E-HELIPAD: 12ft
3	TLOF and FATO area dimensions, surface, strength, marking	TLOF and FATO area dimensions: 24mx20m Surface: W-HELIPAD, C-HELIPAD: Asphalt E-HELIPAD: Concrete Strength: 12ton Marking: See AIP AD2.24 AD chart
4	True BRG of FATO	084.61°/264.61°
5	Declared distance available	Nil
6	APCH and FATO lighting	Nil
7	Remarks	W-HELIPAD: • MAX helicopter type: EC25 • daytime and VMC use only C-HELIPAD: • MAX helicopter type: EC25 • daytime and VMC use only E-HELIPAD: • MAX helicopter type: EC25 • daytime and VMC use only

## RJBE AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
KOBE CTR	The airspace bounded by the lines connecting the following points: (1)344120N/1351756E, (2)344035N/1350815E thence to point(1). The line connecting point (1) to point (2) is the minor arc with a radius of 5NM KOBE ARP.	----- 2000	D	KOBE TWR  En	
	The airspace bounded by the lines connecting the following points: (1)344120N/1351756E, (2)344035N/1350815E thence to point(1). The line connecting point (2) to point (1) is the major arc with a radius of 5NM KOBE ARP.	----- 2500			
KOBE PCA	1. The airspace bounded by the lines connecting the following points: (1)343931N/1350740E , (2)343918N/1350445E , (3)343508N/1350515E , (4)343523N/1350814E thence to point(1). The line connecting point(4) to point(1) is the minor arc with a radius of 5NM KOBE ARP.	4000 ----- 800	C	KANSAI APP  KANSAI RADAR  KANSAI DEP  En	See attached chart
	2. The airspace bounded by the lines connecting the following points: (2)343918N/1350445E , (5)343901N/1350107E , (6)343449N/1350137E , (3)343508N/1350515E thence to point(2).	5000 ----- 1200			
	3. The airspace bounded by the lines connecting the following points: (5)343901N/1350107E , (7)343850N/1345842E , (8)343437N/1345912E , (6)343449N/1350137E thence to point(5).	5000 ----- 1800			
	4. The airspace bounded by the lines connecting the following points. (7)343850N/1345842E , (9)343835N/1345531E , (10)343420N/1345600E , (8)343437N/1345912E thence to point(7). The line connecting point(9) to point(10) is the minor arc with a radius of 15NM KOBE VOR(KCE).	5000 ----- 2500			
KANSAI TCA		See RJBB AD2.17			

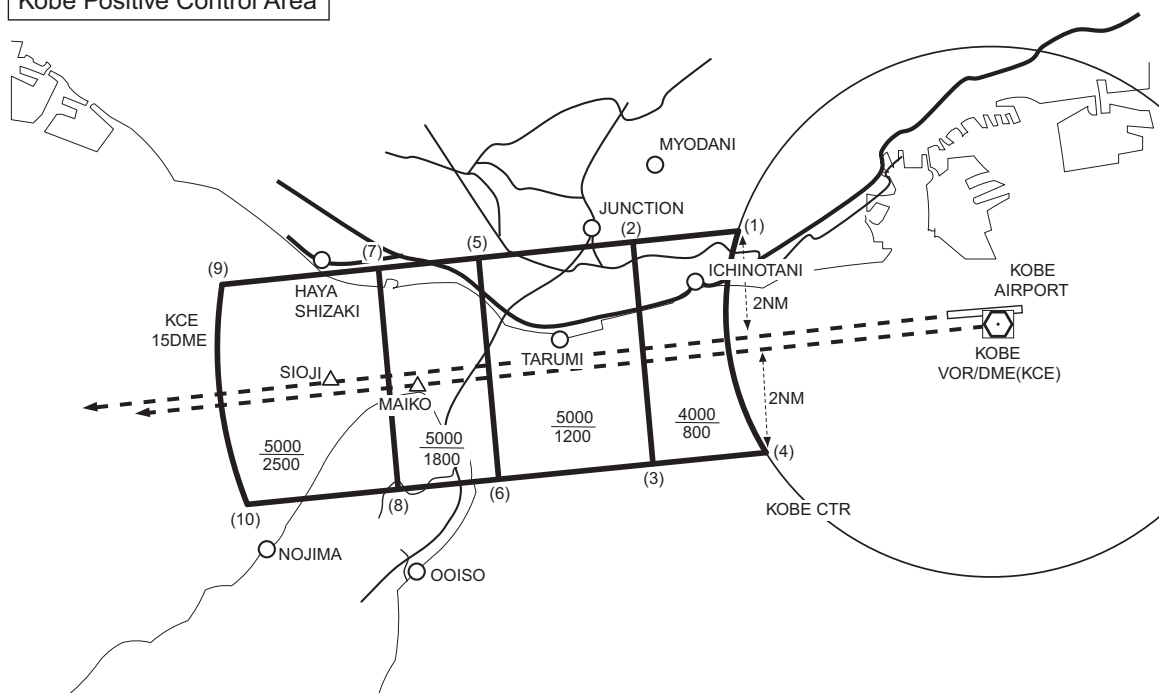神戸特別管制区  
Kobe Positive Control Area

## Point list

(1)343931N1350740E (5)343901N1350107E (9)343835N1345531E  
 (2)343918N1350445E (6)343449N1350137E (10)343420N1345600E  
 (3)343508N1350515E (7)343850N1345842E  
 (4)343523N1350814E (8)343437N1345912E

## RJBE AD 2.18 ATS COMMUNICATION FACILITIES


Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
ASR	Kansai Radar	121.15MHz 120.85MHz 125.5MHz 261.2MHz 121.5MHz(E) 243.0MHz(E)	2200 - 1400	APP service provided by KANSAI APP.
TCA	Kansai TCA	121.1MHz 125.3MHz 270.8MHz	2300 - 1030	
TWR	Kobe Tower	118.5MHz(1) 126.2MHz 121.5MHz(E)	2200 - 1400	(1) Primary
GND	Kobe Ground	122.075MHz	2200 - 1400	
ATIS	Kobe Airport	128.075MHz	2200 - 1400	



## RJBE AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (8°W/2019)	KCE	111.25MHz	H24	343751.58N 1351342.45E		VOR Unusable: 360°-030° beyond 20nm BLW 6000ft. 320°-330° beyond 20nm BLW 3000ft. 350°-360° beyond 20nm BLW 5000ft.
DME	KCE	1136MHz (CH-49Y)	H24	343751.58N 1351342.45E	43.6ft	DME Unusable: 360°-010° beyond 20nm BLW 6000ft. 010°-020° beyond 15nm BLW 6000ft. 020°-030° beyond 20nm BLW 6000ft. 310°-330° beyond 15nm BLW 3000ft. 330°-350° beyond 20nm BLW 5000ft. 350°-360° beyond 15nm BLW 5000ft.
ILS-LOC 09 (CAT-I)	IKO	109.15MHz	2200-1400	343802.24N 1351423.96E		BRG(MAG) 092° 233m away FM RWY27 THR OPR: CAB
ILS-GP 09	-	331.25MHz	2200-1400	343750.96N 1351251.37E		GP angle 3.0° HGT of ILS Ref datum 59ft. 353m inside FM RWY09 THR 125m S of RCL
ILS-DME 09	IKO	1115MHz (CH-28Y)	2200-1400	343750.48N 1351251.55E	39ft	356m inside FM RWY09 THR 140m S of RCL
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based

## ILS FOR RWY 09

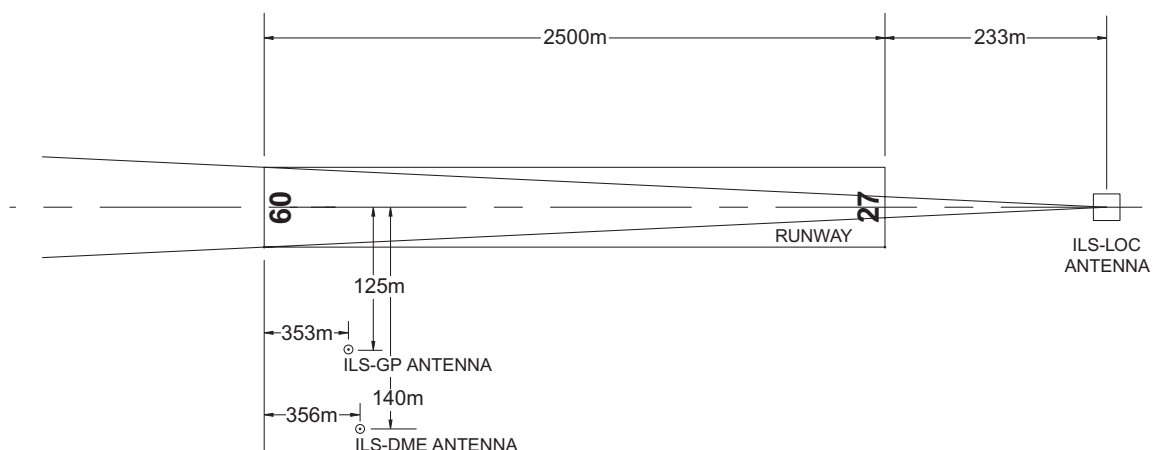

REMARKS: 1. LOC beam BRG(MAG) 092°  
 2. HGT of ILS REF datum 18m (59ft)  
 3. GP Angle 3.0°  
 4. ELEV of ILS-DME 10.255m (34ft)

## RJBE AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

## 1.1 定期便または緊急事態以外の航空機の取扱い

当空港の使用について、航空機の運航者は、空港管理者の許可を得ること。

## 1.2 補助動力装置 (APU) の使用制限

航空機が固定電源設備付きのスポットを使用する場合は、管理者が特に認める場合を除き、次に掲げる時間を超えて補助動力装置の使用を控えるよう努めなければならない。

(1) 出発予定時刻前の 30 分間

(2) 到着後、固定電源設備または航空機用電源車が使用可能となるまでに必要とする最小限の時間

(3) 航空機が点検整備のための補助動力を必要とする場合は最小限の時間

注：スポット 3 ～ 6 は固定電源設備が設置されている。

## 1.1 Aircraft operations other than scheduled flights or in an emergency

On use of this airport, aircraft operator is required to obtain the prior permission of the authority.

## 1.2 Restrictions about the use of auxiliary power units (APU)

When an aircraft is using an aircraft parking stand with fixed electric power facilities, efforts shall be made to avoid using the APU outside the time periods specified below except when specifically acknowledged by the authority as necessary.

(1) 30 minutes prior to the estimated off-block time

(2) The minimum time required for switching over to the fixed electric power facilities or an electric power vehicle for aircraft, after arrival at the parking stand

(3) The minimum time required for aircraft maintenance purposes if needed

Note: Stands 3-6 are equipped with fixed electric power unit.

## 2. Taxiing to and from stands

Nil

## 3. Parking area for small aircraft (General aviation)

Nil

## 4. Parking area for helicopters

Nil

## 5. Apron - taxiing during winter conditions

Nil

## 6. Taxiing - limitations

## 6.1 誘導路交差点の翼端クリアランス

(AD1.1.6.8 参照)

誘導路上の停止位置に待機中の航空機と後方の誘導路を走行する航空機の翼端クリアランスは以下のとおりである。

When B773 holding at the stop marking on TWY T2-T5

Wing Span (WS) of aircraft taxiing on P1-P5	WS < 15.2m	15.2m ≤ WS < 32.2m	WS ≥ 32.2m
Wing tip clearance	*A	*B	*C

## 6.1 Wing tip clearance at the TWY intersection

(REF. AD1.1.6.8)

Wing tip clearance at the TWY intersection between the aircraft holding at the stop marking on the TWY and the other aircraft taxiing behind it are as follows.

Legend:

\*A : wing tip clearance ≥ 15m

\*B : 6.5m ≤ wing tip clearance < 15m

\*C : wing tip clearance < 6.5m

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

**TKOF and LDG for E-HELIPAD, C-HELIPAD and W-HELIPAD:**

Fly along the parallel taxiway. Do not fly over the buildings in airport island and fuelling facilities.

9. Removal of disabled aircraft from runways

Nil

10. Remarks

Nil

**RJBE AD 2.21 NOISE ABATEMENT PROCEDURES**

1. For all jet aircraft, in order to reduce aircraft noise in the vicinity of airport, the following procedures shall be applied unless compliance of the procedures adversely affects the safety of aircraft operations.  
In case that the aircraft is unable to take these procedures, pilots should execute alternative procedures which are considered to be practically equivalent.

(1) For take off

Nil

(2) For landing to RWY09/27

a) Delayed Flap Approach Procedure

Extend final landing flaps after leaving 1,500feet.

b) Make gear down after leaving 2,500feet.

(3) Reverse Thrust

Nil

2. Preferential Runways Procedures

Nil

3. Noise Preferential Routes

Nil

**騒音軽減運航方式**

1. すべてのジェット機に対して、空港周辺における航空機騒音軽減のため、運航の安全に支障のない範囲で、以下の方式が適用される。ただし、これらの方式によることができない航空機は実効的にこれらと同等と認められる代替方式を実施するものとする。

(1) 離陸について

なし

(2) 着陸について（滑走路 09/27）

a) ディレイド・フラップ進入方式

1500 フィート通過後、最終着陸フラップ角とすること

b) 2500 フィート通過後、脚下げを行うこと

(3) リバース・スラストについて

なし

2. 優先滑走路方式

なし

3. 優先飛行経路

なし

## RJBE AD 2.22 FLIGHT PROCEDURES

1. TAKE OFF MINIMA								
	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL Marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	09	A,B,C,D	400m	400m	400m	400m	-	500m
	27		-	400m	-	400m	-	500m
OTHER	09	A,B,C,D	AVBL LDG MINIMA					
	27							

## 2. Lost Communication Procedures for Arrival Aircraft under radar navigational guidance.

If radio communications with Kansai Approach/Radar are lost for 1 minute, squawk Mode A/3 Code 7600 and ;

- (I) 1)Contact Kobe Tower  
2)If unable, proceed in accordance with Visual Flight Rules.  
3)If unable, proceed to SIOJI at the last assigned altitude or 3,000FT whichever is higher and execute Instrument Approach.  
(II) Procedures other than above will be issued when situation required.

## 3. Circling approach to Runway 27

An aircraft shall commence circling to RWY27 at or below 1,500ft, and maintain at or below 1,500ft during circling. If unable to comply with the restriction above, advise KOBE TOWER as soon as possible.

滑走路 27 への周回進入について

航空機は、RWY27 への周回を 1,500ft 以下で開始し、かつ周回中は 1,500ft 以下を維持しなければならない。  
もし、維持することが不可能な場合は、すみやかに神戸タワーに通報すること。

## 4. Missed approach

In case of missed approach, arriving aircraft may be instructed to maintain 1,500ft by KOBE TOWER due to traffic flying over the KOBE airport.

進入復行

進入復行した際、到着機は神戸空港上空を飛行する交通の関係で神戸タワーから 1,500ft を維持するよう指示される場合がある。

## RJBE AD 2.23 ADDITIONAL INFORMATION

1. Vessel (Max 200ft/MSL) will occasionally pass in the vicinity of the airport.

空港周辺を船舶（最高 200ft）が通過する場合がある。

---

**RJBE AD 2.24 CHARTS RELATED TO AN AERODROME**

Aerodrome/Heliport Chart
Standard Departure Chart - Instrument (KOBE)
Standard Departure Chart - Instrument (TRANSITION)
Standard Departure Chart - Instrument (RNAV TRANSITION1)
Standard Departure Chart - Instrument (RNAV TRANSITION2)
Standard Departure Chart - Instrument (MUKRI)
Standard Arrival Chart - Instrument (OMBIP, KAGAWA)
Standard Arrival Chart - Instrument (AVKUL, TRACY)
Instrument Approach Chart (ILS Z or LOC Z RWY09)
Instrument Approach Chart (ILS Y or LOC Y RWY09)
Instrument Approach Chart (RNP RWY09)
Other chart (VISUAL REP)
Other chart (LDG CHART)
Other chart (MVA CHART)

**INTENTIONALLY LEFT BLANK**

## RJBE / KOBE

## AD CHART

Designation	Call Sign	FREQ. (MHz)
TWR	Kobe Tower	118.5, 126.2
GND	Kobe Ground	122.075
ATIS	Kobe Airport	128.075

VAR 8°W(2022)  
Annual Change 5°W

THR 343754N/1351237E  
430.9m  
GS  
WIND SPEED METER  
P1 RVR  
T1  
WDI  
CEILO METER  
P2  
T2  
W1  
W2  
W3  
W4  
W5  
W6  
W7  
W8  
W9  
W10  
W11  
W12  
W13  
W14  
W15  
W16  
W17  
W18  
W19  
W20  
W21  
W22  
W23  
W24  
W25  
W26  
W27  
W28  
W29  
W30  
W31  
W32  
W33  
W34  
W35  
W36  
W37  
W38  
W39  
W40  
W41  
W42  
W43  
W44  
W45  
W46  
W47  
W48  
W49  
W50  
W51  
W52  
W53  
W54  
W55  
W56  
W57  
W58  
W59  
W60  
W61  
W62  
W63  
W64  
W65  
W66  
W67  
W68  
W69  
W70  
W71  
W72  
W73  
W74  
W75  
W76  
W77  
W78  
W79  
W80  
W81  
W82  
W83  
W84  
W85  
W86  
W87  
W88  
W89  
W90  
W91  
W92  
W93  
W94  
W95  
W96  
W97  
W98  
W99  
W100  
W101  
W102  
W103  
W104  
W105  
W106  
W107  
W108  
W109  
W110  
W111  
W112  
W113  
W114  
W115  
W116  
W117  
W118  
W119  
W120  
W121  
W122  
W123  
W124  
W125  
W126  
W127  
W128  
W129  
W130  
W131  
W132  
W133  
W134  
W135  
W136  
W137  
W138  
W139  
W140  
W141  
W142  
W143  
W144  
W145  
W146  
W147  
W148  
W149  
W150  
W151  
W152  
W153  
W154  
W155  
W156  
W157  
W158  
W159  
W160  
W161  
W162  
W163  
W164  
W165  
W166  
W167  
W168  
W169  
W170  
W171  
W172  
W173  
W174  
W175  
W176  
W177  
W178  
W179  
W180  
W181  
W182  
W183  
W184  
W185  
W186  
W187  
W188  
W189  
W190  
W191  
W192  
W193  
W194  
W195  
W196  
W197  
W198  
W199  
W200  
W201  
W202  
W203  
W204  
W205  
W206  
W207  
W208  
W209  
W210  
W211  
W212  
W213  
W214  
W215  
W216  
W217  
W218  
W219  
W220  
W221  
W222  
W223  
W224  
W225  
W226  
W227  
W228  
W229  
W230  
W231  
W232  
W233  
W234  
W235  
W236  
W237  
W238  
W239  
W240  
W241  
W242  
W243  
W244  
W245  
W246  
W247  
W248  
W249  
W250  
W251  
W252  
W253  
W254  
W255  
W256  
W257  
W258  
W259  
W260  
W261  
W262  
W263  
W264  
W265  
W266  
W267  
W268  
W269  
W270  
W271  
W272  
W273  
W274  
W275  
W276  
W277  
W278  
W279  
W280  
W281  
W282  
W283  
W284  
W285  
W286  
W287  
W288  
W289  
W290  
W291  
W292  
W293  
W294  
W295  
W296  
W297  
W298  
W299  
W300  
W301  
W302  
W303  
W304  
W305  
W306  
W307  
W308  
W309  
W310  
W311  
W312  
W313  
W314  
W315  
W316  
W317  
W318  
W319  
W320  
W321  
W322  
W323  
W324  
W325  
W326  
W327  
W328  
W329  
W330  
W331  
W332  
W333  
W334  
W335  
W336  
W337  
W338  
W339  
W340  
W341  
W342  
W343  
W344  
W345  
W346  
W347  
W348  
W349  
W350  
W351  
W352  
W353  
W354  
W355  
W356  
W357  
W358  
W359  
W360  
W361  
W362  
W363  
W364  
W365  
W366  
W367  
W368  
W369  
W370  
W371  
W372  
W373  
W374  
W375  
W376  
W377  
W378  
W379  
W380  
W381  
W382  
W383  
W384  
W385  
W386  
W387  
W388  
W389  
W390  
W391  
W392  
W393  
W394  
W395  
W396  
W397  
W398  
W399  
W400  
W401  
W402  
W403  
W404  
W405  
W406  
W407  
W408  
W409  
W410  
W411  
W412  
W413  
W414  
W415  
W416  
W417  
W418  
W419  
W420  
W421  
W422  
W423  
W424  
W425  
W426  
W427  
W428  
W429  
W430  
W431  
W432  
W433  
W434  
W435  
W436  
W437  
W438  
W439  
W440  
W441  
W442  
W443  
W444  
W445  
W446  
W447  
W448  
W449  
W450  
W451  
W452  
W453  
W454  
W455  
W456  
W457  
W458  
W459  
W460  
W461  
W462  
W463  
W464  
W465  
W466  
W467  
W468  
W469  
W470  
W471  
W472  
W473  
W474  
W475  
W476  
W477  
W478  
W479  
W480  
W481  
W482  
W483  
W484  
W485  
W486  
W487  
W488  
W489  
W490  
W491  
W492  
W493  
W494  
W495  
W496  
W497  
W498  
W499  
W500  
W501  
W502  
W503  
W504  
W505  
W506  
W507  
W508  
W509  
W510  
W511  
W512  
W513  
W514  
W515  
W516  
W517  
W518  
W519  
W520  
W521  
W522  
W523  
W524  
W525  
W526  
W527  
W528  
W529  
W530  
W531  
W532  
W533  
W534  
W535  
W536  
W537  
W538  
W539  
W540  
W541

REMARKS :	RWY GROOVING	2500m x 40m
	RWY STRENGTH	PCR 1039/F/B/X/T
	WIDTH & STRENGTH OF TWY	
	T2, T3, T4, T5	34m PCR 852/F/B/X/T
	T1, T6	32m PCR 1039/F/B/X/T
	P1 thru P3, P5	30m PCR 1039/F/B/X/T
	P4	30m PCR 1132/R/B/W/T
	W1	9m PCR 190/F/B/X/T
	W2	18m PCR 417/F/B/X/T
	W3	23m PCR 513/F/B/X/T
	APRON	905m x 190m

## COMMON WAYS OF ITS MARKINGS AND LGT

RWY HLDG PSN MARKINGS  
and RWY GUARD LIGHTS

RWY HLDG PSN markings are located on TWY T1 THRU T6  
RWY guard lights are located on TWY T1 THRU T6  
Their locations are 75m off the RWY centerline.

## DETAIL A


APRIL 1997

Apron Spot 1-A, B, C

+

A B C

## LONGITUDINAL PROFILE OF RWY

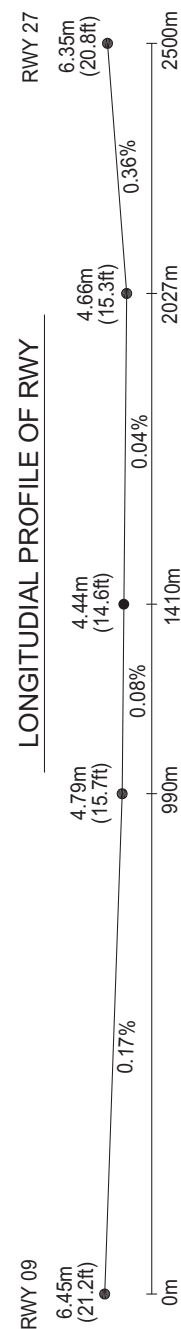

**INTENTIONALLY LEFT BLANK**



STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

SID

KOBE SIX DEPARTURE


RWY09: Turn right, climb via YOE R274 to intercept and proceed via  
KIE R333, via KCE R272 to MAIKO.

RWY27: Climb via KCE R272 to MAIKO.

Note RWY09 : 5.0% climb gradient required up to 500FT.

RWY27 : 5.0% climb gradient required up to 500FT.

CHANGE : PROC renamed. Note added.

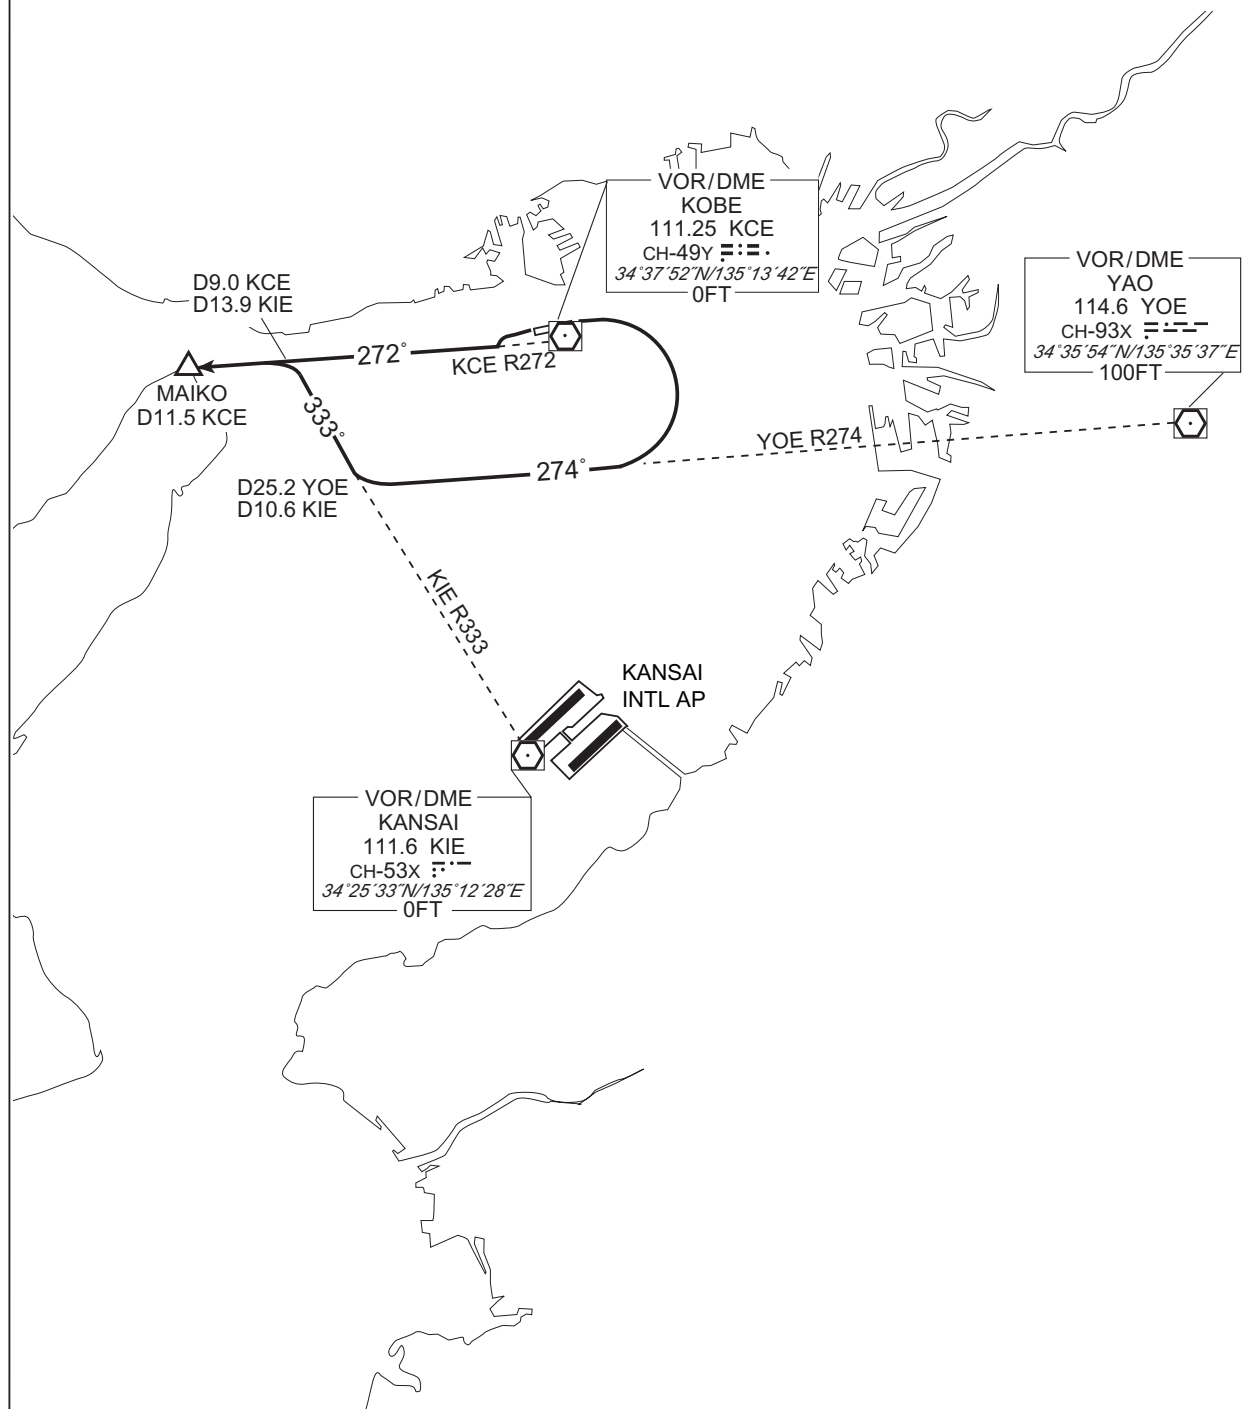

## STANDARD DEPARTURE CHART - INSTRUMENT

RJBE / KOBE

TRANSITION

KIBI TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via OYE R114 to OYE VOR/DME.

Cross KAWAT at or above 7000FT.

YABUU TRANSITION

From over MAIKO, proceed via KCE R272 to KAWAT, via KCE 33.3DME clockwise ARC via OMBIP, to intercept and proceed via YME R215 to YME VOR/DME.

Cross KAWAT at or above 7000FT, cross KCE R330 at or above 8000FT.

KAGAWA TRANSITION


From over MAIKO, proceed via KCE R272 to KAWAT, via KTE R058 to KTE VOR/DME.

Cross KAWAT at or above 7000FT.

OMBIP TRANSITION


From over MAIKO, proceed via KCE R272 to KAWAT, via KCE 33.3DME clockwise ARC to OMBIP.

Cross KAWAT at or above 7000FT.

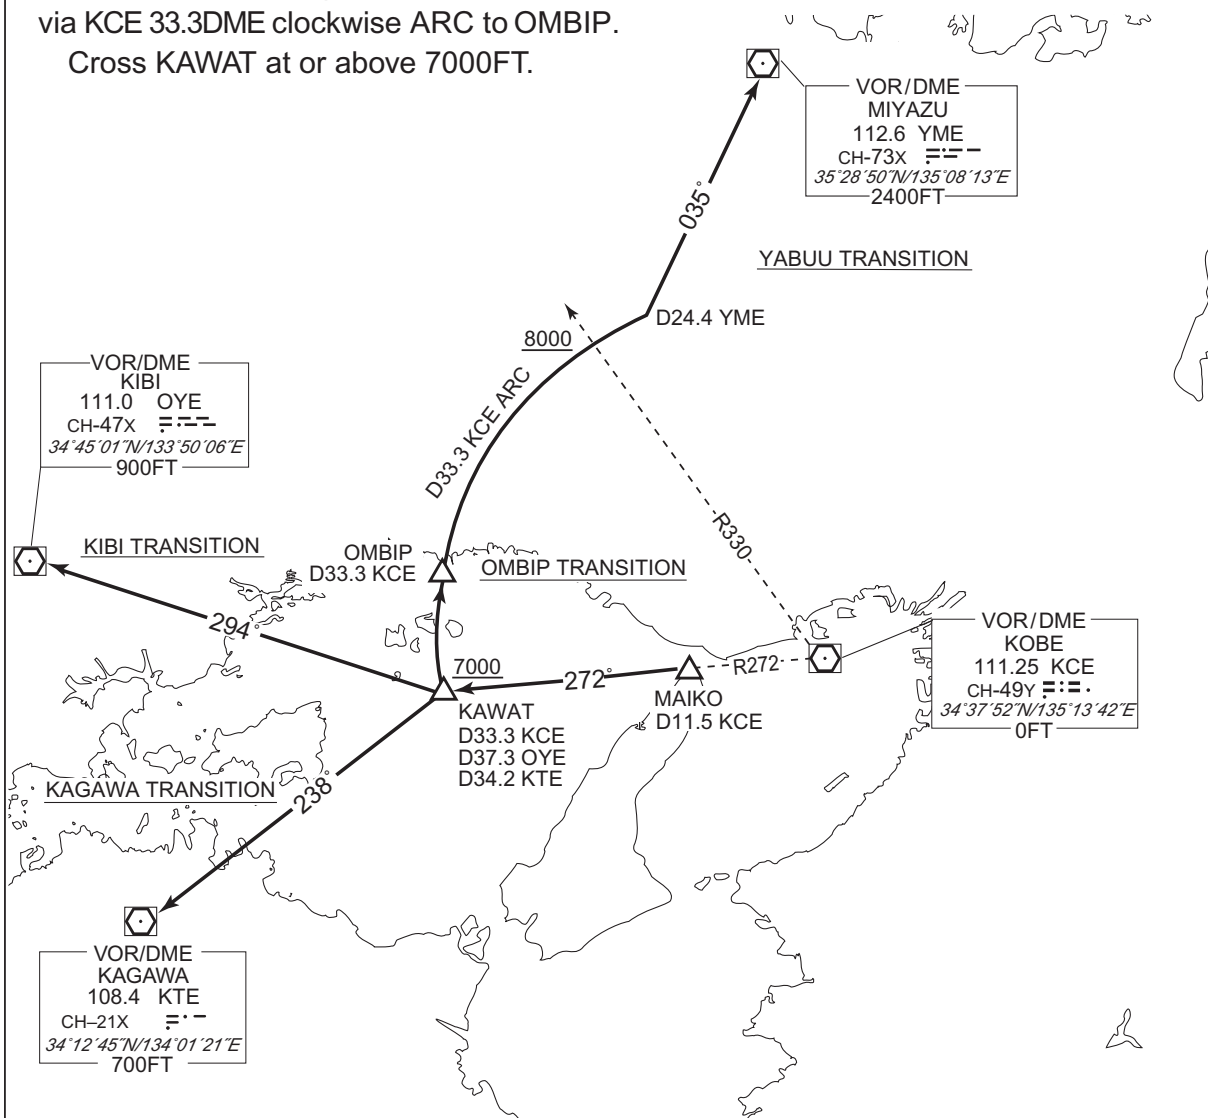

CHANGE : YABUU TRANSITION, OMBIP TRANSITION established. TAMBA TRANSITION, AYAYA TRANSITION abolished. PROC course.  
ALT restriction at KAWAT.

STANDARD DEPARTURE CHART-INSTRUMENT

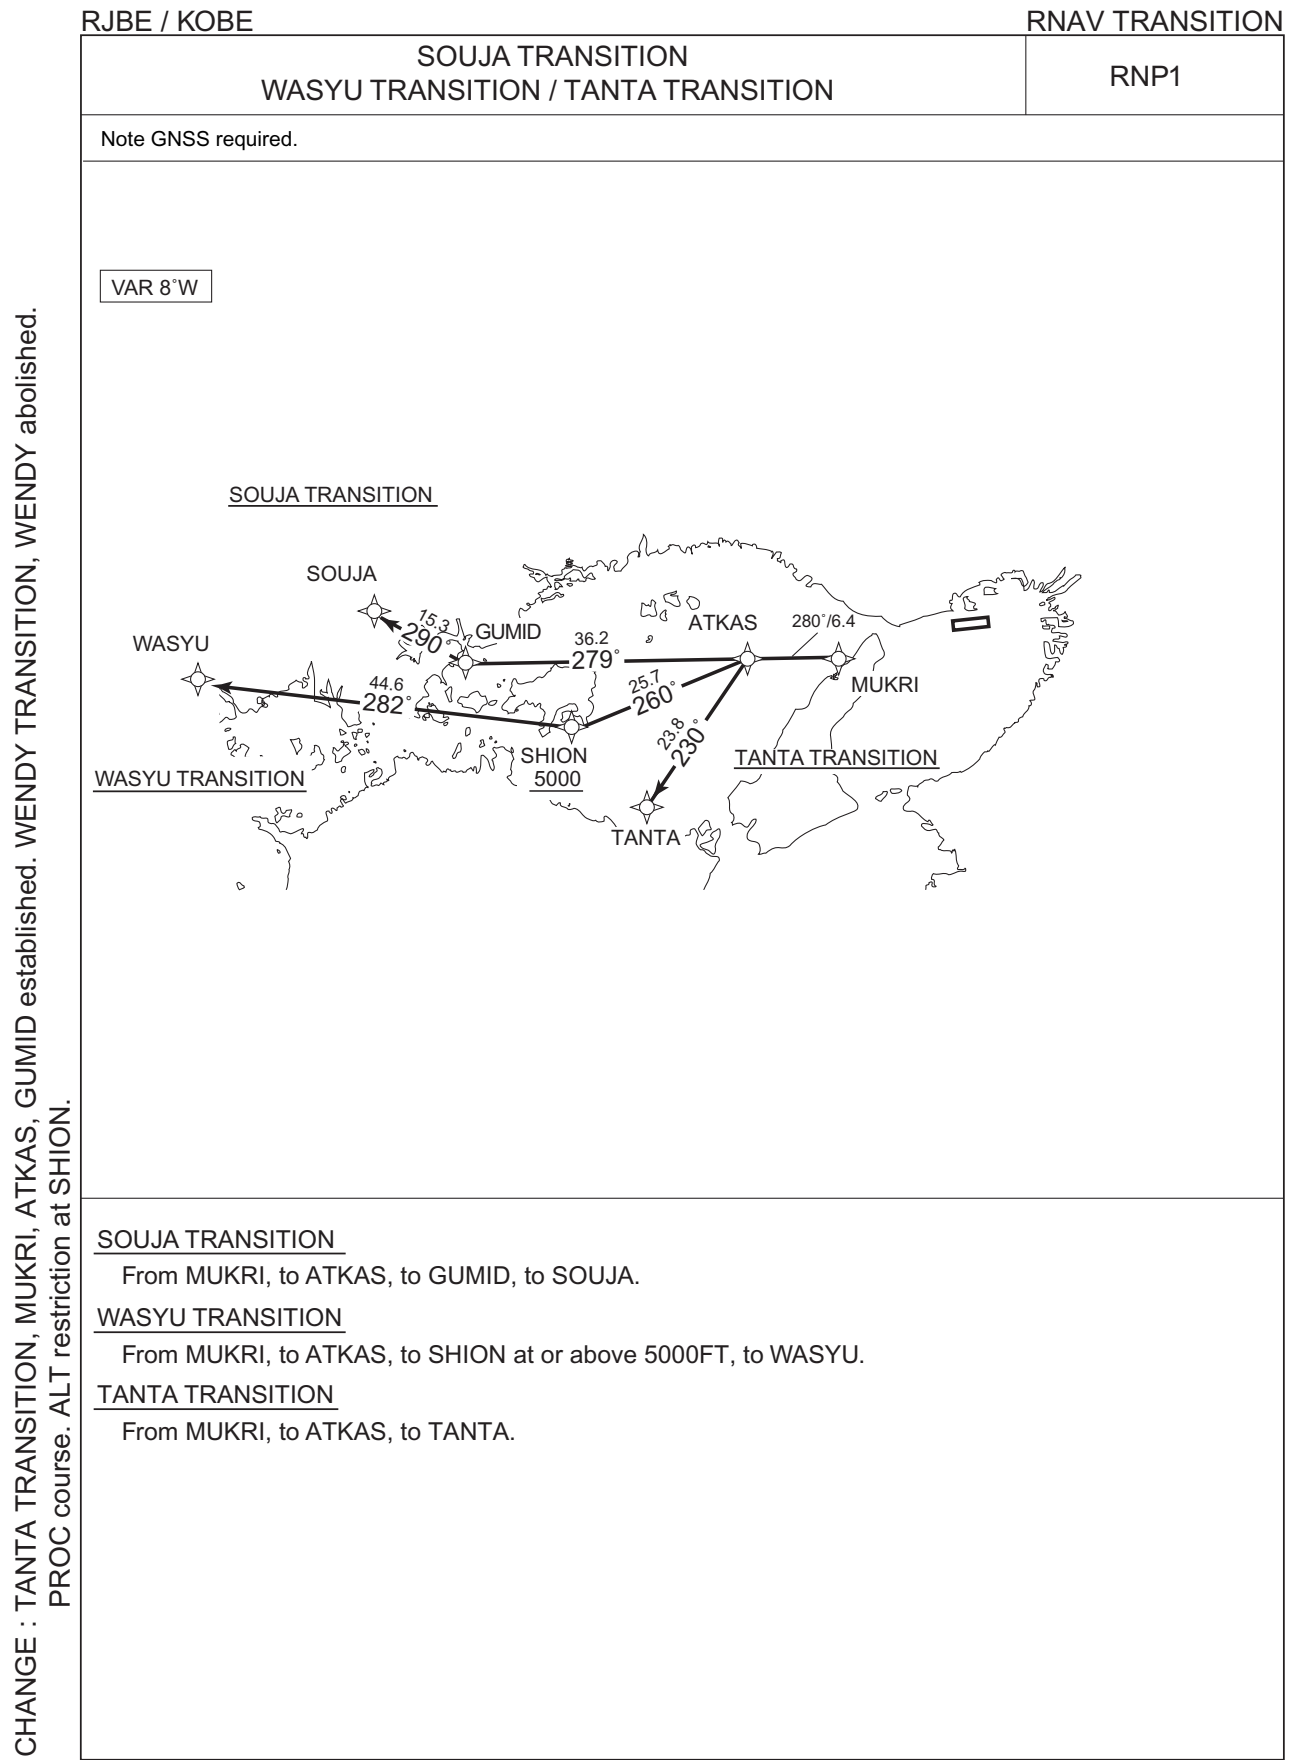

## STANDARD DEPARTURE CHART-INSTRUMENT

## RJBE / KOBE

## RNAV TRANSITION

SOUJA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	ATKAS	—	280 (271.9)	-8.2	6.4	—	—	—	—	RNP1
003	TF	GUMID	—	279 (270.9)	-8.2	36.2	—	—	—	—	RNP1
004	TF	SOUJA	—	290 (282.2)	-8.2	15.3	—	—	—	—	RNP1

WASYU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	ATKAS	—	280 (271.9)	-8.2	6.4	—	—	—	—	RNP1
003	TF	SHION	—	260 (251.4)	-8.2	25.7	—	+5000	—	—	RNP1
004	TF	WASYU	—	282 (273.6)	-8.2	44.6	—	—	—	—	RNP1

TANTA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course M°(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	ATKAS	—	280 (271.9)	-8.2	6.4	—	—	—	—	RNP1
003	TF	TANTA	—	230 (221.4)	-8.2	23.8	—	—	—	—	RNP1


Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
MUKRI	343345.5N / 1345419.2E	SHION	342542.1N / 1341657.4E
ATKAS	343358.2N / 1344630.9E	WASYU	342817.5N / 1332301.1E
GUMID	343425.8N / 1340234.0E	TANTA	341604.9N / 1342729.2E
SOUJA	343738.6N / 1334422.5E		

CHANGE : TANTA TRANSITION, MUKRI, ATKAS, GUMID established. WENDY TRANSITION, WENDY abolished. PROC course. VAR. ALT restriction at SHION. Navigation Specification. Waypoint Coordinates added.

STANDARD DEPARTURE CHART-INSTRUMENT

CHANGE : MUKRI, LANID, PORUS established. STEEL abolished. Note. PROC course.  
ALT restriction at LANID, PORUS. DIST FM MUKRI to TRIPY.

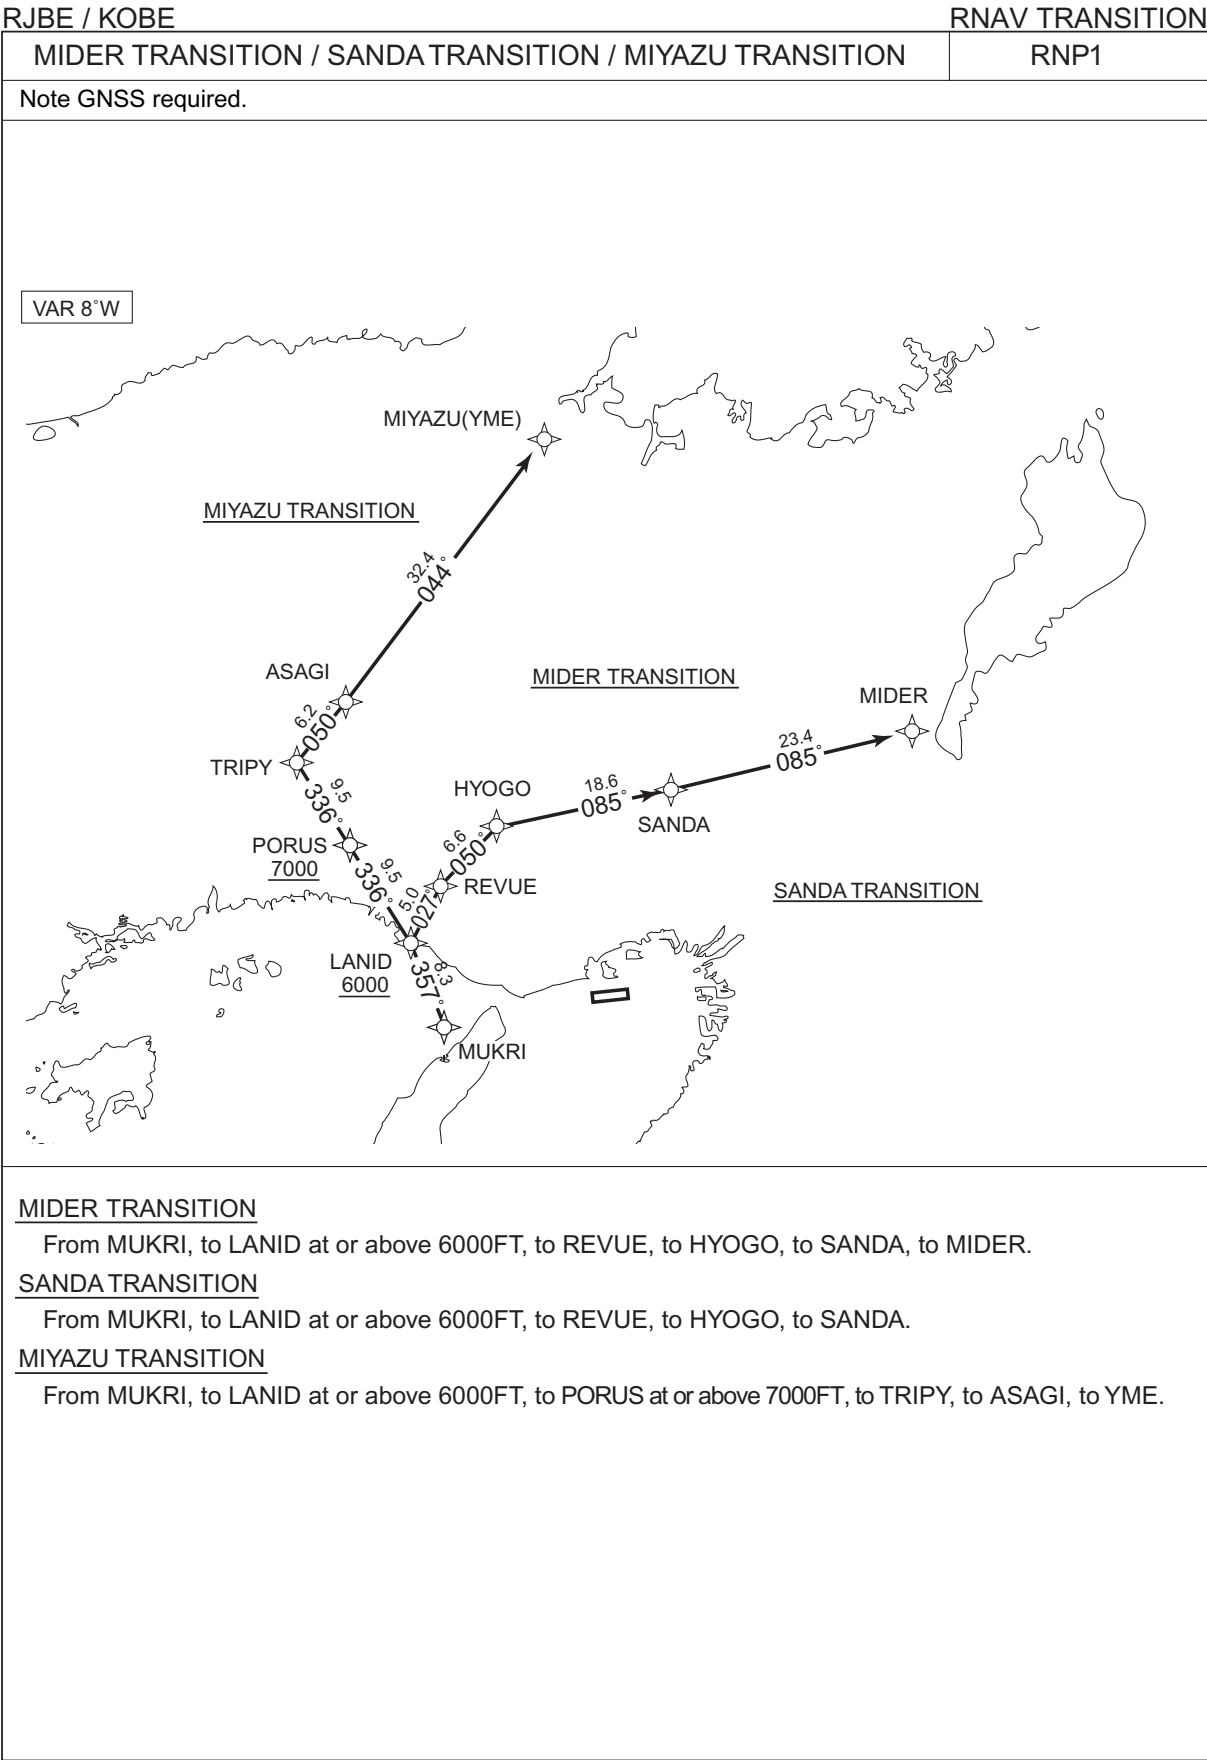

## STANDARD DEPARTURE CHART-INSTRUMENT

## RJBE / KOBE

## RNAV TRANSITION

MIDER TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	LANID	—	357 (349.2)	-8.2	8.3	—	+6000	—	—	RNP1
003	TF	REVUE	—	027 (018.9)	-8.2	5.0	—	—	—	—	RNP1
004	TF	HYOGO	—	050 (041.6)	-8.2	6.6	—	—	—	—	RNP1
005	TF	SANDA	—	085 (076.4)	-8.2	18.6	—	—	—	—	RNP1
006	TF	MIDER	—	085 (077.1)	-8.2	23.4	—	—	—	—	RNP1

SANDA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	LANID	—	357 (349.2)	-8.2	8.3	—	+6000	—	—	RNP1
003	TF	REVUE	—	027 (018.9)	-8.2	5.0	—	—	—	—	RNP1
004	TF	HYOGO	—	050 (041.6)	-8.2	6.6	—	—	—	—	RNP1
005	TF	SANDA	—	085 (076.4)	-8.2	18.6	—	—	—	—	RNP1

MIYAZU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	MUKRI	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	LANID	—	357 (349.2)	-8.2	8.3	—	+6000	—	—	RNP1
003	TF	PORUS	—	336 (327.9)	-8.2	9.5	—	+7000	—	—	RNP1
004	TF	TRIPY	—	336 (327.8)	-8.2	9.5	—	—	—	—	RNP1
005	TF	ASAGI	—	050 (041.6)	-8.2	6.2	—	—	—	—	RNP1
006	TF	YME	—	044 (035.7)	-8.2	32.4	—	—	—	—	RNP1

CHANGE : MUKRI, LANID, PORUS established. STEEL abolished. PROC course. VAR.  
DIST FM MUKRI to TRIPY. Navigation Specification.

STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV TRANSITION

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
MUKRI	343345.5N / 1345419.2E	MIDER	350101.4N / 1354933.6E
LANID	344152.2N / 1345226.6E	PORUS	344956.9N / 1344615.6E
REVUE	344636.4N / 1345425.3E	TRIPY	345801.2N / 1344003.4E
HYOGO	345130.6N / 1345944.0E	ASAGI	350237.2N / 1344502.4E
SANDA	345550.2N / 1352143.9E	YME	352850.5N / 1350813.3E

CHANGE : Waypoint Coordinates added.


STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV SID

MUKRI ONE DEPARTURE	RNP1
---------------------	------

Note GNSS required.

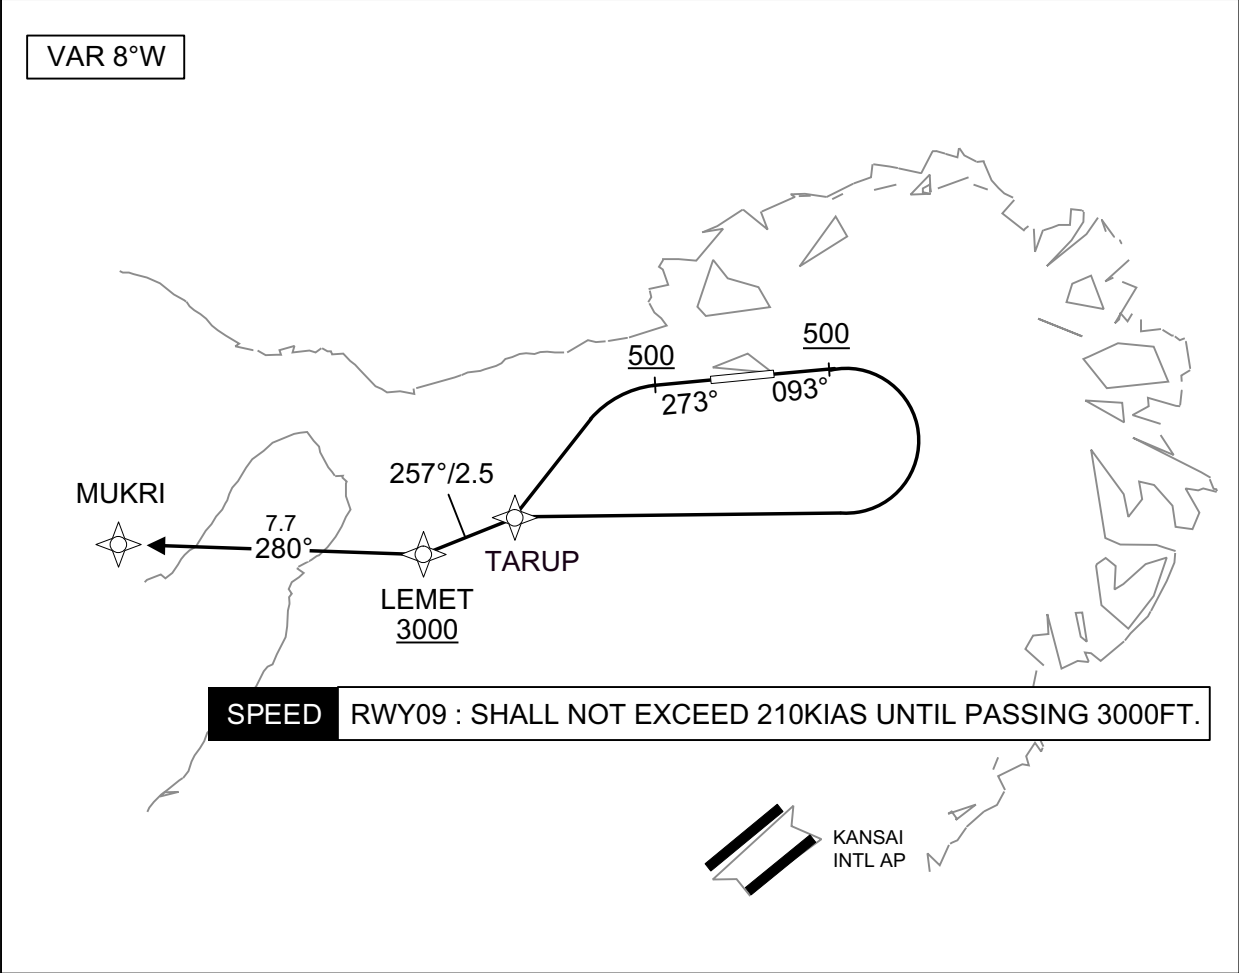

RWY09 : Climb on HDG093° at or above 500FT, turn right direct to TARUP, to LEMET at or above 3000FT, to MUKRI.

RWY27 : Climb on HDG273° at or above 500FT, turn left direct to TARUP, to LEMET at or above 3000FT, to MUKRI.

Note RWY09 : 5.0% climb gradient required up to 500FT.  
RWY27 : 5.0% climb gradient required up to 500FT.

CHANGE : New PROC.



STANDARD DEPARTURE CHART-INSTRUMENT

RJBE / KOBE

RNAV SID

MUKRI ONE DEPARTURE

RWY09

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	093 (084.6)	-8.2	—	—	+500	—	—	RNP1
002	DF	TARUP	—	—	-8.2	—	R	—	—	—	RNP1
003	TF	LEMET	—	257 (248.5)	-8.2	2.5	—	+3000	—	—	RNP1
004	TF	MUKRI	—	280 (272.0)	-8.2	7.7	—	—	—	—	RNP1

RWY27

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	273 (264.6)	-8.2	—	—	+500	—	—	RNP1
002	DF	TARUP	—	—	-8.2	—	L	—	—	—	RNP1
003	TF	LEMET	—	257 (248.5)	-8.2	2.5	—	+3000	—	—	RNP1
004	TF	MUKRI	—	280 (272.0)	-8.2	7.7	—	—	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
TARUP	343423.6N / 1350626.5E	MUKRI	343345.5N / 1345419.2E
LEMET	343329.7N / 1350340.2E		

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

STAR

OMBIP ARRIVAL

From over OMBIP, proceed via KCE 33.3DME counterclockwise ARC to intercept and proceed via KCE R283 to TRACY, via KIE R311 to intercept and proceed via KCE R273 to SIOJI.


Cross SIOJI at or above 3000FT.

KAGAWA ARRIVAL

From over KTE VOR/DME, proceed via KTE R054 to intercept and proceed via KCE R283 to TRACY, via KIE R311 to intercept and proceed via KCE R273 to SIOJI.

Cross KCE R283/30.5DME(KTE R054/40.3DME) at or above 4000FT,  
cross SIOJI at or above 3000FT.

CHANGE : New PROC.

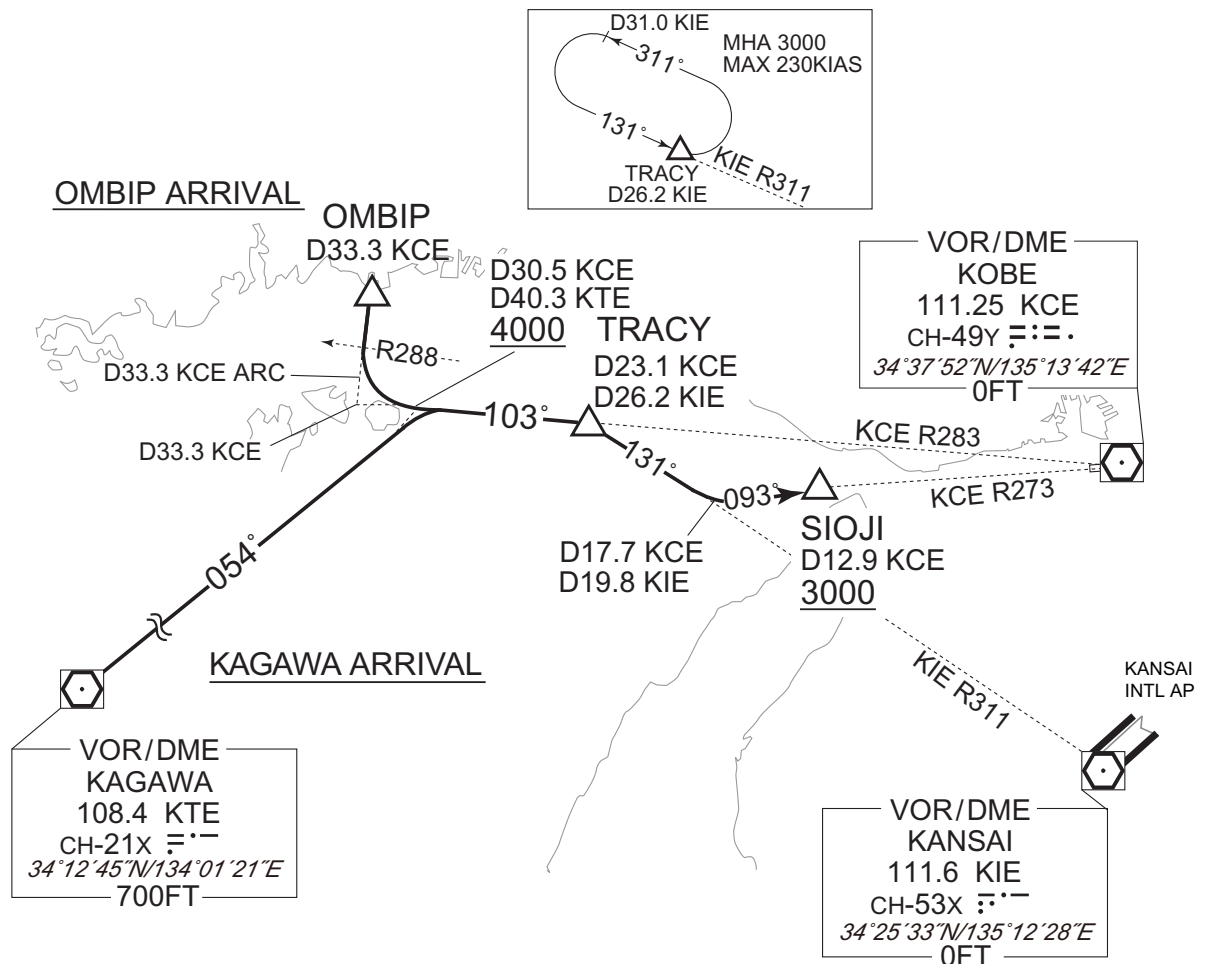


STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

RNAV STAR RWY09

AVKUL ARRIVAL / TRACY ARRIVAL	RNP1
-------------------------------	------

Note GNSS required.

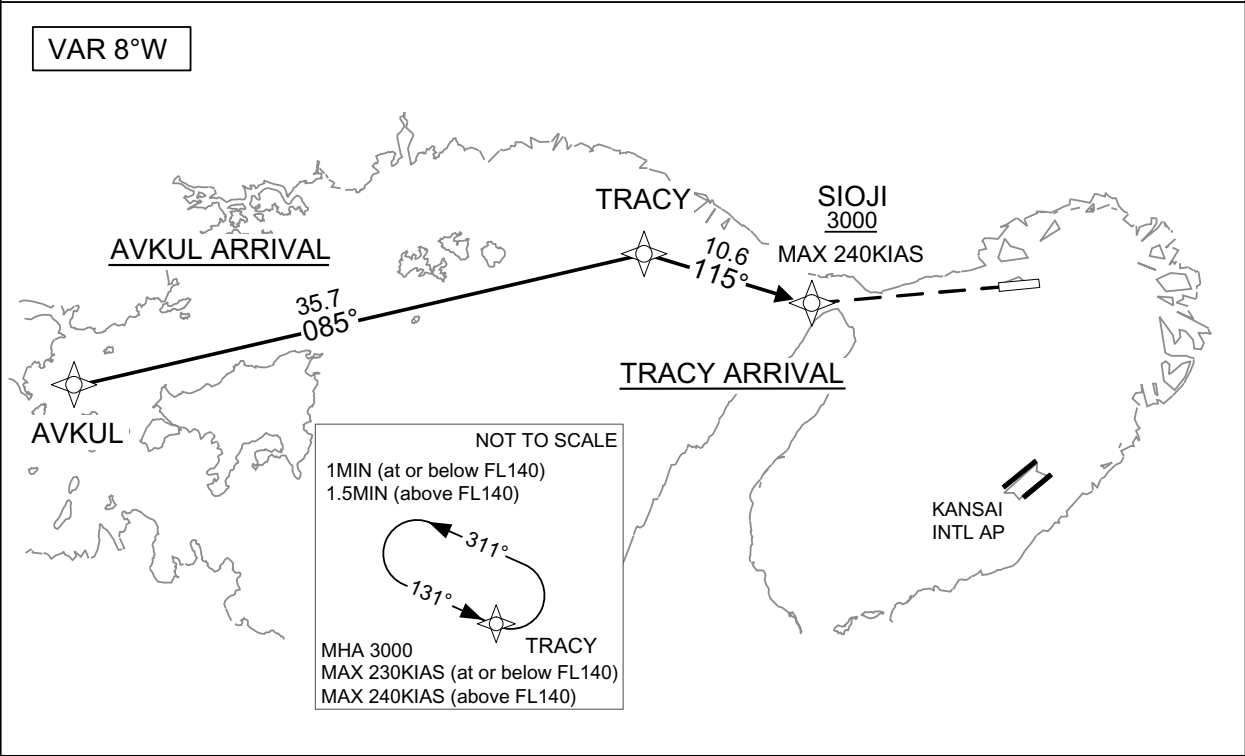

AVKUL ARRIVAL

From AVKUL, to TRACY, to SIOJI at or above 3000FT.

TRACY ARRIVAL

From TRACY, to SIOJI at or above 3000FT.

CHANGE : New PROC.

STANDARD ARRIVAL CHART-INSTRUMENT

RJBE / KOBE

RNAV STAR RWY09

AVKUL ARRIVAL

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	AVKUL	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	TRACY	—	085 (076.5)	-8.2	35.7	—	—	—	—	RNP1
003	TF	SIOJI	—	115 (106.7)	-8.2	10.6	—	+3000	-240	—	RNP1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	TRACY	131 (123.1)	-8.2	1.0(-14000) 1.5(+14001)	L	3000	—	-230(-14000) -240(+14001)	RNP1

TRACY ARRIVAL

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	TRACY	—	—	-8.2	—	—	—	—	—	RNP1
002	TF	SIOJI	—	115 (106.7)	-8.2	10.6	—	+3000	-240	—	RNP1


Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	TRACY	131 (123.1)	-8.2	1.0(-14000) 1.5(+14001)	L	3000	—	-230(-14000) -240(+14001)	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AVKUL	343135.4N / 1340338.7E	SIOJI	343645.2N / 1345808.8E
TRACY	343949.3N / 1344547.8E		


CHANGE : New PROC.


## INSTRUMENT APPROACH CHART

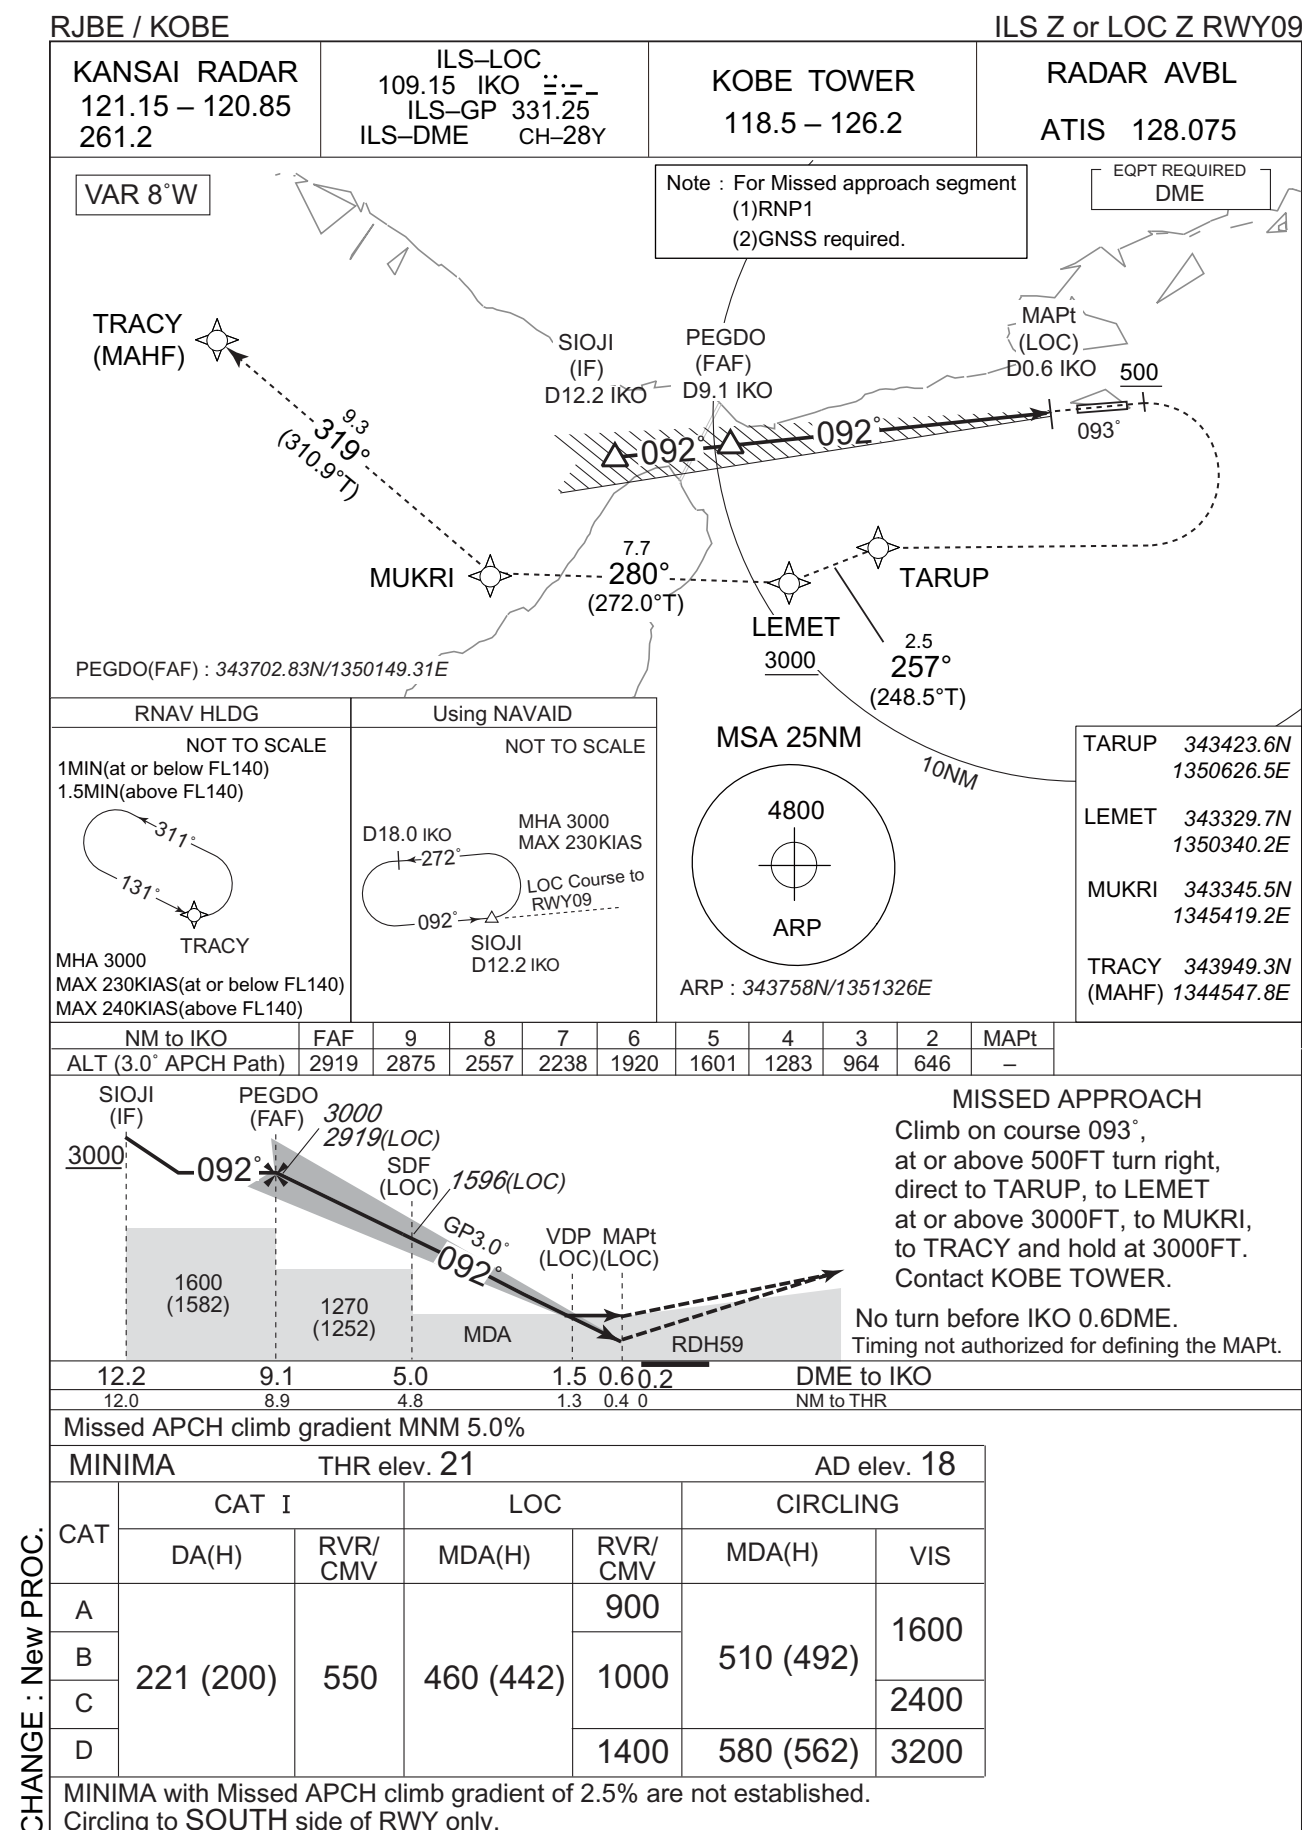


## RJBE / KOBE

ILS Y or LOC Y RWY09

KANSAI RADAR 121.15 – 120.85 261.2	ILS-LOC 109.15 IKO  ILS-GP 331.25 IL S-DME CH-28Y	KOBE TOWER 118.5 – 126.2	RADAR AVBL  ATIS 128.075
--	---	-----------------------------	--------------------------------

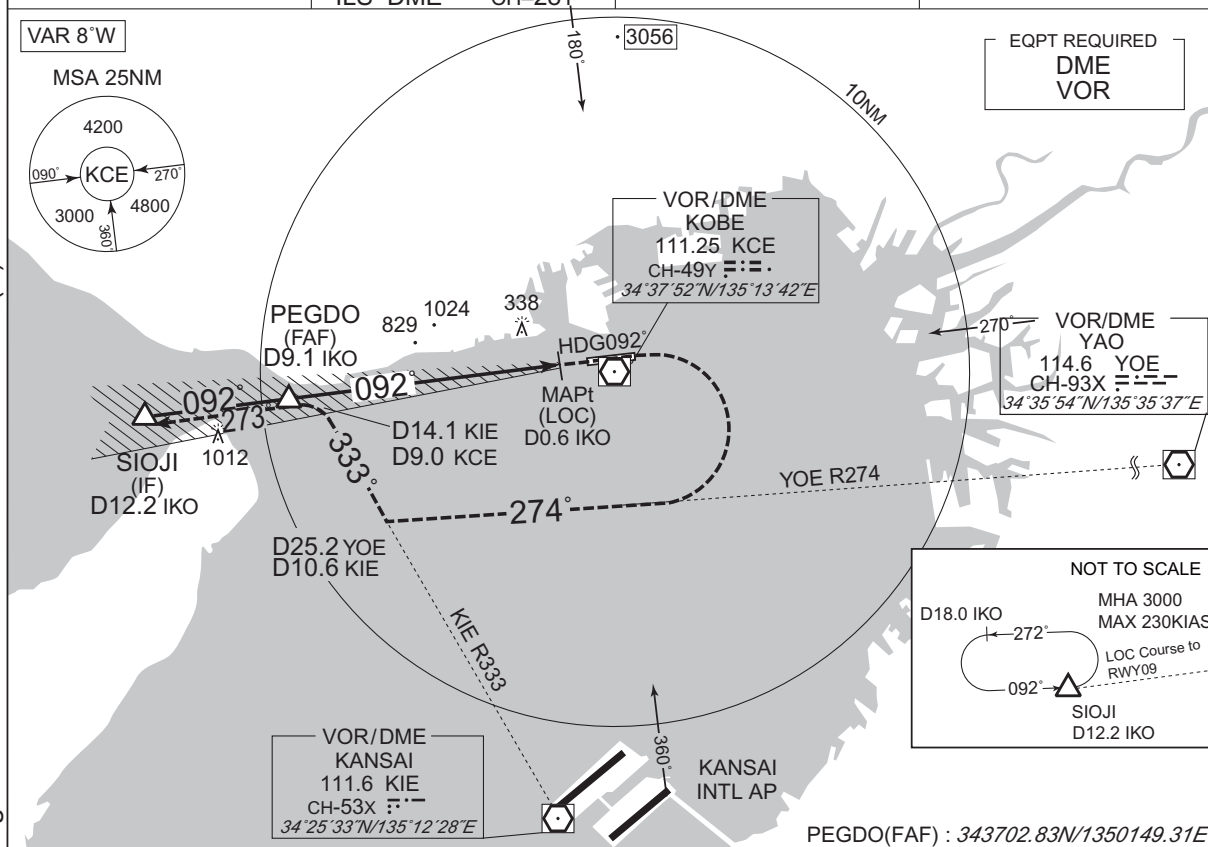

NM to IKO	FAF	9	8	7	6	5	4	3	2	MAPt
Alt (30° APCH Path)	2919	2875	2557	2238	1920	1601	1283	964	646	—

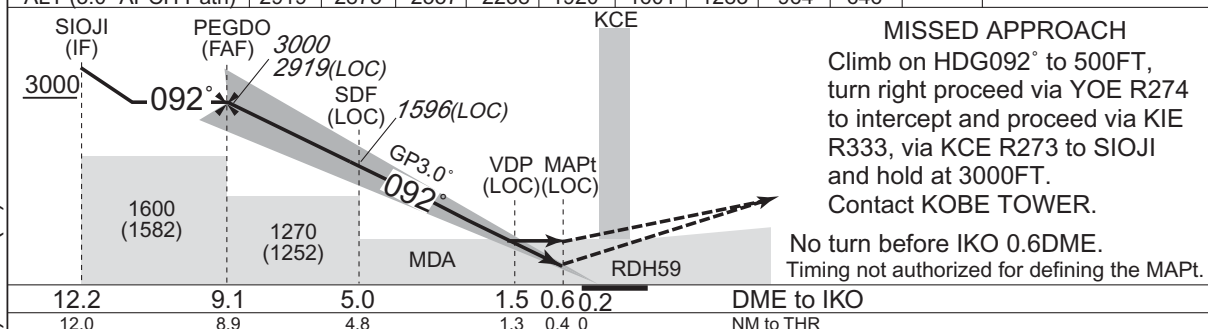

Missed APCH climb gradient MNM 5.0%
-------------------------------------

MINIMA		THR elev. 21			AD elev. 18	
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	221 (200)	550	460 (442)	900	510 (492)	1600
B				1000		
C						
D				1400	580 (562)	3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to **SOUTH** side of RWY only.


CHANGE : PROC renamed. PEGDO established. MARIN abolished. PROC ALT at PEGDO(FAF), SDF.  
ALT(3.0° APCH Path). OCA(H). Missed APCH climb gradient MNM. THR elev. MINIMA for DA(H).

## RJBE / KOBE

RNP RWY09

VAR 8°W

Baro-VNAV not authorized below -5°C

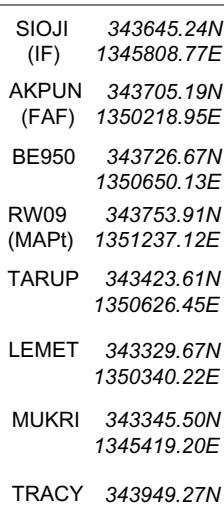

### MISSED APPROACH

Turn right direct to TARUP,  
to LEMET at or above 3000FT,  
to MUKRI, to TRACY and hold  
at 3000FT.  
Contact KOBE TOWER.

Missed APCH climb gradient MNM 5.0%

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to **SOUTH** side of RWY only.

CHANGE : New PROC.

**INTENTIONALLY LEFT BLANK**



RJBE / KOBE


Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
一ノ谷 Ichinotani	276°T / 5.5NM	JR須磨駅 JR Station
名谷 Myodani	294°T / 7.0NM	神戸市営西神・山手線名谷駅 Station
長田 Nagata	291°T / 4.2NM	JR新長田駅 JR Station
和田岬 Wadamisaki	304°T / 2.2NM	岬 Cape
布引 Nunobiki	342°T / 4.8NM	布引公園 Park
灘浜 Nadahama	359°T / 3.8NM	ハーバーハイウェイ摩耶ランプ Ramp
ポートアイランド Port Island	012°T / 2.0NM	ポートアイランド南埠頭 Southern Warf of Port Island
六甲アイランド Rokko Island	047°T / 4.4NM	六甲アイランド南東端 Southern Edge of Rokko Island
深江 Fukae	038°T / 6.0NM	阪神高速5号湾岸線 深江浜インターチェンジ Interchange
イーストポイント East Point	053°T / 7.2NM	西宮ヨットハーバー防波堤 Breakwater of Nishinomiya Yacht Harbor

CHANGE : VAR.

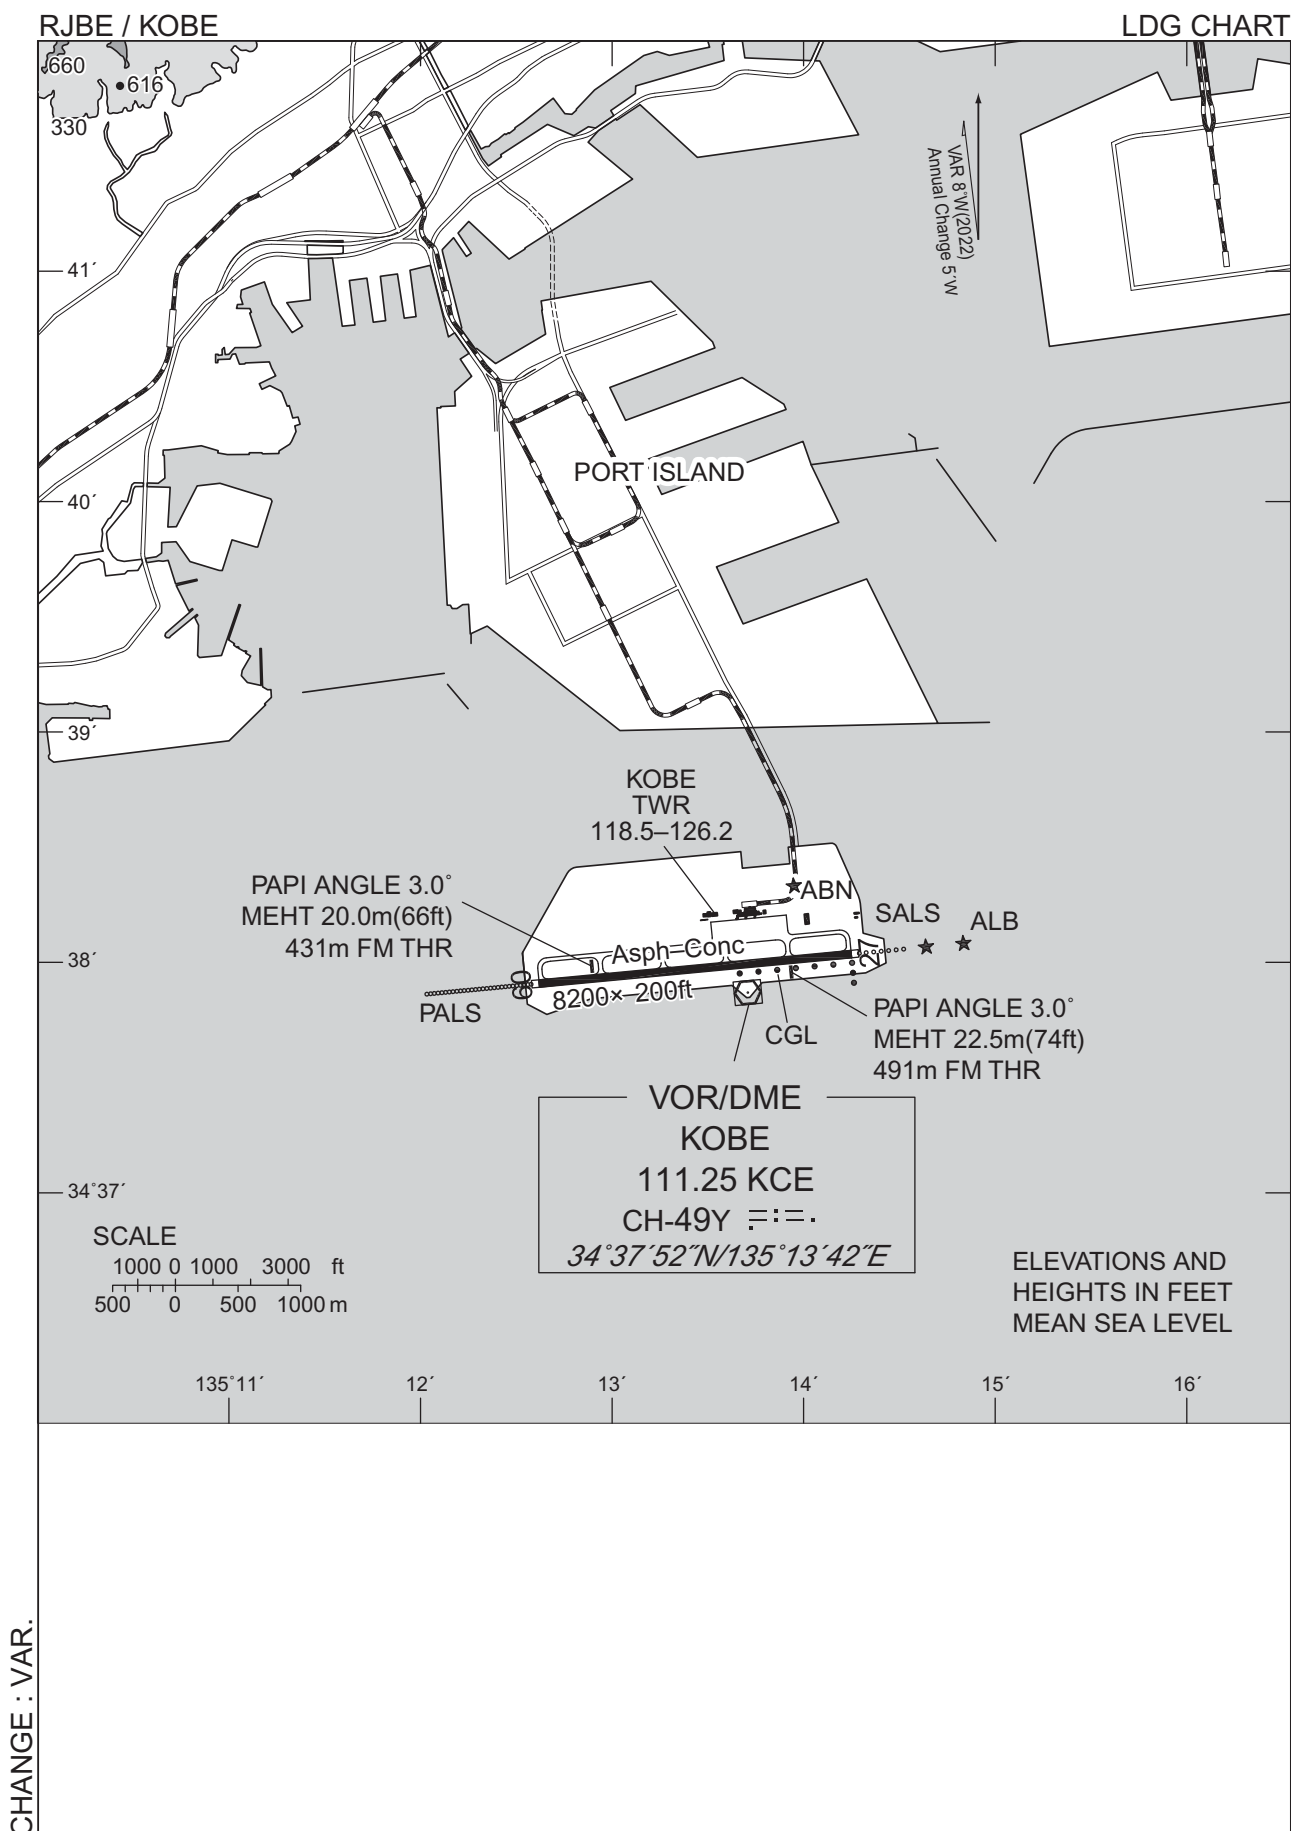

RJBE / KOBE

Minimum Vectoring Altitude CHART

