


RJTY / YOKOTA

AD CHART

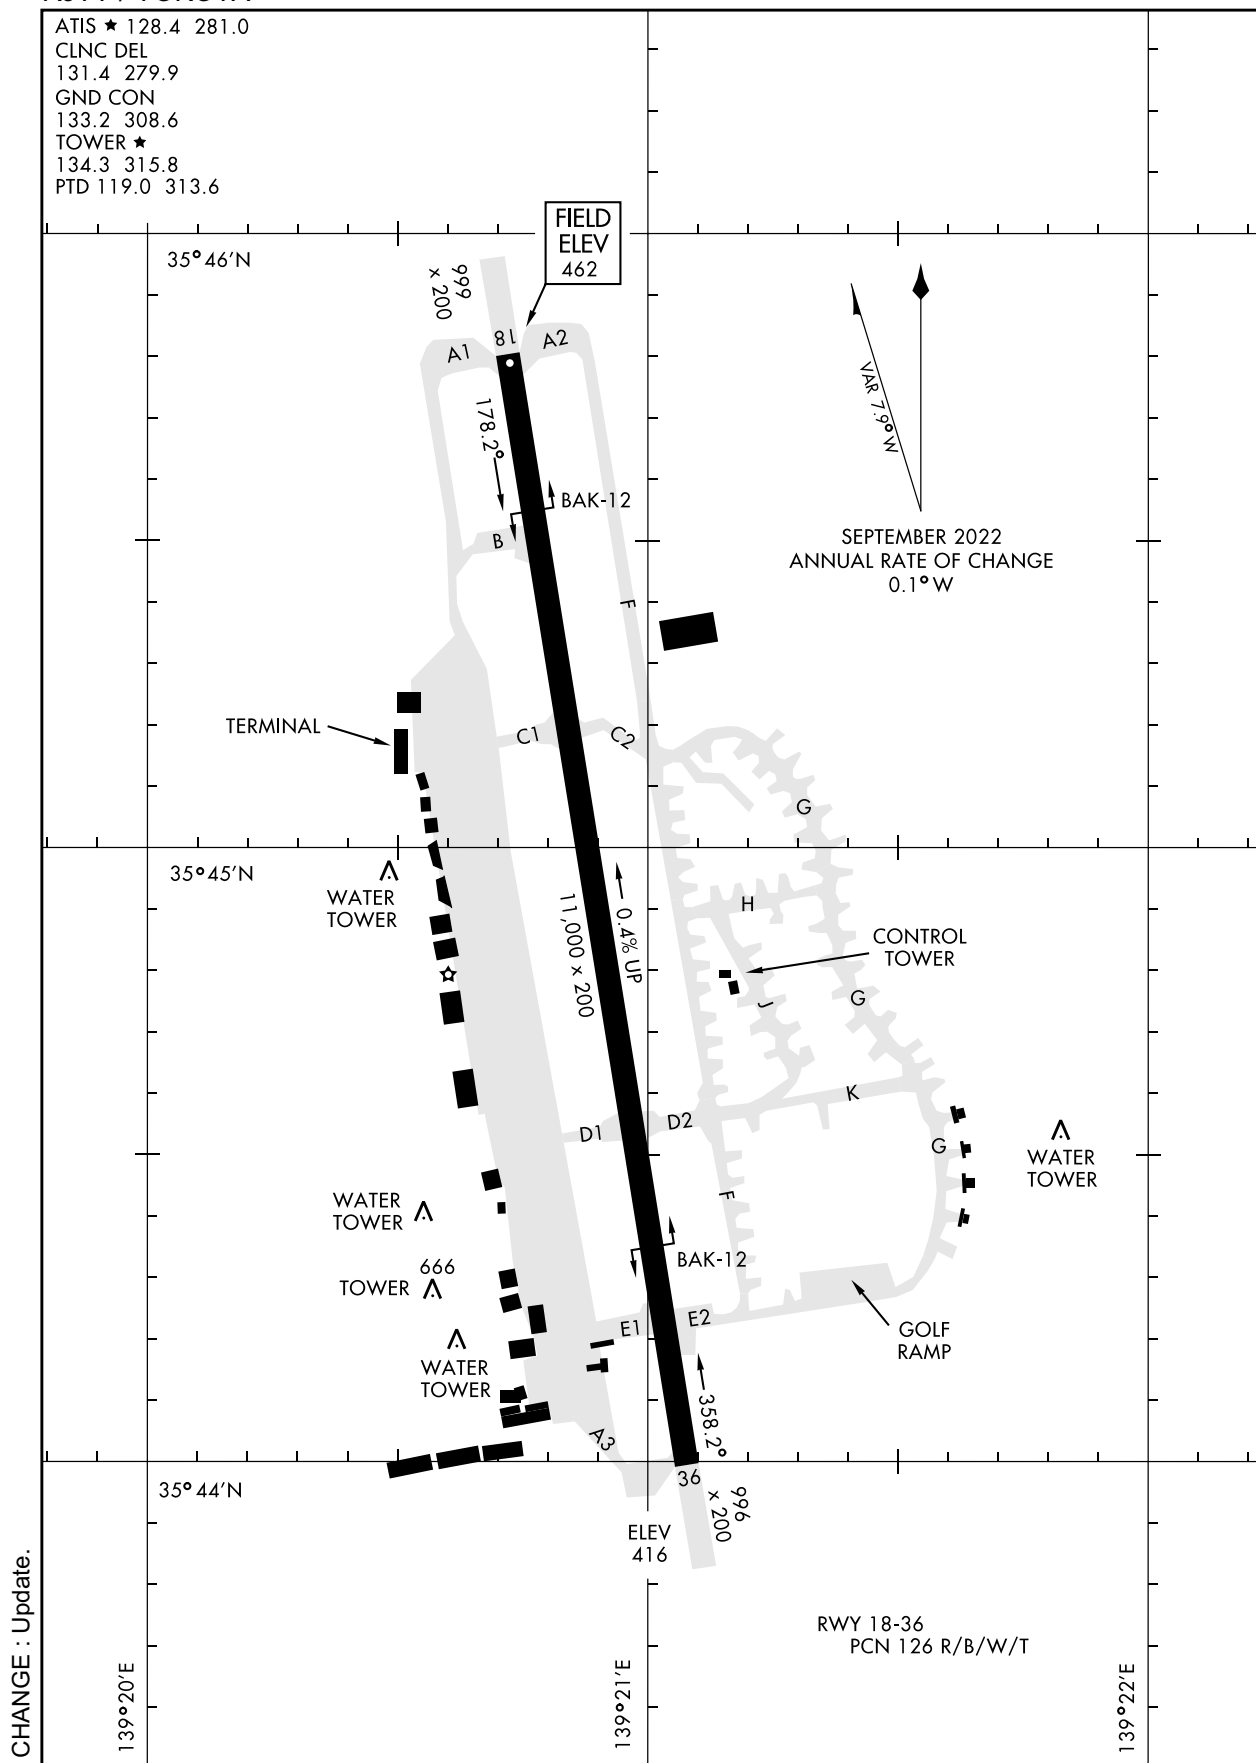


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

BREEE FOUR DEPARTURE(OBSTACLE)

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
TOWER★
134.3 315.8
DEP CON
122.1 363.8

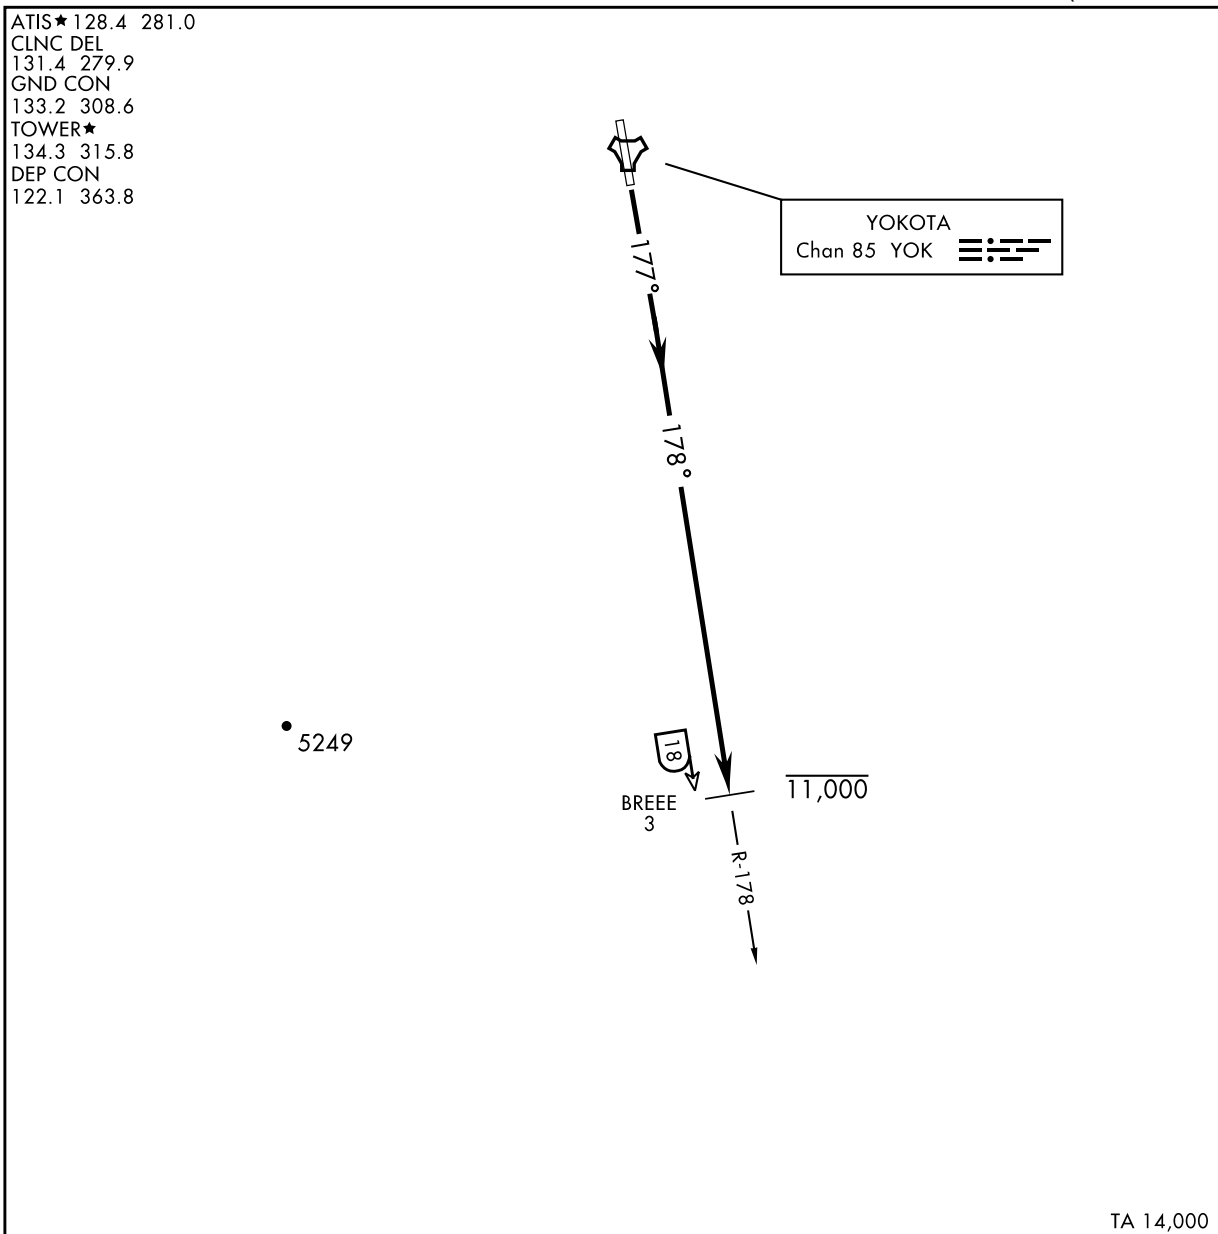

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.
Cross BREEE at or below 11,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY /YOKOTA

TIMAP FOUR DEPARTURE(OBSTACLE)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.
 Cross TIMAP at or below 13,000. Continue as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
TOWER★
134.3 315.8
DEP CON
122.1 363.8

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a)	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 (b)	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 (c)	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 (b)	V/V(fpm)	476	952	1428	1904	2380	2856

* Minimum † ATC Climb Rate
(a) to 8000
(b) to 13,400
(c) to 7900



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU.
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU.
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT


RJTY / YOKOTA

FISAB TWO DEPARTURE(RNAV)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8

TAKE-OFF OBSTACLES:

- (1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.
 (2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.
 (3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

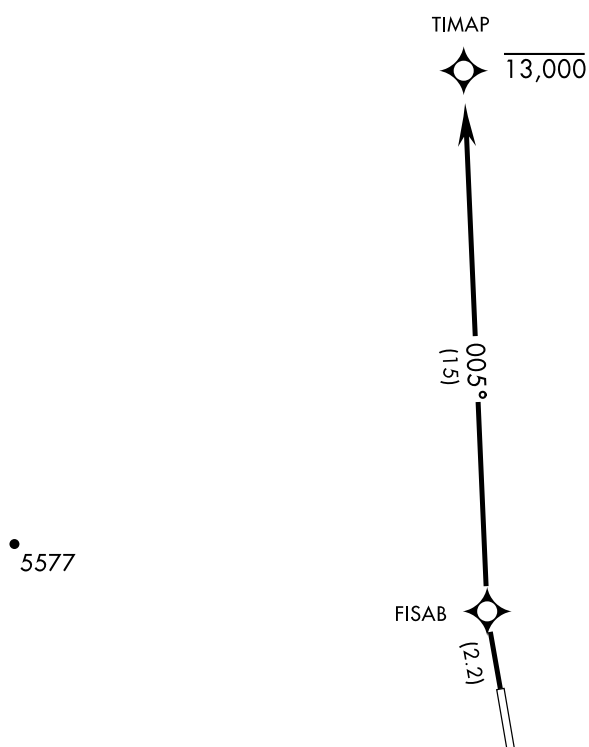

RNAV 1
 DME/DME RNP-0.3 NA

RADAR REQUIRED
 (for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP


STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

GERGE TWO DEPARTURE(RNAV)

ATIS★128.4 281.0
CLNC DEL
131.4 279.9
GND CON
133.2 308.6
TOWER★
134.3 315.8
DEP CON
122.1 363.8

- TAKE-OFF OSBTACLES:
- (1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
 - (2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
 - (3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
 - (4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
 - (5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
 - (6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.

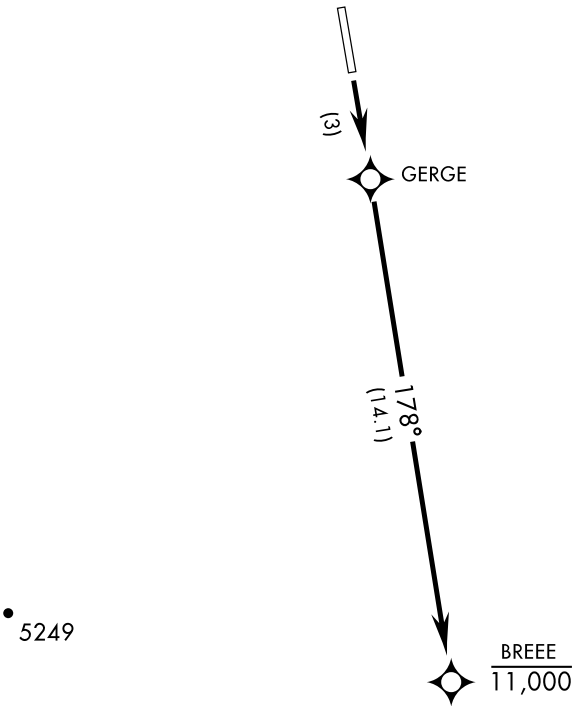

RNAV 1
DME/DME RNP-0.3 NA

RADAR REQUIRED
(for non-GPS Equipped Aircraft)

GPS REQUIRED

TA 14,000



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP


INTENTIONALLY LEFT BLANK


RJTY / YOKOTA

CHANGE : New PROC.

6/10/22

RJTY / YOKOTA

LOC I-YAS 108.7	APCH CRS 177°	Rwy ldg 11,000 TDZE 462 Arpt Elev 462	ILS Z or LOC Z RWY18		
▼ * When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile. ** When ALS inop increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to $1\frac{1}{8}$ miles. *** Circling not authorized E of Rwy 18-36.			ALSF-1 	† MISSED APPROACH: Climb to 4000 on YOK TACAN R-178 to BREEE and hold.	
ATIS ★ 128.4 281.0	APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)	TOWER ★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9	

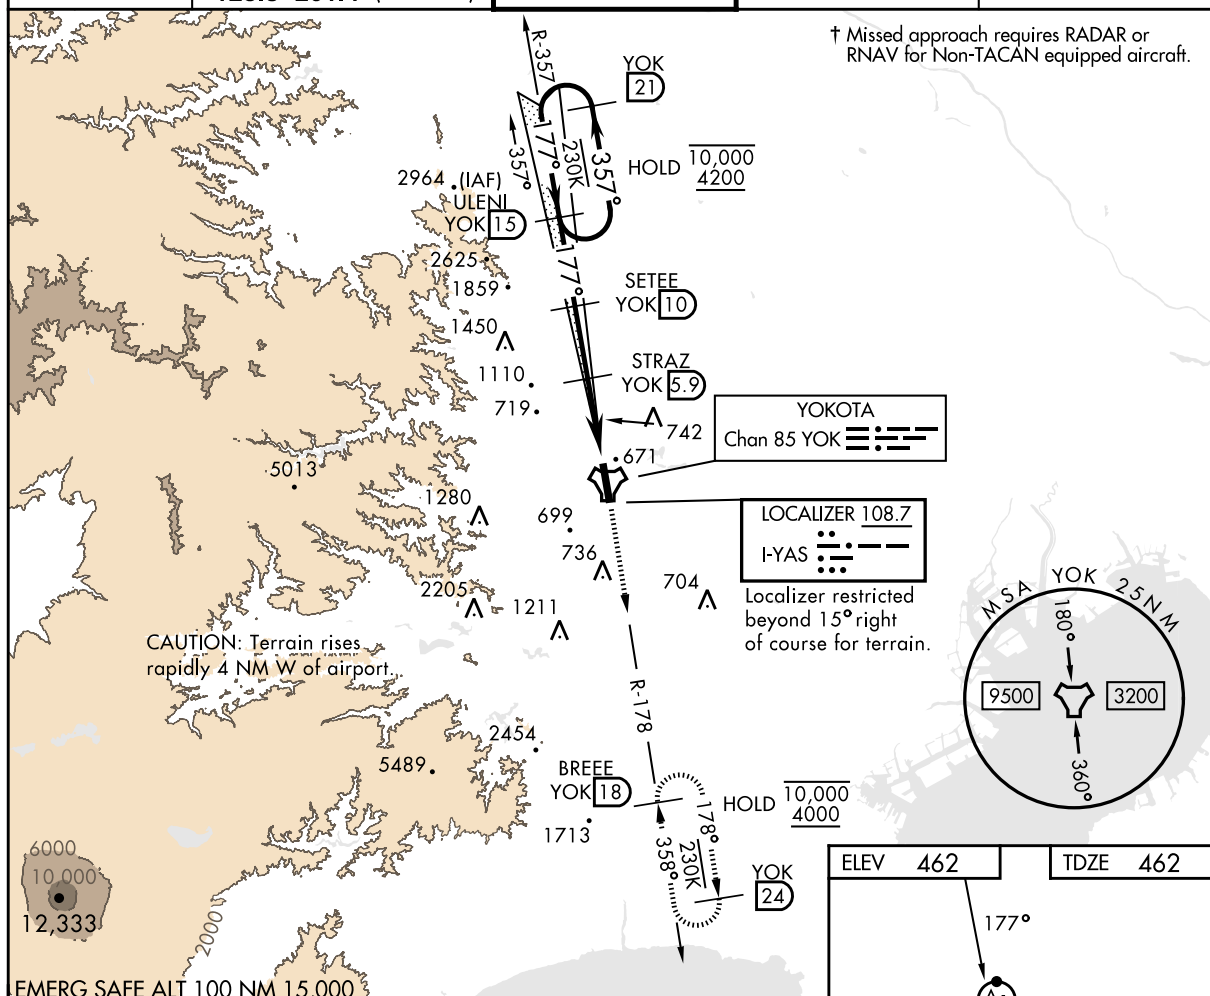

VGS and ILS glidepath not coincident (VGS angle 3.00/TCH 68)

TLV FL140
TA 14,000

BREEE
R-178
18

YOK
R-178

4000

ULENI
R-357
15

10,000
4200

357°
177°

SETEE
10

3200

177°

STRAZ
5.9

2100

TONNY
1.5

TACAN

GS 3.00°
TCH 52

4.4 NM

0.6 NM


CATEGORY	A	B	C	D	E
S-ILS 18*	699/24 237 (300-½)				
S-LOC 18**	1120/24 658 (700-½)		1120-1⅜ 658 (700-1⅜)		
CIRCLING ***	1120-1 658 (700-1)		1280-2½ 818 (900-2½)	1360-3 898 (900-3)	1580-3 1118 (1200-3)

HIRL Rwy 18-36

6/10/22

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

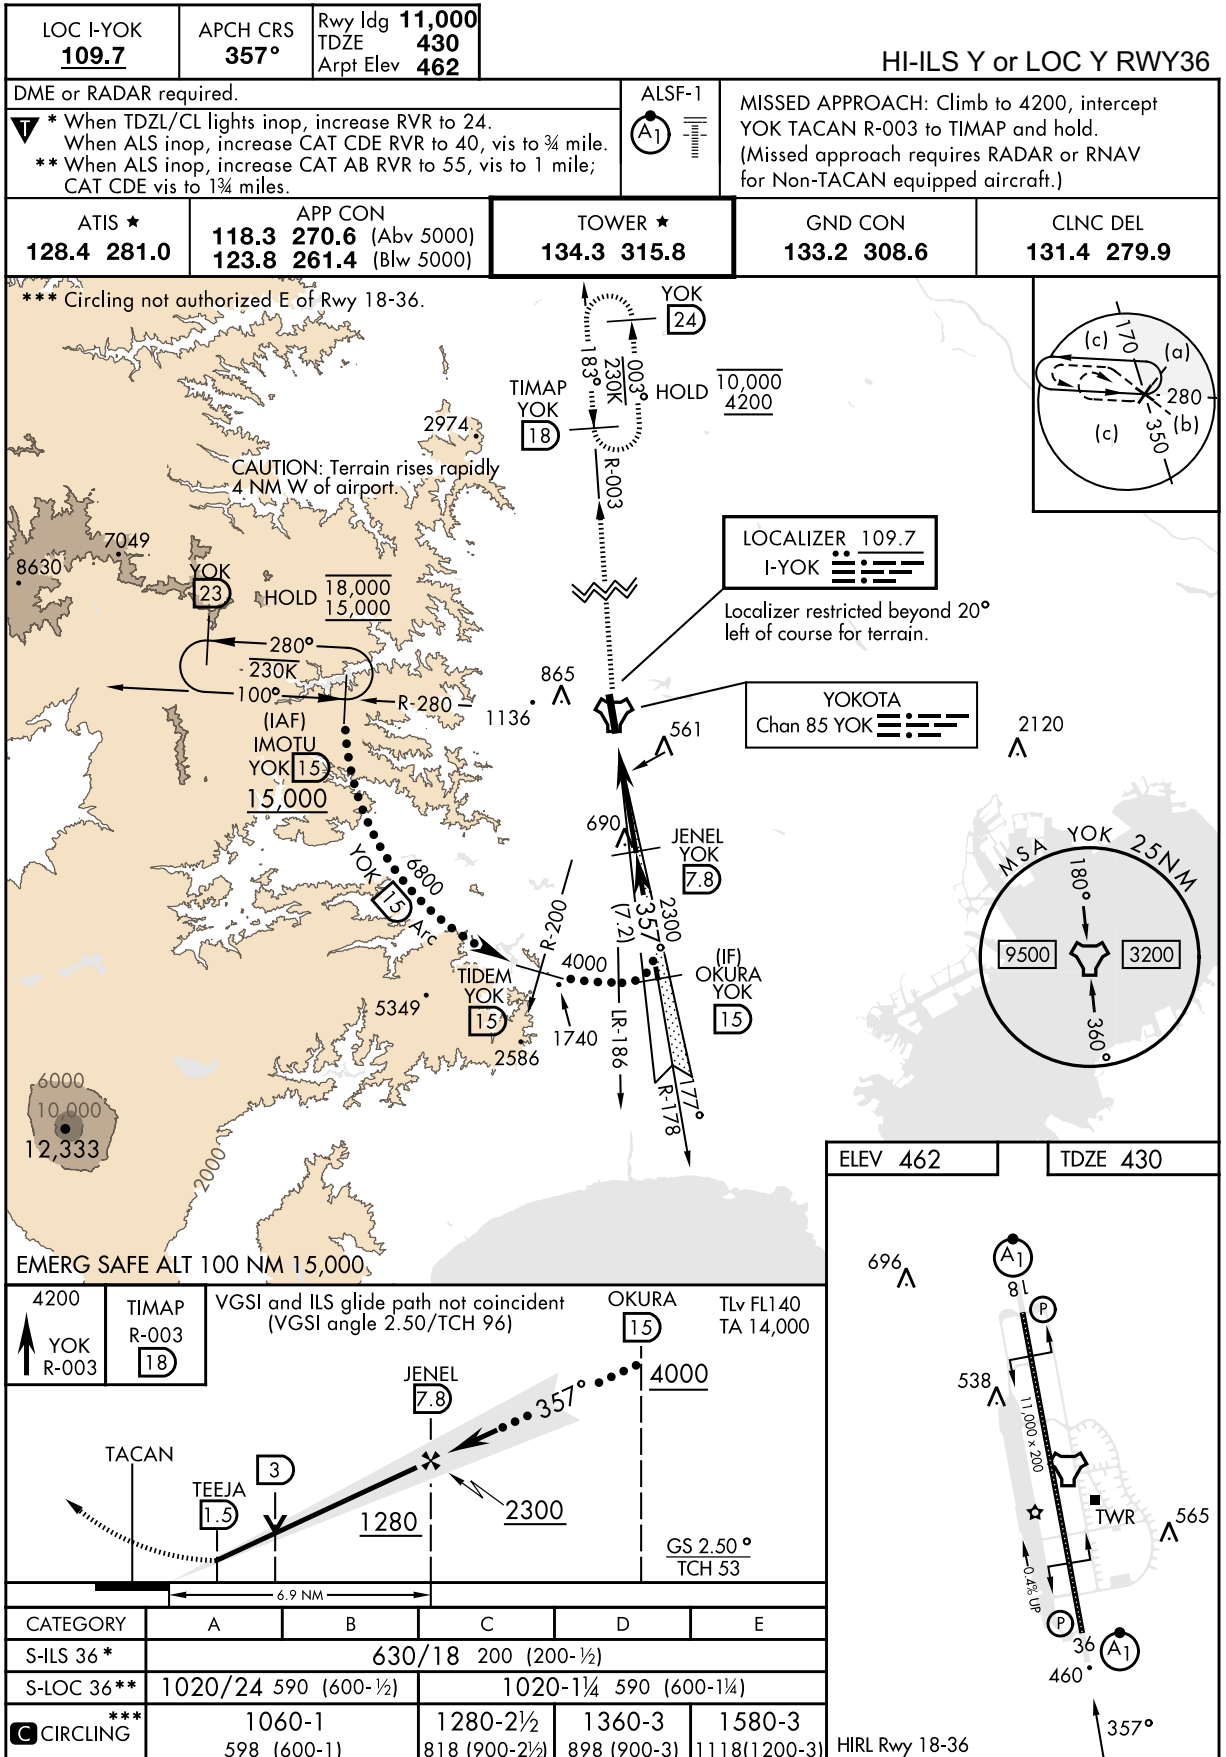

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

LOC I-YOK 109.7	APCH CRS 357°	Rwy ldg 11,000 TDZE 430 Arpt Elev 462
---------------------------	-------------------------	------------------------------------------------------------------

ILS Z or LOC Z RWY36


RADAR or DME required.

▼ * When ALS inop, increase RVR to 40, vis to ¾ mile.
When TDZL/CL lights inop increase RVR to 24.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1¼ miles.




† MISSED APPROACH: Climb to 4200, intercept YOK TACAN R-003 to TIMAP and hold.

ATIS ★ 128.4 281.0	APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)	TOWER ★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9
------------------------------	---------------------------------------------------------------------------	-------------------------------	-------------------------------	--------------------------------

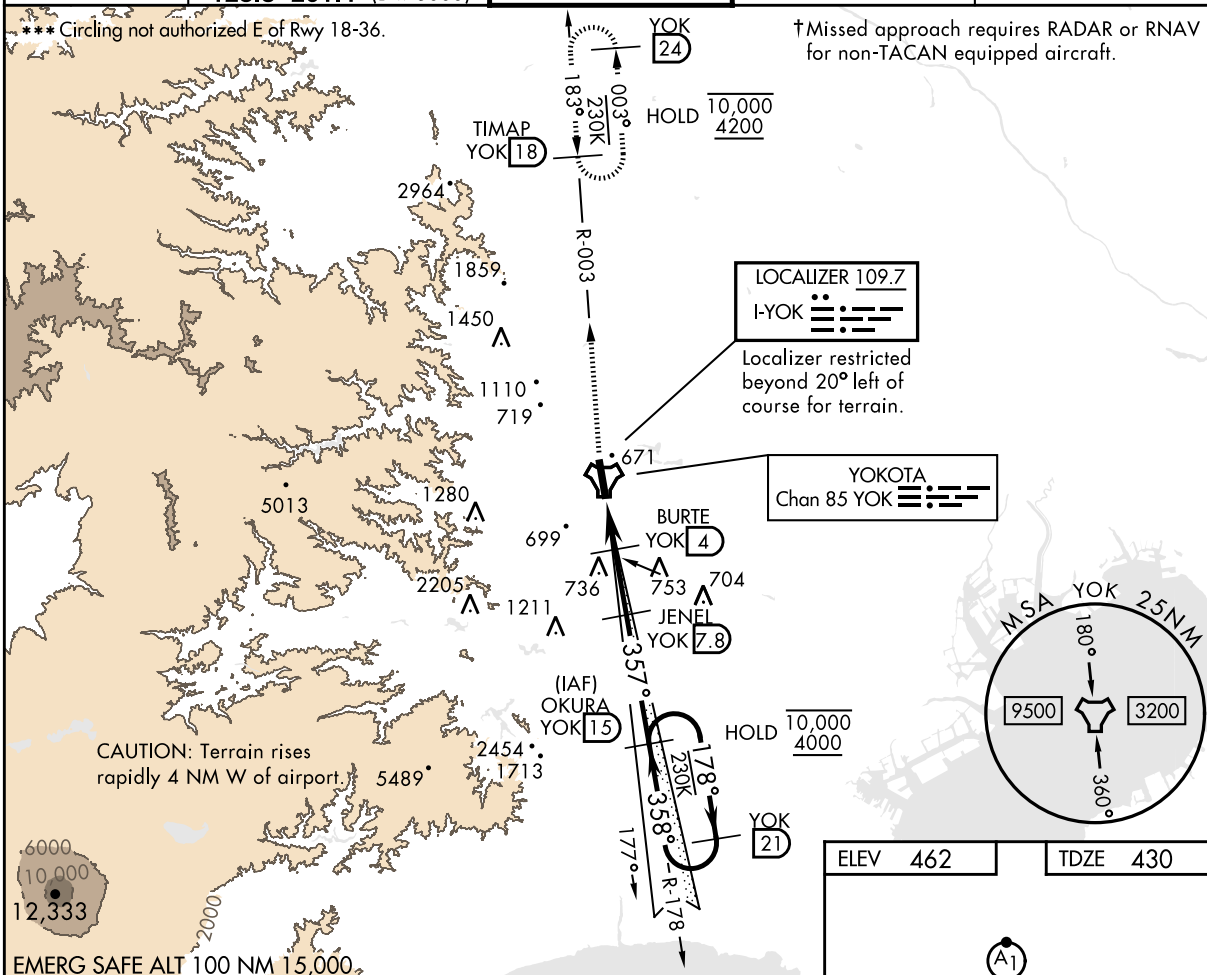

ELEV 462	TDZE 430
----------	----------

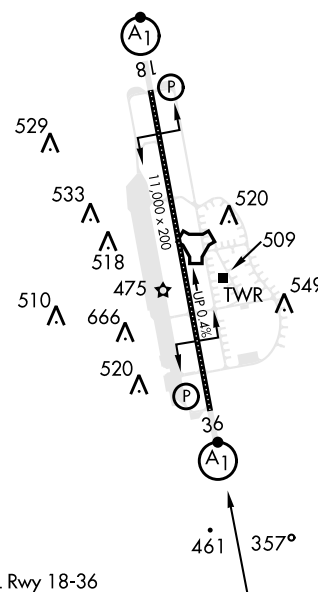

CHANGE : New PROC.


CATEGORY	A	B	C	D	E
S-ILS 36 *	630/18		200	(200-½)	
S-LOC 36 **	860/24	430 (400-½)	860/40	430	(400-¾)
*** CIRCLING	1060-1 598 (600-1)	1280-2½ 818 (900-2½)	1360-3 898 (900-3)	1580-3 1118 (1200-3)	


HIRL Rwy 18-36

NOTE: REPRINTING DOD FLIP


INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS 177°	Rwy ldg 11,000 TDZE 462 Arpt Elev 462	RNAV(GPS) RWY18		
DME/DME RNP - 0.3 NA		ALSIF-1 	MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.	
ATIS ★ 128.4 281.0	APP CON 118.3 270.6 Abv 5000 123.8 261.4 Blw 5000	TOWER ★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9

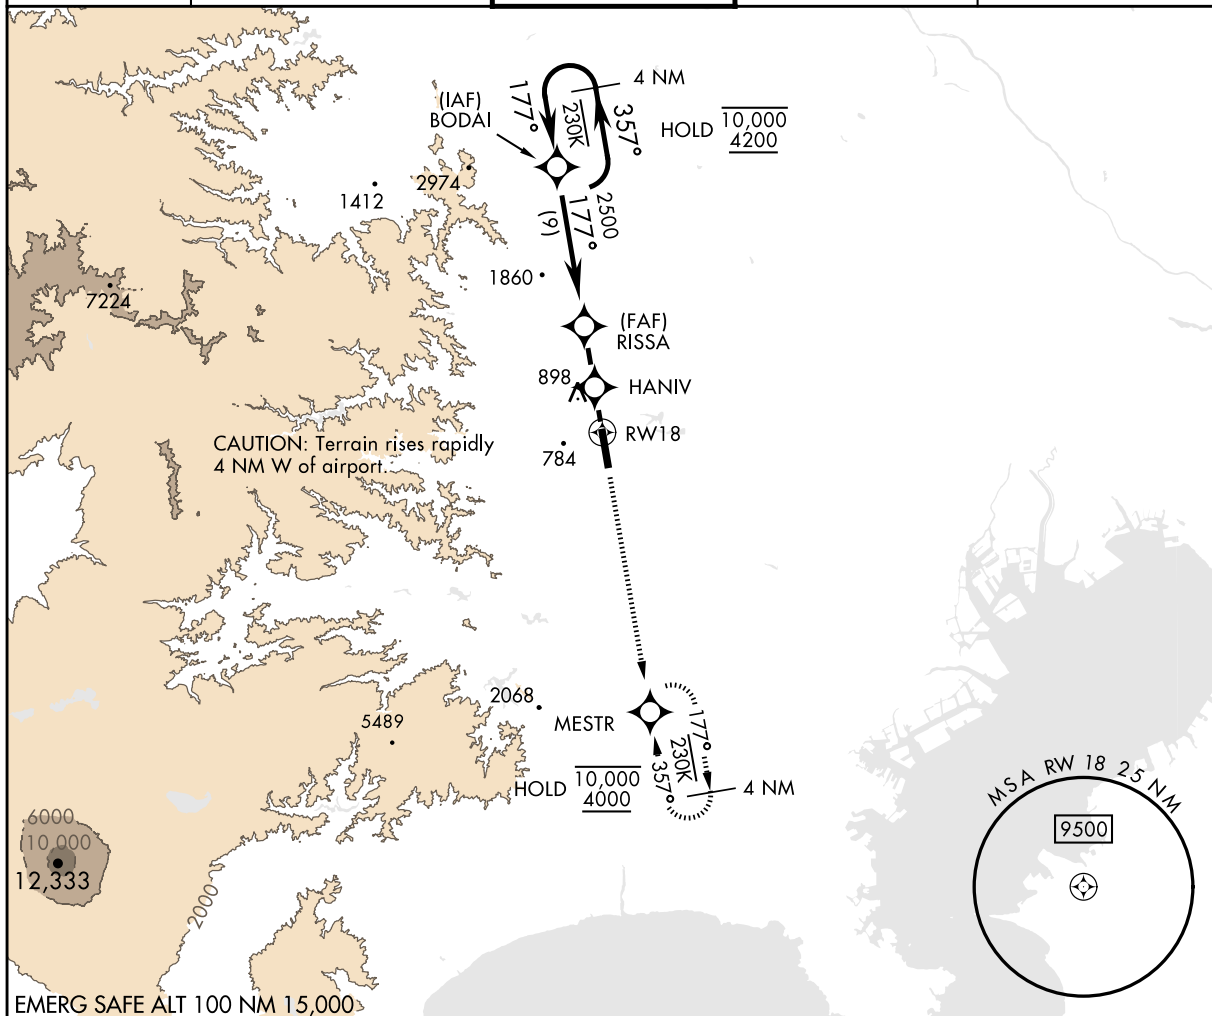

CHANGE : Update.

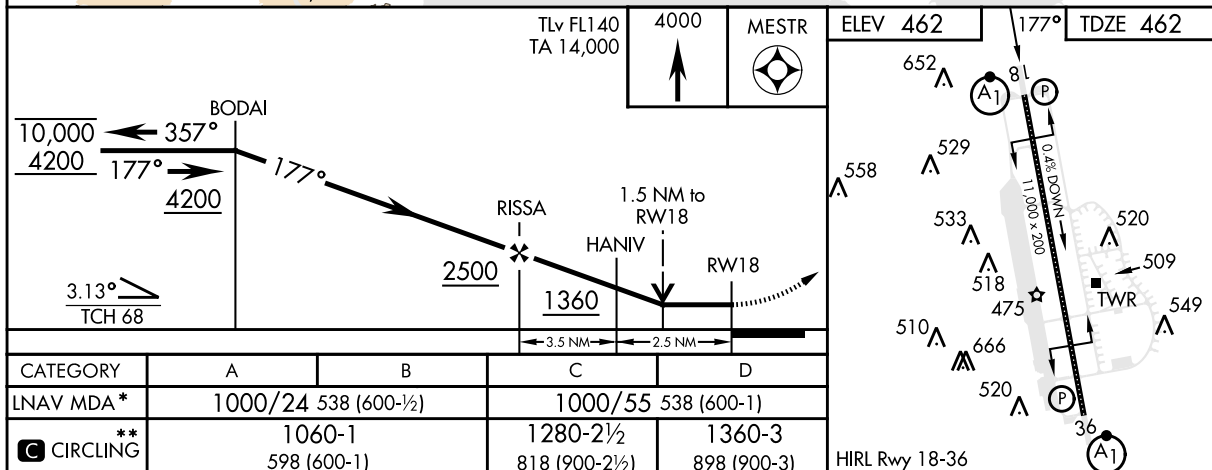

NOTE: REPRINTING DOD FLIP

RJTY / YOKOTA

CHANGE : Update.

6/10/22