

AD 2 AERODROMES

RJNF AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJNF - FUKUI

RJNF AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	360834N/1361326E 175°/0.6km FM RWY 18 THR
2	Direction and distance from (city)	5nm N FM Fukui station
3	Elevation/ Reference temperature	18ft / 33°C(2003-2008)
4	Geoid undulation at AD ELEV PSN	Nil
5	MAG VAR/ Annual change	8°W (2022) / 4.2' W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	FUKUI PREF. PUBLIC AP. 50-1-2, Edomenaka, Harue-cho, Sakai-city, Fukui,919-0412, JAPAN Tel: 0776-51-0580,0776-51-4066 Fax: 0776-51-4102 e-mail: kuukou@pref.fukui.lg.jp Web: https://www.pref.fukui.lg.jp/doc/fukui-airport/index.html
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Nil

RJNF AD 2.3 OPERATIONAL HOURS

1	AD Administration	0000 - 0800
2	Customs and immigration	On request Customs: 0776-22-1832 Immigration: 0776-28-2101
3	Health and sanitation	Quarantine(human): On request(06-6571-4312) Quarantine(animal, plant): Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24 (TOKYO)
7	ATS	0000 - 0800 Remarks: AFIS provided by Osaka Airport Office.
8	Fuelling	0000 - 0800(On request, Tel: 0776-51-6640)
9	Handling	Nil
10	Security	Nil
11	De-icing	Nil
12	Remarks	Nil

RJNF AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	JET A-1, AVGAS 100
3	Fuelling facilities/ capacity	Fuel truck
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	The prior permission of Oil company is required 0776-51-6640 : Mizukami trading company

RJNF AD 2.5 PASSENGER FACILITIES

1	Hotels	Nil
2	Restaurants	Nil
3	Transportation	Taxi
4	Medical facilities	Hospital in Harue-cho 3km
5	Bank and Post Office	Nil
6	Tourist Office	Nil
7	Remarks	Nil

RJNF AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 3
2	Rescue equipment	AVBL : Ambulance car and chemical fire engines
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

RJNF AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Snow removing truck x 1, Tire dozer x 1 Snow remover rotary x 1
2	Clearance priorities	1.RWY 2.TWY 3.Apron
3	Remarks	Snow removal will be commenced, if RWY, TWY and Apron are covered with a depth of 5cm snow or more.

RJNF AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface : asphalt-concrete Strength : Spot 1-3, 5-7 : PCR 165/F/C/X/T Spot 8-12 : AUW 4300kg/0.3MPa
2	Taxiway width, surface and strength	WIDTH : 15.0m Surface : asphalt-concrete Strength: PCR 165/F/C/X/T
3	ACL and elevation	Not Available
4	VOR checkpoints	Not Available
5	INS checkpoints	Not Available
6	Remarks	Nil

RJNF AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:18/36 (Marking) RWY designation, RWY CL, RWY THR, Middle point, Aiming point, TDZ, RWY side stripe marking TWY: (Marking) TWY CL, TWY side stripe marking
3	Stop bars	Nil
4	Remarks	Nil

RJNF AD 2.10 AERODROME OBSTACLES

In Area2 See Obstacle data

In Area3 To be developed

RJNF AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	TOKYO
2	Hours of service MET Office outside hours	H24(TOKYO)
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Briefing is available upon inquiry at TOKYO
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S ₆ , U ₈₅ , U ₇ , U ₅ , U ₃ , U ₂₅ , U _{2/T} , P _S , P ₅ , P ₃ , P ₂₅ , P _{SWE} , P _{SWF} , P _{SWG} , P _{SWI} , P _{SWM} , P _{SW} (domestic), E, C, W _E , W _F , W _G , W _I , W, N
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	RADIO
10	Additional information(limitation of service, etc.)	Nil

RJNF AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCR) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
18	175.75°	1200x30	PCR 165/F/C/X/T Asphalt Concrete	360853.67N 1361324.41E	THR ELEV: 17ft
36	355.75°	1200x30	PCR 165/F/C/X/T Asphalt Concrete	360814.84N 1361327.84E	THR ELEV: 19ft
Slope of RWY		Strip Dimensions(M)	RESA (Overrun) Dimensions(M)		Remarks
7		10	11		14
See AD 2.24 AD chart		1320x120	45 × 120		RWY grooving 1200m x 20m
		1320x120	45 × 120		

RJNF AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
18	1200	1200	1200	1200	Nil
36	1200	1200	1200	1200	Nil

RJNF AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
18	Nil	Nil	PAPI 3.0%/LEFT 266m 45ft	Nil	Nil	Nil	Nil	Nil
36	Nil	Nil	PAPI 3.0%/LEFT 266m 45ft	Nil	Nil	Nil	Nil	Nil
Remarks								
10								
RWY THR ID LGT for RWY 18/36 THR(Color:White)								

RJNF AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil
2	LDI location and LGT Anemometer location and LGT	Anemometer : RWY 36 : 400m FM RWY 36 THR, LGTD
3	TWY edge and center line lighting	Nil
4	Secondary power supply/ switch-over time	Within 10 seconds: PAPI, RWY THR ID LGT
5	Remarks	Nil

RJNF AD 2.16 HELICOPTER LANDING AREA

Nil

RJNF AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
Fukui Information Zone	Area within a radius of 5nm (9km) of FUKUI ARP(36°09'N/136°13'E).	3,000 or below	E	FUKUI RADIO En	

RJNF AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
AFIS	FUKUI RADIO	118.6MHz	0000 - 0800	Operated by Osaka Airport Office. APP SER is provided by Komatsu APP.

RJNF AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
MSAS		1575.42MHz	H24			Transmitting antennas are satellite based

RJNF AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

For the use of this AP : PPR Tel 0776-51-0580

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJNF AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RJNF AD 2.22 FLIGHT PROCEDURES**TAKE OFF MINIMA**

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP Filed	18 36	A,B	-	-	-	400	-	500
OTHER	18 36	A,B	AVBL LDG MINIMA					

RJNF AD 2.23 ADDITIONAL INFORMATION

Nil

RJNF AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart Standard Departure Chart - Instrument (AWARA-RNAV) Instrument Approach Chart (RNP RWY18) Other Chart (Visual REP)


RJNF / FUKUI

AD CHART


CHANGE : CEILOMETER added.

FUKUI AP

VAR 8°W 2022
Annual Change 4.2' W

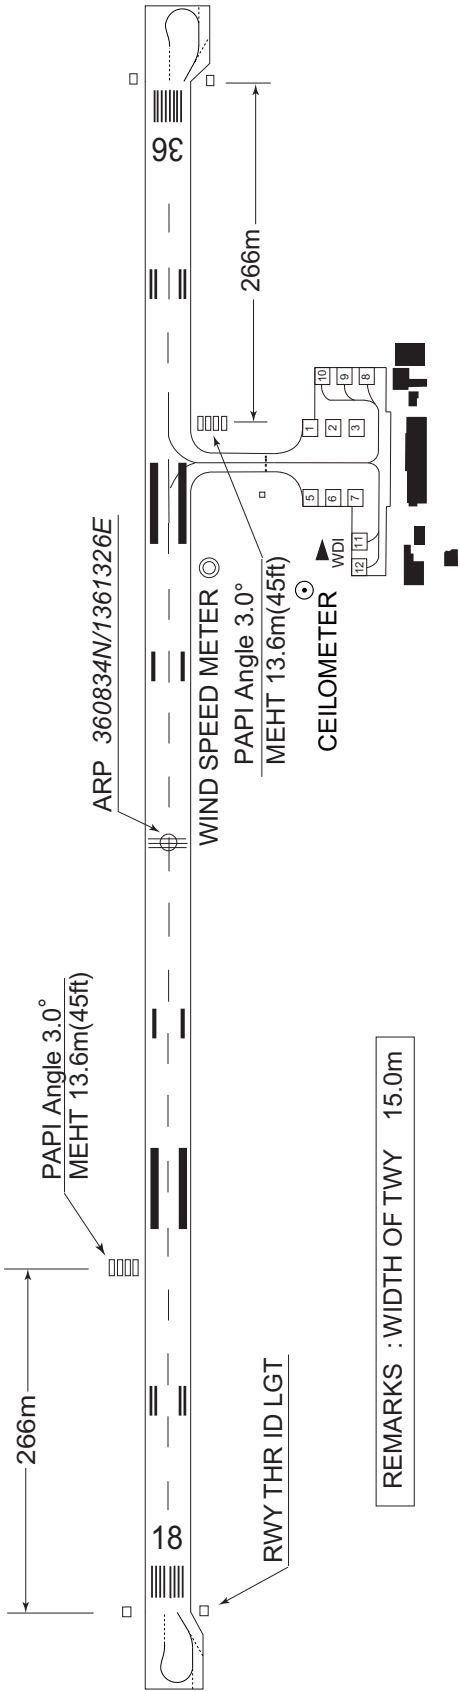

LONGITUDINAL PROFILE OF RWY

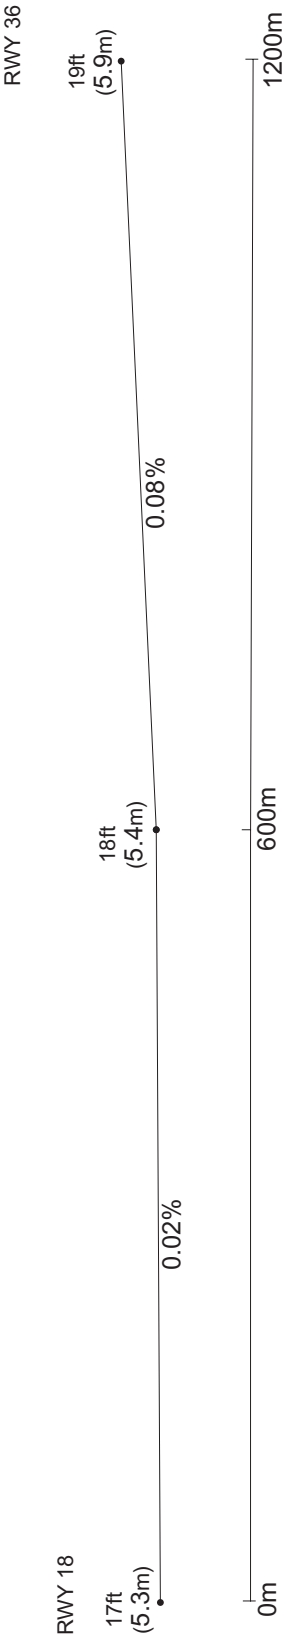

STANDARD DEPARTURE CHART -INSTRUMENT

RJNF / FUKUI

RNAV SID

AWARA ONE DEPARTURE

RNP1

Note GNSS required.

VAR 9° W

RWY18: Climb on HDG184° at or above 800FT, turn right direct to AWARA.
RWY36: Climb on HDG004° at or above 500FT, turn left direct to AWARA.
Note RWY18: 5.0% climb gradient required up to 1100FT.

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	184 (175.9)	-8.5	—	—	+800	—	—	RNP1
002	DF	AWARA	—	—	-8.5	—	R	—	—	—	RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	004 (355.9)	-8.5	—	—	+500	—	—	RNP1
002	DF	AWARA	—	—	-8.5	—	L	—	—	—	RNP1

Waypoint Coordinates

Waypoint Identifier	Coordinates
AWARA	361759.4N / 1360547.2E

CHANGE : VAR. Waypoint Coordinates added.

RJNF / FUKUI

RNP RWY18

KOMATSU APP

120.1 - 261.2 - 362.3

RNP APCH

FUKUI RADIO

118.6

AFIS provided
by Osaka Airport Office

NO RADAR

Baro-VNAV not authorized below -10°C

VAR 9°W

AWARA
(IAF/MAHF)

361759.35N
1360547.19E

GOZEN
(IAF)

362504.92N
1361156.57E

KAGAR
(IF)

361823.17N
1361234.01E

NF181
(FAF)

361323.44N
1361300.56E

RW18
(MAPt)

360853.67N
1361324.41E

NF182
(MATF)

360545.47N
1361341.03E

NM to Next Fix

MAPt

2

3

4

FAF

ALT (3.0° APCH Path)

-

704

1022

1341

1500

GOZEN
(IAF)

184°

6.7

(175.7°T)

AWARA
(IAF/MAHF)

094°

5.5

(085.8°T)

KAGAR
(IF)

184°

5.0

(175.9°T)

NF181
(FAF)

184°

4.5

(175.9°T)

RW18
(MAPt)

NF182
(MATF)

10NM

270°

4489

MSA 25NM

10000

ARP

ARP: 360834N/1361326E

1MIN

274°

094°

MHA 3000

MAX 170KIAS

AWARA

NOT TO SCALE

MISSED APPROACH

Climb direct to **NF182**,
turn right direct to **AWARA**
and hold at 3000FT.
Contact KOMATSU APP.

Timing not authorized for defining the MAPt.

GOZEN
AWARA
(IAF)

3000

KAGAR
(IF)

1500

NF181
(FAF)

1500

VDP
(LNAV)

1500

RW18
(MAPt)

3.00°

RDH50

MDA

1100
(1082)

NM to THR

0

1.4

4.5

9.5

Missed APCH climb gradient MNM 5.0%


MINIMA		THR elev. 17		AD elev. 18		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	480 (463)	1500	480 (462)	1500	570 (552)	1600
B						
C	-	-	-	-	-	-
D	-	-	-	-	-	-

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : VAR. HLDG pattern at AWARA. ALT restriction at KAGAR.

RJNF / FUKUI

Visual REP

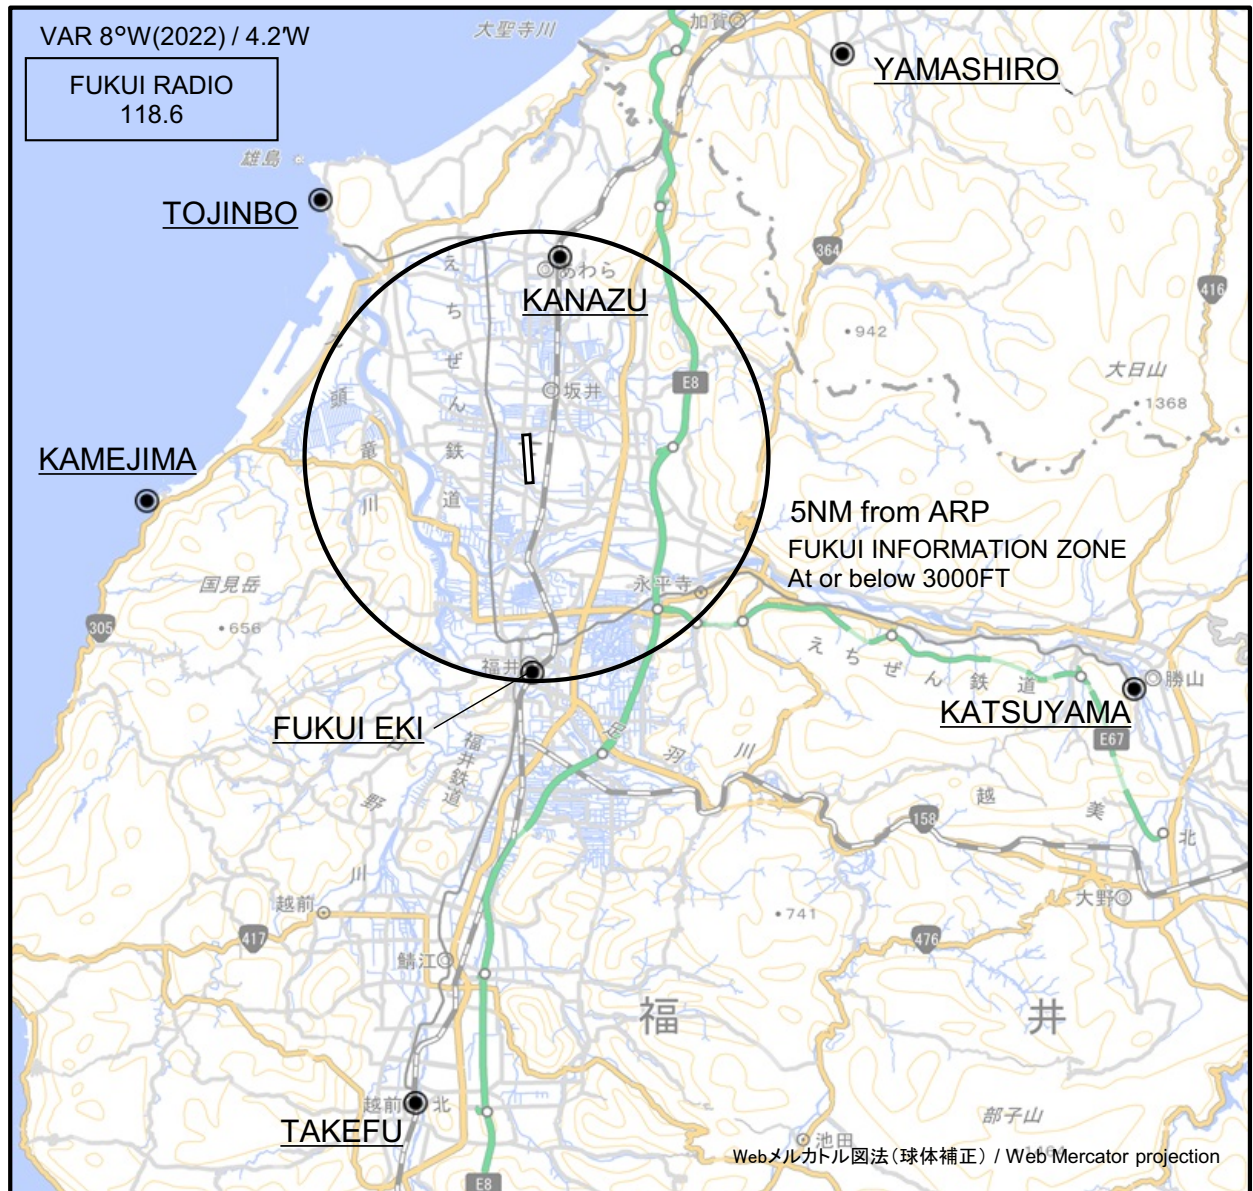

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
山代 Yamashiro	037°T / 11.1NM	山代温泉街 Town of the Yamashiro hot-spring
金津 Kanazu	007°T / 4.4NM	JR芦原温泉駅 Station
勝山 Katsuyama	112°T / 14.0NM	えちぜん鉄道駅 Station
武生 Takefu	190°T / 14.6NM	JR駅 Station
亀島 Kamejima	263°T / 8.5NM	岩礁 Reef
東尋坊 Tojinbo	320°T / 7.3NM	タワー Tower
福井駅 Fukui eki	180°T / 4.8NM	JR駅 Station