

**INTENTIONALLY LEFT BLANK**

## ROMY / MIYAKO RNAV SID and TRANSITION

CHANGE : Navigation Specification(Basic RNP1  $\rightarrow$  RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

RNAV SID and TRANSITION

UMAKI TWO DEPARTURE

RWY04

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	043 (038.2)	-5.1	-	-	+700	-	-	RNP1
002	DF	WAIDO	-	-	-5.1	-	R	+3000	-	-	RNP1
003	TF	UMAKI	-	266 (261.0)	-5.1	26.3	-	+3000	-	-	RNP1

RWY22

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	223 (218.2)	-5.1	-	-	+600	-	-	RNP1
002	DF	UMAKI	-	-	-5.1	-	R	+3000	-	-	RNP1

YUNTA TRANSITION


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	UMAKI	-	-	-5.1	-	-	+3000	-	-	RNP1
002	TF	YUNTA	-	267 (261.7)	-5.1	26.5	-	+3000	-	-	RNP1

JOTTO TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	UMAKI	-	-	-5.1	-	-	+3000	-	-	RNP1
002	TF	YAIMA	-	240 (234.5)	-5.1	44.0	-	-	-230	-	RNP1
003	TF	JOTTO	-	311 (305.5)	-5.1	5.0	-	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

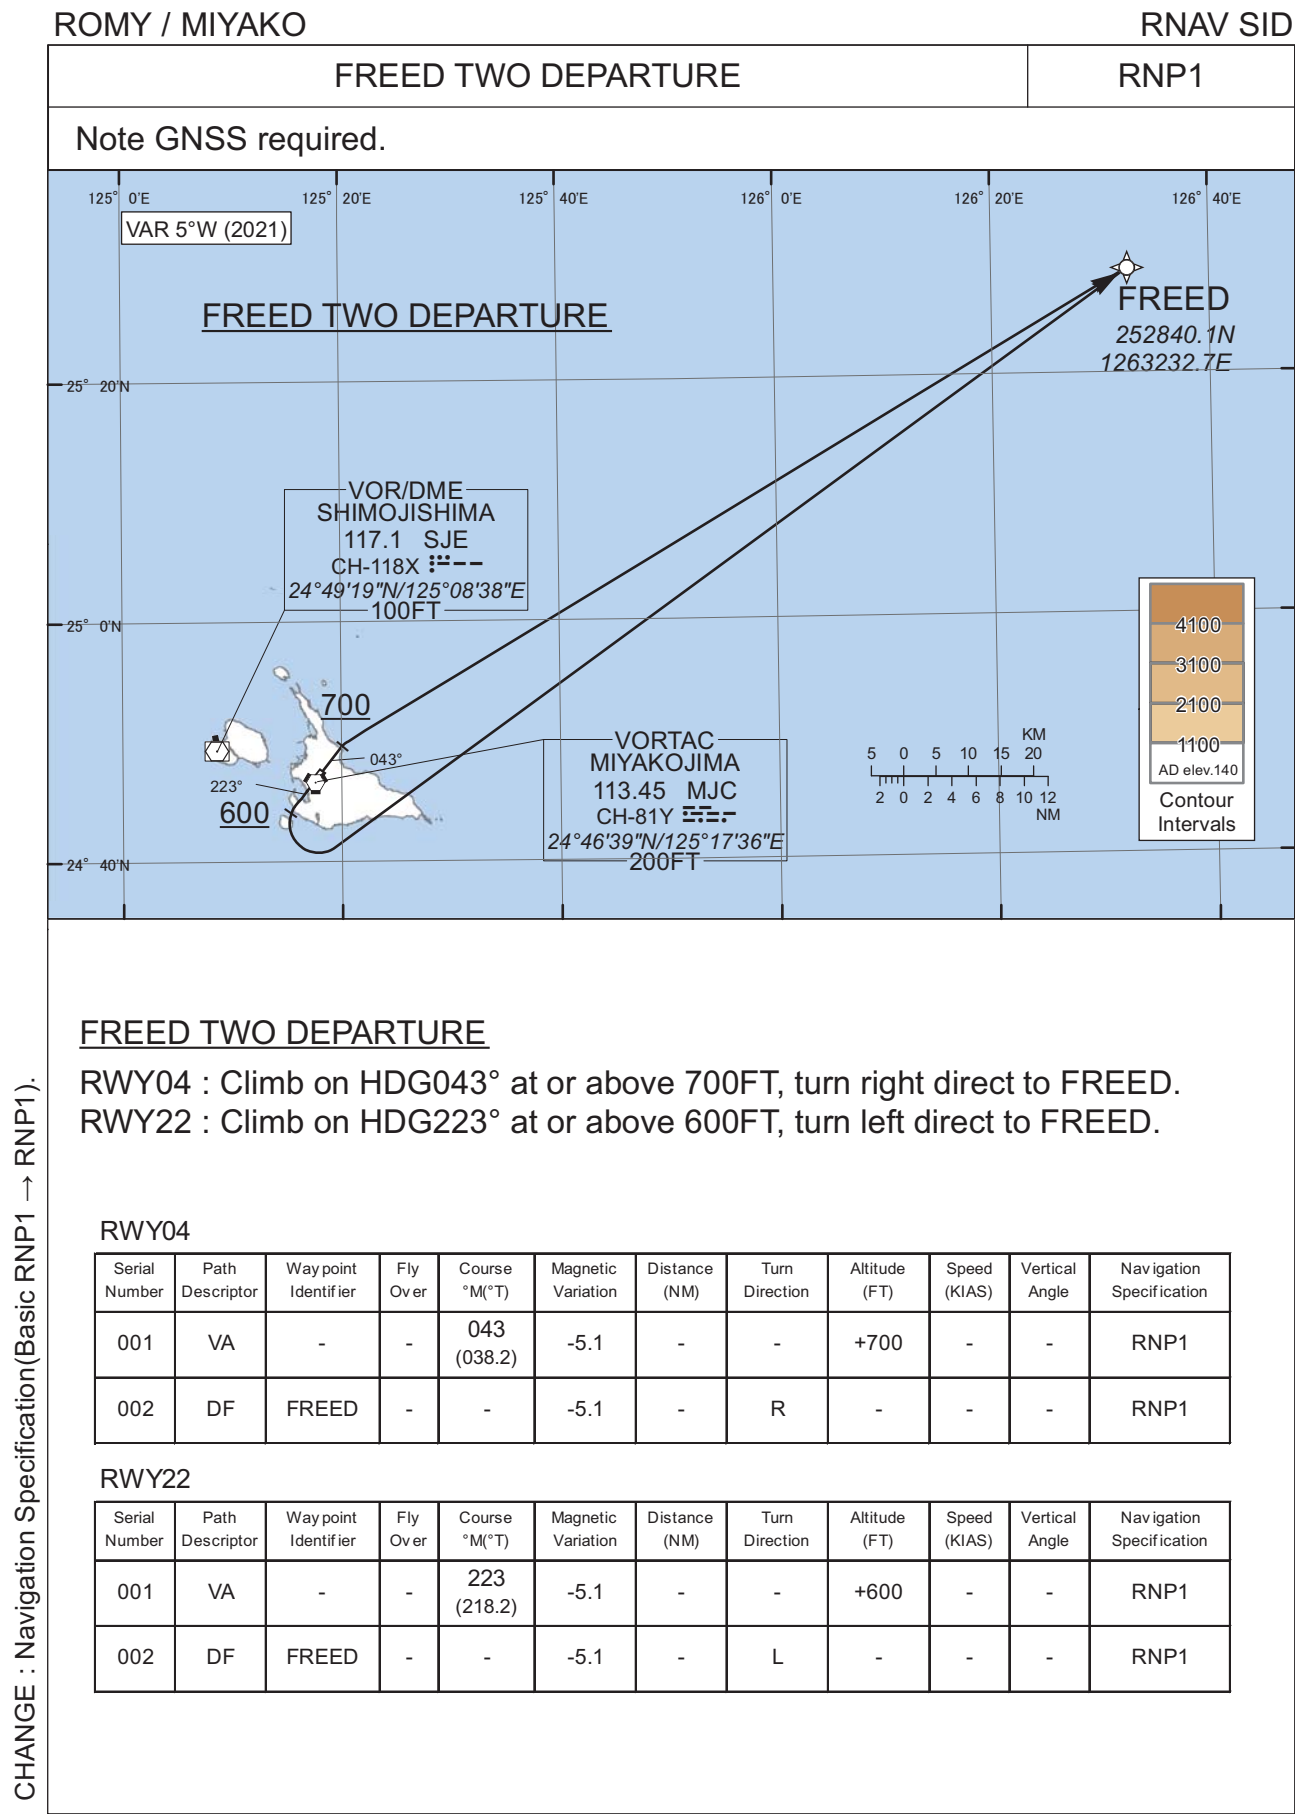


## STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

SID

NAHA SIX DEPARTURE

RWY 04 : Climb RWY HDG to 700FT, turn right...

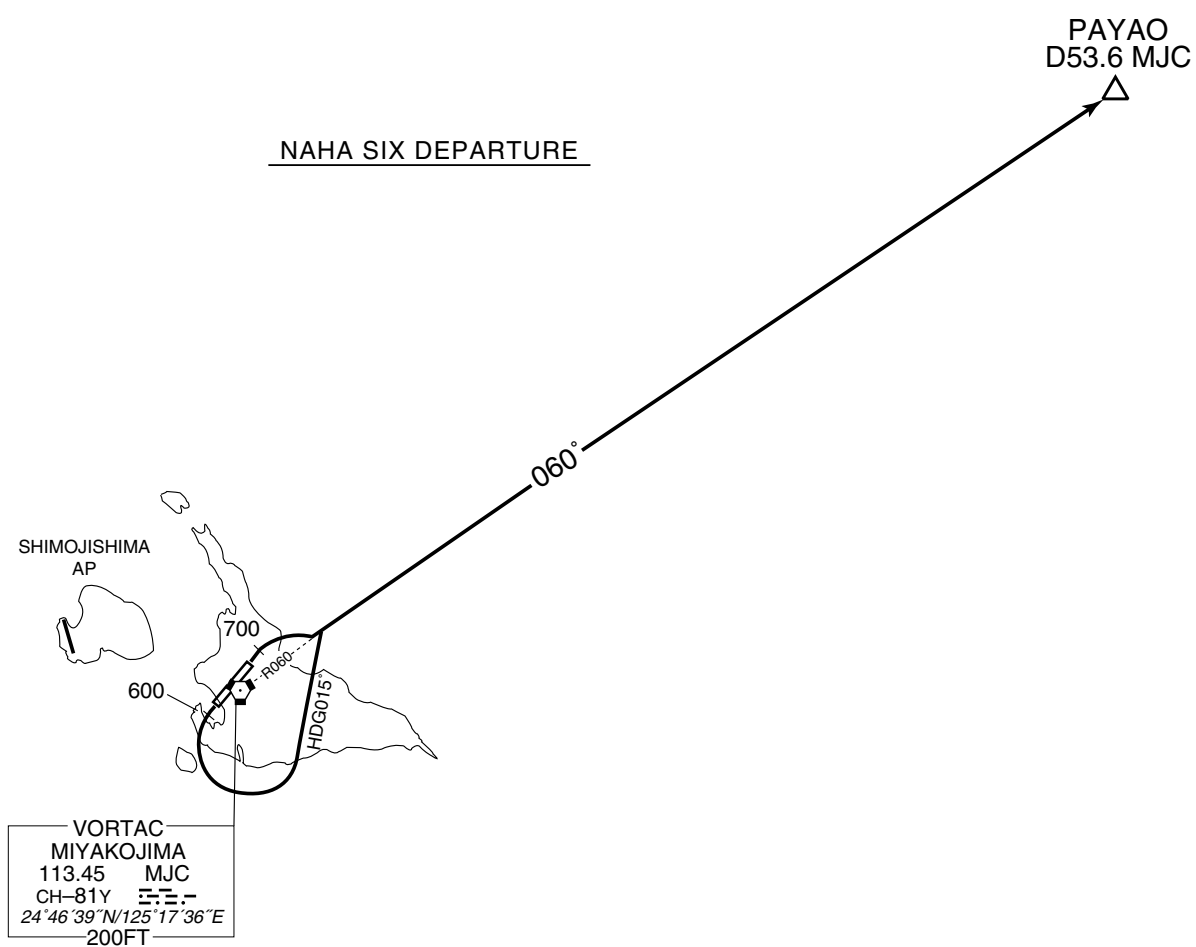RWY 22 : Climb RWY HDG to 600FT, turn left HDG015°...  
... to intercept and proceed via MJC R060 to PAYAO.


STANDARD DEPARTURE CHART -INSTRUMENT

ROMY / MIYAKO

SID

WEST SEVEN DEPARTURE

RWY 04 : Climb RWY HDG to 700FT, turn right...  
RWY 22 : Climb RWY HDG to 600FT, turn right...  
... to intercept and proceed via MJC R253 to SHUJI.  
Cross SHUJI at or above 3000FT.

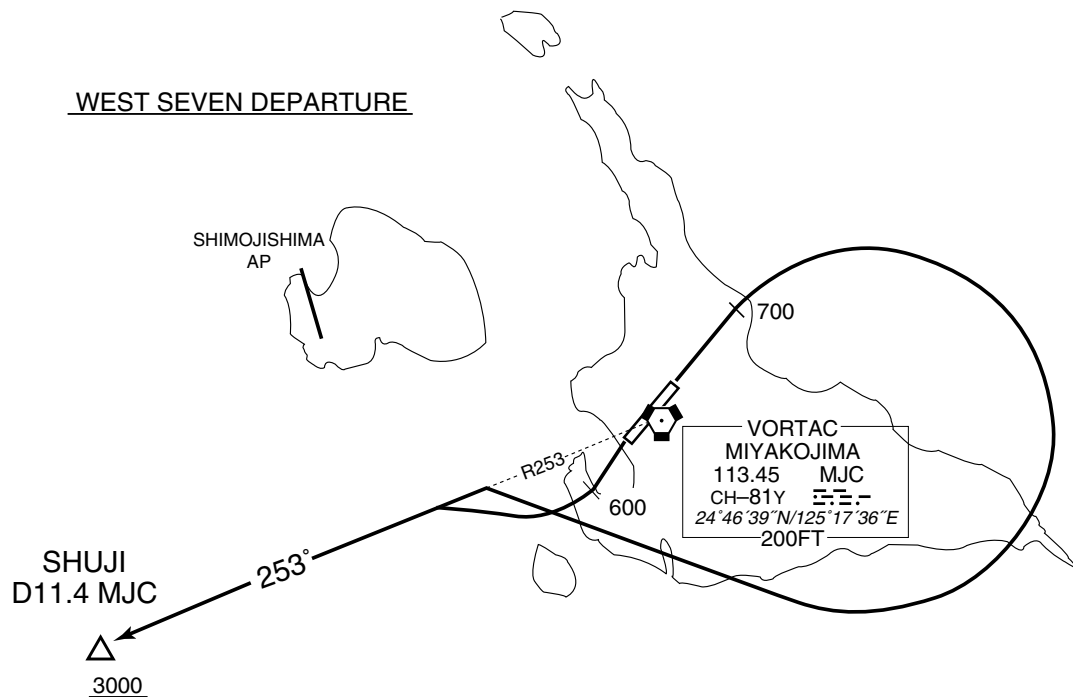


STANDARD ARRIVAL CHART - INSTRUMENT

ROMY / MIYAKO

RNAV STAR RWY04

YUTAH WEST ARRIVAL	RNP1
--------------------	------

Note GNSS required.

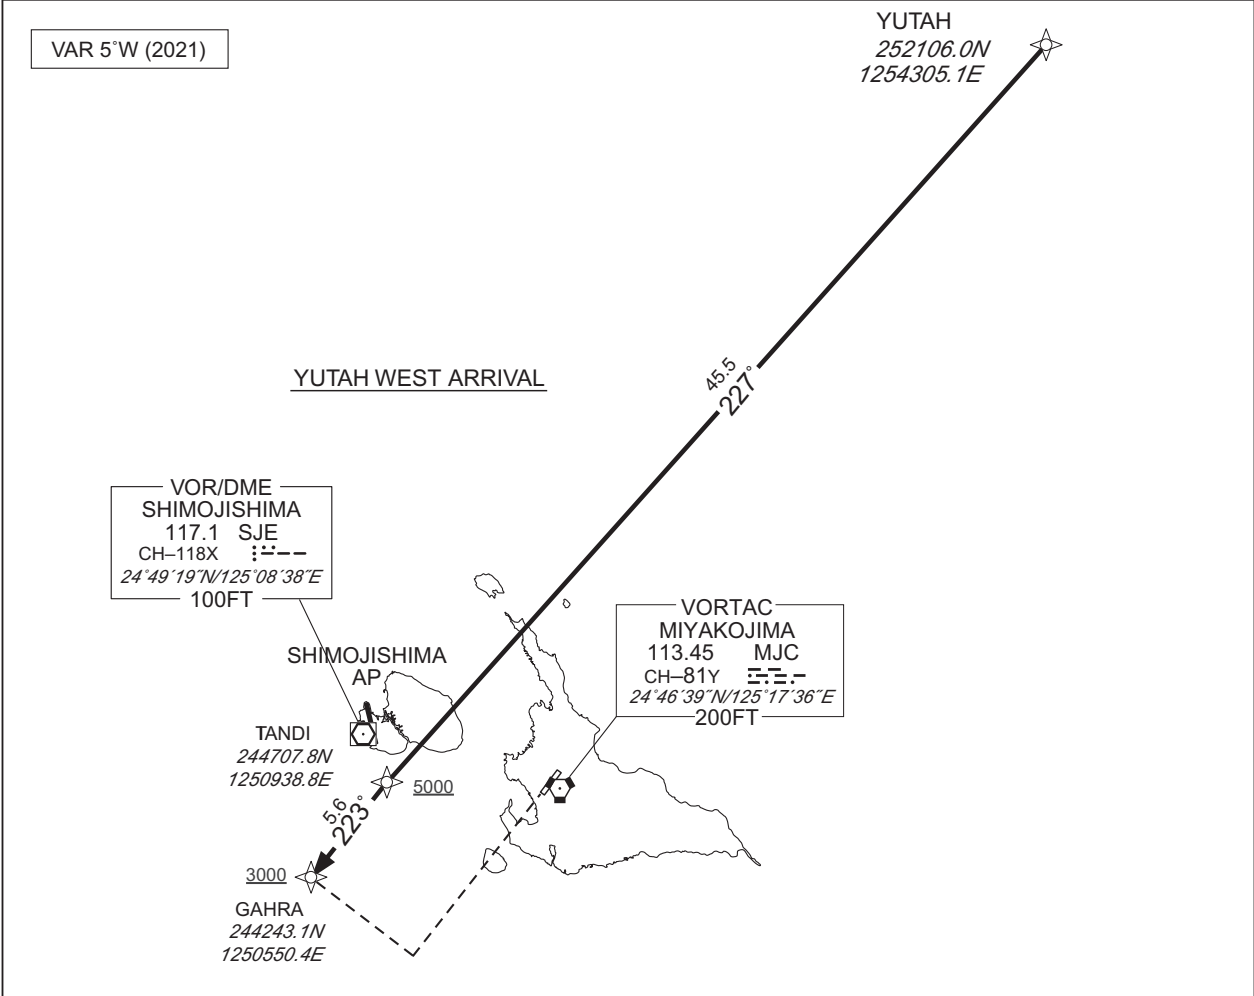

YUTAH WEST ARRIVAL

From YUTAH, to TANDI at or above 5000FT, to GAHRA at or above 3000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YUTAH	—	—	-5.1	—	—	—	—	—	RNP1
002	TF	TANDI	—	227 (221.8)	-5.1	45.5	—	+5000	—	—	RNP1
003	TF	GAHRA	—	223 (218.1)	-5.1	5.6	—	+3000	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART - INSTRUMENT

ROMY / MIYAKO


RNAV STAR RWY22

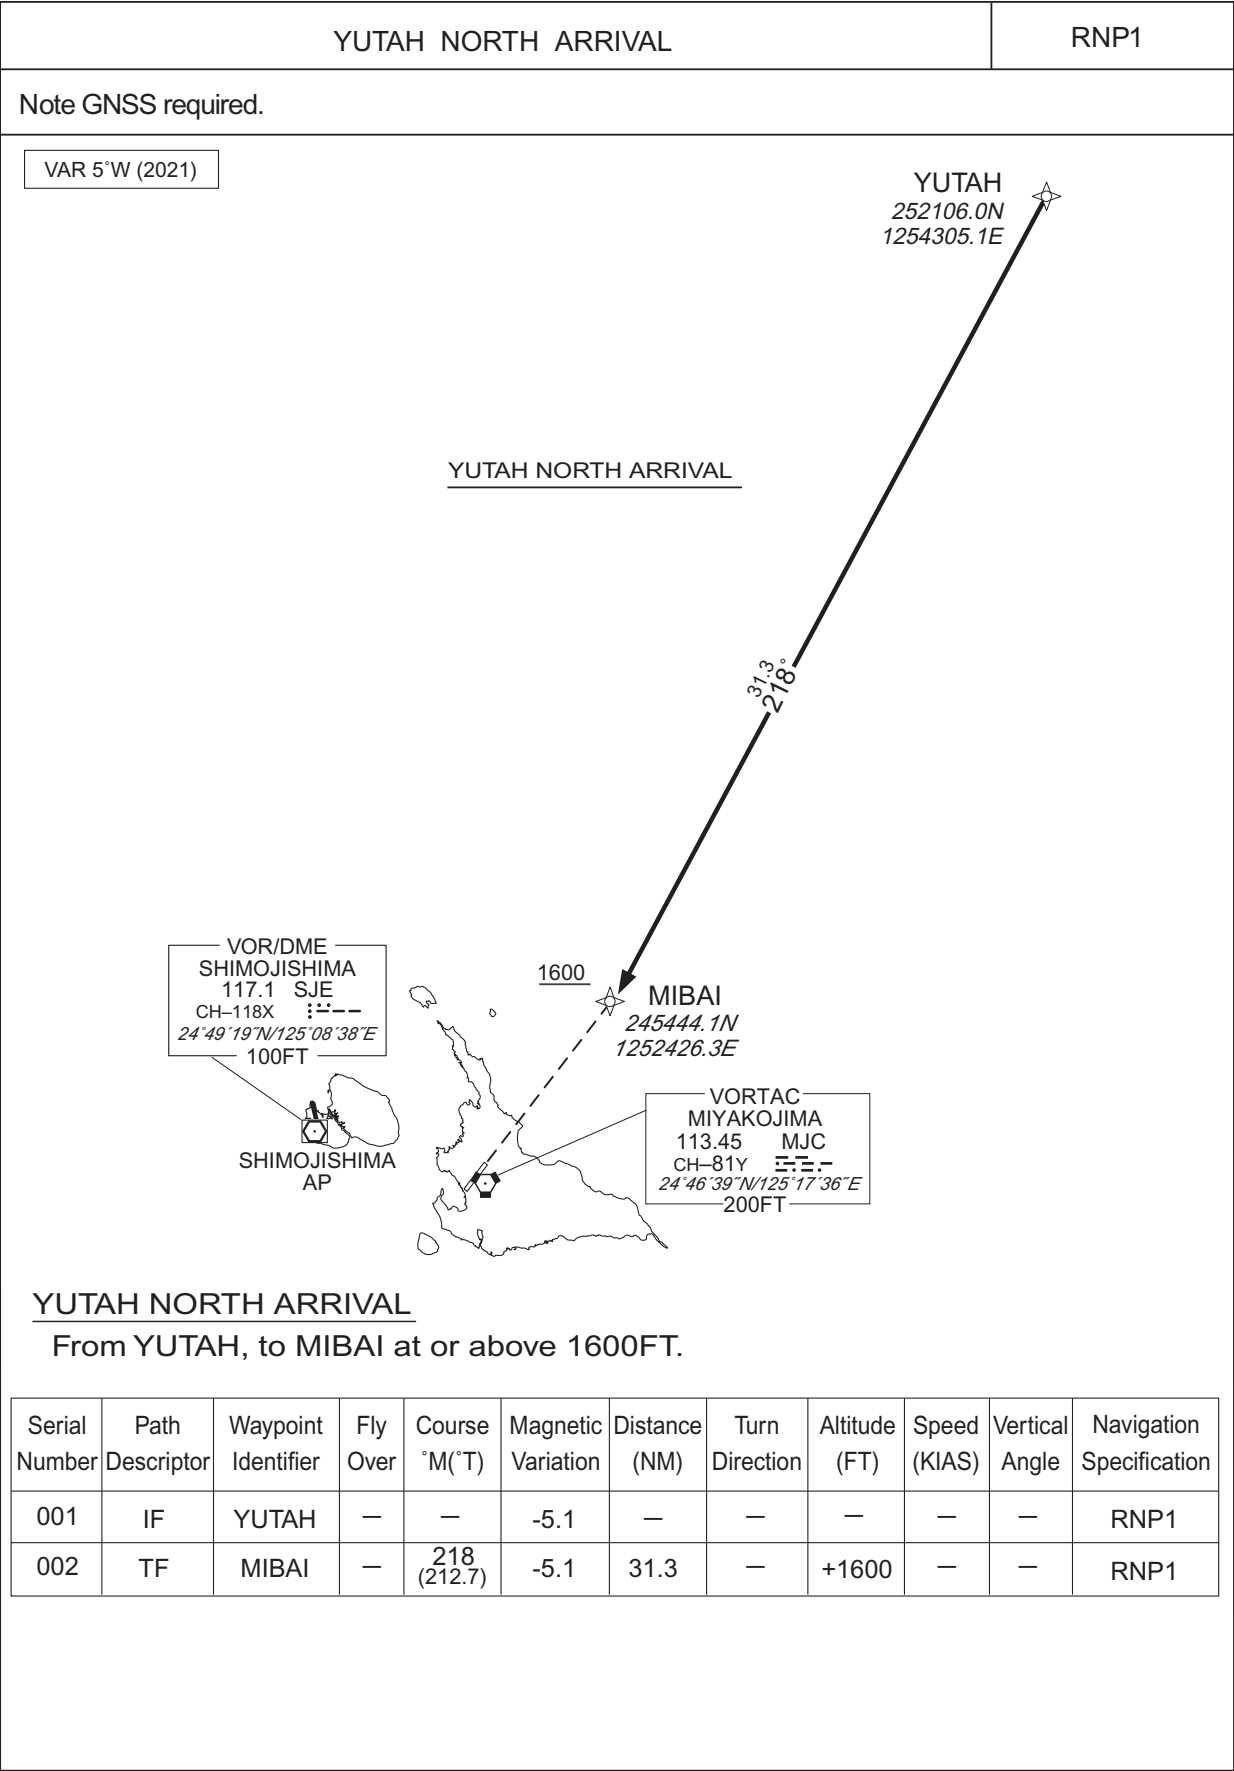

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO


ILS Z or LOC Z RWY22

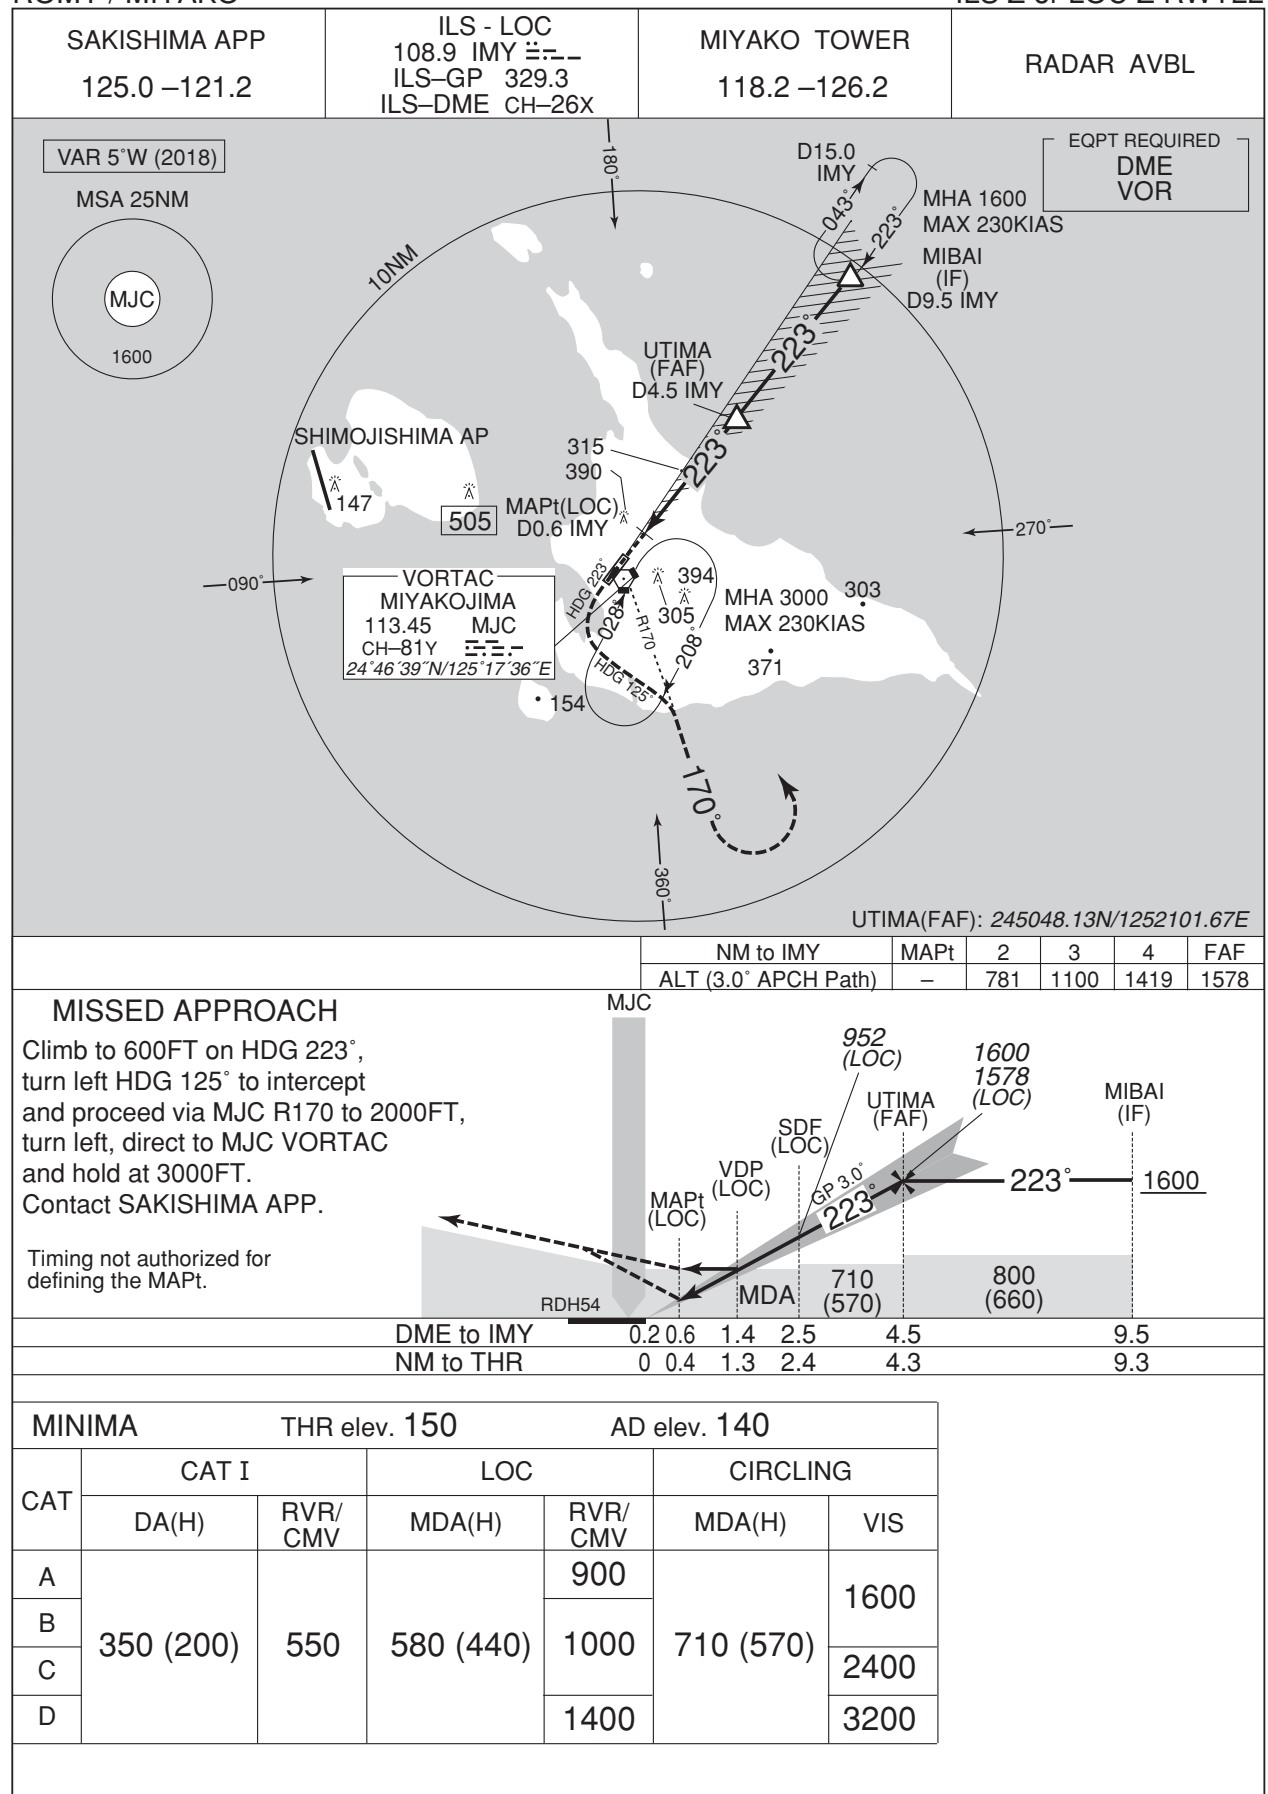

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO


ILS Y or LOC Y RWY22

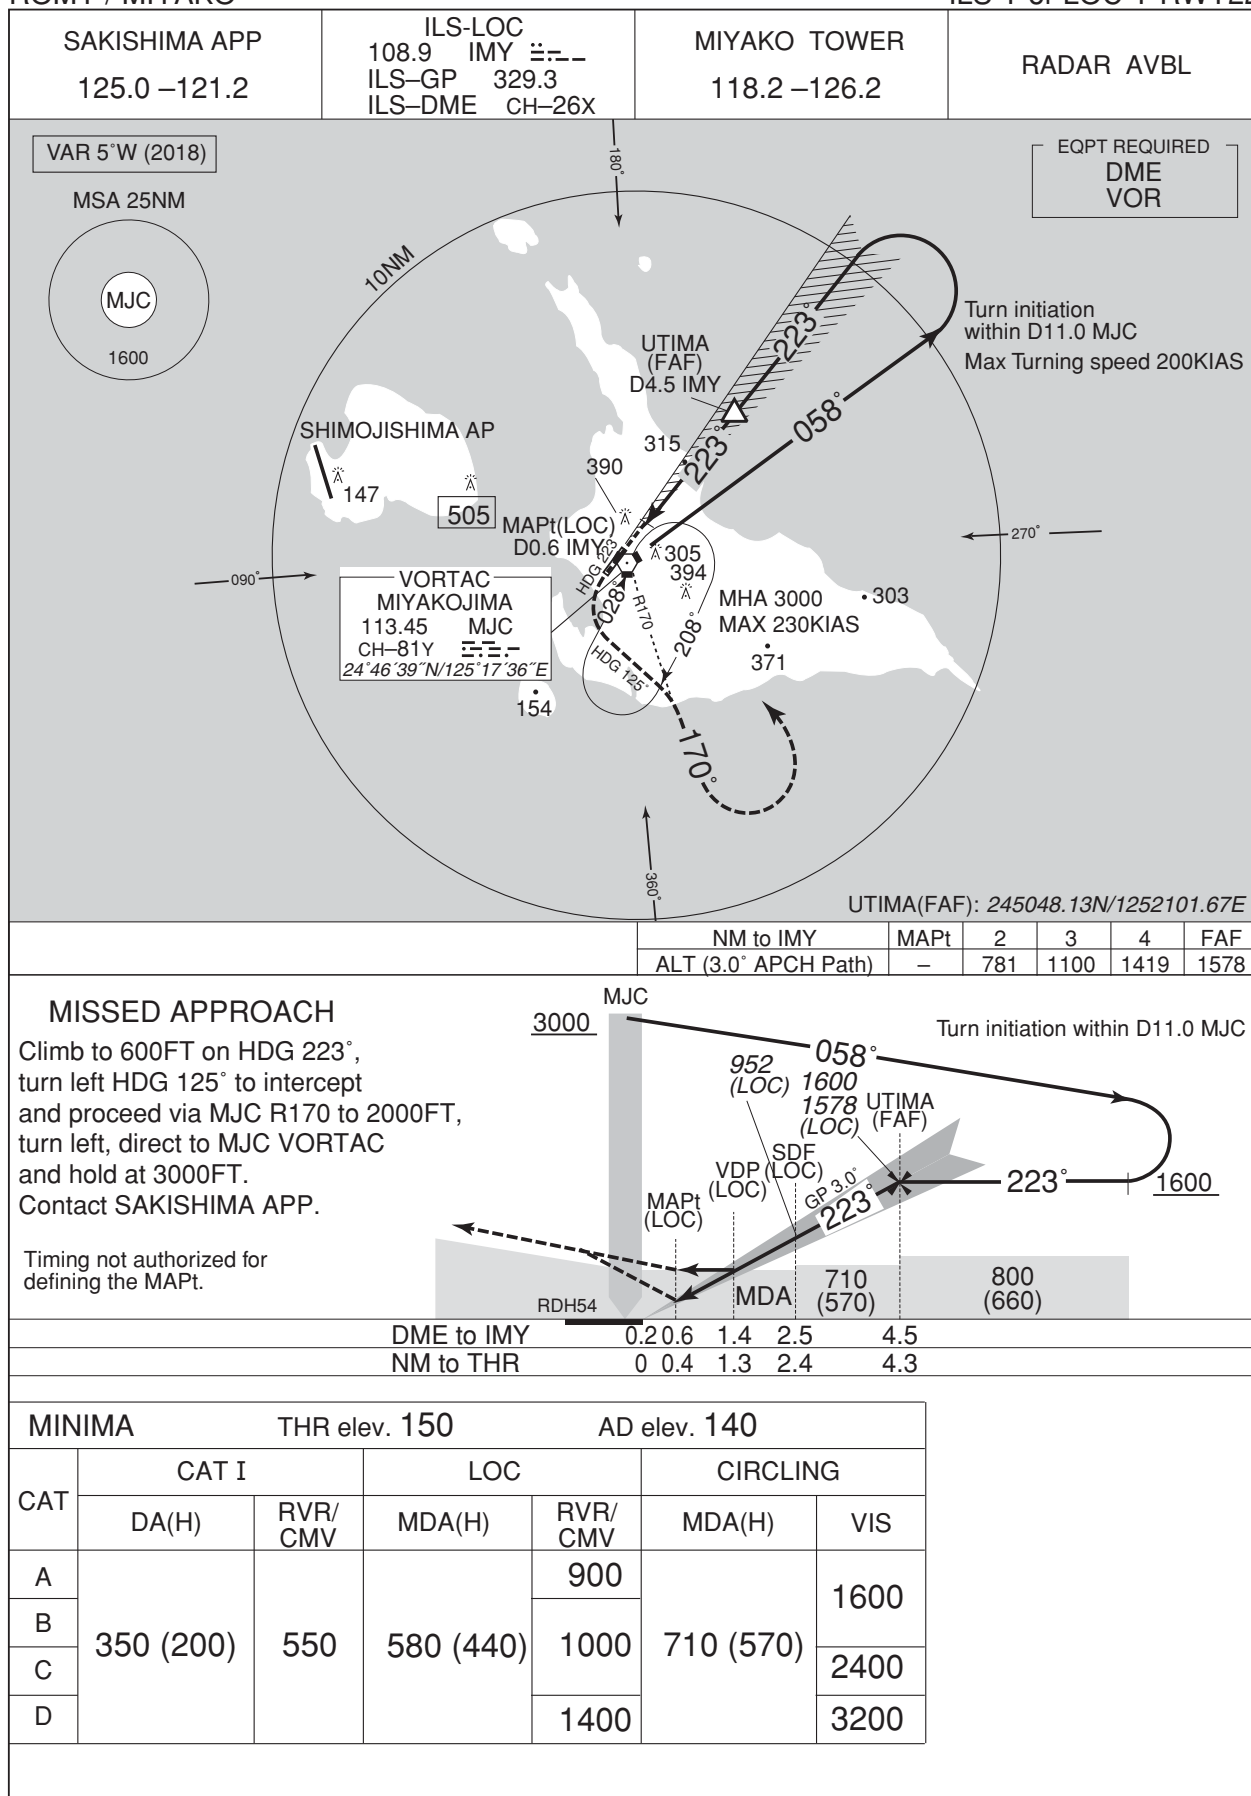

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

VOR RWY04

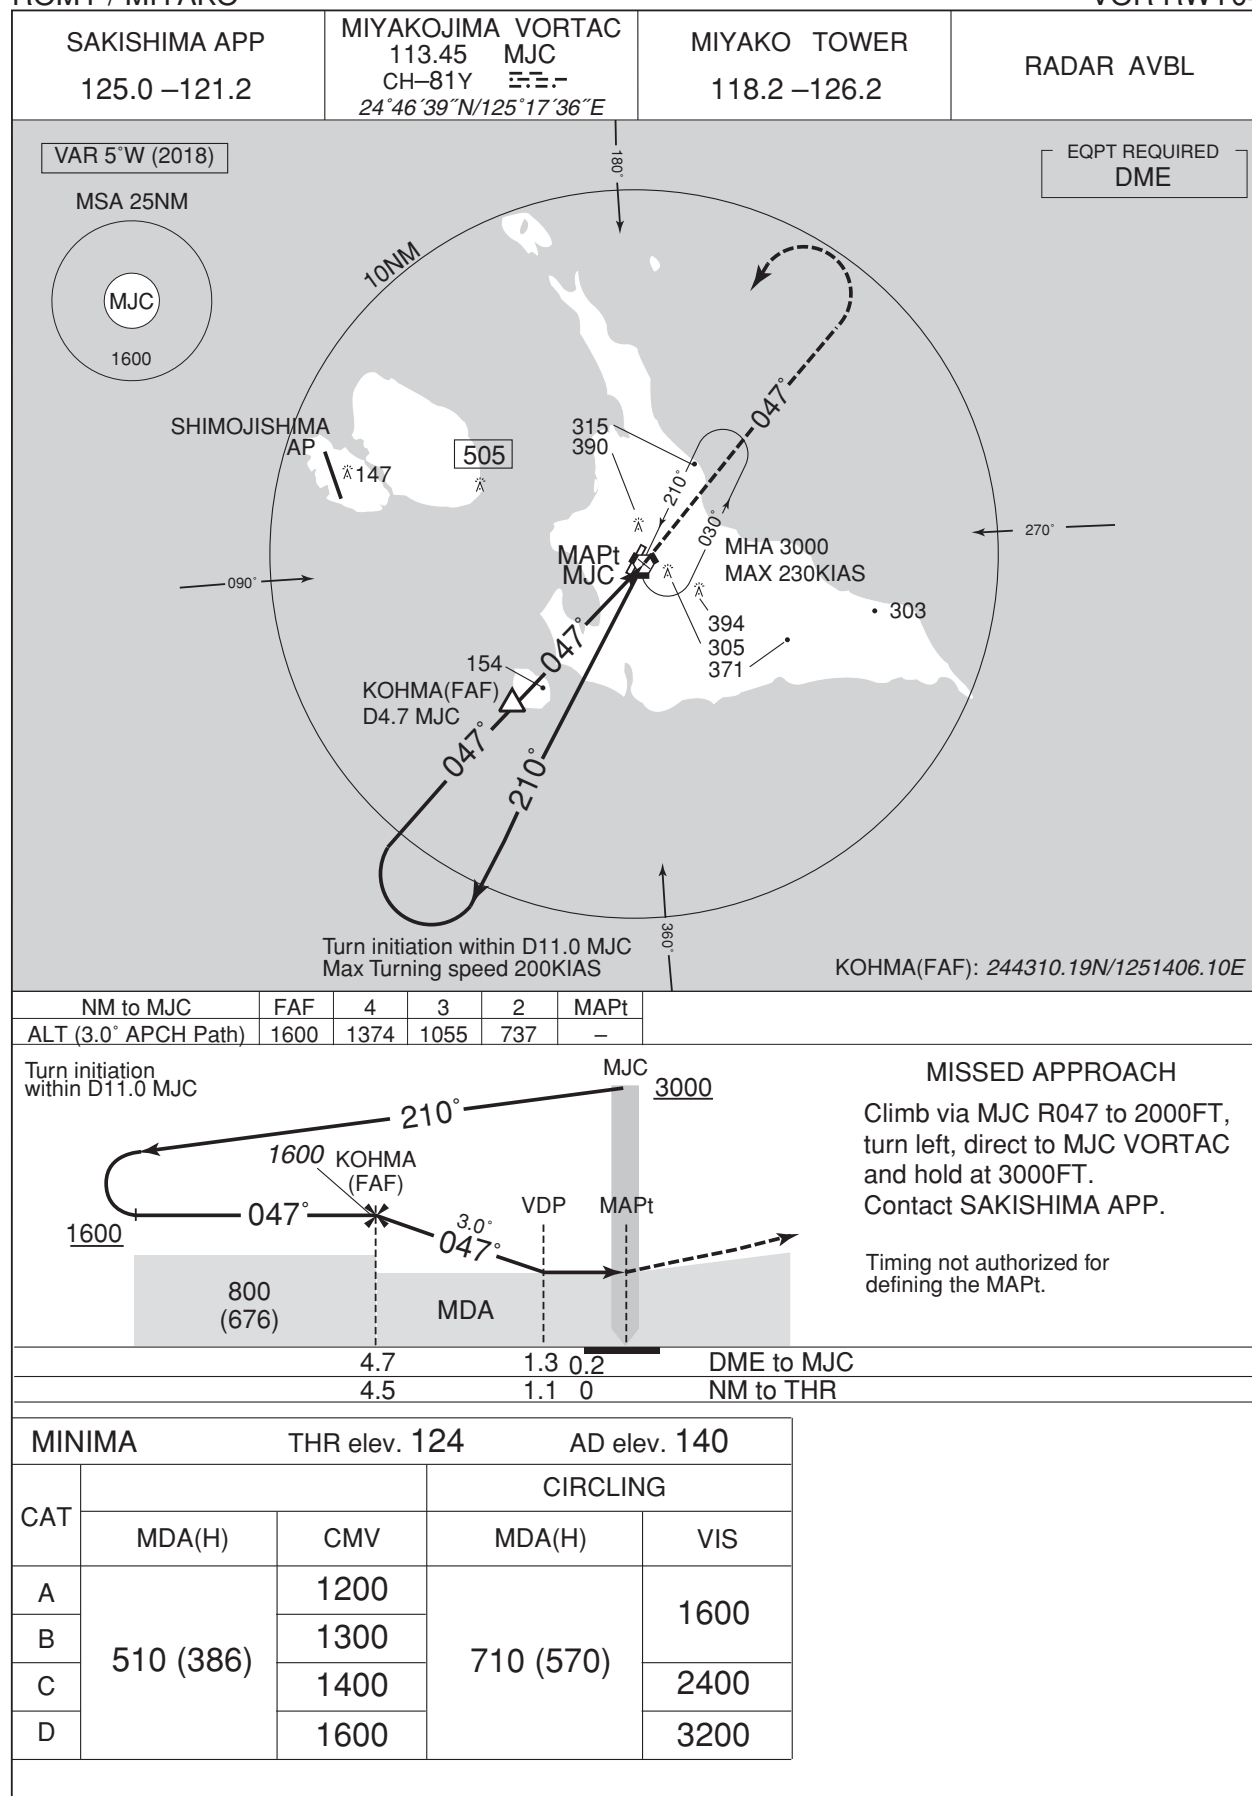


## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

VOR RWY22

SAKISHIMA APP	MIYAKOJIMA VORTAC 113.45 MJC CH-81Y 55.1 24°46'39"N/125°17'36"E	MIYAKO TOWER 118.2-126.2	RADAR AVBL
---------------	--	-----------------------------	------------

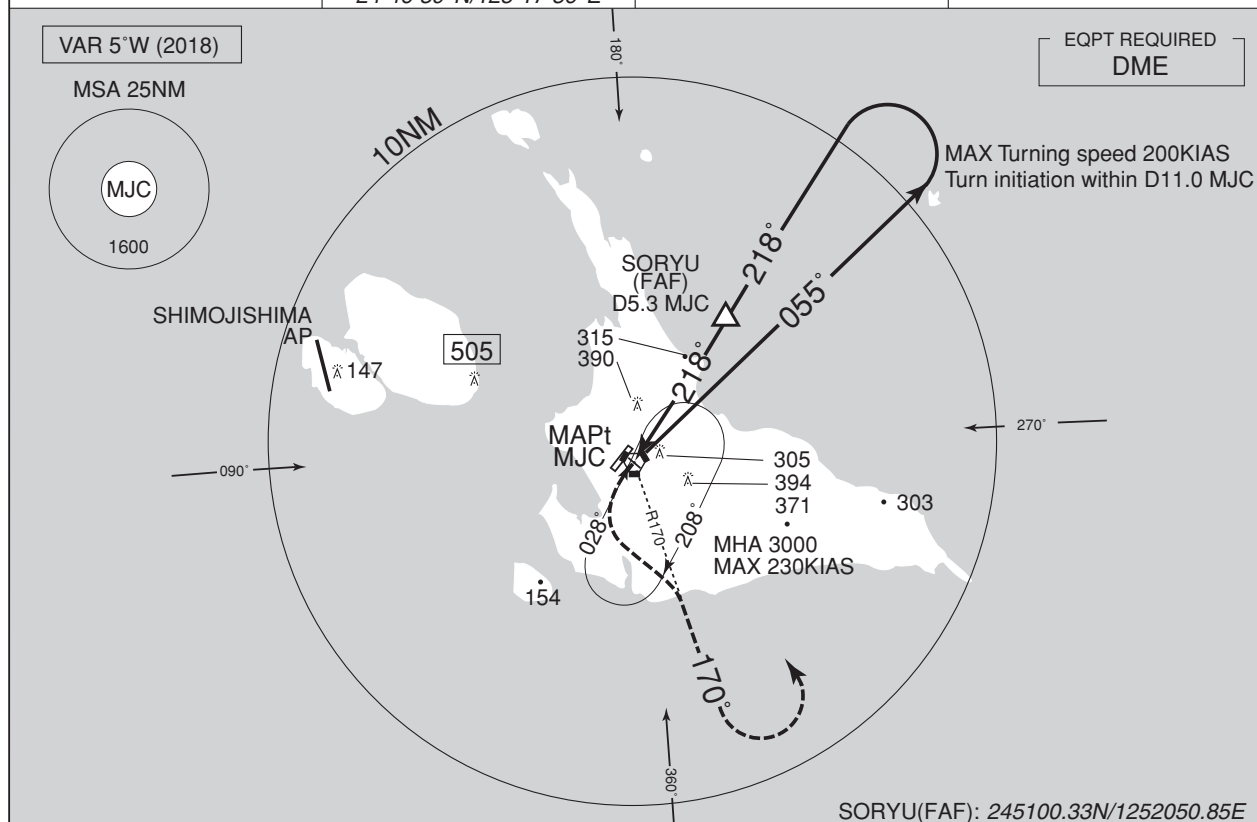


NM to MJC	MAPt	3	4	5	FAF
ALT (3.0° APCH Path)	—	881	1200	1518	1600

### MISSED APPROACH

Turn left, climb via MJC R170 to 2000FT, turn left, direct to MJC VORTAC and hold at 3000FT. Contact SAKISHIMA APP.

Timing not authorized for  
defining the MAPt.

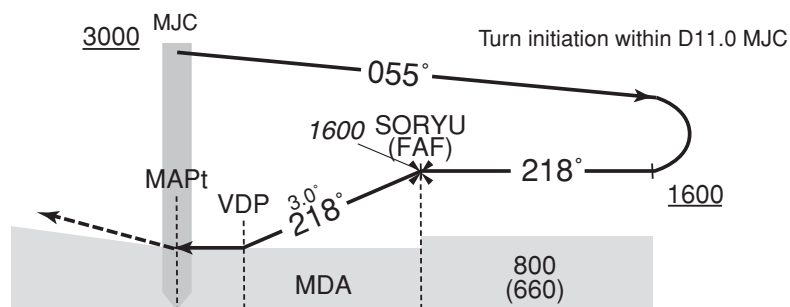


DME to MJC	0.9	2.3	5.3
NM to THR	0	1.5	4.4

MINIMA		THR elev. 150	AD elev. 140	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	640 (500)	1000	710 (570)	1600
B		1200		2400
C				
D				


## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Z RWY04

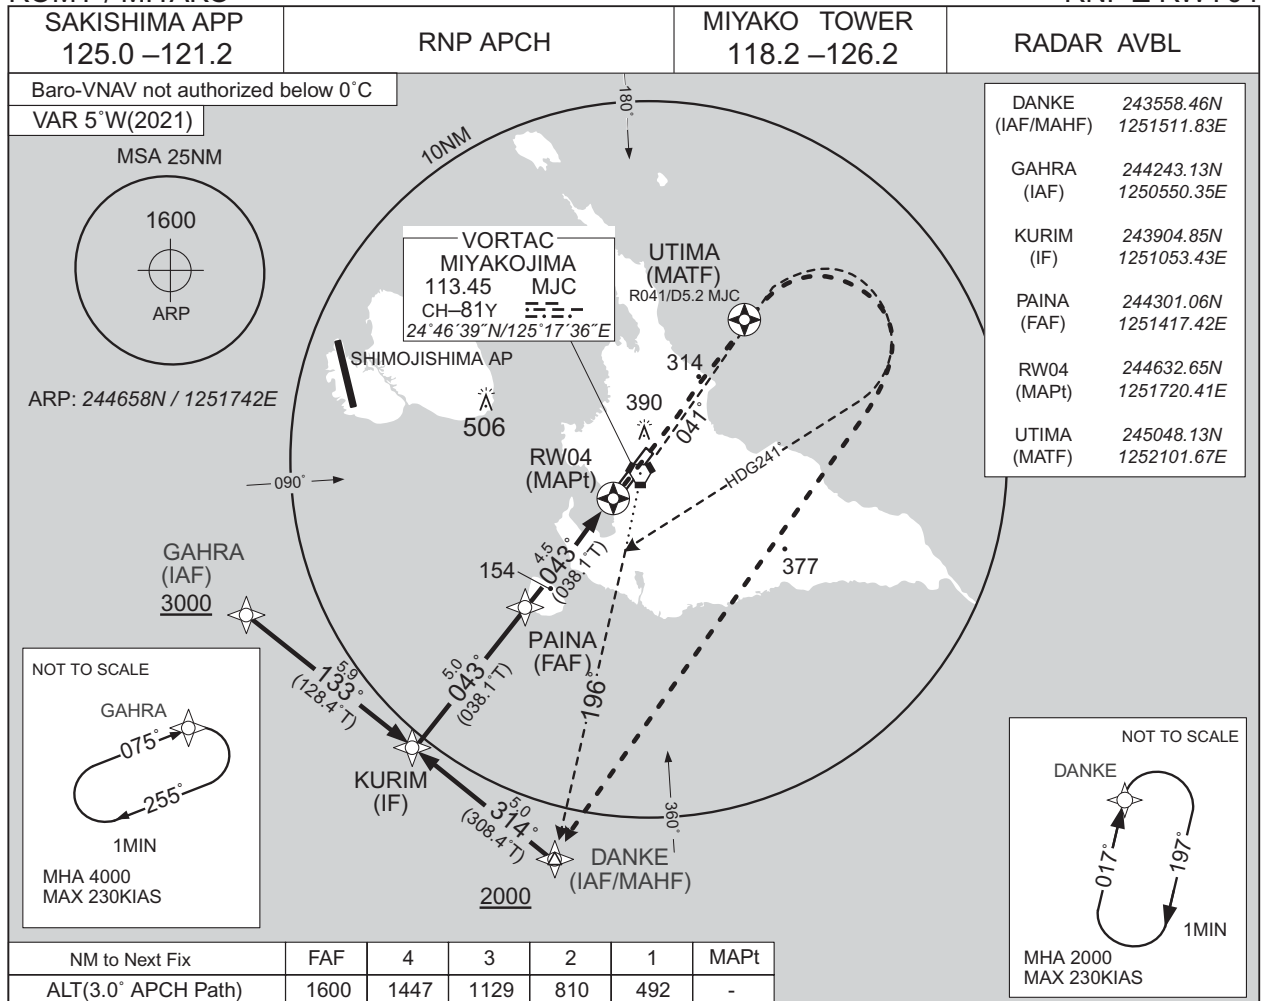


CHANGE:PROC renamed. Requirement for RNP.

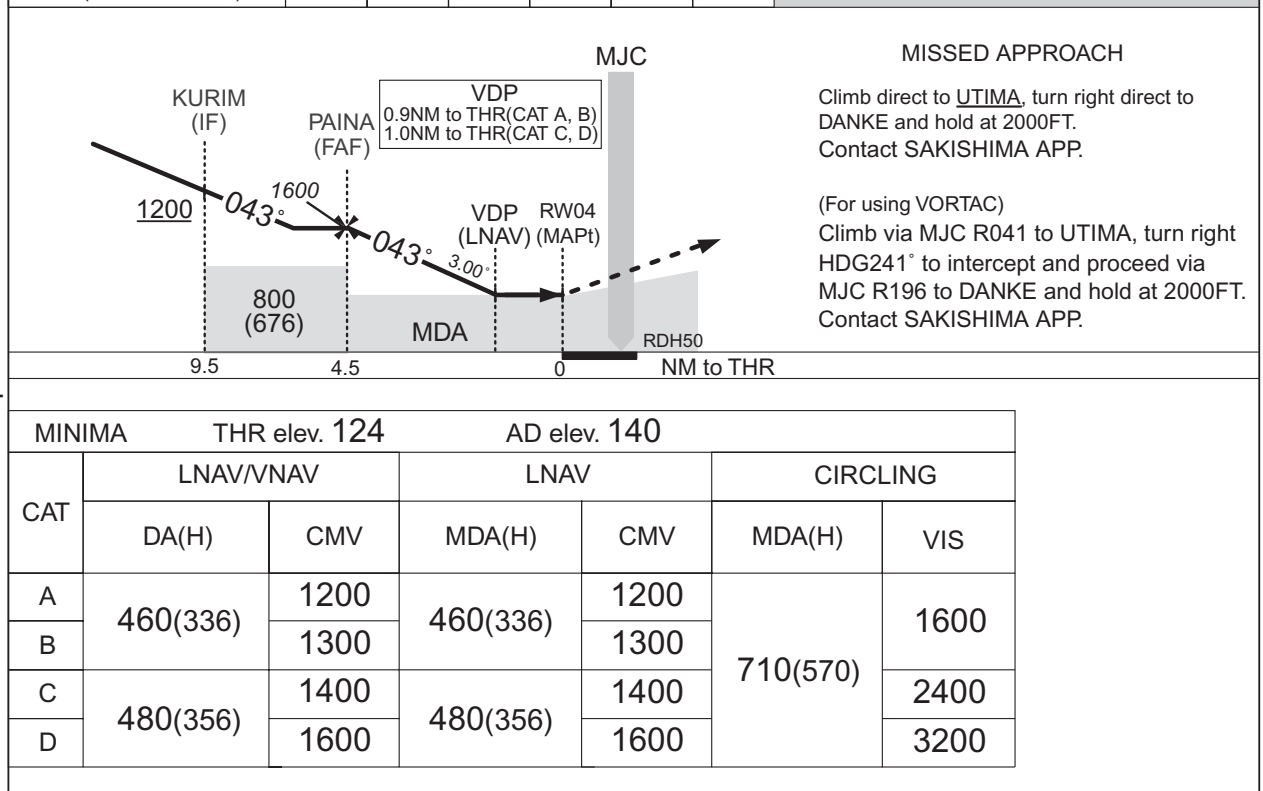

## ROMY / MIYAKO

RNP Y RWY04(AR)

SAKISHIMA APP 125.0 - 121.2	RNP AR RF required.	MIYAKO TOWER 118.2 - 126.2	RADAR AVBL
--------------------------------	------------------------	-------------------------------	------------

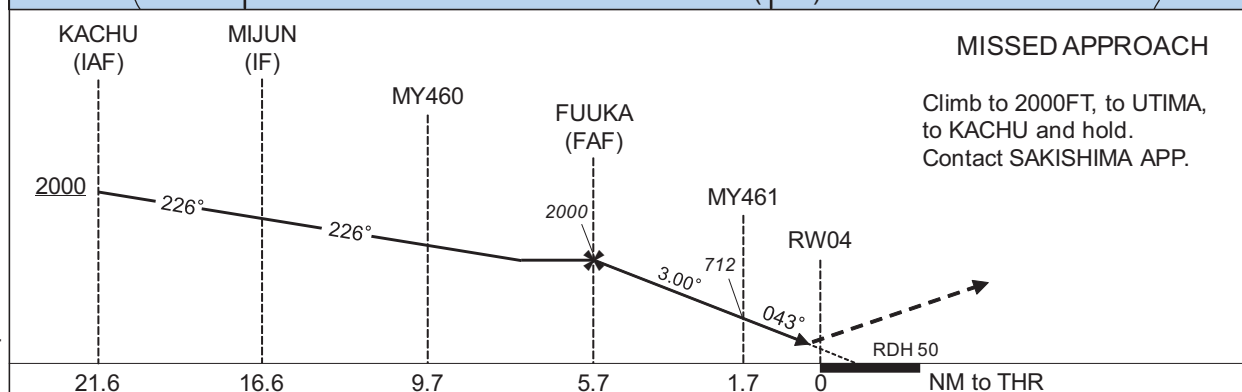

MINIMA	THR elev. 124		AD elev. 140	
CAT	RNP 0.29		RNP 0.30	
	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B				
C	424(300)	1400	430(306)	1400
D		1600	440(316)	1600

## Authorization Required

CHANGE : PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP Y RWY04(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	KACHU	-	-	-5.2	-	-	+2000	-	-	-
002	TF	MIJUN	-	226 (220.8)	-5.2	5.0	-	-	-	-	1.0
003	TF	MY460	-	226 (220.7)	-5.2	6.9	-	+2000	-185	-	1.0
004	RF Center: MYRF1 r=2.52NM	FUUKA	-	-	-5.2	4.0	L	2000	-	-	1.0
005	RF Center: MYRF1 r=2.52NM	MY461	-	-	-5.2	4.0	L	712	-	-3.00	0.29 0.30
006	TF	RW04	Y	043 (038.1)	-5.2	1.7	-	174	-	-3.00/50	0.29 0.30
007	TF	UTIMA	-	043 (038.2)	-5.2	5.4	-	-	-	-	1.0
008	TF	KACHU	-	001 (355.6)	-5.2	6.7	-	2000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	KACHU	199 (193.5)	-5.2	1.0 (-14000)	R	2000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
KACHU	245726.14N / 1252027.95E	MYRF1	244646.77N / 1251400.81E
MIJUN	245338.80N / 1251651.84E		
MY460	244826.09N / 1251155.10E		
FUUKA	244450.77N / 1251213.64E		
MY461	244512.72N / 1251611.26E		
RW04	244632.65N / 1251720.41E		
UTIMA	245048.13N / 1252101.67E		



CHANGE : PROC renamed.

## ROMY / MIYAKO

RNP X RWY04(AR)

SAKISHIMA APP 125.0 - 121.2	RNP AR RF required.	MIYAKO TOWER 118.2 - 126.2	RADAR AVBL
--------------------------------	------------------------	-------------------------------	------------

For uncompensated Baro-VNAV systems, procedure not authorized below 0°C / above 45°C

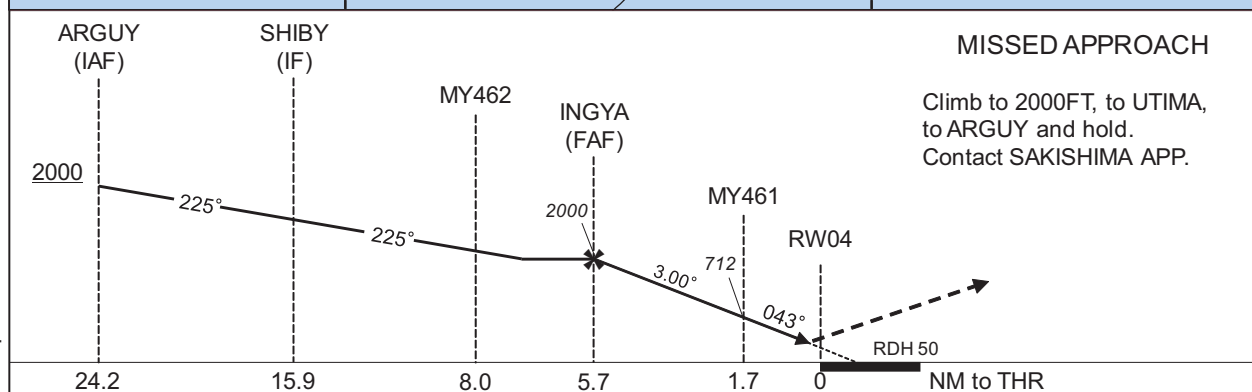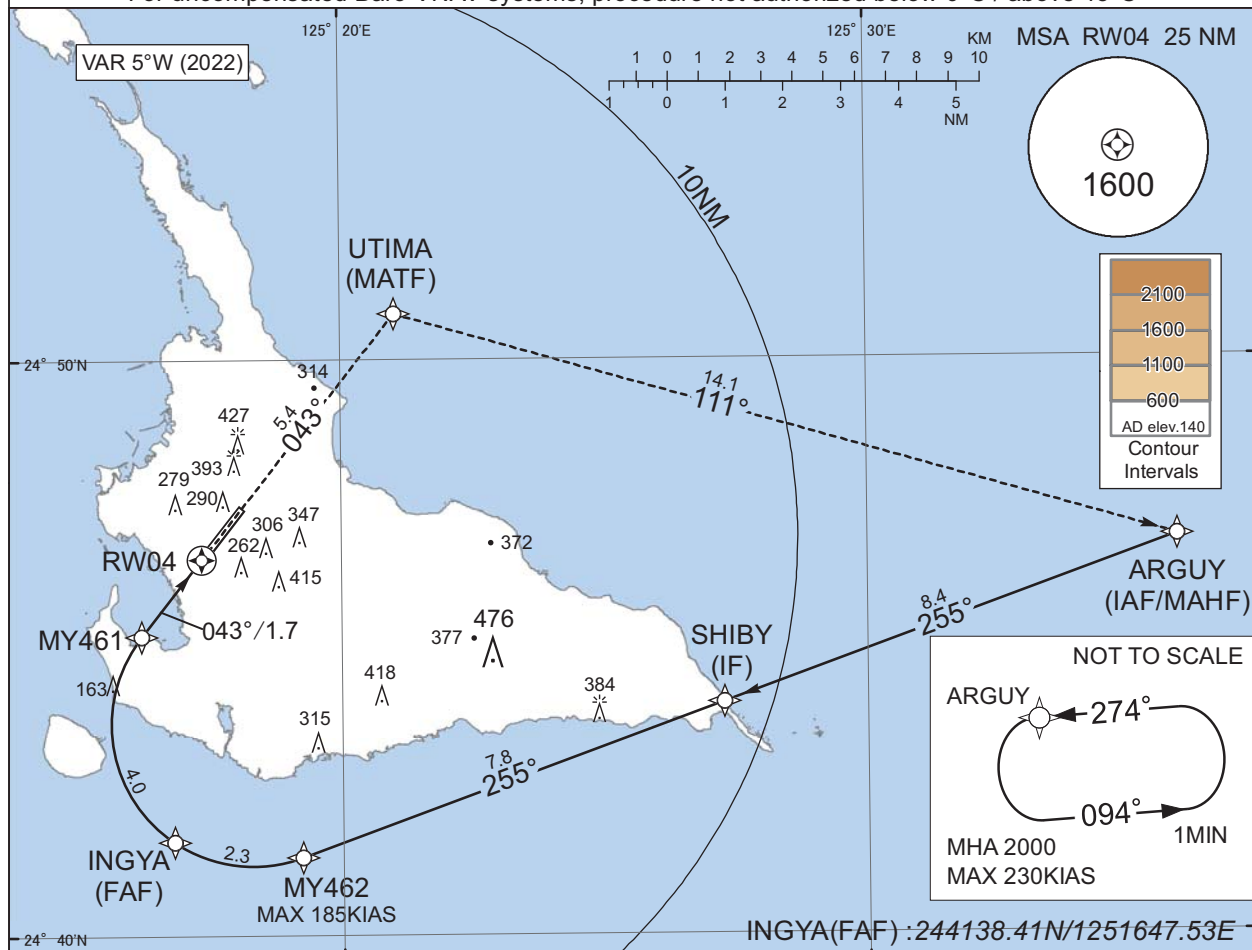

MINIMA	THR elev. 124		AD elev. 140	
CAT	RNP 0.29		RNP 0.30	
	DA(H)	CMV	DA(H)	CMV
A	-	-	-	-
B				
C	424(300)	1400	430(306)	1400
D		1600	440(316)	1600

## Authorization Required

CHANGE : PROC renamed. Requirement for RNP.

## INSTRUMENT APPROACH CHART

ROMY / MIYAKO

RNP X RWY04(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	ARGUY	-	-	-5.2	-	-	+2000	-	-	-
002	TF	SHIBY	-	255 (250.0)	-5.2	8.4	-	-	-	-	1.0
003	TF	MY462	-	255 (250.0)	-5.2	7.8	-	+2000	-185	-	1.0
004	RF Center: MYRF2 r=2.46NM	INGYA	-	-	-5.2	2.3	R	2000	-	-	1.0
005	RF Center: MYRF2 r=2.46NM	MY461	-	-	-5.2	4.0	R	712	-	-3.00	0.29 0.30
006	TF	RW04	Y	043 (038.1)	-5.2	1.7	-	174	-	-3.00/50	0.29 0.30
007	TF	UTIMA	-	043 (038.2)	-5.2	5.4	-	-	-	-	1.0
008	TF	ARGUY	-	111 (106.1)	-5.2	14.1	-	2000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	ARGUY	274 (269.3)	-5.2	1.0 (-14000)	L	2000	FL140	-230 (-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
ARGUY	244652.87N / 1253554.53E	MYRF2	244340.95N / 1251818.44E
SHIBY	244401.74N / 1252716.29E		
MY462	244121.83N / 1251913.79E		
INGYA	244138.41N / 1251647.53E		
MY461	244512.72N / 1251611.26E		
RW04	244632.65N / 1251720.41E		
UTIMA	245048.13N / 1252101.67E		

CHANGE : PROC renamed.

ROMY / MIYAKO

Visual REP

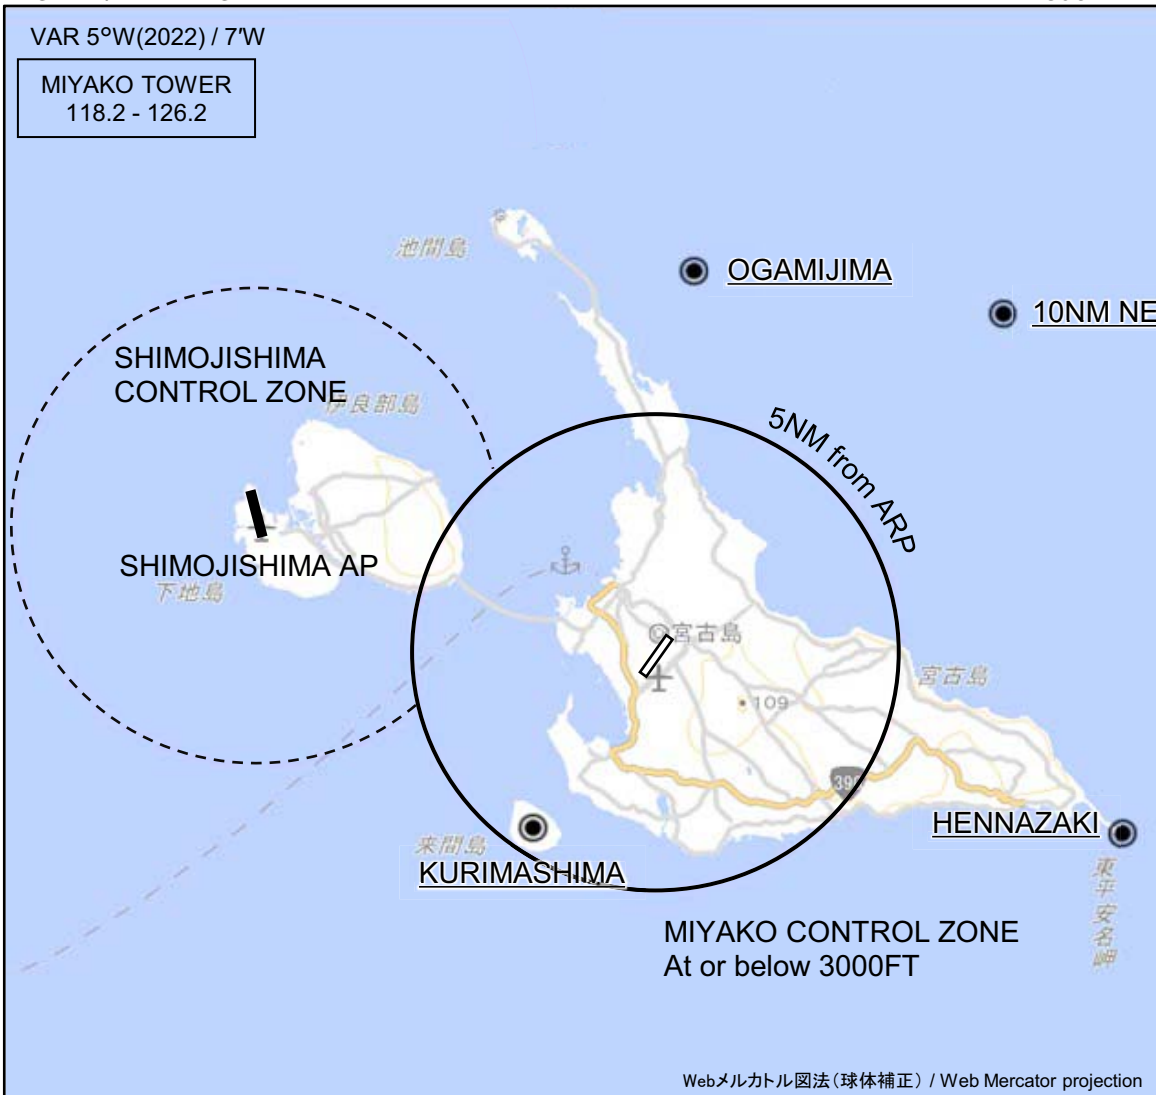

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
大神島 Ogamijima	005°T / 8.0NM	島 Island
10NM NE	045°T / 10.0NM	海上 Over the sea
来間島 Kurimashima	215°T / 4.5NM	島 Island
平安名崎 Hennazaki	112°T / 10.2NM	灯台 Lighthouse

## Minimum Vectoring Altitude CHART

