

AD 2 AERODROMES**RORA AD 2.1 AERODROME LOCATION INDICATOR AND NAME****RORA - AGUNI****RORA AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	263534N 1271425E 004°/400m from RWY 01 THR
2	Direction and distance from (city)	
3	Elevation/ Reference temperature	38ft / 32°C(2004-2008)
4	Geoid undulation at AD ELEV PSN	108ft
5	MAG VAR/ Annual change	6°W (2024) / 6'W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Okinawa Pref. Public AP. 4550 Aza Hama Aguni-son Shimajiri-gun Okinawa Tel 098-988-2313 Fax 098-988-2481
7	Types of traffic permitted(IFR/VFR)	VFR
8	Remarks	Nil

RORA AD 2.3 OPERATIONAL HOURS

1	AD Administration	2300 - 0900
2	Customs and immigration	On request Customs: 098-862-8529 Immigration: 098-832-4185
3	Health and sanitation	Nil
4	AIS Briefing Office	Nil
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	Nil
7	ATS	Nil
8	Fuelling	Nil
9	Handling	Ask AD administration
10	Security	Ask AD administration
11	De-icing	Nil
12	Remarks	Nil

RORA AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RORA AD 2.5 PASSENGER FACILITIES

1	Hotels	Hotels in Aguni village
2	Restaurants	In Aguni village
3	Transportation	Nil
4	Medical facilities	Clinic 2km from airport
5	Bank and Post Office	Bank in Aguni village / Post Office in Aguni village
6	Tourist Office	Nil
7	Remarks	Nil

RORA AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT 3
2	Rescue equipment	Chemical fire fighting truck x 1
3	Capability for removal of disabled aircraft	Incapable
4	Remarks	Nil

RORA AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Not Applicable
2	Clearance priorities	Not Applicable
3	Remarks	Nil

RORA AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface : Asphalt-concrete Strength : AUW 5700kg/0.28MPa
2	Taxiway width, surface and strength	Width : 9m Surface : Asphalt-concrete Strength : AUW 5700kg/0.28MPa
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	(Spot NR) 1: 263534.79N 1271422.87E 2: 263533.89N 1271422.78E
6	Remarks	Nil

RORA AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY:01/19 (Marking) RWY designation, RWY CL, RWY side stripe, RWY middle point, RWY THR, Aiming point TWY: (Marking) TWY CL, TWY side stripe
3	Stop bars	Nil
4	Remarks	(Marking) Overrun area

RORA AD 2.10 AERODROME OBSTACLES

- In Area2 Nil
- In Area3 To be developed

RORA AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Nil
2	Hours of service MET Office outside hours	Nil
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Nil
6	Flight documentation Language(s) used	Nil
7	Charts and other information available for briefing or consultation	Nil
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	Nil
10	Additional information(limitation of ser- vice, etc.)	Nil

RORA AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY		
1	2	3	4	5	6		
01	004.88°	800x25	AUW 5700kg /0.28MPa Asphalt-concret	263521.01N 1271424.02E 108ft	THR ELEV: 44ft		
19	184.88°	800x25	AUW 5700kg /0.28MPa Asphalt-concrete	263546.91N 1271426.48E 108ft	THR ELEV: 26ft		
Slope of RWY	Strip Dimensions(M)		RESA (Overrun) Dimensions(M)		Remarks		
7	10		11		14		
See AD2.24 AD chart			920x60 920x60				
			50 x 80 50 x 80				
			Nil				

RORA AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
01	800	800	800	800	Nil
19	800	800	800	800	Nil

RORA AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LEN INTST	LGT type	RTHL Color	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9	
01	Nil	Nil		PAPI 3.0°/Left 183.7m 28ft	Nil	Nil	Nil	Nil	Nil
19	Nil	Nil		PAPI 3.0°/Left 142.7m 28ft	Nil	Nil	Nil	Nil	Nil
Remarks									
10									
RWY THR ID LGT for RWY 01/19 THR (Color:White)									

RORA AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil
2	LDI location and LGT Anemometer location and LGT	Nil
3	TWY edge and center line lighting	Nil
4	Secondary power supply / switch-over time	ALL LGT / Within 15 sec
5	Remarks	Nil

RORA AD 2.16 HELICOPTER LANDING AREA

Nil

RORA AD 2.17 ATS AIRSPACE

Designation and lateral limits	Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1	2	3	4	6
Nil				

RORA AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
Nil				

RORA AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
Nil						

RORA AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Nil

2. Taxiing to and from stands

Nil

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Nil

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RORA AD 2.21 NOISE ABATEMENT PROCEDURES

Nil

RORA AD 2.22 FLIGHT PROCEDURES

Nil

RORA AD 2.23 ADDITIONAL INFORMATION

Nil

RORA AD 2.24 CHARTS RELATED TO AN AERODROME


Aerodrome/Heliport Chart

Other Chart (LDG CHART)

RORA / AGUNI

AD CHART

CHANGE : VAR.

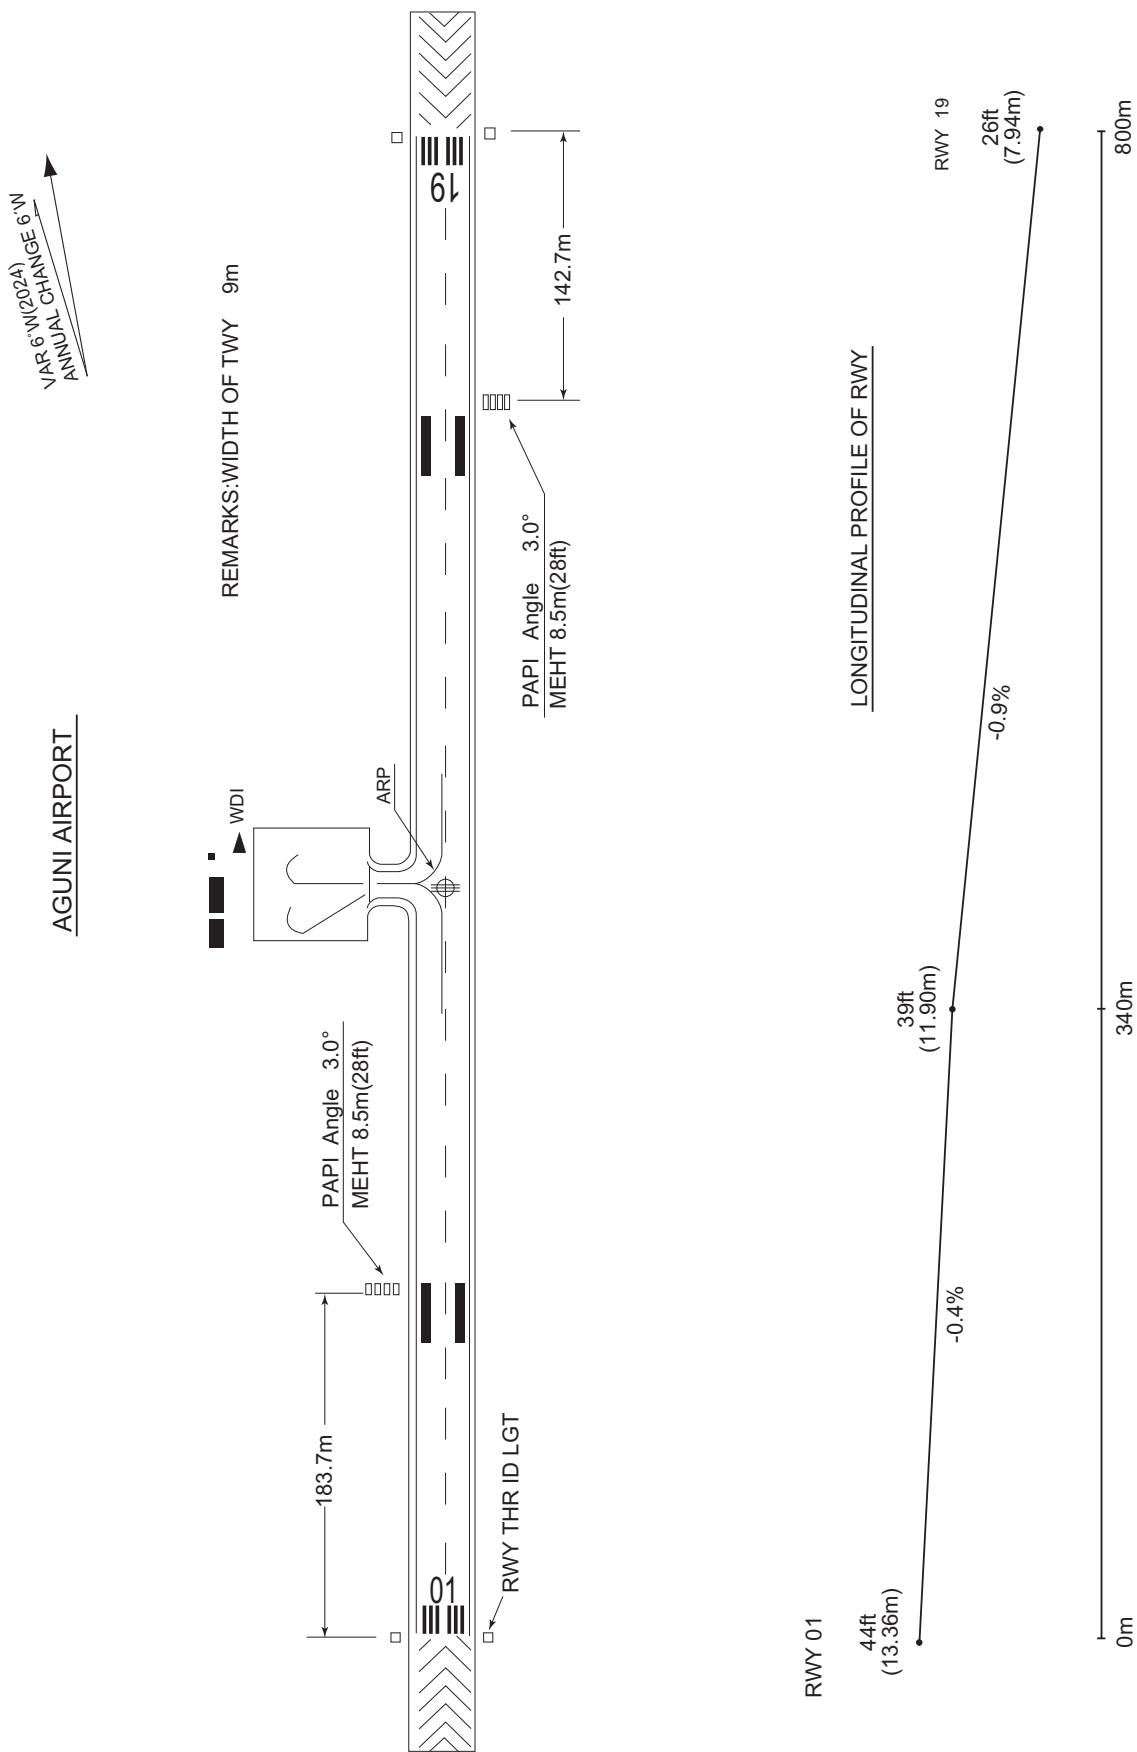

INTENTIONALLY LEFT BLANK

