

## AD CHART



STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

ANNIE FIVE DEPARTURE

RWY17 : Climb RWY HDG to 500FT, turn right HDG036° to intercept and proceed ...


RWY35 : Climb ...

... via SJE R351 to ANNIE.

Cross ANNIE at assigned altitude.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

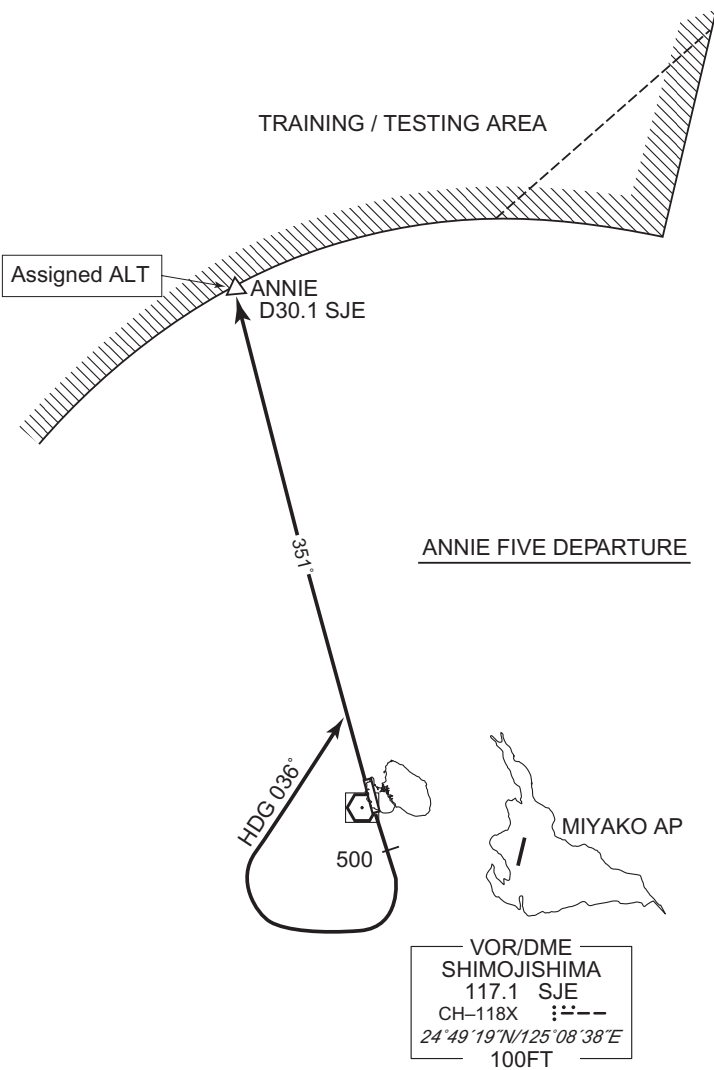

CHANGE : PROC renamed. Note added.

## STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

BETTY FIVE DEPARTURE

RWY17 : Climb RWY HDG to 500FT ...

RWY35 : Climb RWY HDG to 500FT, turn left HDG 126° to intercept and proceed ...

... via SJE R171 to BETTY.

Cross BETTY at assigned altitude.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.



CHANGE : PROC renamed. Note added.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

MIYAKOJIMA FOUR DEPARTURE

RWY17 : Climb RWY HDG to 500FT, turn left,...

RWY35 : Climb RWY HDG to 500FT, turn right,...

...direct to MJC VORTAC. Cross MJC VORTAC at or above 3000FT.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

MIYAKOJIMA FOUR DEPARTURE




CHANGE : PROC renamed. Note added.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

RNAV SID

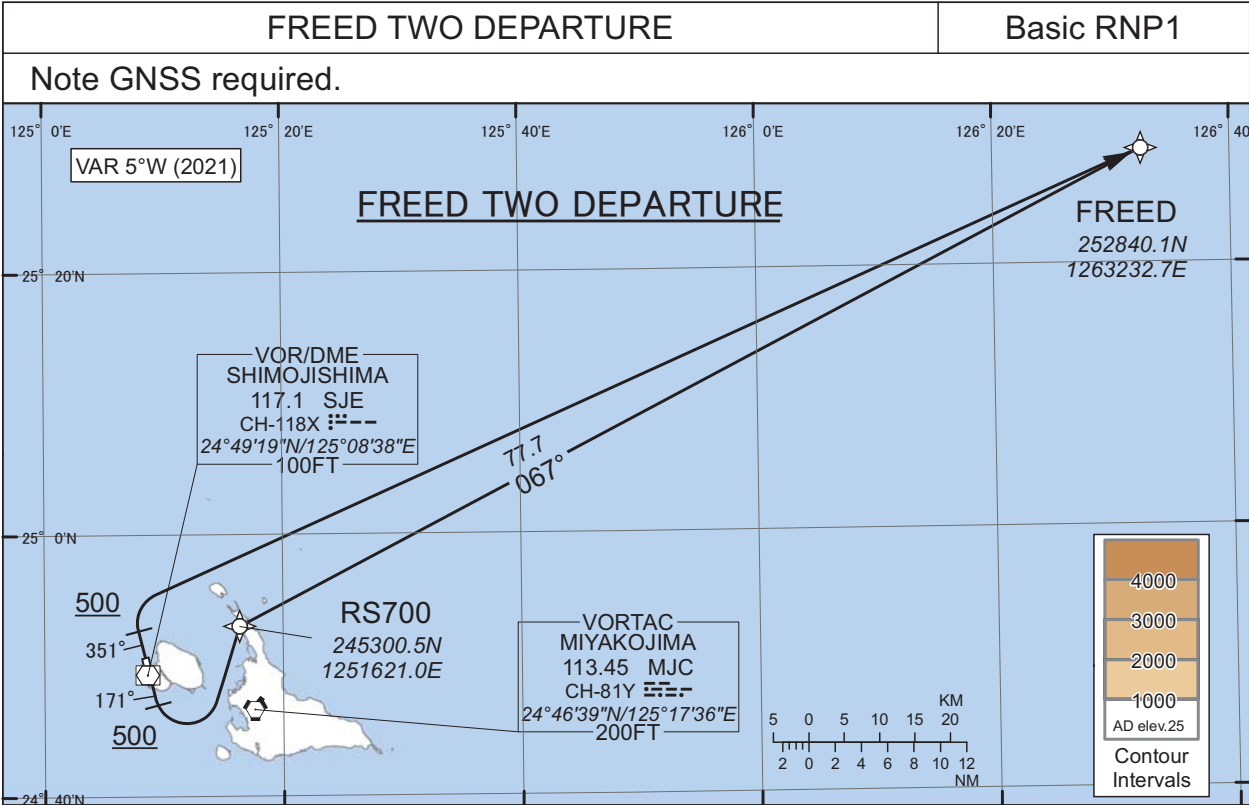

FREED TWO DEPARTURE

RWY17 : Climb on HDG171° at or above 500FT, turn left direct to RS700, to FREED.  
RWY35 : Climb on HDG351° at or above 500FT, turn right direct to FREED.

Note RWY17 : 5.0% climb gradient required up to 500FT.  
OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

RWY17

Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	171 (166.1)	-5.1	-	-	+500	-	-	Basic RNP1
002	DF	RS700	-	-	-5.1	-	L	-	-	-	Basic RNP1
003	TF	FREED	-	067 (062.4)	-5.1	77.7	-	-	-	-	Basic RNP1

RWY35

Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	351 (346.1)	-5.1	-	-	+500	-	-	Basic RNP1
002	DF	FREED	-	-	-5.1	-	R	-	-	-	Basic RNP1

CHANGE : PROC renamed. Navigation specification. Sensor for RNAV.

STANDARD ARRIVAL CHART - INSTRUMENT

RORS / SHIMOJISHIMA

STAR

ANNIE ARRIVAL

From over ANNIE, proceed via SJE R351 to DIANA.  
Cross DIANA at or above 1600FT.



## STANDARD ARRIVAL CHART - INSTRUMENT

RORS / SHIMOJISHIMA

STAR

BETTY ARRIVAL

From over BETTY, proceed via MJC R184 to intercept and proceed via SJE R169 to CHIMI.

Cross CHIMI at or above 1600FT.



INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

ILS Z or LOC Z RWY17



CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.



Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 15		AD elev. 25		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	240 (225)	600	460 (445)	900	510 (485)	1600
B				1000		2400
C				1400		3200
D				1400		3200

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to WEST side of RWY only.



## INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

ILS Y or LOC Y RWY17



Turn initiation within D11.0 SJE



## MISSED APPROACH

Climb to 2000FT on HDG170°,  
turn right, direct to SJE  
VOR/DME and hold.  
Contact SAKISHIMA APP.

Timing not authorized for defining  
the MAPt.

Missed APCH climb gradient MNM 3.0%

MINIMA		THR elev. 15		AD elev. 25		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	240 (225)	600	460 (445)	900	510 (485)	1600
B				1000		2400
C					1400	
D				3200		

MINIMA with Missed APCH climb gradient of 2.5% are not established.  
Circling to WEST side of RWY only.

CHANGE : Call sign (REMOTE→RADIO). AFIS unit added.

INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

VOR RWY17



CHANGE : Call sign (REMOTE→RADIO). AFIS unit added.

## INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

VOR RWY35




CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA

RNP RWY17

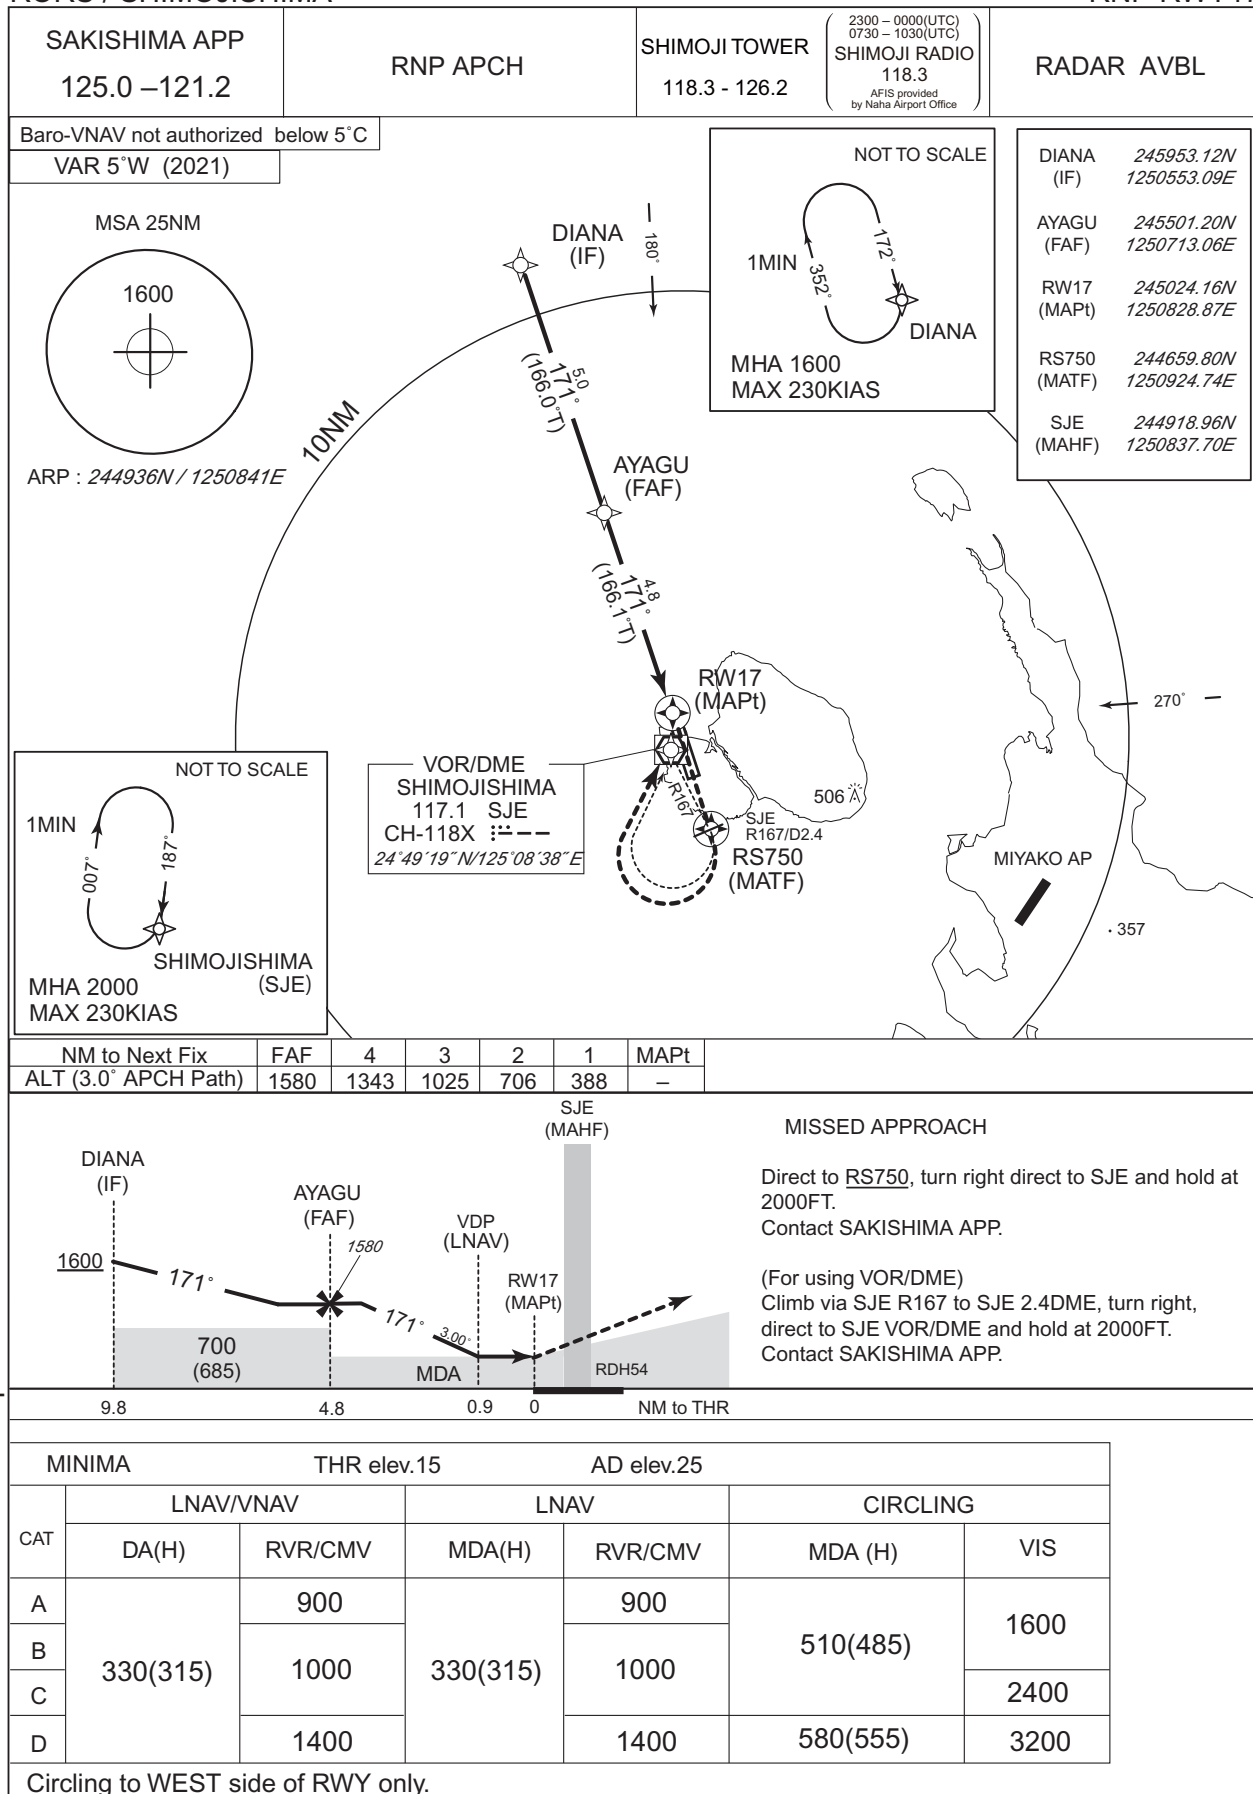

CHANGE:PROC renamed. Requirement for RNP.


## RORS / SHIMOJISHIMA

RNP RWY35




SAKISHIMA APP 125.0 – 121.2	RNP APCH	SHIMOJI TOWER 118.3 - 126.2	<div> 2300 – 0000(UTC)  0730 – 1030(UTC)  SHIMOJI RADIO  118.3  AFIS provided  by Naha Airport Office </div>	RADAR AVBL
--------------------------------	----------	--------------------------------	--	------------

Baro-VNAV not authorized below 5°C

VAR 5°W (2021)



ARP 244936N / 1250841E

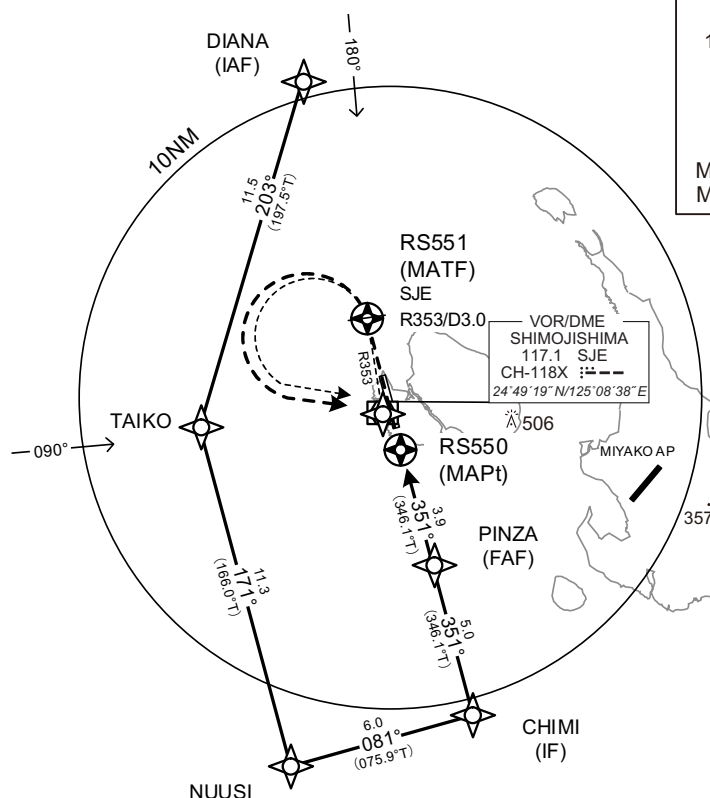


DIANA (IAF)	245953.12N 1250553.09E
TAIKO	244856.60N 1250205.03E
NUUSI	243800.12N 1250504.90E
CHIMI (IF)	243927.59N 1251128.20E
PINZA (FAF)	244419.54N 1251008.52E
RS550 (MAPt)	244805.41N 1250906.81E
RS551 (MATF)	245213.91N 1250758.85E
SJE (MAHF)	244918.96N 1250837.70E

MAPt	1	2	3	FAF	NM to Next Fix
—	668	986	1305	1581	ALT (3.0° APCH Path)

Direct to RS551, turn left direct to SJE and hold at 2000FT.  
Contact SAKISHIMA APP.

(For using VOR/DME)  
Climb via SJE R353 to SJE 3.0DME, turn left, direct  
to SJE VOR/DME and hold at 2000FT.  
Contact SAKISHIMA APP

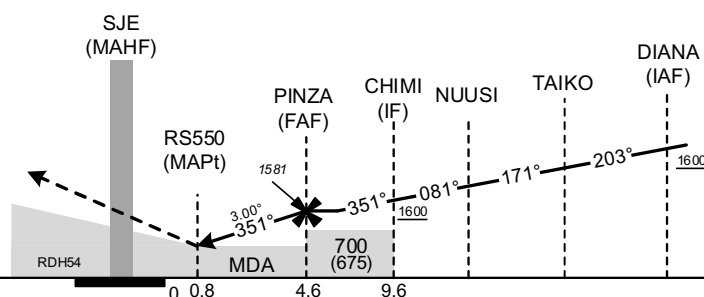


MINIMA		THR elev.54		AD elev.25		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA (H)	VIS
A	350(296)	800	350(325)	900	510(485)	1600
B				1000		
C						2400
D		1200		1400	580(555)	3200

Circling to WEST side of RWY only.

RORS / SHIMOJISHIMA

Visual REP

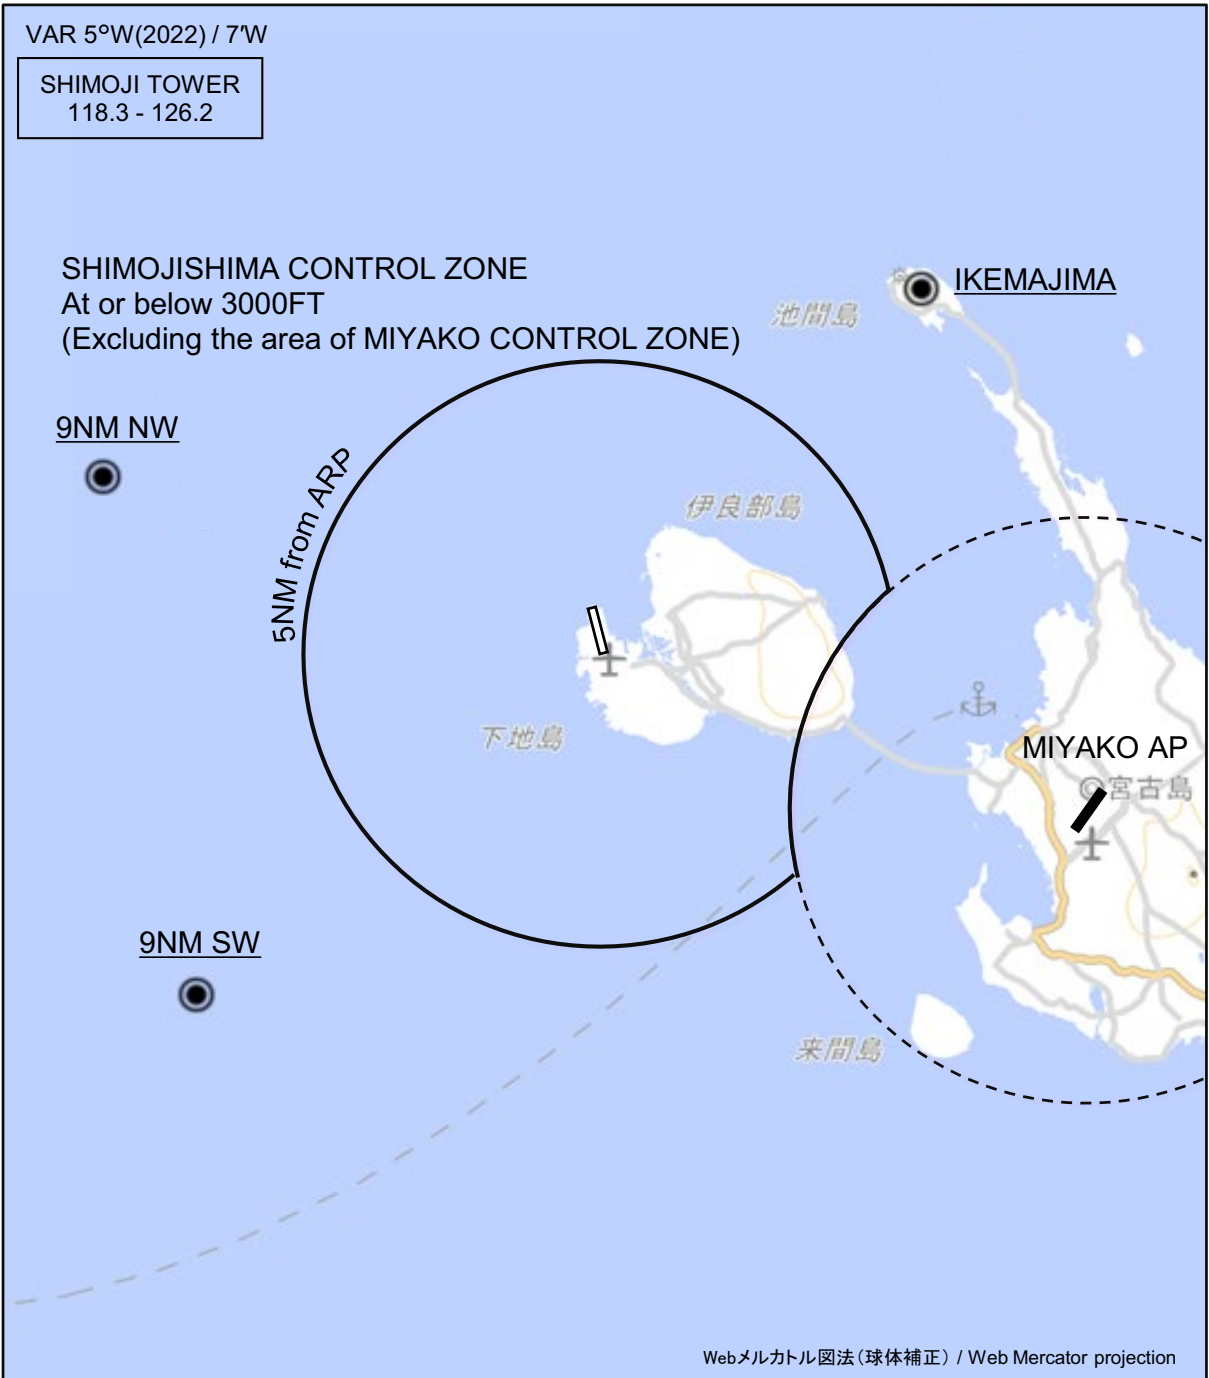

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
池間島 Ikemajima	040°T / 8.2NM	島 Island
9NM NW	290°T / 9.0NM	海上 Over the sea
9NM SW	230°T / 9.0NM	海上 Over the sea



RORS / SHIMOJISHIMA

LDG CHART



RORS / SHIMOJISHIMA

Minimum Vectoring Altitude CHART

