

AD CHART



RJSM / MISAWA

Aircraft Parking / Docking Chart



STANDARD DEPARTURE CHART - INSTRUMENT


RJSM / MISAWA

ATIS ★ 128.4 315.35
CLNC DEL
118.65 275.8
TOWER
118.1 315.8
DEP CON
125.3 363.8

ENKAI THREE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
10	V/V(fpm)	350	700	1050	1400	1750	2100

ATC Climb Rate to 3500

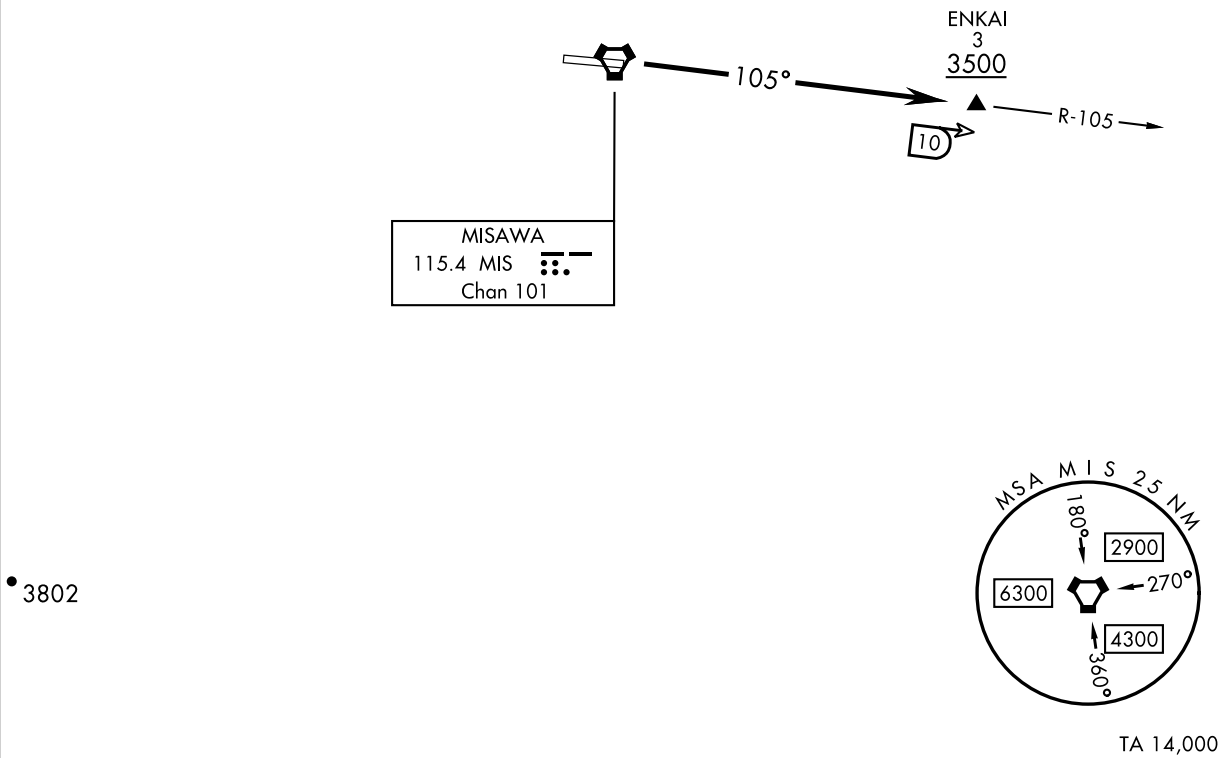

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 10: Climb on MIS VORTAC R-105 to ENKAI.
Cross ENKAI at or above 3500.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJSM / MISAWA

KOSUI THREE DEPARTURE



▼


DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 28: Climb on MIS VORTAC R-282 to KOSUI.
Cross KOSUI at or above 3600.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

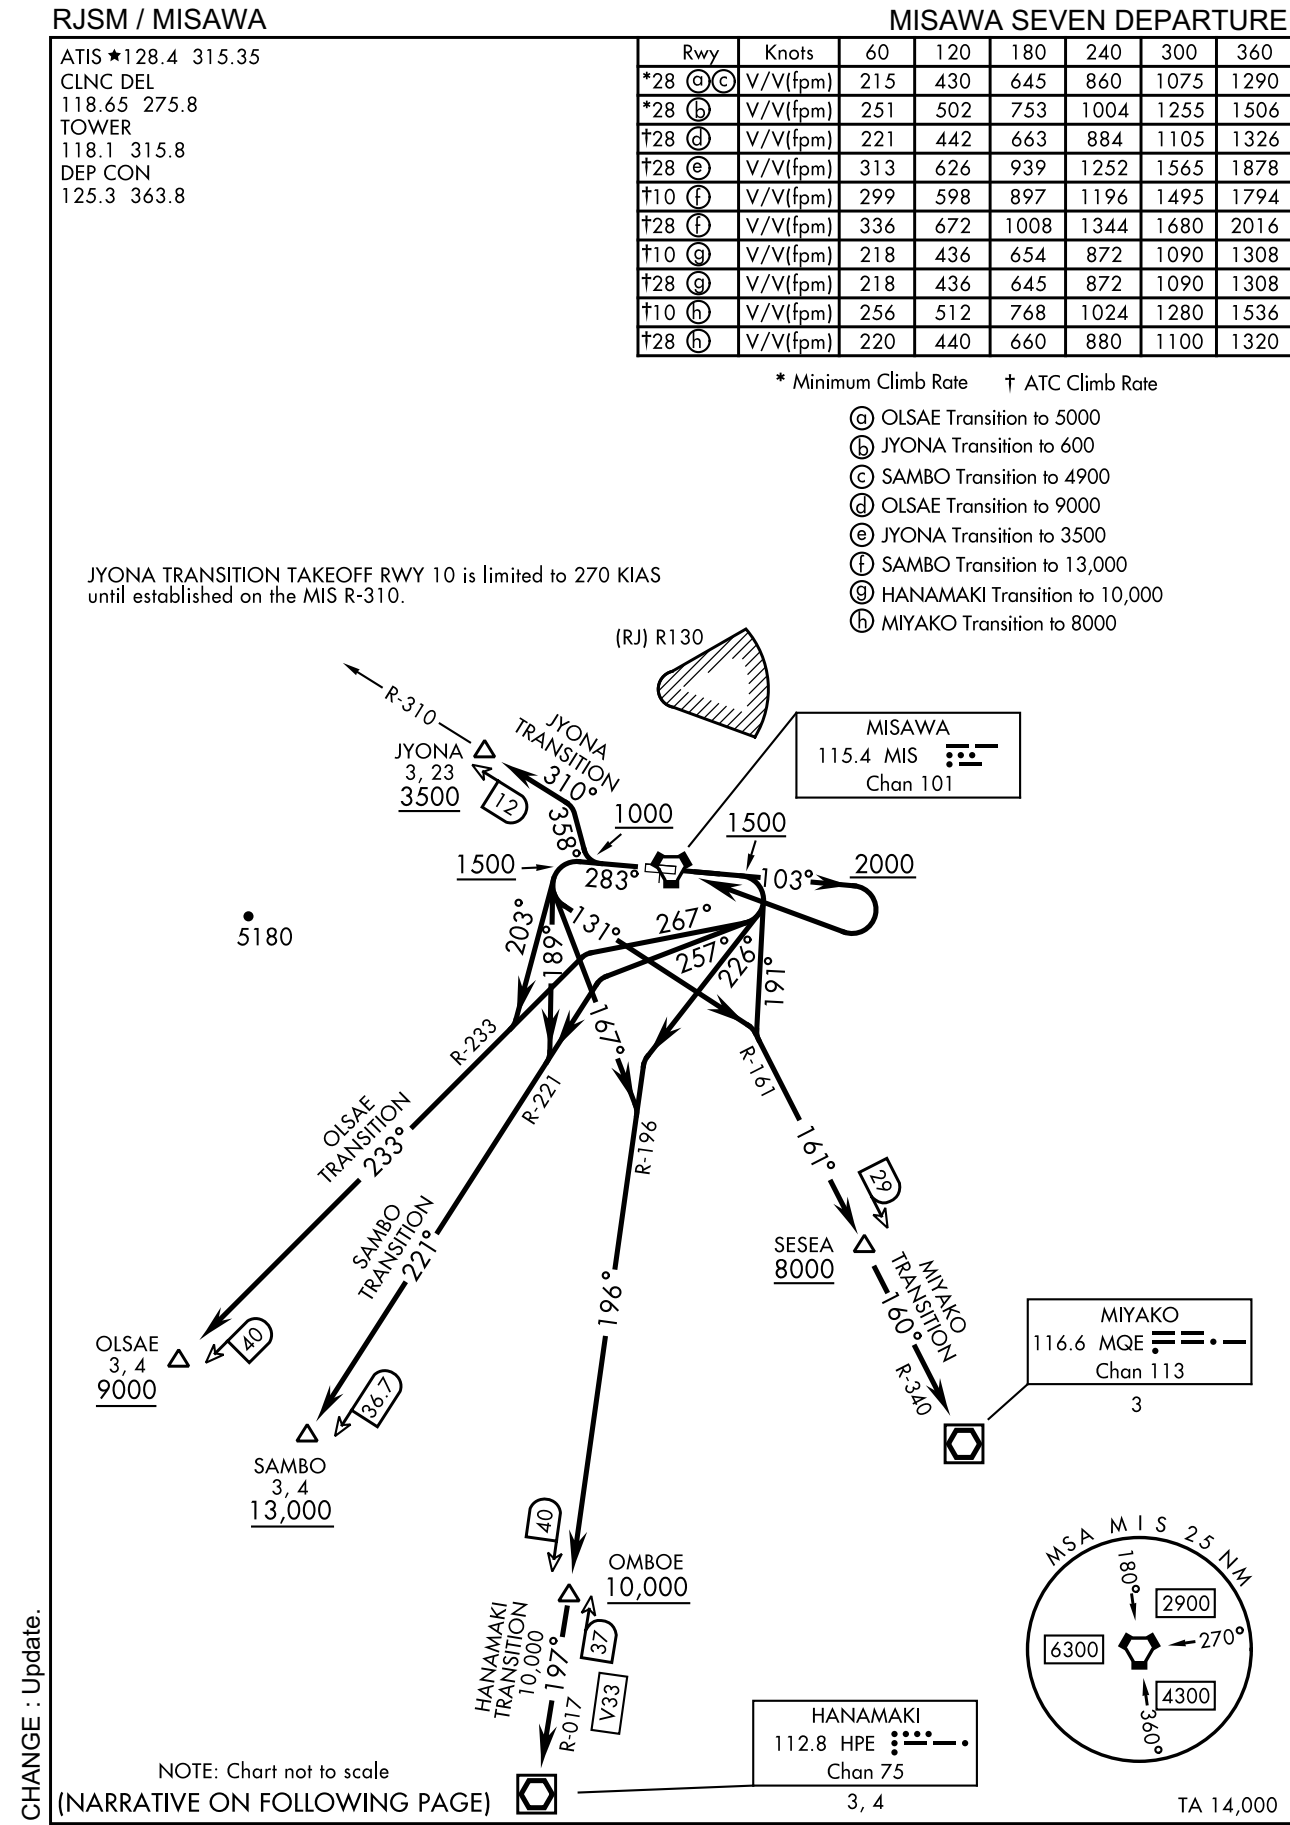

STANDARD DEPARTURE CHART - INSTRUMENT

RJSM / MISAWA

MISAWA SEVEN DEPARTURE



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 10: Climb heading 103° to 1500 (2000 for JYONA TRANSITION), thence

TAKEOFF RWY 28: Climb heading 283° to 1500 (1000 for JYONA TRANSITION), thence

HANAMAKI TRANSITION:

TAKEOFF RWY 10: ...turn right heading 226° to intercept MIS VORTAC R-196 (HPE VOR/DME R-017) to HANAMAKI VOR/DME. Cross OMBOE at or above 10,000. Maintain ATC assigned altitude.

TAKEOFF RWY 28: ...turn left heading 167° to intercept MIS VORTAC R-196 (HPE VOR/DME R-017) to HANAMAKI VOR/DME. Cross OMBOE at or above 10,000. Maintain ATC assigned altitude.

JYONA TRANSITION:

TAKEOFF RWY 10: ...turn right, climb via MIS VORTAC to intercept MIS R-310 direct JYONA. Cross JYONA at or above 3500. Maintain ATC assigned altitude.

TAKEOFF RWY 28: ...turn right heading 358° to intercept MIS VORTAC R-310 to JYONA. Cross JYONA at or above 3500. Maintain ATC assigned altitude.

MIYAKO TRANSITION:

TAKEOFF RWY 10: ...turn right heading 191° to intercept MIS VORTAC R-161 (MQE VOR/DME R-340) to MIYAKO VOR/DME. Cross SESEA at or above 8000. Maintain ATC assigned altitude.

TAKEOFF RWY 28: ...turn left heading 131° to intercept MIS VORTAC R-161 (MQE VOR/DME R-340) to MIYAKO VOR/DME. Cross SESEA at or above 8000. Maintain ATC assigned altitude.

OLSAE TRANSITION:

TAKEOFF RWY 10: ...turn right heading 267° to intercept MIS VORTAC R-233 to OLSAE (MIS R-233/40 DME). Cross OLSAE at or above 9000. Maintain ATC assigned altitude.

TAKEOFF RWY 28: ...turn left heading 203° to intercept MIS VORTAC R-233 to OLSAE (MIS R-233/40 DME). Cross OLSAE at or above 9000. Maintain ATC assigned altitude.

SAMBO TRANSITION:

TAKEOFF RWY 10: ...turn right heading 257° to intercept MIS VORTAC R-221 to SAMBO (MIS R-221/36.7 DME). Cross SAMBO at or above 13,000. Maintain ATC assigned altitude.

TAKEOFF RWY 28: ...turn left heading 189° to intercept MIS VORTAC R-221 to SAMBO (MIS R-221/36.7 DME). Cross SAMBO at or above 13,000. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJSM / MISAWA

ATIS★128.4 315.35
CLNC DEL
118.65 275.8
TOWER
118.1 315.8
DEP CON
125.3 363.8

REIWA TWO DEPARTURE

Rwy	Knots	60	120	180	240	300	360
10	V/V(fpm)	289	578	867	1156	1445	1734
28	V/V(fpm)	249	498	747	996	1245	1494

ATC Climb Rate to 10,000




NOTE: REPRINTING DOD FLIP

INTENTIONALLY LEFT BLANK


INSTRUMENT APPROACH CHART

RJSM / MISAWA

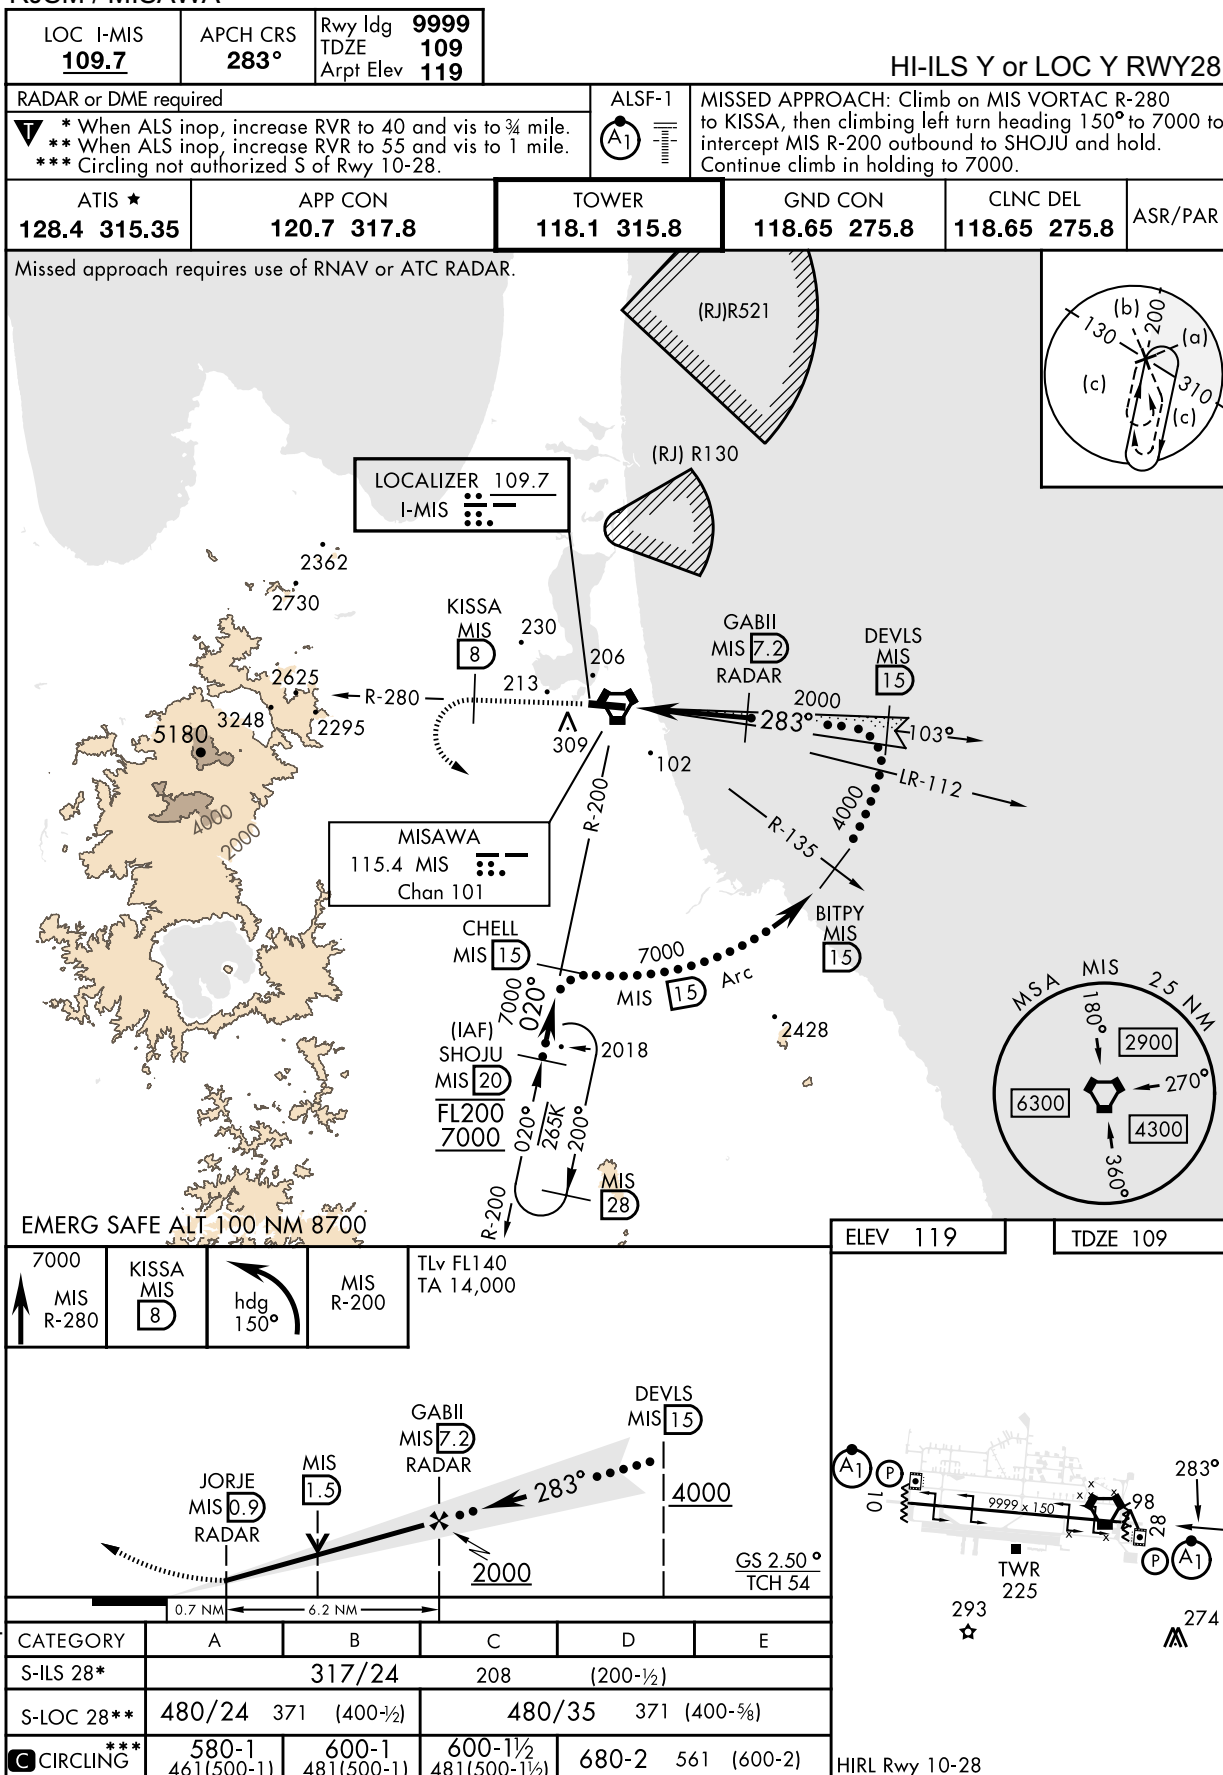

RJSM / MISAWA

ELEV 119		TDZE 109
----------	--	----------

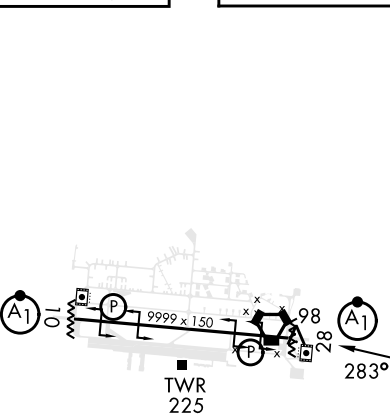

293 ☆

274 A


HIRL Rwy 10-28

5/10/23


RJSM / MISAWA

VORTAC MIS 115.4 Chan 101		APCH CRS 290°	Rwy Idg 9999 TDZE 109 Arpt Elev 119	HI-VOR Y or TACAN Y RWY28		
RADAR or DME required  *When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1 1/4 miles. **Circling S of Rwy 10-28 not authorized.			ALSF-1 	MISSED APPROACH: Climb on MIS VORTAC R-280 to KISSA, then climbing left turn heading 150° to 7000 to intercept MIS R-200 outbound to SHOJU and hold. Continue climb in holding to 7000.		
ATIS ★ 128.4 315.35	APP CON 120.7 317.8	TOWER 118.1 315.8	GND CON 118.65 275.8	CLNC DEL 118.65 275.8	ASR/PAR	

Missed approach requires use of RNAV or ATC RADAR.

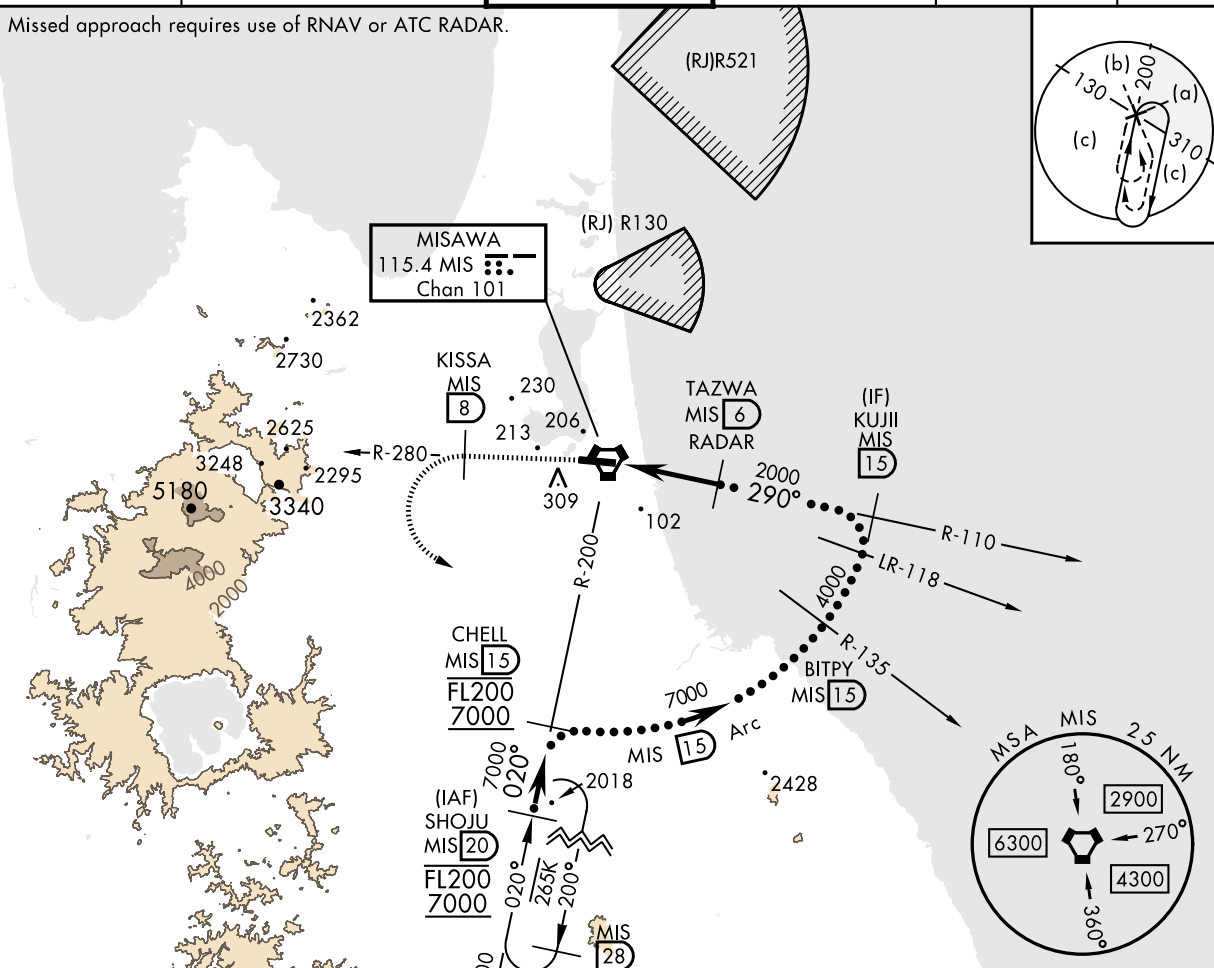

EMERG SAFE ALT 100 NM 8700


7000 MIS R-280	KISSA MIS 8	 hdg 150°	MIS R-200
----------------------	-------------------	--	--------------

TLv FL140
TA 14,000

VGSI and descent angles
not coincident
(VGSI Angle 2.50/TCH 55).



CATEGORY	A	B	C	D	E
S-28*	540/24 431 (500-½)		540/40 431 (500-¾)		
C CIRCLING**	580-1 461(500-1)	600-1 481(500-1)	600-1½ 481(500-1½)	680-2 561 (600-2)	

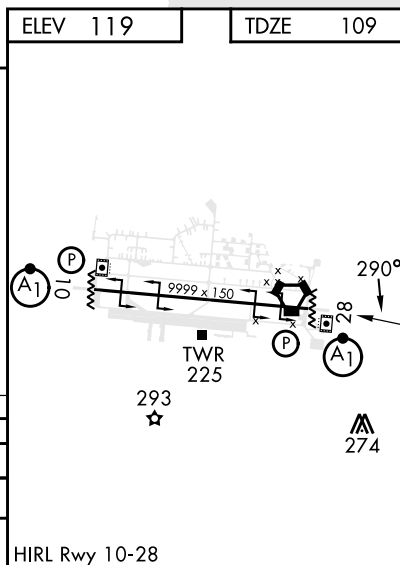

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJSM / MISAWA

VORTAC MIS 115.4 Chan 101	APCH CRS 290°	Rwy ldg TDZE 109 Arpt Elev 119
---	-------------------------	--

VOR Z or TACAN Z RWY28

RADAR or DME required

▼ * When ALS inop, increase CAT AB RVR to 55 vis to 1 mile, CAT CDE vis to 1¼ miles.
** Circling S of Rwy 10-28 not authorized.

ALS F-1



MISSED APPROACH: Climb on MIS VORTAC R-280 to KISSA, then climbing left turn heading 150° to 7000 to intercept MIS R-200 outbound to SHOJU and hold. Continue climb in holding to 7000.

ATIS ★ 128.4 315.35	APP CON 120.7 317.8	TOWER 118.1 315.8	GND CON 118.65 275.8	CLNC DEL 118.65 275.8	ASR/PAR
-------------------------------	-------------------------------	-----------------------------	--------------------------------	---------------------------------	---------

Missed approach requires use of RNAV or ATC RADAR.



EMERG SAFE ALT 100 NM 8700

7000 MIS R-280	KISSA MIS 8	hdg 150°	MIS R-200
----------------------	-------------------	-------------	--------------


VGSI and descent angles
not coincident
(VGSI Angle 2.50/TCH 55).

TLv FL140
TA 14,000



CATEGORY	A	B	C	D	E
S-28 *	540/24 431 (500-½)	540/40 431 (500-¾)			
CIRCLING **	580-1 461(500-1)	600-1 481(500-1)	600-1½ 481(500-1½)	680-2 561 (600-2)	

ELEV 119	TDZE 109
----------	----------

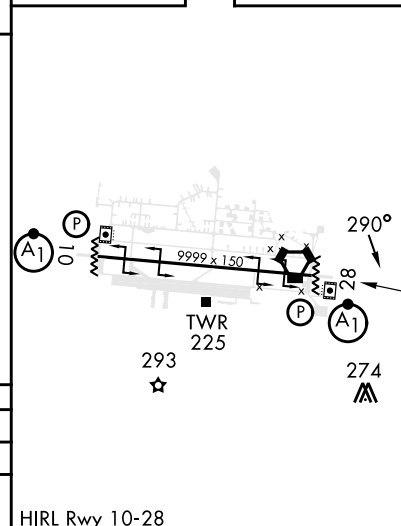


CHANGE : Update.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART


RJSM / MISAWA

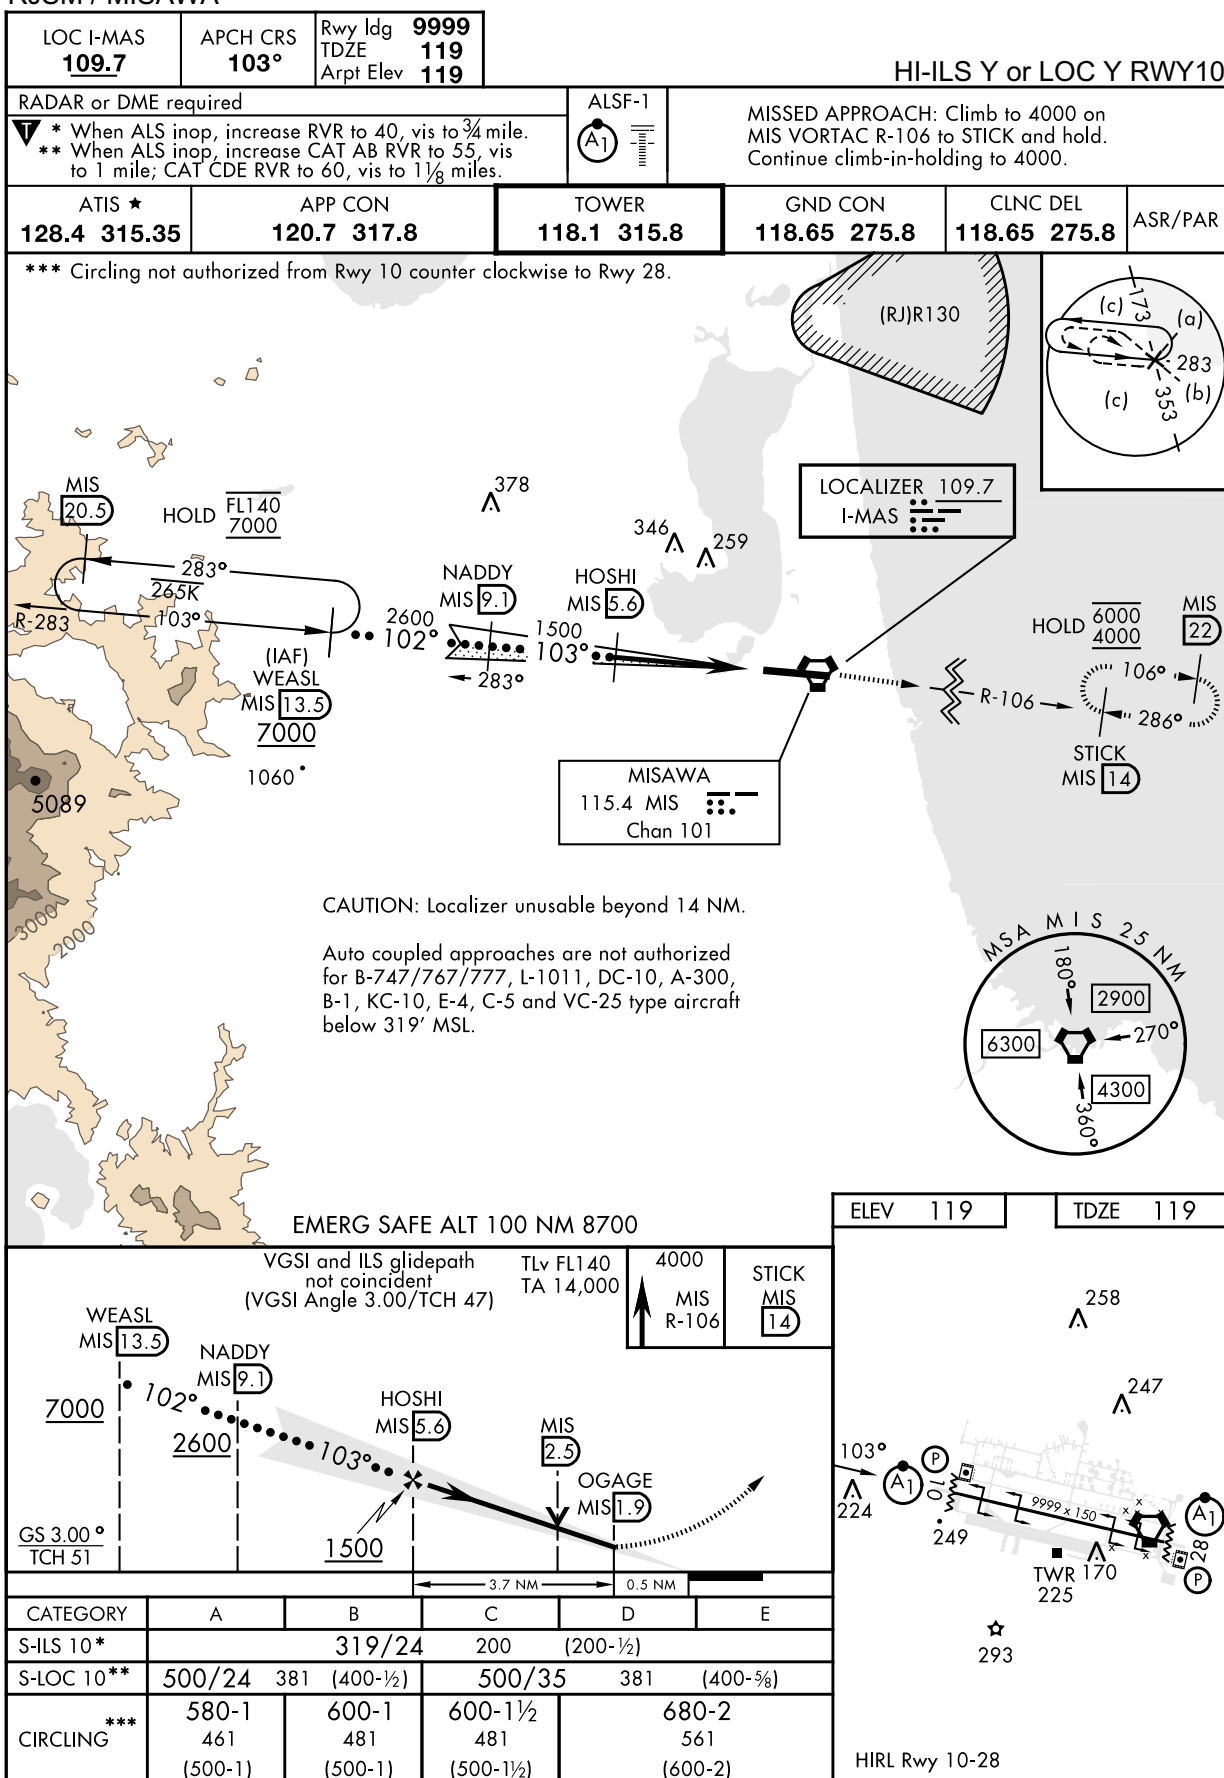


NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJSM / MISAWA

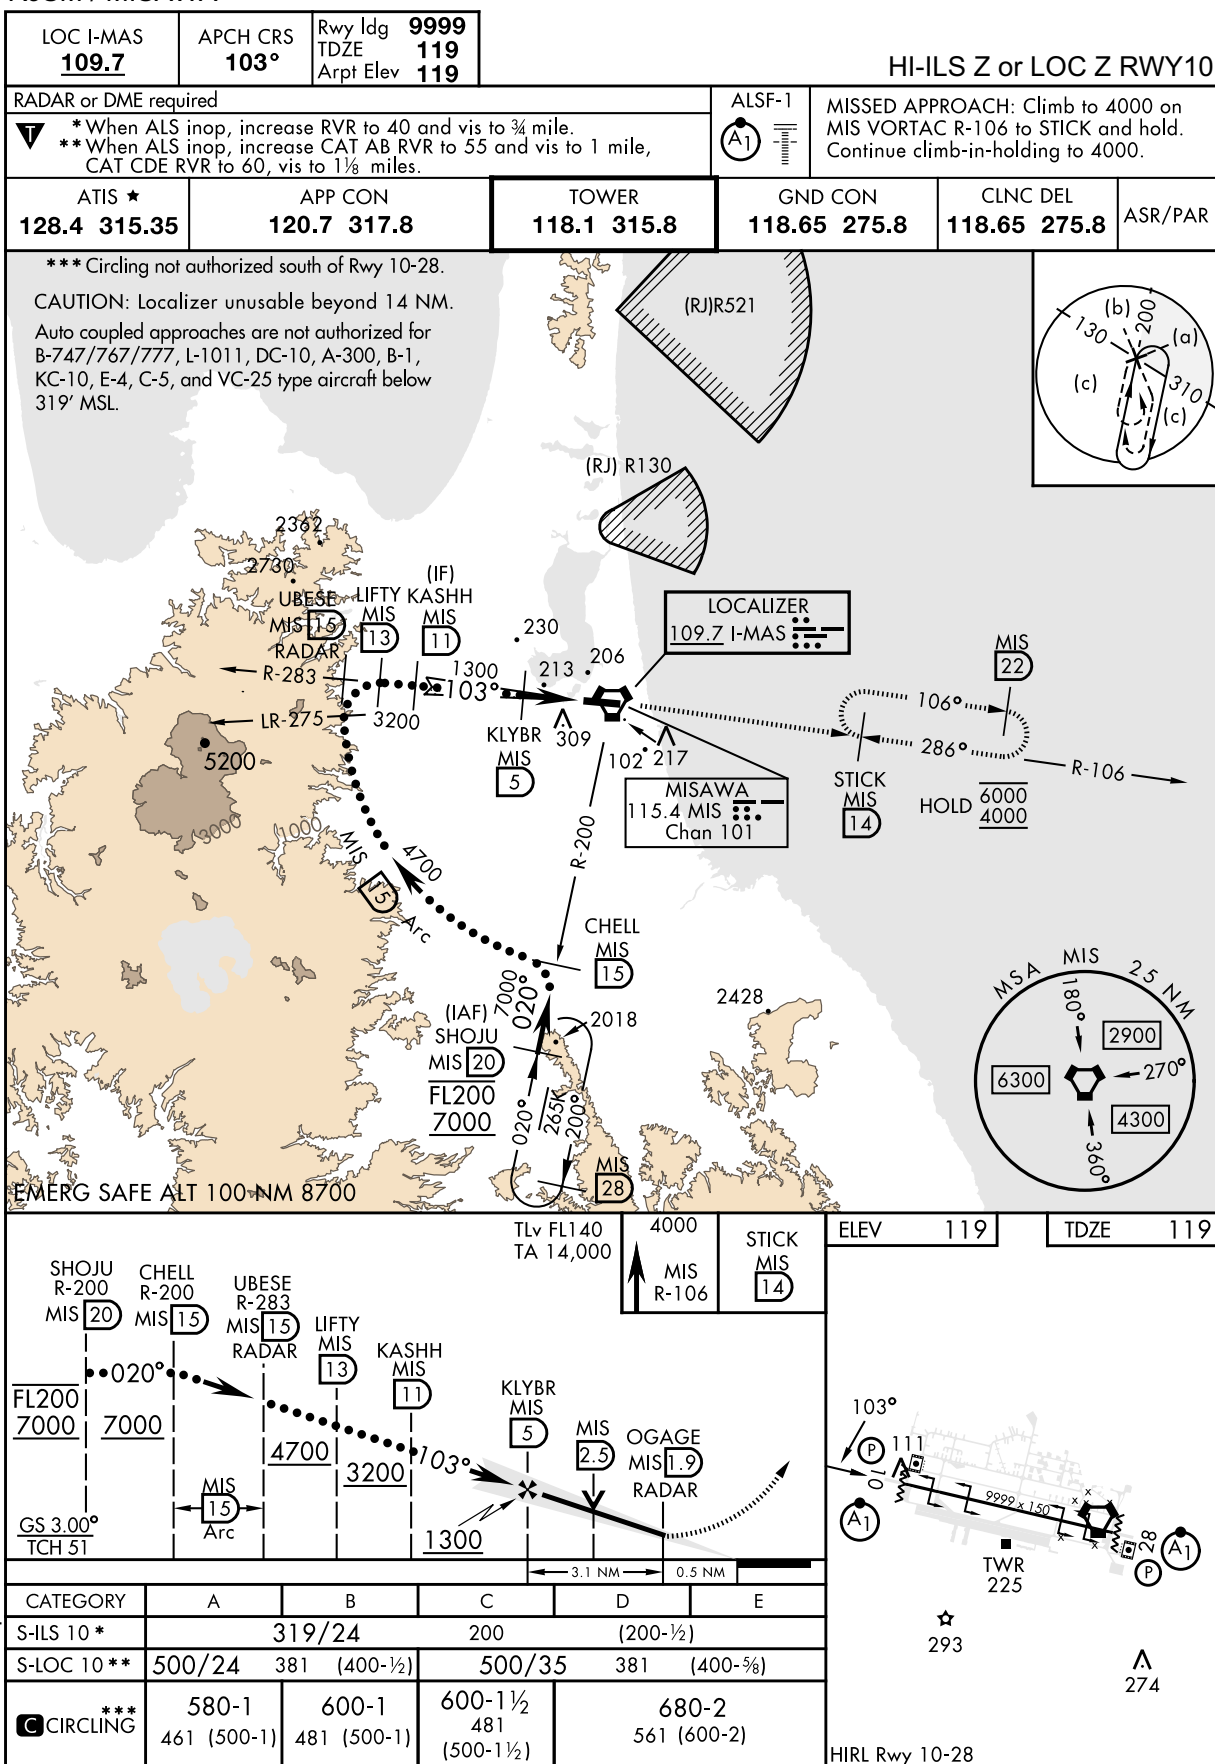

INSTRUMENT APPROACH CHART

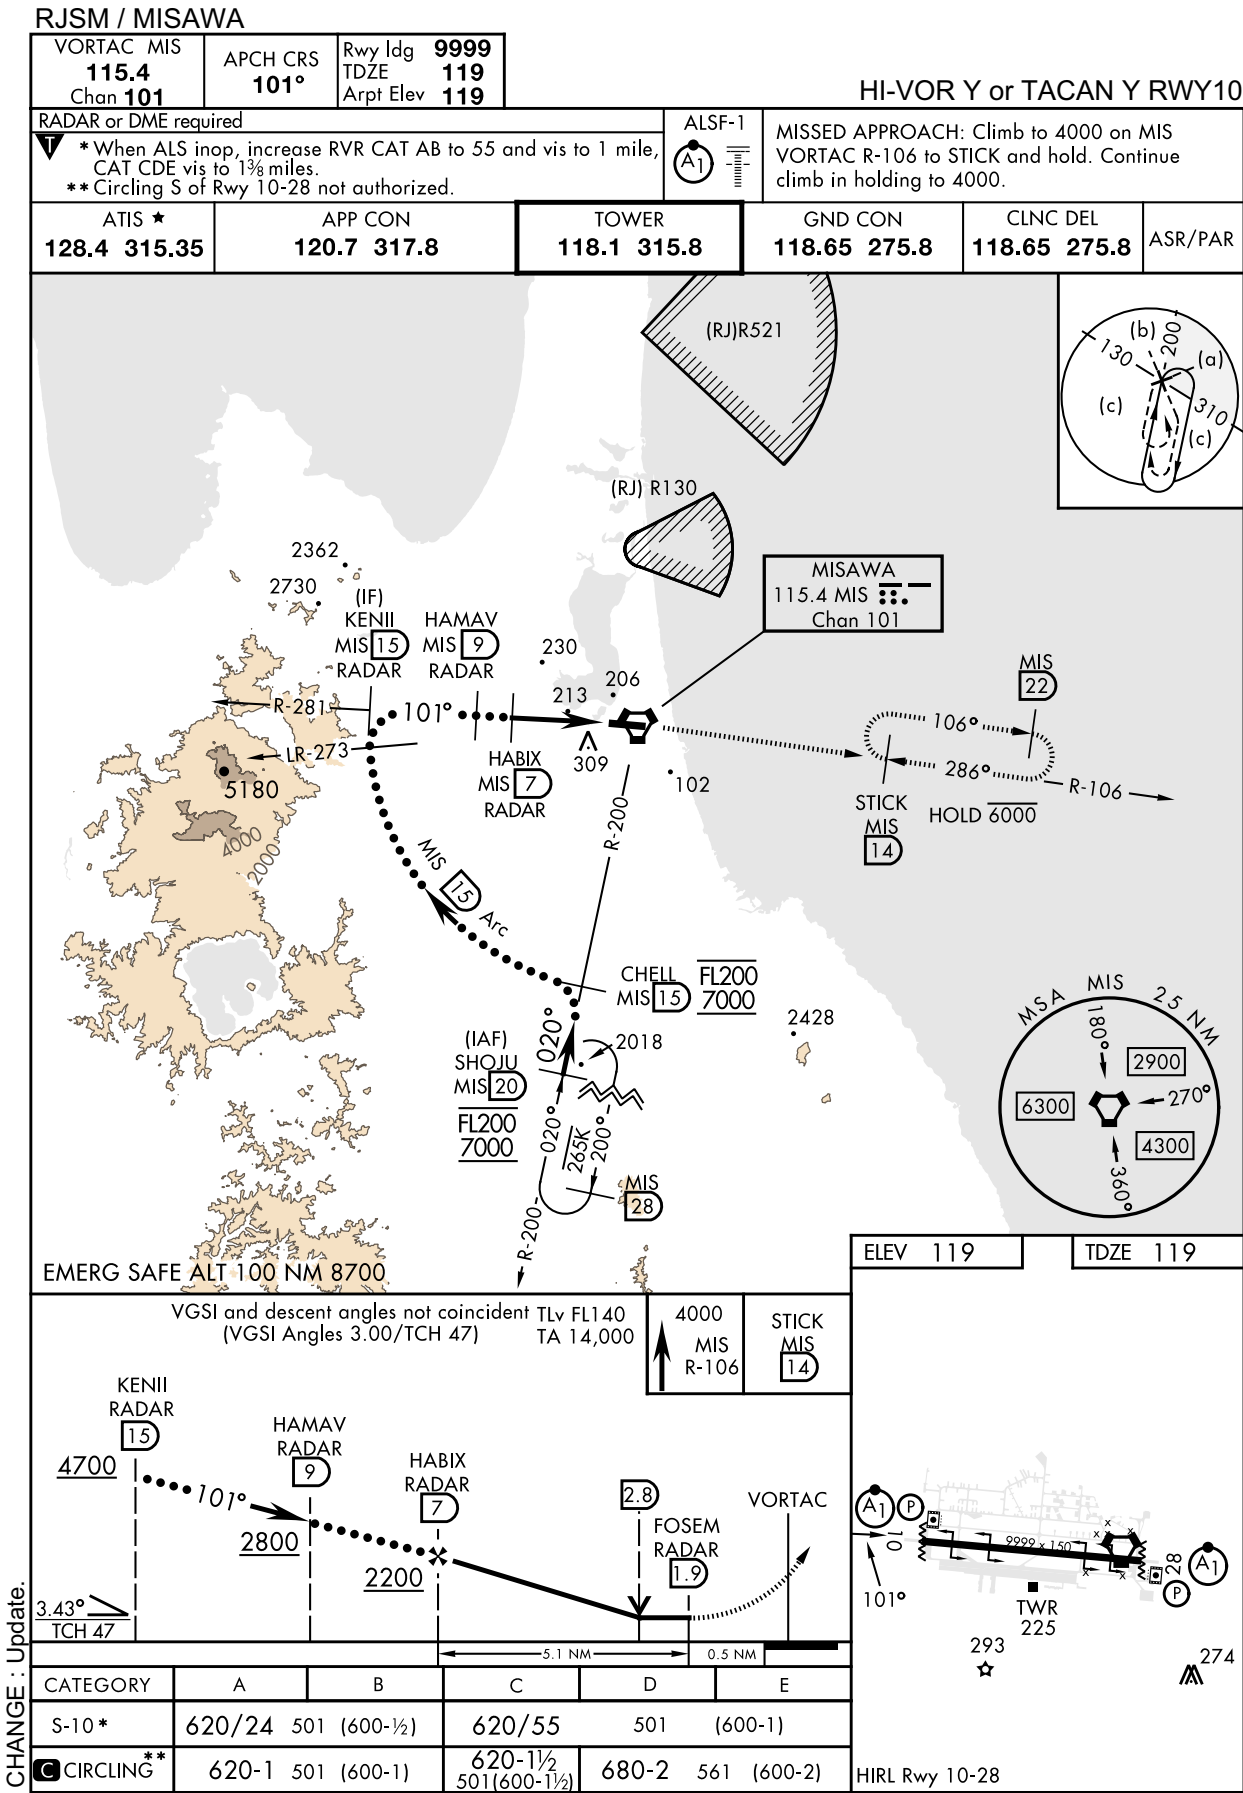

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJSN /MISAWA

APCH CRS	Rwy Idg	9999
283°	TDZE	109
	Arpt Elev	119

RNAV(GPS) RWY28

RNP APCH-GPS

* When ALS inop increase CAT ABC RVR to 45, vis to 7/8 mile; CAT DE RVR to 50, vis to 1 mile.
 ** When ALS inop increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.


ALSF-1



MISSED APPROACH: Climb to 2000 then climbing left turn to 7000 direct SHOJU and hold, continue climb-in-hold to 7000.

ATIS★	APP CON	TOWER	GND CON	CLNC DEL	ASR/PAR
128.4 315.35	120.7 317.8	118.1 315.8	118.65 275.8	118.65 275.8	

*** Circling NA S of RWY 10-28.

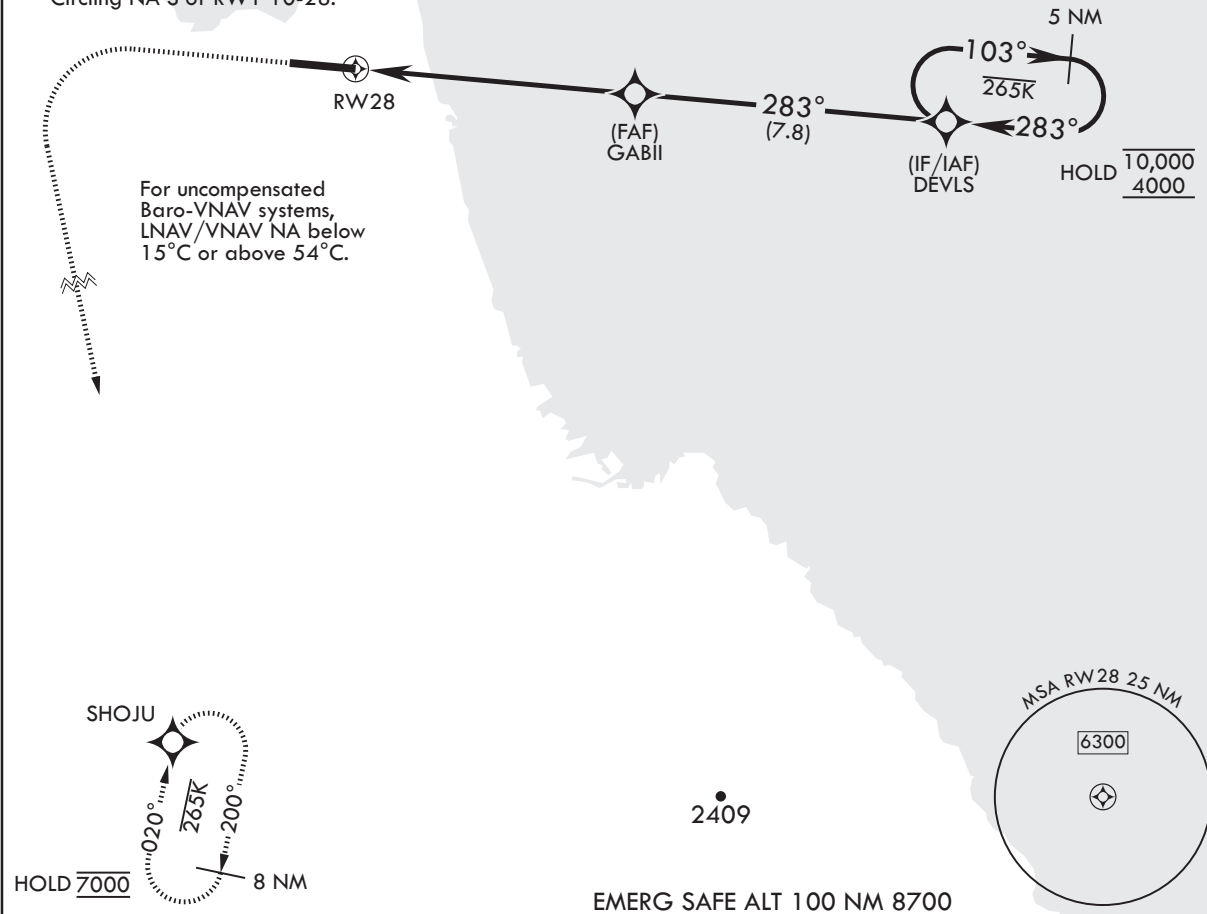

2000	7000	SHOJU	TLv FL140 TA 14,000	5 NM Holding Pattern	ELEV 119	TDZE 109
crs 283°				DEVL		



CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	402/24 293 (300-1/2)	413/24 304 (300-1/2)	421/24 312 (400-1/2)	432/26	323 (400-1/2)
LNAV MDA**	580/24	471 (500-1/2)	580/50	471	(500-1)
CIRCLING***	580-1 461 (500-1)	600-1 481 (500-1)	600-1 1/2 481 (500-1 1/2)	680-2	561 (600-2)



CHANGE : New PROC.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJSM / MISAWA

APCH CRS 103°	Rwy Idg 9999 TDZE 119 Arpt Elev 119
------------------	---

RNAV(GPS) RWY10

RNP APCH – GPS


T * When ALS inop increase CAT ABCD RVR to 45, vis to 7/8 mile; CAT E RVR to 55, vis to 1 mile.
 ** When ALS inop increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1 3/8 miles.

ALSF-1


MISSED APPROACH: Climb to 1000 then climbing turn to 4000 direct STICK and hold, continue climb-in-hold to 4000.

ATIS★ 128.4 315.35	APP CON 120.7 317.8	TOWER 118.1 315.8	GND CON 118.65 275.8	CLNC DEL 118.65 275.8	ASR/PAR
-----------------------	------------------------	----------------------	-------------------------	--------------------------	---------

*** Circling NA S of RWY 10-28.

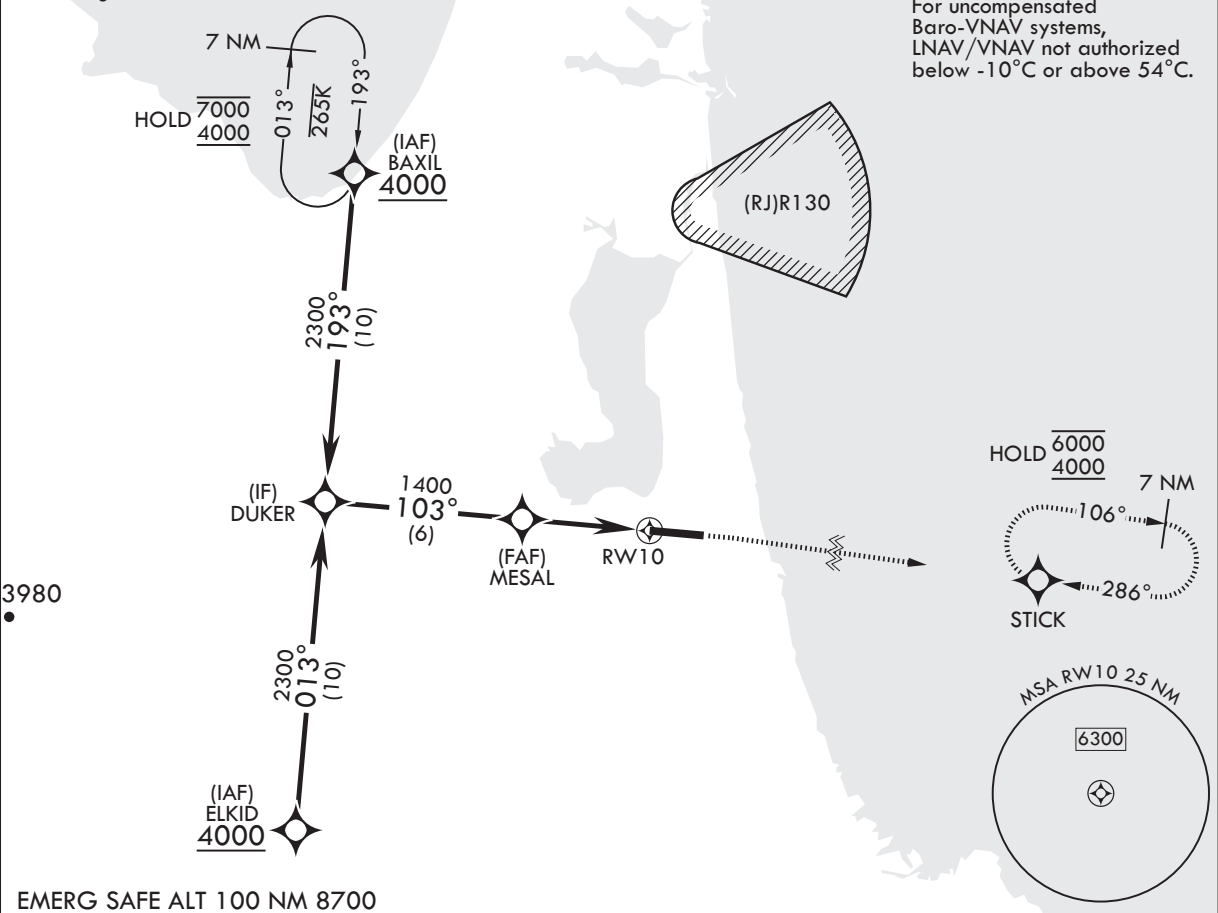

EMERG SAFE ALT 100 NM 8700

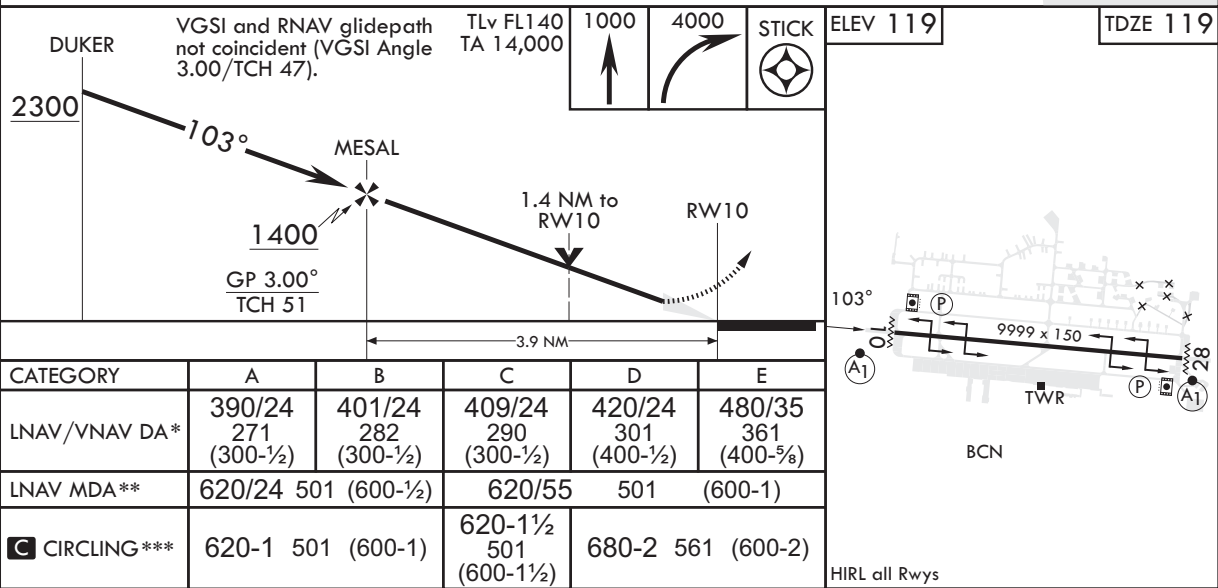

CHANGE : New PROC.

NOTE: REPRINTING DOD FLIP

INTENTIONALLY LEFT BLANK

RJSM / MISAWA

Minimum Vectoring Altitude CHART

